

Movement by Perfection

)19':)\$3

Axial fans

Main catalogue
2016 Edition

The Royal League in ventilation, control and drive technology

ZIEHL-ABEGG 

Using air intelligently

Air is always there but is hardly perceived consciously.

Directing air in a specific form of movement is the competence of ZIEHL-ABEGG. As the world's leading provider of fans with adapted control technology, ZIEHL-ABEGG relies on the efficiency and reliability of the products. With the trailblazing solutions from ZIEHL-ABEGG, customers use air and energy optimally for their individual requirements.

FANselect The fan selection program

With the first fully comprehensive certified fan selection program FANselect the customer can find the optimum fans and system components for his needs conveniently, precisely and quickly. The specified values conform to reality. They are determined in the ZIEHL-ABEGG InVent technology centre which houses the world's biggest combined air and noise test benches of the ventilation system branch.

More information on www.fanselect.info



Contents

The ZIEHL-ABEGG Company		Page 4	Information
Axial fan FE2owlet-ECblue	sickle-shaped and profiled blades made of high performance composite material or aluminium, optimised for full bell mouth, with highly efficient EC motor	Page 18	FE2owlet-ECblue
Axial fan FE2owlet	sickle-shaped and profiled blades made of high performance composite material or aluminium, optimised for full bell mouth	Page 140	FE2owlet
Axial fan FE2owlet-ECblue with ZAplus	Axial fan FE2owlet-ECblue in optimised full bell mouth with guiding vane, motor suspension and short diffusor	Page 278	FE2owlet-ECblue with ZAplus
Axial fan FE2owlet with ZAplus	Axial fan FE2owlet in optimised full bell mouth with guiding vane, motor suspension and short diffusor	Page 354	FE2owlet with ZAplus
System components		Page 430	System components
Control technology		Page 446	Control technology
General notes		Page 520	Appendix
Ziehl-Abegg global		Page 539	



Welcome to the world of ZIEHL-ABEGG



Top technology "Made by ZIEHL-ABEGG"

A pioneering spirit and the courage of innovation were the driving forces behind Emil Ziehl's development of his first external rotor motor over a hundred years ago. With this he laid the corner stone for the success story of ZIEHL-ABEGG in 1910. Today, the family company ZIEHL-ABEGG, with its headquarters in Künzelsau, develops, produces and sells high quality, high-tech components: Fans, special electric motors and their perfectly adapted, state-of-the-art control technology. Still today, Emil Ziehl's pioneering spirit is the motivator for making good even better and finding new, revolutionary solutions. ZIEHL-ABEGG is based in Southern Germany but is at home all over the world. At the worldwide production and sales sites, thousands of employees develop, produce and sell technical, economical and ecological progress.

Welcome to the world of ventilation, control and drive technology.

One-stop expertise




Fan, motor and control technology

Whether air conditioning, drying, cooling or ventilating, the efficient fans with adapted drive and control technology from ZIEHL-ABEGG cope with these tasks safely and reliably. Individual and also complex customer requirements are welcome challenges.

At ZIEHL-ABEGG headquarters in Künzelsau, more than 300 engineers and technicians concentrate daily on finding the best solution. In the InVent, one of the most modern technology centres of its kind, they work on the innovations of the future. Their ideas are put into practice by excellently trained specialists on state-of-the-art plants. The production as well as all processes are accompanied by prudent quality management. ZIEHL-ABEGG products are subjected to rigorous testing before being put into operation at the customer's. On the world's biggest air and noise test bench, vibrations and external noises are eliminated and thus ensure top class fan measurements in accordance with ISO and DIN. The result is top class products and services which are marked by the seals "Premium Quality" and "Premium Efficiency".

The world's most modern and largest test-bench for fans at the main location in Künzelsau

Right picture:
Most modern production lines
for fans
with the highest demands
in the world

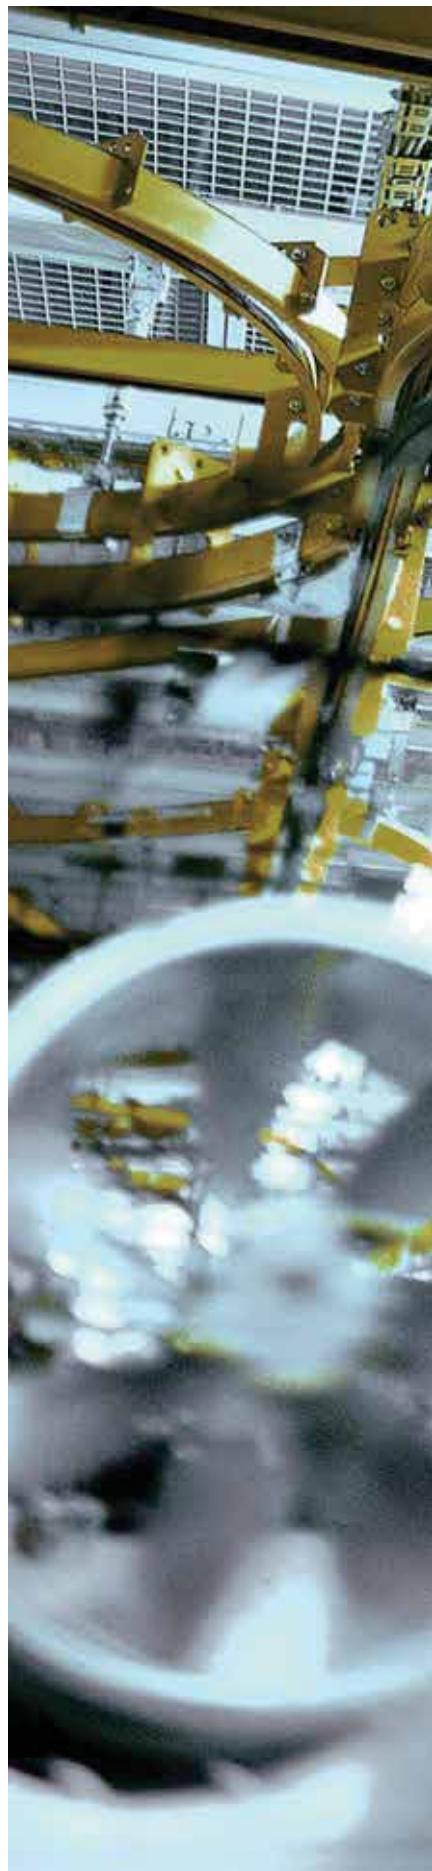



EC fans of the Royal League

Quiet, efficient, environmentally friendly

EC fans from ZIEHL-ABEGG unite state-of-the-art motor technology with innovative aerodynamics. This symbiosis scores high marks by merging revolutionary ECblue technology with premium fans. The result is efficiency and absolutely economical operation. The new generation of axial fans heads the ECblue technology: The FE2owlet has bionomically designed rotor blades for almost noiseless conveyance of air. Moreover, the FE2owletbio is made from 100% recyclable bio-polyamides. Further highlights of material development at ZIEHL-ABEGG are shown in the Cpro centrifugal fan with the new ZAmid® technology. The new high performance composite material is as hard as steel but only half the weight. This is kind on the bearings and saves energy. Greater efficiency also comes from the newly developed blade geometry in the centrifugal impellers which has only become possible thanks to the innovative composite material. In standard application, EC-fans achieve maximum volume flows with extraordinary efficiency despite their low noise. Together with the ECblue motors, ZIEHL-ABEGG fans achieve a dynamic response which makes them absolute leaders in environmental friendliness and efficiency.

ECblue motor technology






Maximum efficiency and minimum consumption
ECblue with the latest *Z A mid® Technology*
Radial fans sector



Unique bionic profile FE2owlet,
combined with ECblue technology

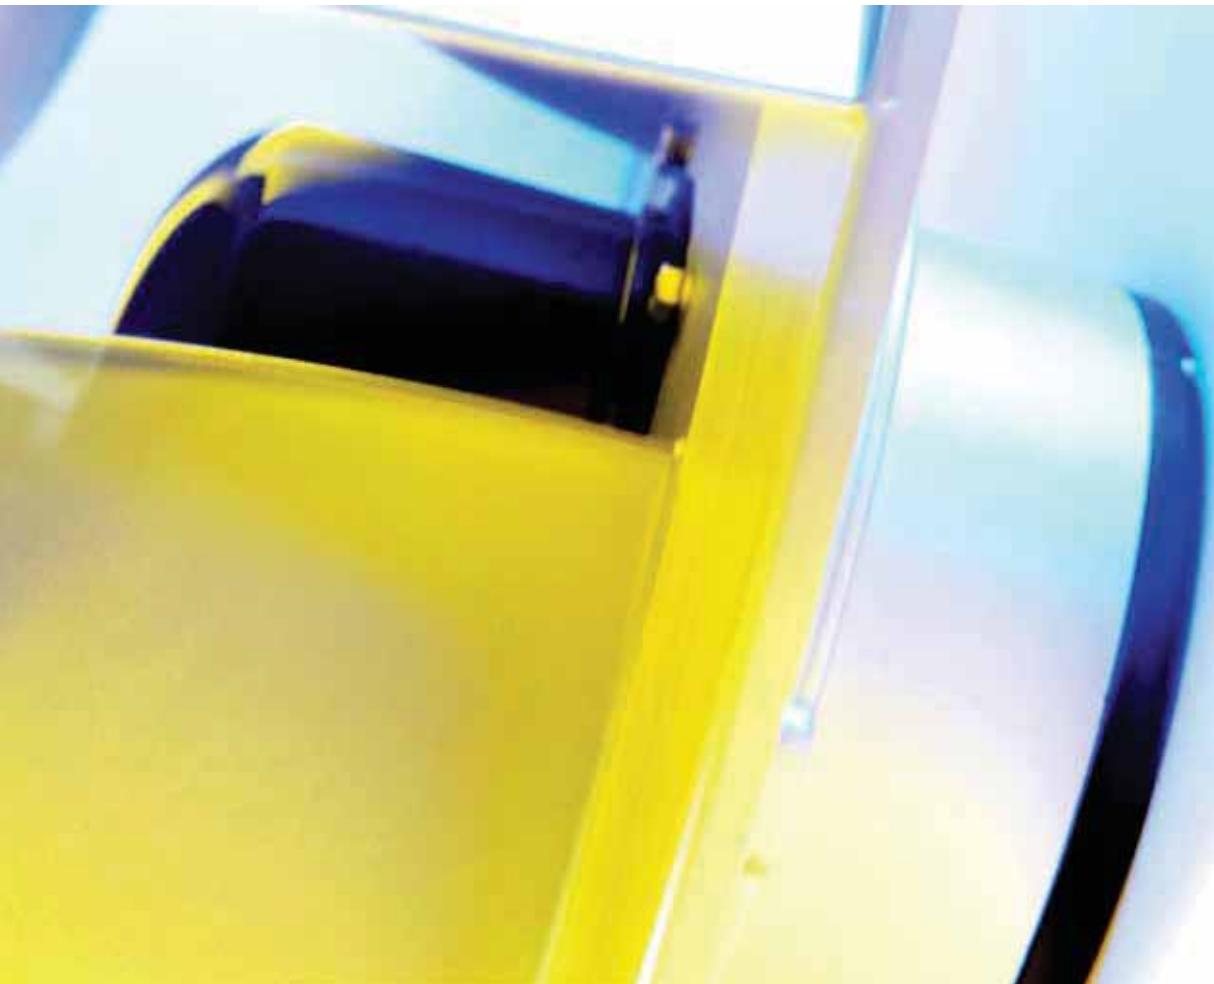

AC-fans of the Royal League



Strong, robust, extraordinary

In all applications in which the material is exposed to immense stress, the AC fans from ZIEHL-ABEGG demonstrate their quality and ability. Their solid components and robust design and technology are able to withstand even the greatest stresses. The fans are therefore used in many different areas of industry or agriculture - wherever absolute insensitivity and stability is important.

The high quality motor technology is the result of decades of experience at ZIEHL-ABEGG. Intelligently used components such as the Fcontrol frequency inverter make them environmentally friendly and efficient key players. Maintenance-free and extraordinarily performant, AC fans from ZIEHL-ABEGG are a safe and rewarding investment.

AC motor technology, robust in operation





Expertise in ventilation

ErP directive

With the Kyoto protocol, the European Union pledged to reduce CO₂ emissions by at least 20 per cent by the year 2020. One measure for achieving this is the ErP directive for improved energy efficiency and general environmental compatibility of electrical equipment – also known in Germany as the Eco Design directive. It supports a resource-friendly and energy-efficient product design. With the implementation of the ErP directive, stricter efficiency requirements for fans in the output range from 125 W to 500 kW apply since 2013 and 2015 in two stages. A further stage is planned for 2020. Energy efficiency is thus given the same standing as the compliance with the low voltage or EMC directive. The system efficiency requirement is a prerequisite for a CE mark and is thus essential for a product to be used in EU member states. An own label as for refrigerators is not planned for fans because the fan manufacturers do not usually have any influence on the installation conditions.

Products for use in EU countries and world-wide markets are listed in this catalogue. For the fans for the EU countries, the respective ErP identification is included directly in the description of the fan.



The European Ventilation Industry Association (EVIA) represents the European ventilation industry with national and European institutions.

The EVIA is the key platform for fan manufacturers and is their interface to politicians, decision-makers in the European Union, and other associations that use fans in their products. The EVIA supports the use of high efficiency fans in Europe to implement the EU targets for increased efficiency.

ZIEHL-ABEGG played a leading role in its foundation and supports the EVIA with active involvement in its working groups. ZIEHL-ABEGG also provides the chairman.



Selection of fans step by step

1. Axial fans overview

Get an initial overview of our axial fans and navigate quickly to the section of the catalogue relevant for you.



Information

FE2owlet

FE2owlet

FE2owlet-ECblue

FE2owlet with ZApus


System components

Control technology

Appendix

2. Quick selection

Obtain product details quickly and easily, thanks to quick selection using the volume flow rate and the volume flow rate technical data.

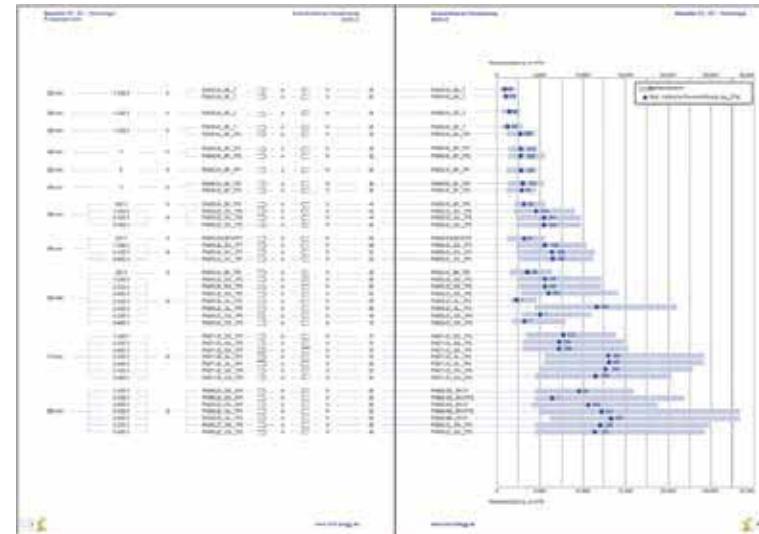

Information

FE2owlet

FE2owlet

FE2owlet-ECblue

FE2owlet with ZApus


System components

Control technology

Appendix

3. Product details

The double product page contains all relevant product information for your selected fan.

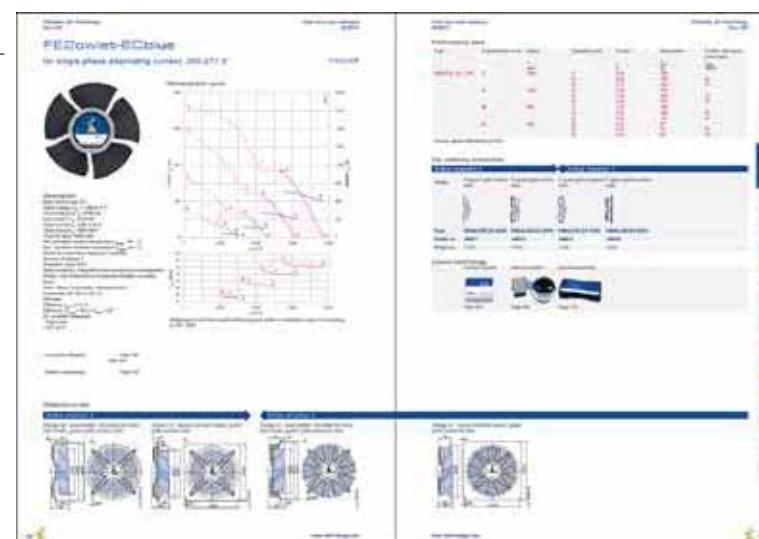

Information

FE2owlet

FE2owlet

FE2owlet-ECblue

FE2owlet with ZApus

System components

Control technology

Appendix

Technical description


FE2owlet

Product specification

Fluted, sickle-shaped blades based on bionic insights. Available sizes 250 - 1,250 mm, volume flow rates up to 53,750 m³/h and static pressure increase up to 418 Pa.

Properties and special features

- Low operating costs due to optimum efficiency with minimum noise levels
- High flexibility due to 100% speed controllable volume flow rate
- Very smooth running and long service life due to dynamic balancing in two levels
- Compact dimensions for every installation situation
- Compliant with ERP directive 2015
- Numerous approvals (incl. VDE, UL, CCC, EAC, CE)

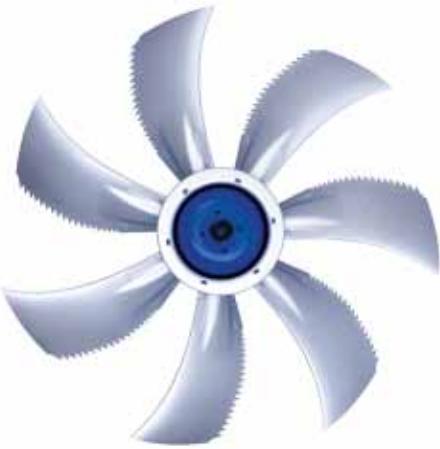

Motor concepts

External rotor motors

- ECblue EC technology with integrated controller matched to the fan
- AC technology



Technical description

FE2owlet with ZAplus

Product specification

Optimised full bell mouth with guiding vane, motor suspension and short diffusor. Fluted, sickle-shaped blades based on bionic insights. Available sizes 450 - 910 mm, volume flow rates up to 36,500 m³/h and static pressure increase up to 420 Pa.

Properties and special features

- Intelligent ventilation system with built-in efficiency guarantee
- Lowest operating costs due to optimum efficiency with minimum noise levels due to bionic blade design and aerodynamically optimised ZAplus nozzle
- High level of flexibility due to 100% speed controllable volume flow rate
- High corrosion protection with corrosion-free nozzle made of high performance composite material
- Very smooth running and long service life due to dynamic balancing in two levels
- Air handling capacity possible with diffusor kit (ZAplus+)
- Minimal handling effort as no packaging needed
- Compliant with ERP directive 2015
- Numerous approvals (incl. VDE, UL, CCC, EAC, CE)

Motor concepts

External rotor motors

- ECblue EC technology with integrated controller matched to the fan
- AC technology



Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Type key


Necessary ordering information
Type and Art. no.

Example

Type: FN050-4EQ.4I.A7P1
Art. no.: 140084

Example

FN 050 - 4 E Q . 4 I . A 7 P 1

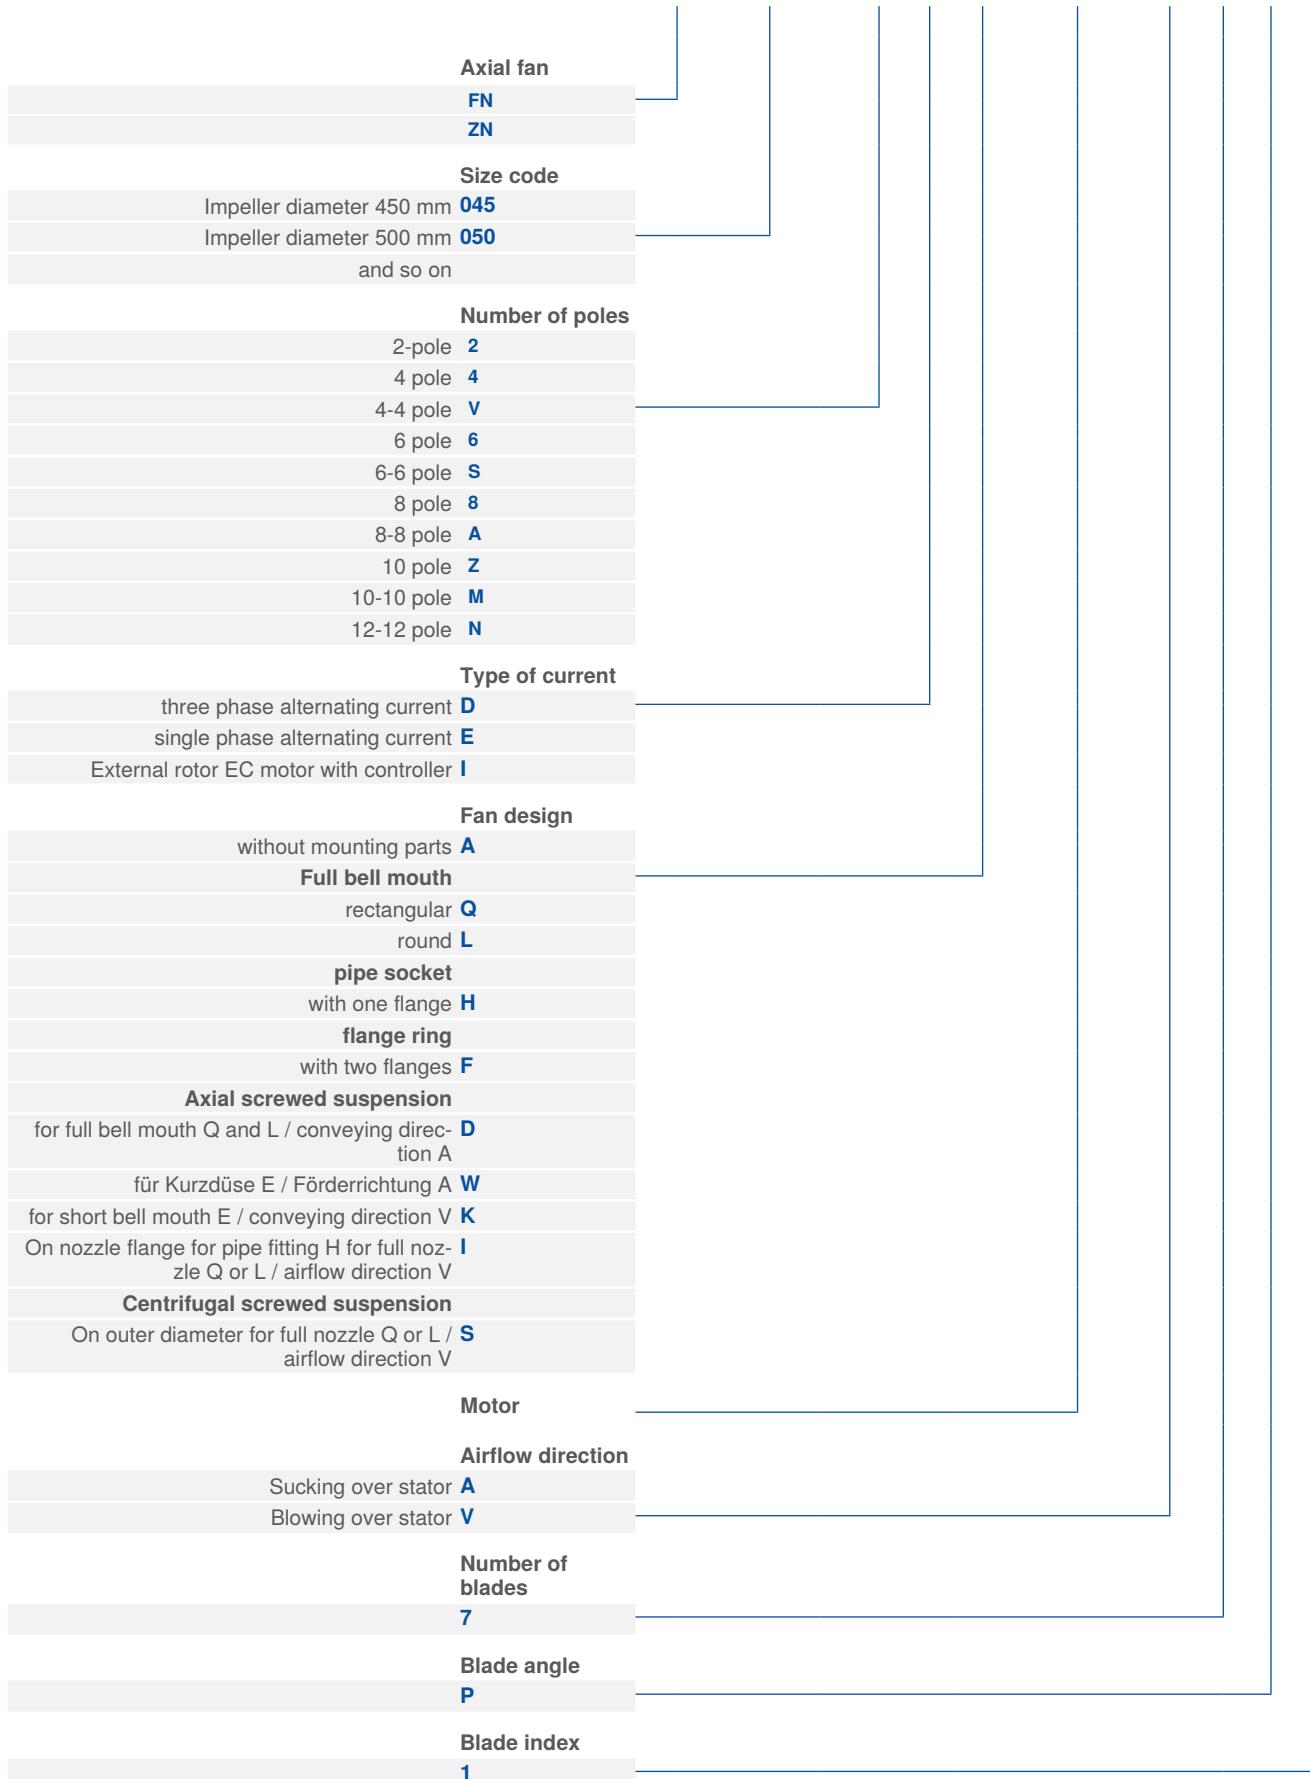

Selection programme FANselect

The world's best selection program for fans

The screenshot shows the FANselect software interface. At the top, there are tabs for 'watch list (0)', 'options', 'help', and 'logout'. The title 'FANselect' is centered above a search bar containing fields for 'airflow volume' (4000 m³/h), 'static pressure / total pressure' (50 Pa), 'max. supply' (3° / 400V / 50Hz), and 'ambient temperature' (20 °C). A checkbox 'design influence' is checked. Below the search bar are sections for 'additional selection criteria' (range, design, search) and 'selection criteria range' (set to axial fans). On the right, a 'TUV SUD' logo is displayed. The main area shows a table of 42 hits with columns for type, article no., Q_v, P_{st}, D_t, SFP, P_{form}, P_{el}, P_{el}, P_{el}, n, I_{el(A)}, I_{el(A)}, F_{el}, U_{el}, T_{el}, and max. supply. Buttons for 'reset', 'back', and 'next' are at the bottom.

At www.fanselect.info, we are offering you FANselect, a selection program for axial and centrifugal fans with the matching system components.

With FANselect, you can, for instance, select and calculate the fans listed in this catalogue. FANselect provides you with an option to calculate the efficiency, the acoustics, the SFP and much more. In addition, you can also select the matching systems components. You can conveniently save your configuration in a file or print it out.

The FANselect selection program, including the customer DLL, is available for you to download at any time at www.fanselect.info.

The screenshot shows the FANselect software interface. At the top, there are tabs for 'watch list (0)', 'options', 'help', and 'logout'. The title 'FANselect' is centered above a search bar containing fields for 'airflow volume' (4000 m³/h) and 'static pressure' (50 Pa). Below the search bar are sections for 'performance curve', 'Life-Cycle-Costs', 'drawing', 'nominal values', and 'SFP class'. On the right, a 'TUV SUD' logo is displayed. The main area features three graphs: 1) Power input P_{el} [W] vs. airflow Q_v [m³/h], showing curves for 2200, 1200, and 500 rpm. 2) Efficiency η_{el} [%] vs. airflow Q_v [m³/h], showing curves for 2200, 1200, and 500 rpm. 3) Acoustics L_{WA} [dB(A)] vs. airflow Q_v [m³/h]. Buttons for 'reset', 'back', and 'next' are at the bottom.



FE2owlet-ECblue

EC-Technology

Product overview

Quick selection

Seite 20

Size 250

Seite 24

Size 300

Seite 28

Size 350

Seite 32

Size 400

Seite 36

Size 420

Seite 38

Size 450

Seite 40

Size 500

Seite 50

Size 560

Seite 58

Size 630

Seite 66

Size 710

Seite 82

Size 800

Seite 96

Size 910

Seite 110

Size 1000

Seite 124

Size 1250

Seite 132

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus


System
components

Control
technology

Appendix


Baugröße	Spannung	Typ	Luftförderrichtung	ErP	Seite
250	1~200-277 V	FN025-6I_0B_7 FN025-6I_0E_7	A ↗ ↘ V ↘ ↗ V	- 2015	24 26
300	1~200-277 V	FN030-6I_0E_7 FN030-6I_BA_7P2	A ↗ ↘ V ↘ ↗ V	2015 2015	28 30
350	1~200-277 V	FN035-6I_0E_7 FN035-6I_BA_7P2	A ↗ ↘ V ↘ ↗ V	- 2015	32 34
400	1~200-277 V	FN040-6I_BD_7P1	A ↗ ↘ V ↘ ↗ V	2015	36
420	1~200-277 V	FN042-6I_BD_7P1	A ↗ ↘ V ↘ ↗ V	2015	38
450	1~200-277 V	FN045-6I_BD_7P2 FN045-6I_BD_7P3 FN045-ZI_DC_5P4 FN045-ZI_DC_5P4	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015	40 42 44 46
500	1~200-277 V 3~200-240 V 3~380-480 V	FN050-6I_BD_7P2 FN050-ZI_DC_7P2 FN050-ZI_DC_7P2 FN050-ZI_DC_7P2	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015	48 50 52 54
560	1~200-277 V 3~200-240 V 3~380-480 V	FN056-6I_BD_5P4 FN056-ZI_DC_5P4 FN056-ZI_DC_5P4 FN056-ZI_DC_5P4	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015	56 58 60 62
630	1~200-277 V 3~200-240 V 3~380-480 V	FN063-6I_BD_7P2 FN063-ZI_DG_7P2 FN063-ZI_DG_7P2 FN063-ZI_GG_7P3 FN063-ZI_GL_7P3 FN063-ZI_DG_7P2 FN063-ZI_GG_7P3 FN063-ZI_GL_7P3	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015 2015 2015 2015 2015	64 66 68 70 72 74 76 78
710	1~200-277 V 3~200-240 V 3~380-480 V	FN071-6I_BD_7P3 FN071-ZI_DG_7P3 FN071-ZI_DG_7P3 FN071-ZI_GG_7P4 FN071-ZI_GL_7P4 FN071-ZI_DG_7P3 FN071-ZI_GG_7P4 FN071-ZI_GL_7P4	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015 2015 2015 2015 2015	80 82 84 86 88 90 92 94
800	1~200-277 V 3~200-240 V 3~380-480 V	FN080-ZI_DG_5P4 FN080-ZI_DG_5P4 FN080-ZI_GG_7P3 FN080-ZI_GL_7P3 FN080-ZI_DG_5P4 FN080-ZI_GG_7P3 FN080-ZI_GL_7P3	A ↗ ↘ V ↘ ↗ V	2015 2015 2015 2015 2015 2015 2015	96 98 100 102 104 106 108



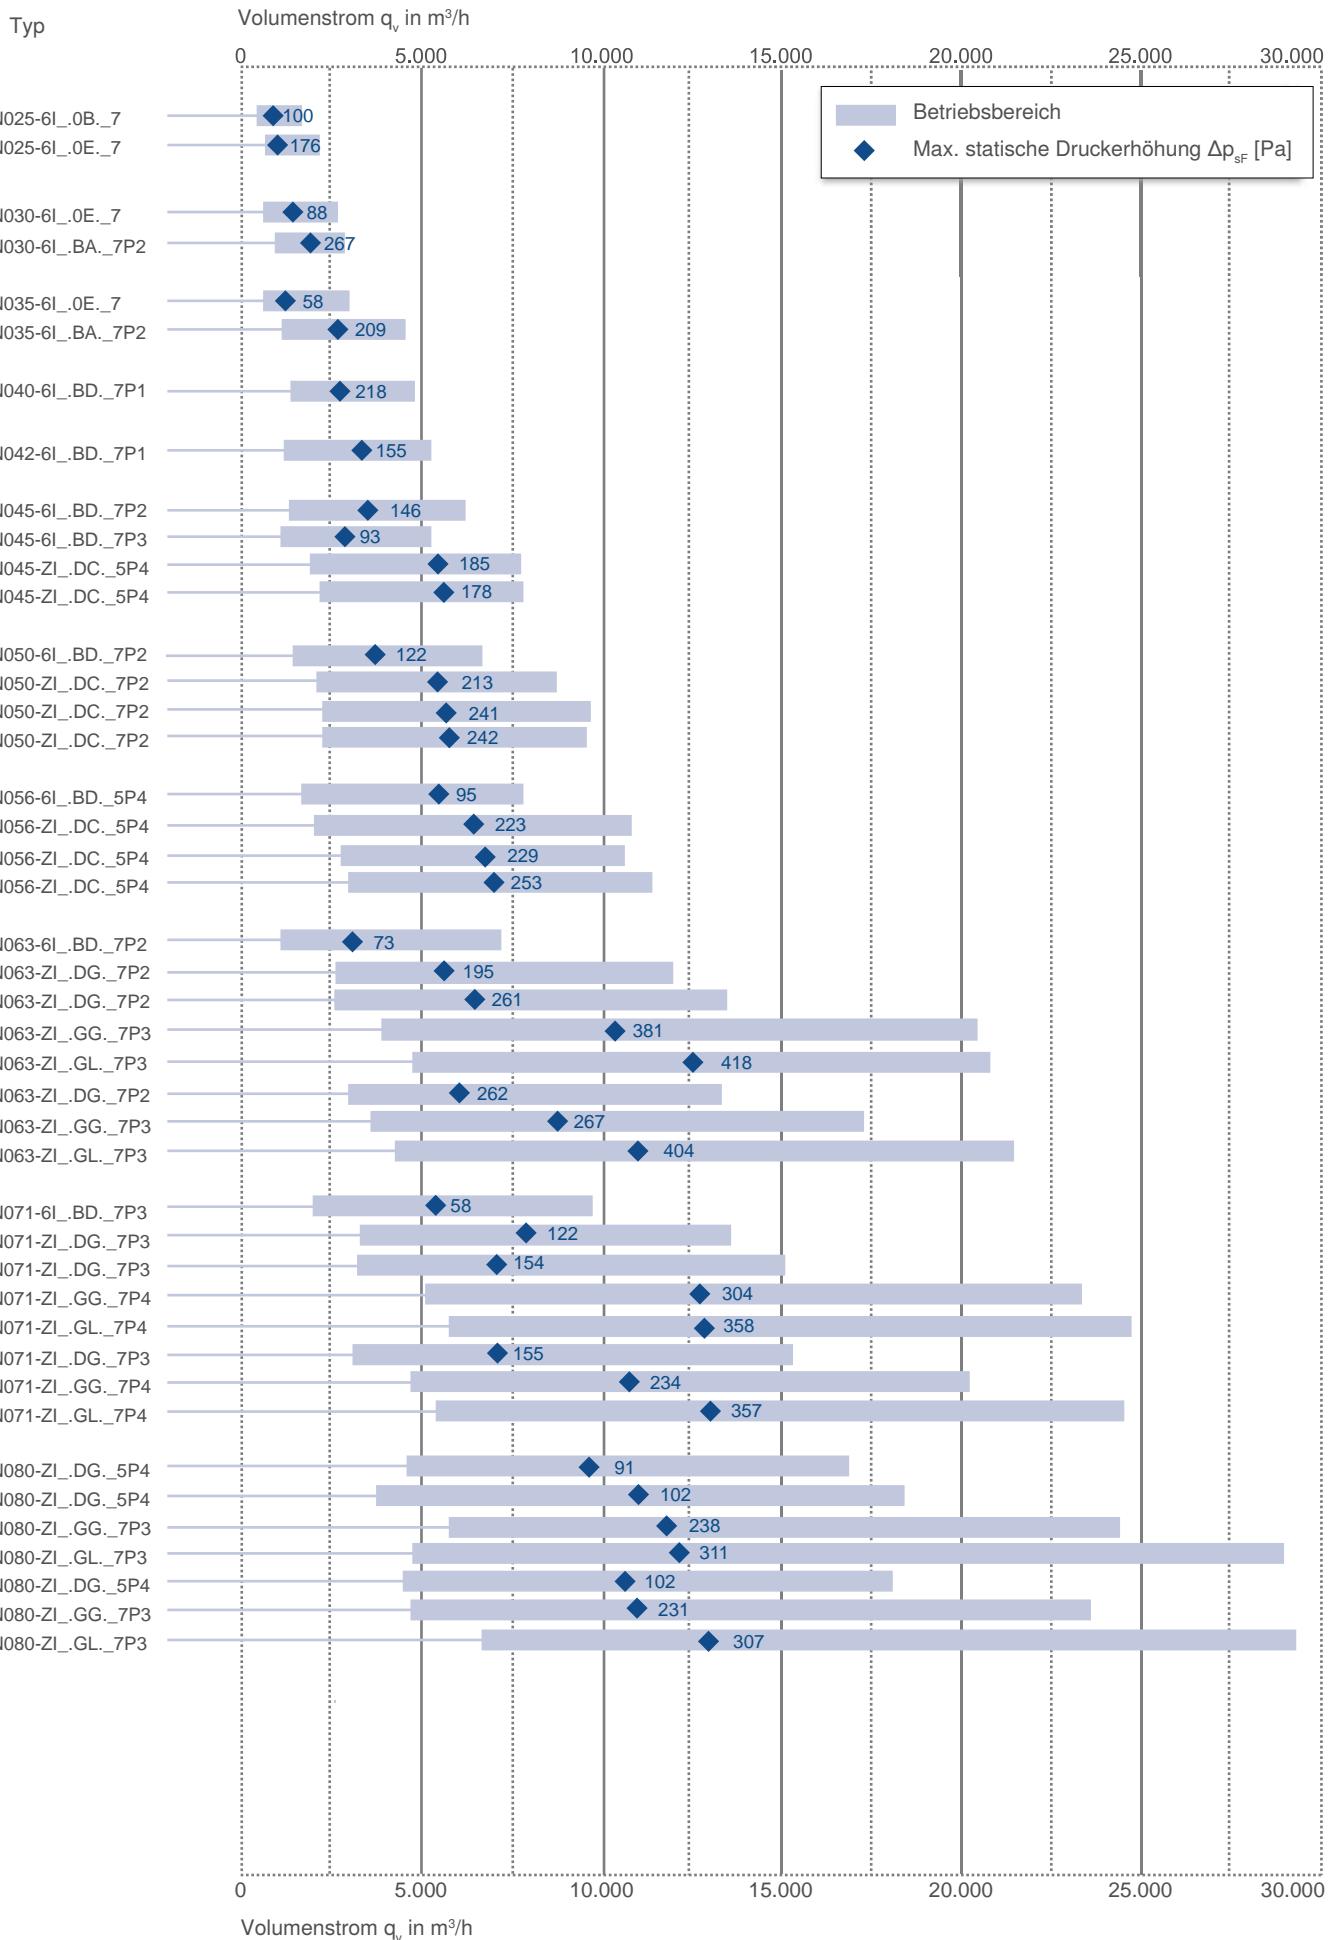

Size	Voltage	Type	Airflow direction	ErP	Page
910	1~200-277 V	FN091-ZI_.DG_.4P3	→ A ↘ V	2015	110
	3~200-240 V	FN091-ZI_.DG_.4P3	→ A ↘ V	2015	112
	3~380-480 V	FN091-ZI_.GG_.5P1	→ A ↘ V	2015	114
		FN091-ZI_.GL_.5P1	→ A ↘ V	2015	116
	3~380-480 V	FN091-ZI_.DG_.4P3	→ A ↘ V	2015	118
		FN091-ZI_.GG_.5P1	→ A ↘ V	2015	120
		FN091-ZI_.GL_.5P1	→ A ↘ V	2015	122
1000	3~200-240 V	FN100-ZI_.GG_.5P1	→ A ↘ V	2015	124
	3~380-480 V	FN100-ZI_.GL_.5P1	→ A ↘ V	2015	126
	3~200-240 V	FN100-ZI_.GG_.5P1	→ A ↘ V	2015	128
	3~380-480 V	FN100-ZI_.GL_.5P1	→ A ↘ V	2015	130
1250	3~200-240 V	FN125-ZI_.GL_.3P1	→ A ↘ V	2015	132
	3~380-480 V	FN125-ZI_.GQ_.3P1	→ A ↘ V	2015	134
	3~200-240 V	FN125-ZI_.GL_.3P1	→ A ↘ V	2015	136
	3~380-480 V	FN125-ZI_.GQ_.3P1	→ A ↘ V	2015	138



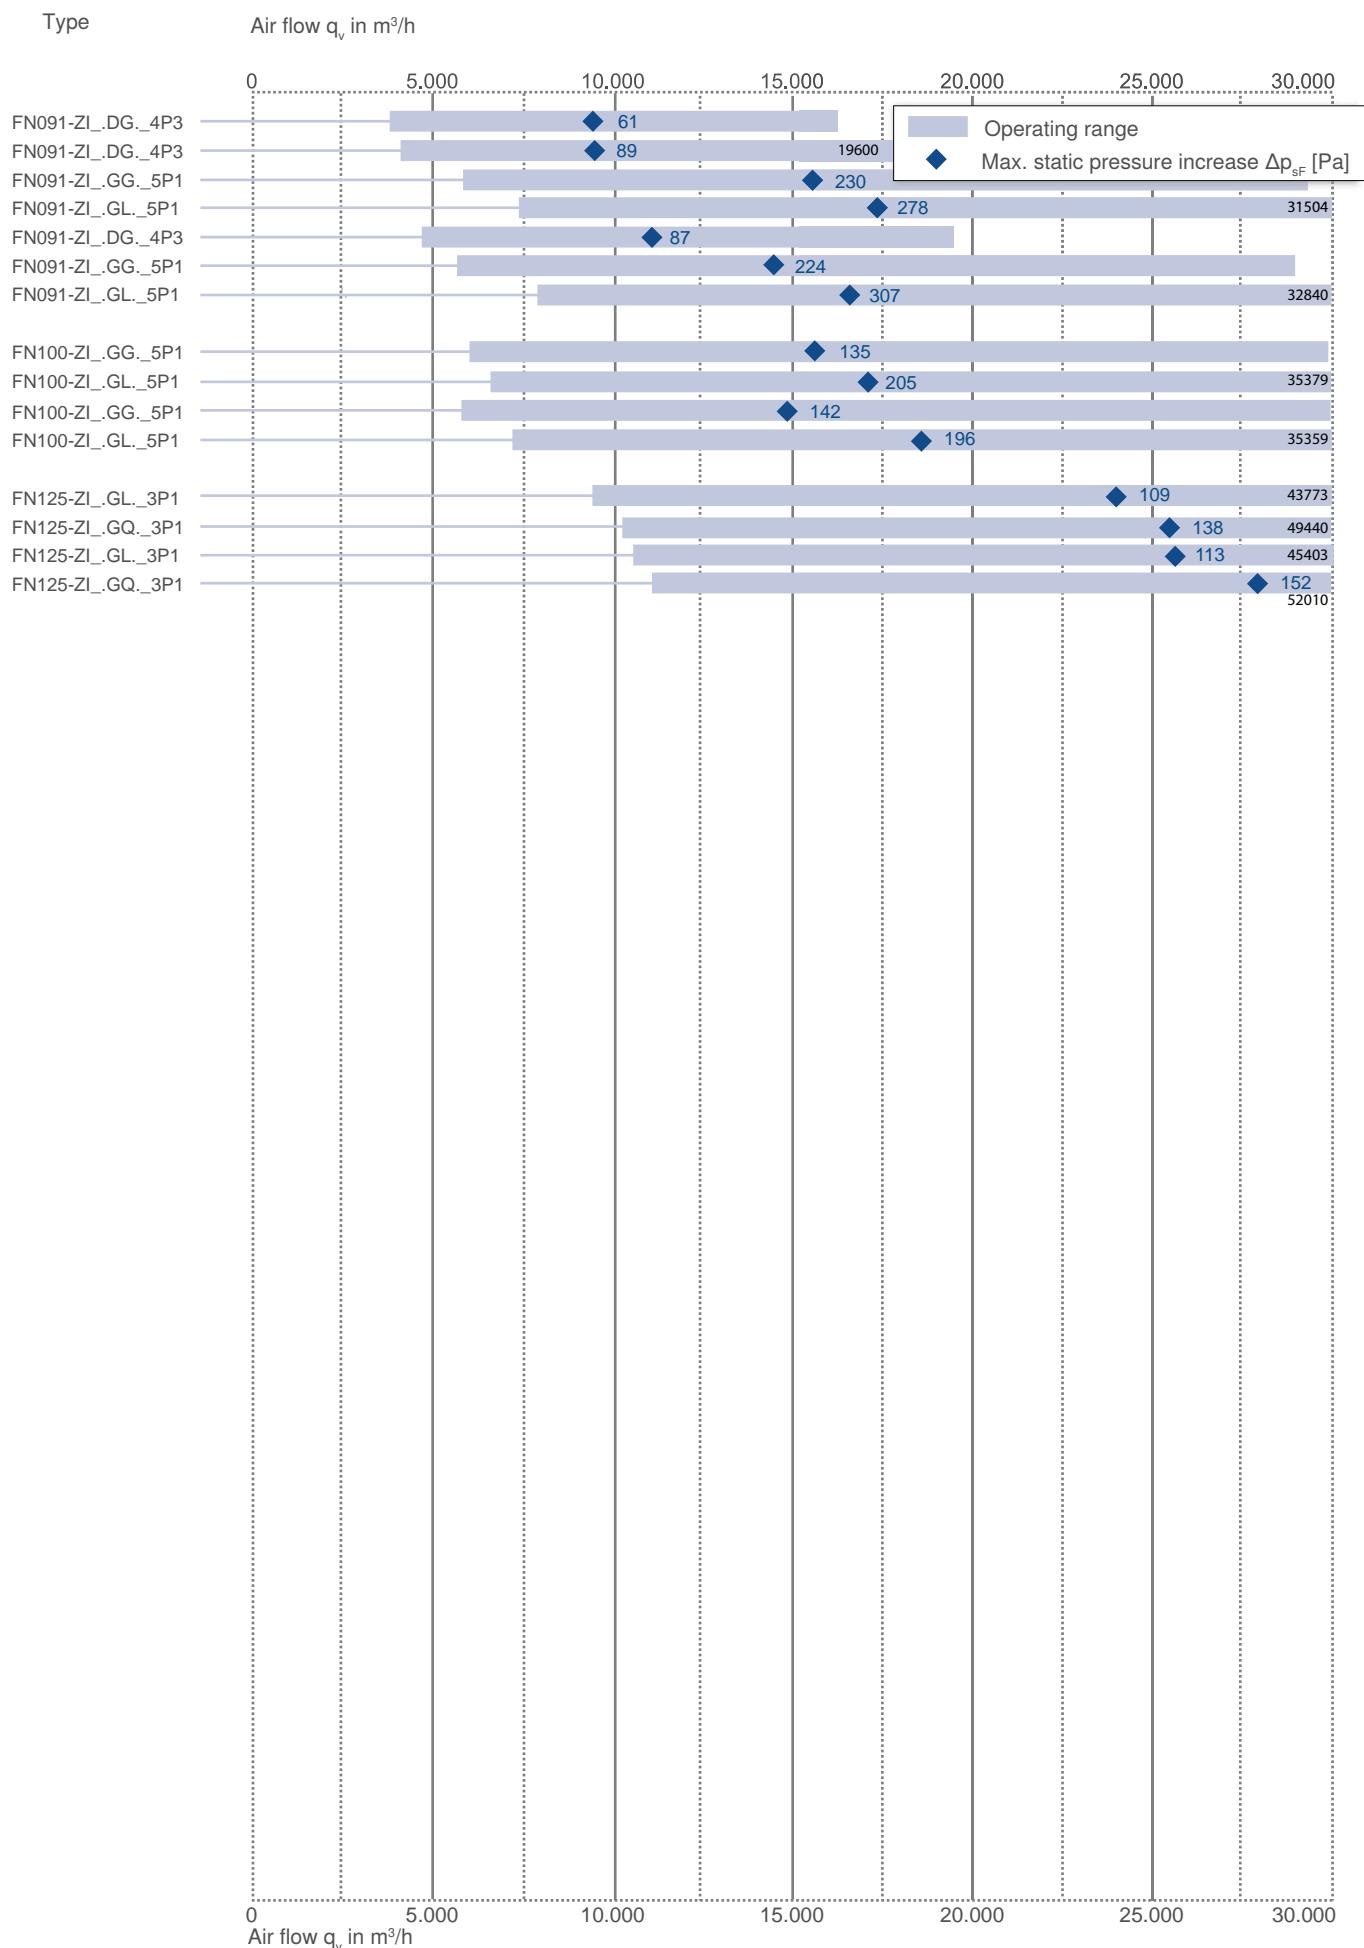

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO25



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 110 W*

Rated current I_N : 0.90-0.65 A*

Rated speed n_N : 2580 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: Integrated controller with attached cable

Number of blades: 7

Protection class: IP44

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, powder-coated, ultramarine blue


Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_1 < 125$ W)

* Rated data

Characteristic curve

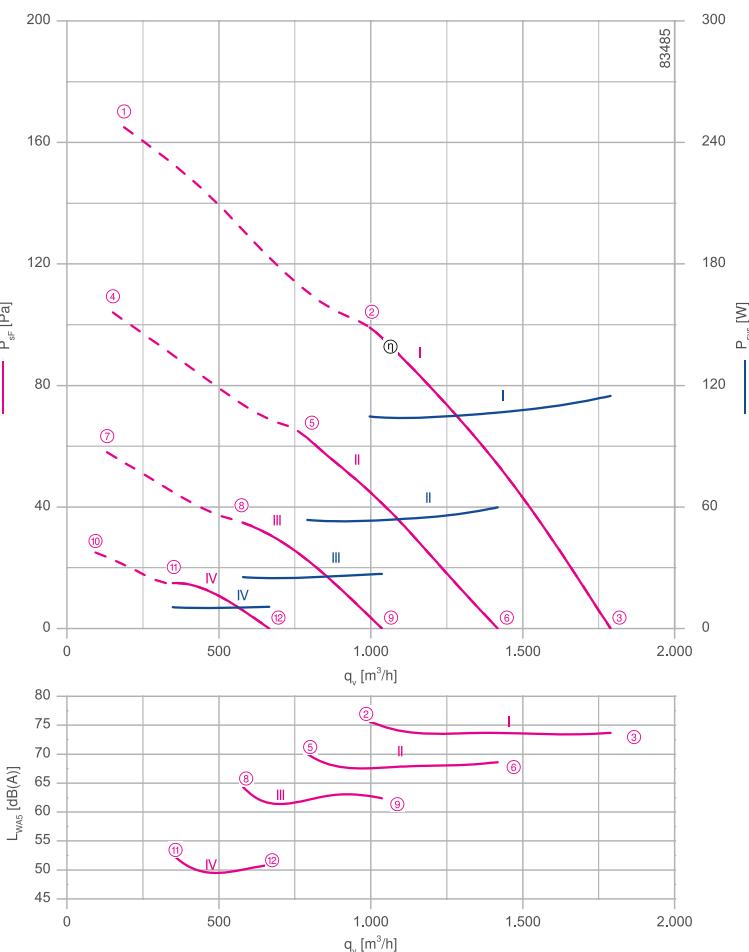

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 528

KT00036A


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

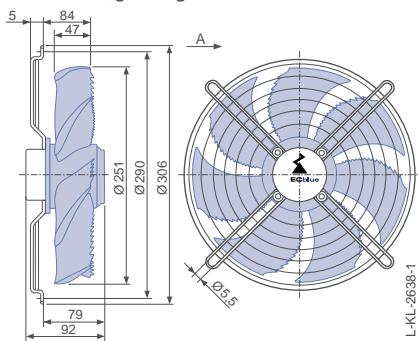


Design L - round full bell mouth, guard grille suction side

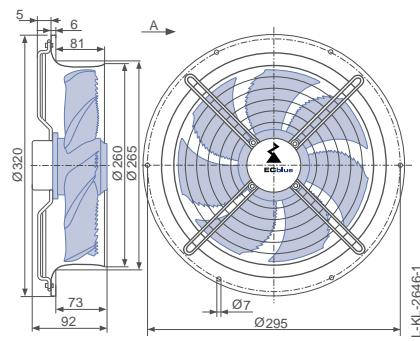

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

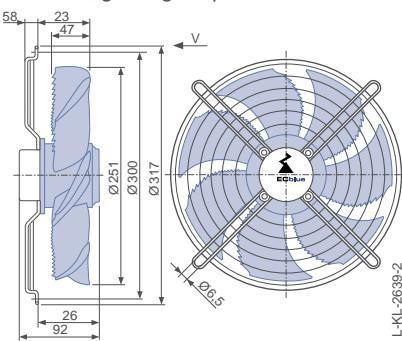

Performance data

Type	Characteristic curve	Torque	Operating point	Current	Input power	Suction side sound power level L_{WAS} dB(A)
		%		I A	P _{sys} W	
FN025-6I..OB..7	I	100	①	0.64	90	
		100	②	0.72	100	76
		100	③	0.78	110	74
	II	80	④	0.35	46	
		80	⑤	0.40	55	70
		80	⑥	0.44	60	69
	III	60	⑦	0.19	22	
		60	⑧	0.21	26	64
		60	⑨	0.22	28	62
	IV	40	⑩	0.11	10	
		40	⑪	0.11	10	51
		40	⑫	0.12	11	51

Current values determined at 230V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type	FN025-6ID.0B.A7	FN025-6IL.0B.A7	FN025-6IK.0B.V7	FN025-6II.0B.V7
Article no.	140029	140033	140049	140041
Weight kg	2.50	3.50	2.90	2.50
				3.50


Control technology

Control modules




Page 452

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

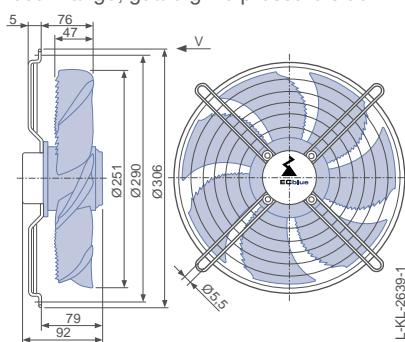

Design H - pipe sockets with a flange, guard grille pressure side

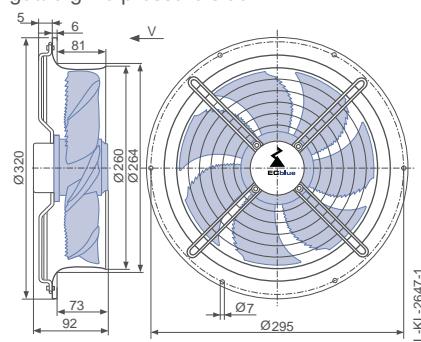

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO25



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 230 W*

Rated current I_N : 1.65- 1.20 A*

Rated speed n_N : 3250 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: Integrated controller with attached cable

Number of blades: 7

Protection class: IP44

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, powder-coated, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{startA} : 31.7 %



Efficiency: $N_{actual} = 42.2 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

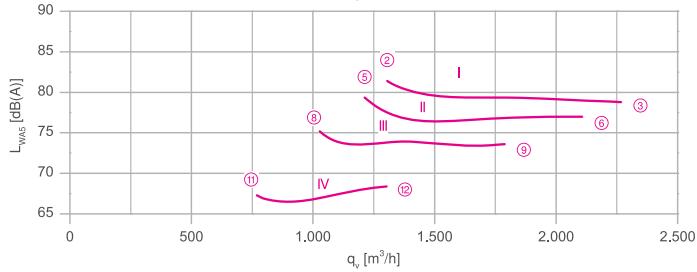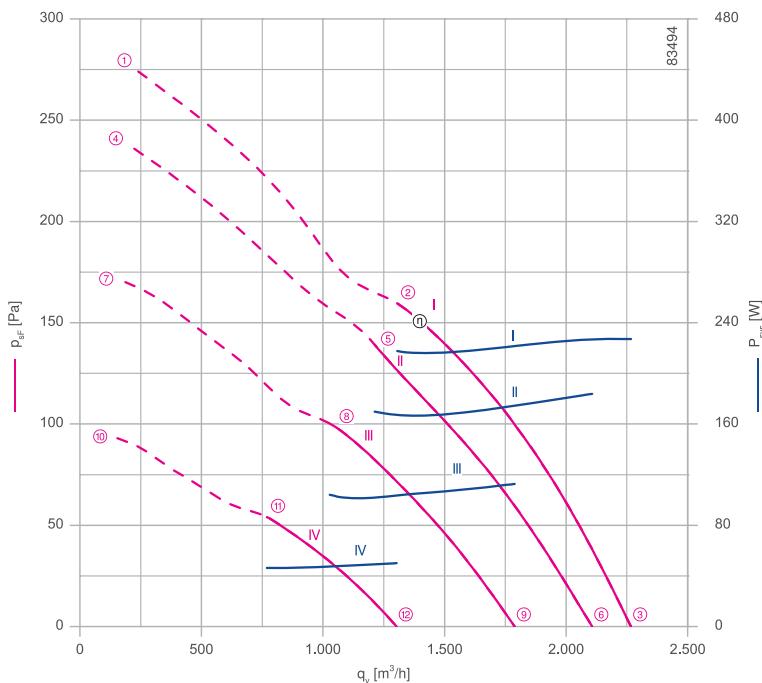

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 528

KT00036A


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

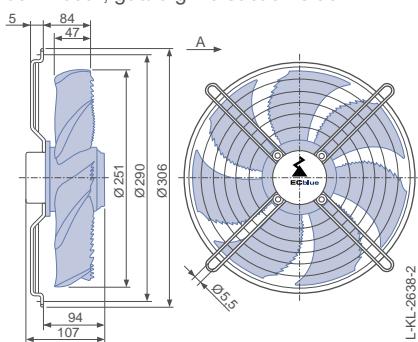


Design L - round full bell mouth, guard grille suction side

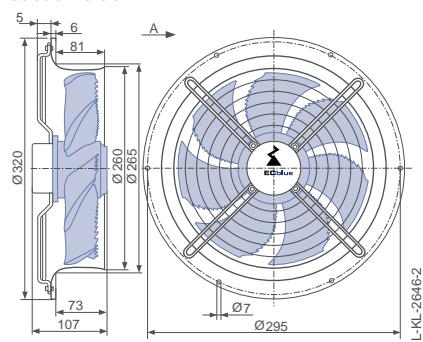

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

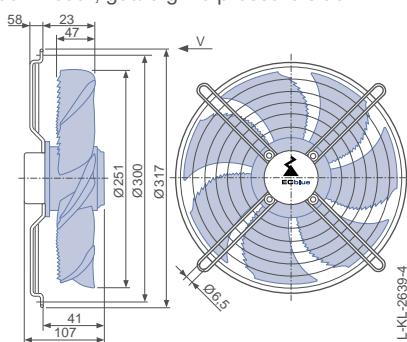

Performance data

Type	Characteristic curve	Torque %	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN025-6I..0E..7	I	100	①	1.20	190	
		100	②	1.40	220	82
		100	③	1.45	230	79
	II	80	④	0.98	150	
		80	⑤	1.10	170	79
		80	⑥	1.20	180	77
	III	60	⑦	0.62	90	
		60	⑧	0.72	100	75
		60	⑨	0.76	110	74
	IV	40	⑩	0.31	42	
		40	⑪	0.35	46	67
		40	⑫	0.37	50	68

Current values determined at 230V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type	FN025-6ID.0E.A7	FN025-6IL.0E.A7	FN025-6IK.0E.V7	FN025-6II.0E.V7
Article no.	140030	140034	140050	140042
Weight kg	3.00	4.00	3.40	3.00
				4.00


Control technology

Control modules




Page 452

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

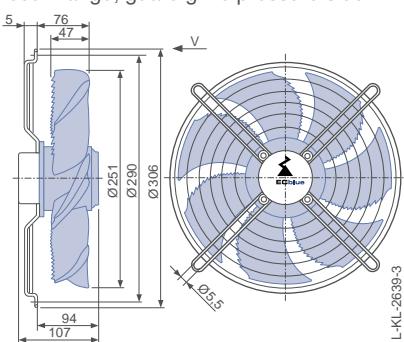

Design H - pipe sockets with a flange, guard grille pressure side

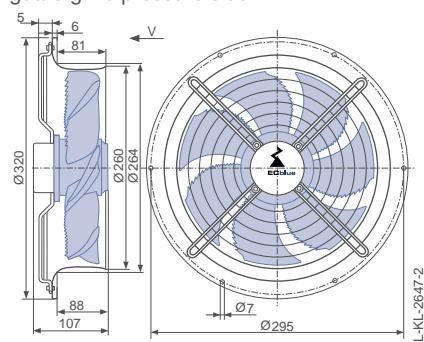

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO30



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 150 W*

Rated current I_N : 1.15-0.84 A*

Rated speed n_N : 1900 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: Integrated controller with attached cable

Number of blades: 7

Protection class: IP44

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, powder-coated, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 32.0 %


Efficiency: $N_{actual} = 43.7 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

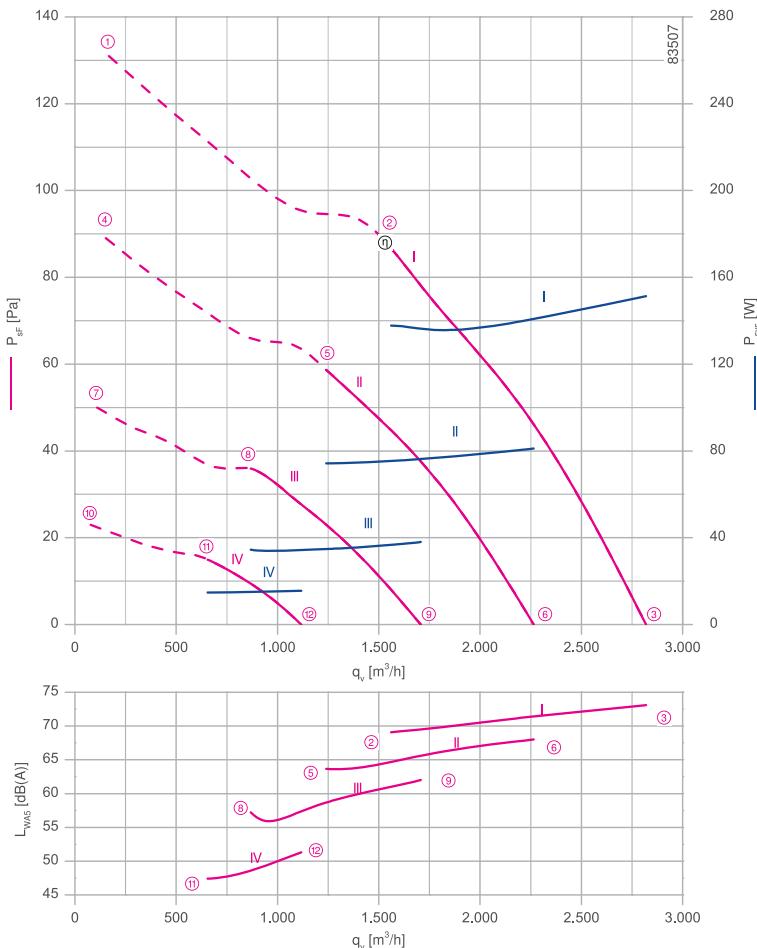

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 528

KT00036A


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

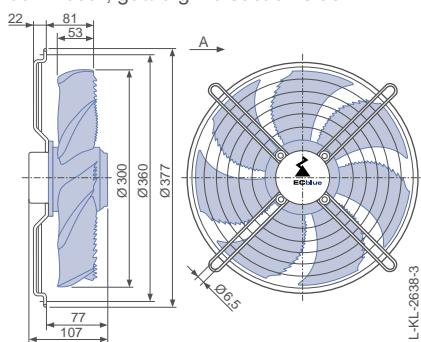


Design L - round full bell mouth, guard grille suction side

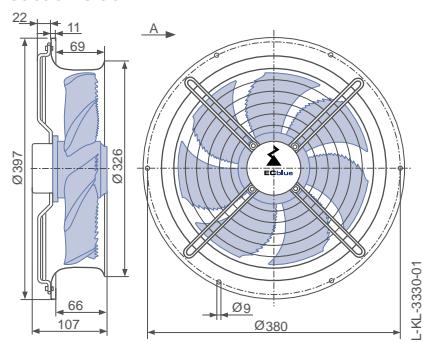

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

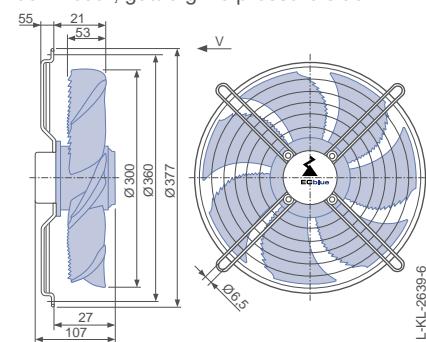

Performance data

Type	Characteristic curve	Torque %	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN030-6I..0E..7	I	100	①	0.82	120	
		100	②	0.94	140	69
		100	③	1.00	150	73
	II	80	④	0.48	70	
		80	⑤	0.52	75	64
		80	⑥	0.58	80	68
	III	60	⑦	0.26	32	
		60	⑧	0.27	34	57
		60	⑨	0.29	38	62
	IV	40	⑩	0.14	14	
		40	⑪	0.15	15	47
		40	⑫	0.15	16	51

Current values determined at 230V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type	FN030-6ID.0E.A7	FN030-6IL.0E.A7	FN030-6IK.0E.V7	FN030-6II.0E.V7
Article no.	140031	140035	140051	140043
Weight kg	3.70	5.30	3.90	3.70
				FN030-6IH.0E.V7
				140047


Control technology

Control modules




Page 452

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

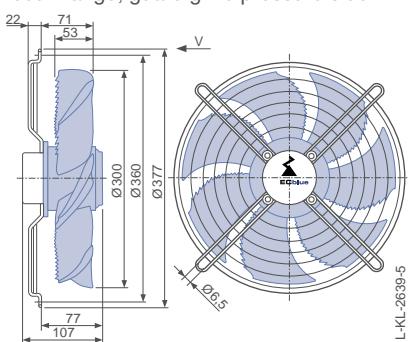

Design H - pipe sockets with a flange, guard grille pressure side

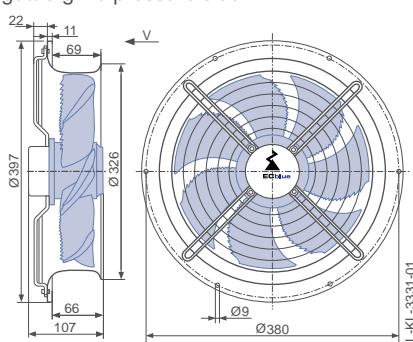


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN030-6I_.BA._7P2	I	2750	①	2.20	520	
			②	1.80	420	83
			③	1.40	320	84
	II	2200	④	1.20	280	
			⑤	0.96	220	78
			⑥	0.76	170	78
	III	1650	⑦	0.56	130	
			⑧	0.46	100	71
			⑨	0.39	85	71
	IV	1100	⑩	0.24	46	
			⑪	0.22	38	61
			⑫	0.20	34	61

Current values determined at 230V

Fan ordering information

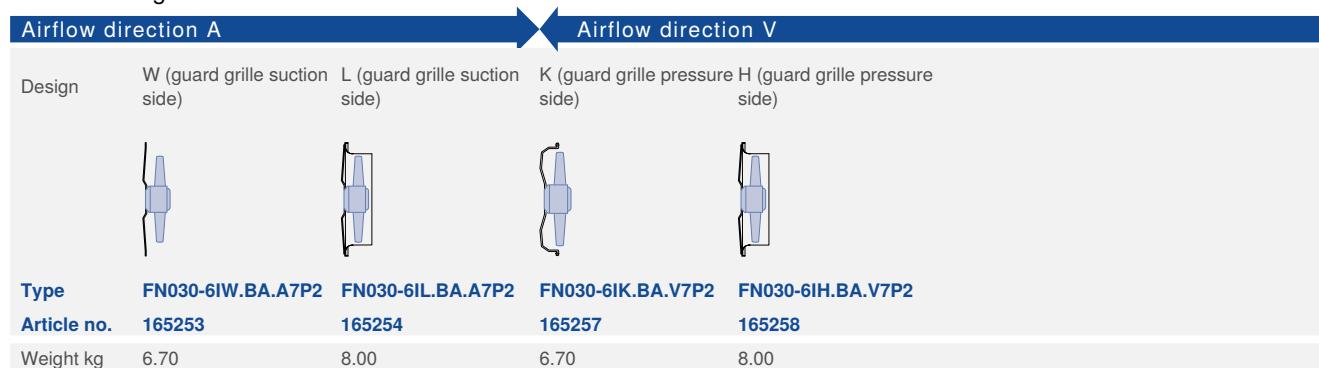


Control technology



Page 452

Design H - pipe sockets with a flange, guard grille pressure side

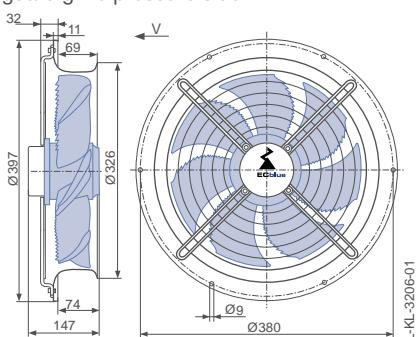

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 35



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 120 W*

Rated current I_N : 0.90-0.65 A*

Rated speed n_N : 1290 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: Integrated controller with attached cable

Number of blades: 7

Protection class: IP44

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, powder-coated, ultramarine blue


Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_1 < 125$ W)

* Rated data

Characteristic curve

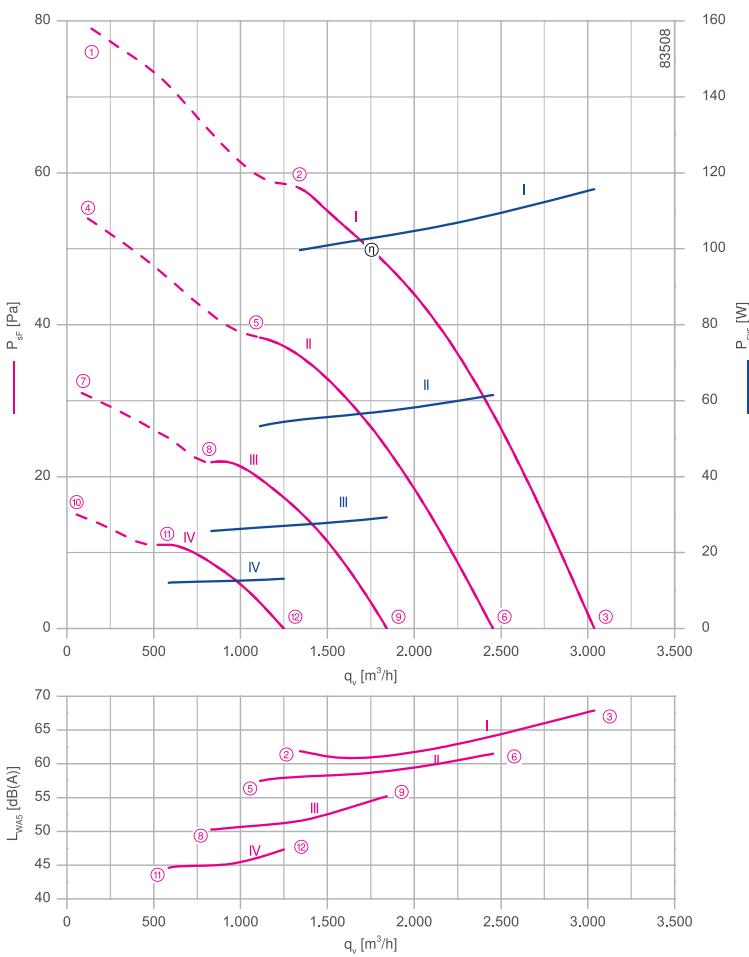

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 528

KT00036A


System components

Page 430

Dimensions mm


Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

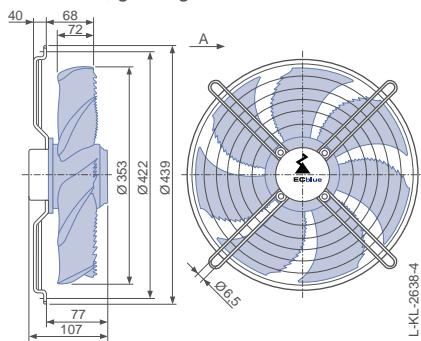


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

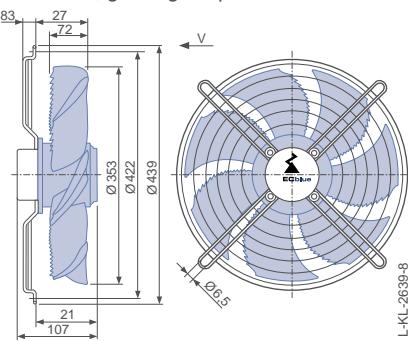

Design L - round full bell mouth, guard grille suction side

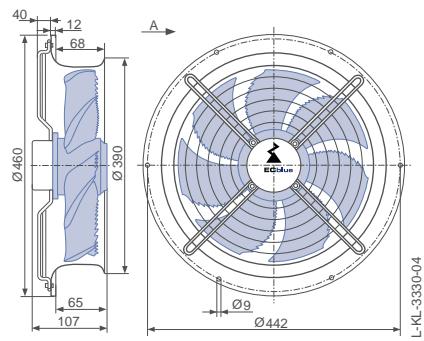

Performance data

Type	Characteristic curve	Torque	Operating point	Current	Input power	Suction side sound power level L_{WAS} dB(A)
		%		I A	P _{sys} W	
FN035-6I..0E..7	I	100	①	0.66	95	
		100	②	0.70	100	62
		100	③	0.78	120	68
	II	80	④	0.37	50	
		80	⑤	0.39	55	58
		80	⑥	0.44	60	62
	III	60	⑦	0.20	24	
		60	⑧	0.21	26	50
		60	⑨	0.24	30	55
	IV	40	⑩	0.12	12	
		40	⑪	0.13	12	45
		40	⑫	0.13	13	47

Current values determined at 230V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type	FN035-6ID.0E.A7	FN035-6IL.0E.A7	FN035-6IK.0E.V7	FN035-6II.0E.V7
Article no.	140032	140036	140052	140044
Weight kg	4.40	6.40	4.80	4.40
				6.40


Control technology

Control modules




Page 452

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

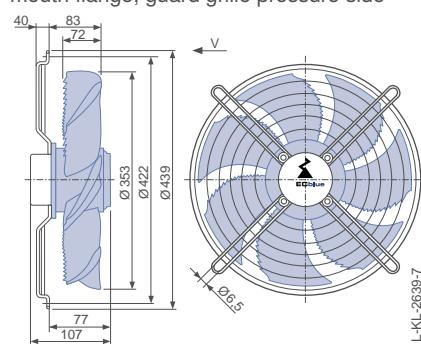

Design H - pipe sockets with a flange, guard grille pressure side

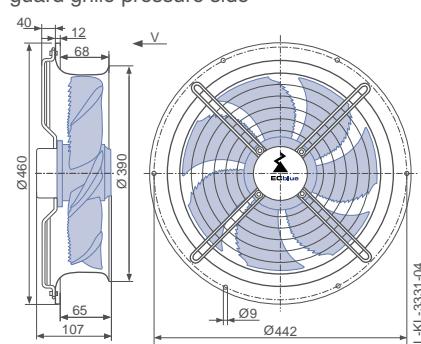

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO 35



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 460 W*

Rated current I_N : 2.40- 1.70 A*

Rated speed n_N : 2000 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 38.8 %


Efficiency: $N_{actual} = 47.2 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

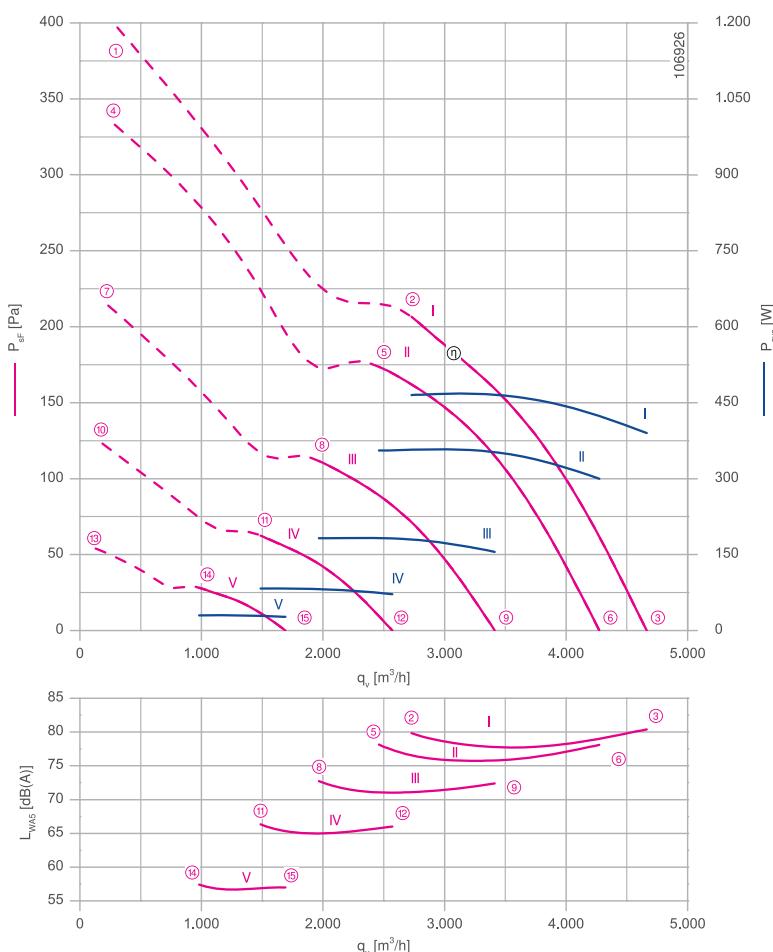

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

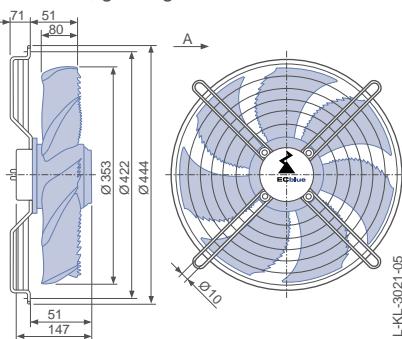

Design L - round full bell mouth, guard grille suction side

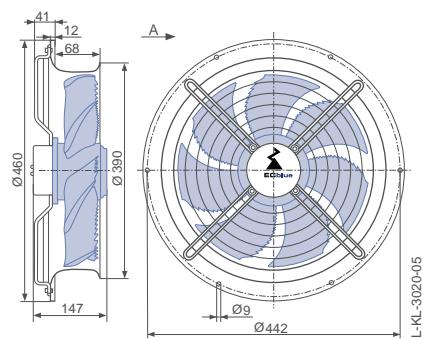

Design Q - square full bell mouth, guard grille suction side

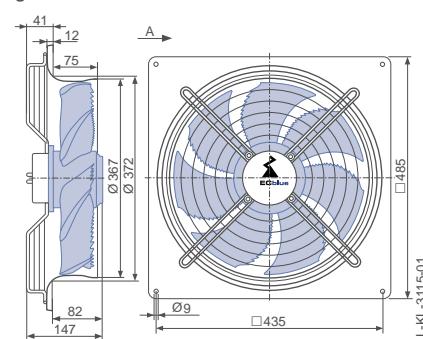

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
FN035-6I.BA.7P2	I	2000	① ② ③	2.90 2.00 1.70	660 460 390	80 80	55
	II	1830	④ ⑤ ⑥	2.20 1.55 1.30	500 360 300	78 78	60
	III	1460	⑦ ⑧ ⑨	1.10 0.80 0.68	250 180 160	73 72	70
	IV	1100	⑩ ⑪ ⑫	0.50 0.38 0.34	110 85 70	66 66	
	V	730	⑬ ⑭ ⑮	0.22 0.18 0.17	40 30 26	57 57	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V		
Design	W (guard grille suction side)	L (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type Article no.	FN035-6IW.BA.A7P2 165261	FN035-6IL.BA.A7P2 165262	FN035-6IQ.BA.A7P2 165263	FN035-6IK.BA.V7P2 165265
Weight kg	7.20	8.70	9.50	7.20
				9.50

Control technology


Control modules




Page 452

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

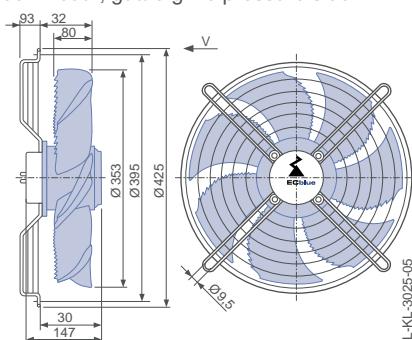

Design Q - square full bell mouth, guard grille pressure side

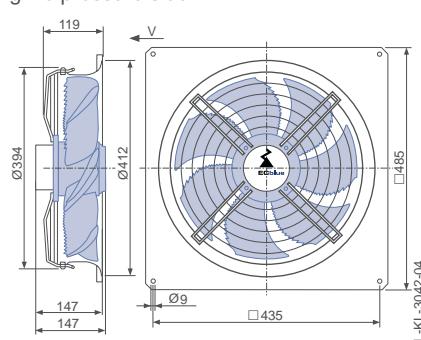

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO 40



Beschreibung

Motortechnologie: EC
Bemessungsspannung U: 1~ 200-277 V*
Bemessungsfrequenz f: 50/60 Hz*
Aufnahmeleistung P_{sys} : 420 W*
Bemessungsstrom I: 2,20-1,55 A*
Bemessungsdrehzahl n_{max} : 1800 min⁻¹*
Thermische Klasse: THCL155*

Min. zulässige Fördermitteltemperatur $t_{R(min)}$: -35 °C
Max. zulässige Fördermitteltemperatur $t_{R(max)}$: 60 °C

Elektrischer Anschluss: Integrierter Controller

Flügelanzahl: 7

Schutzart: IP54

Motorschutz: Integriertes aktives Temperaturmanagement

Flügel: Hochleistungs-Verbundwerkstoff, unlackiert, schwarz

Rotor: Stahl, 2-Schicht-Lackierung, ultramarinblau

Konformität: ErP 2015, CE

ErP-Daten


Wirkungsgrad η_{statA} : 49,5 %
Effizienzgrad: $N_{ist} = 58,5 / N_{soll} = 40^{**}$

EC-Controller integriert

* Leistungsschilddaten

**ErP 2015

Characteristic curve

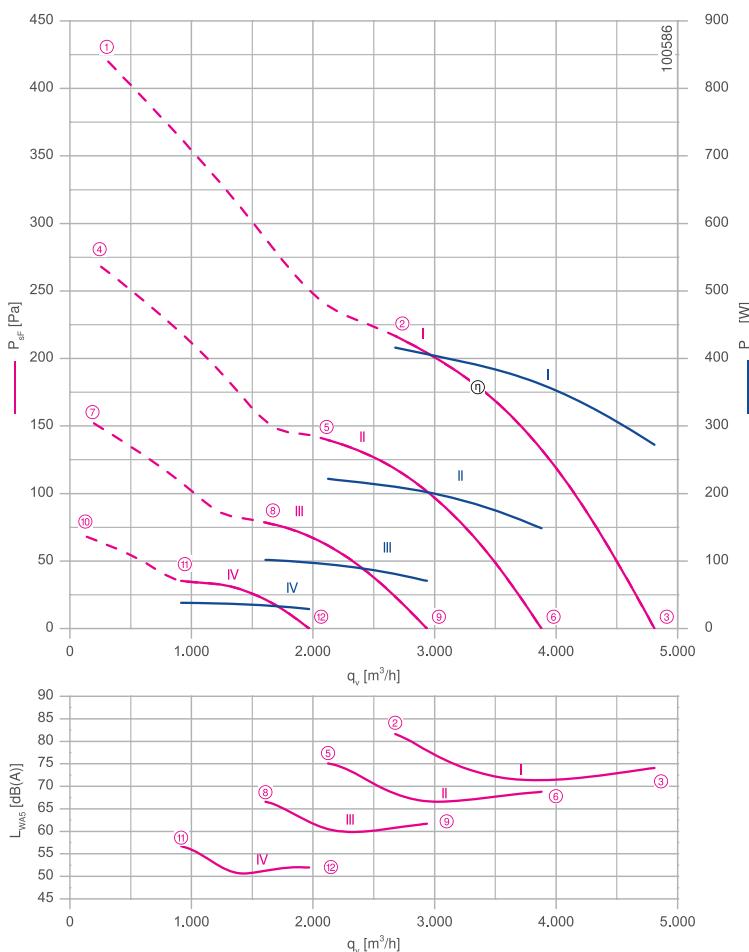

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

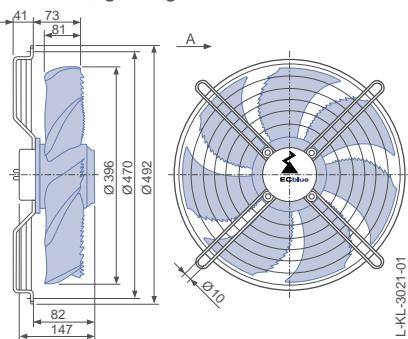


Design L - round full bell mouth, guard grille suction side

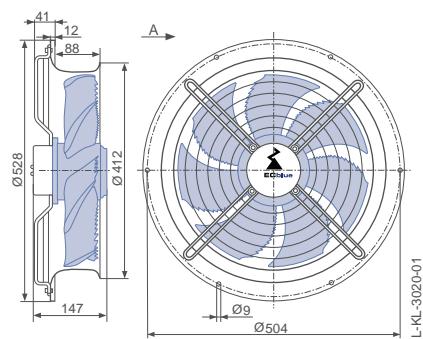

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

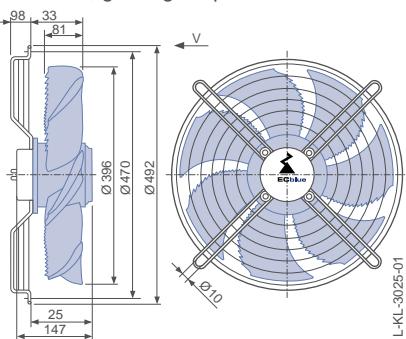


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN040-61_BD_7P1	I	1800	①	2.50	580	
			②	1.85	420	83
			③	1.20	270	74
	II	1440	④	1.35	300	
			⑤	0.98	220	75
			⑥	0.66	150	69
	III	1080	⑦	0.62	140	
			⑧	0.48	100	67
			⑨	0.35	70	62
	IV	720	⑩	0.28	48	
			⑪	0.24	38	56
			⑫	0.19	28	52

Current values determined at 230V

Fan ordering information

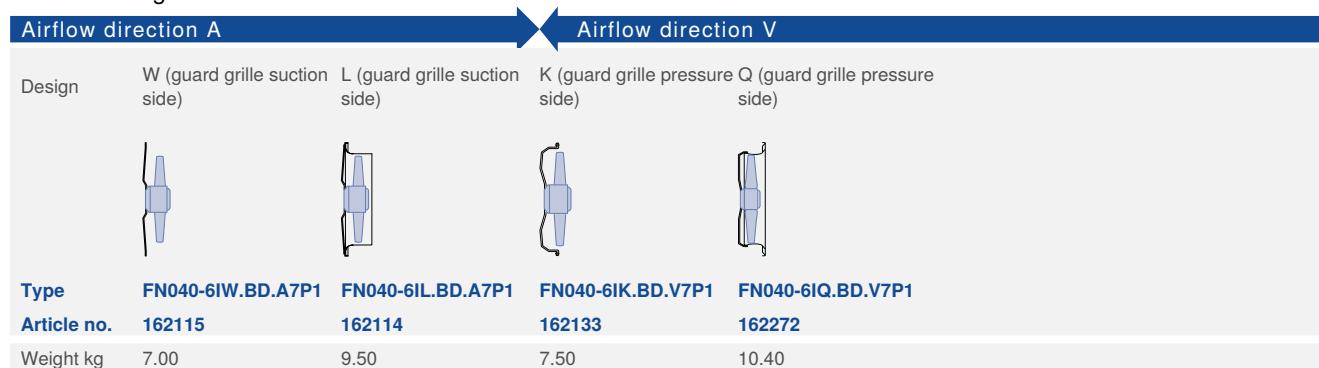


Control technology



Page 452

Design Q - square full bell mouth, guard grille pressure side

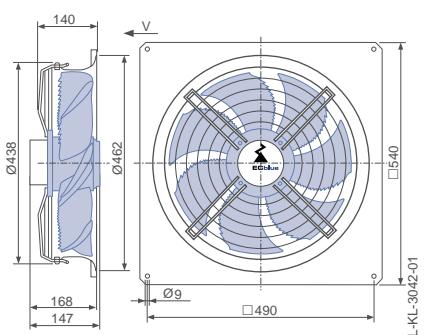

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 4 2



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 390 W*

Rated current I_N : 1.95- 1.45 A*

Rated speed n_N : 1600 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{startA} : 46.2 %


Efficiency: $N_{actual} = 55.3 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

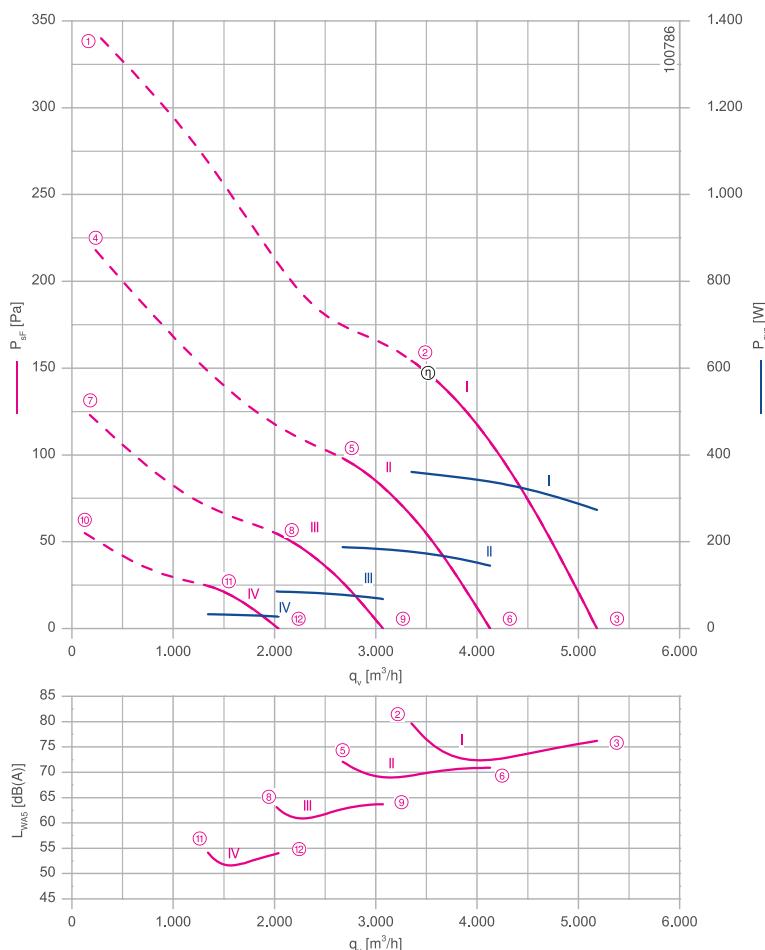

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

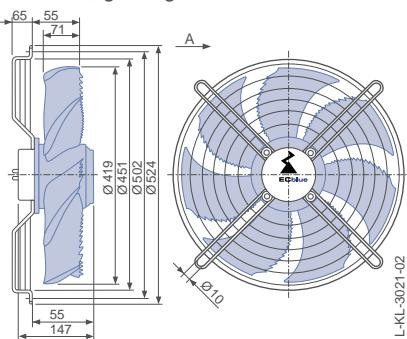


Design L - round full bell mouth, guard grille suction side

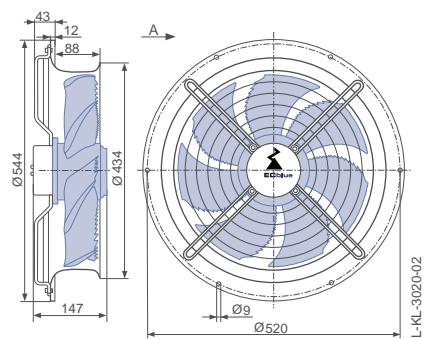

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

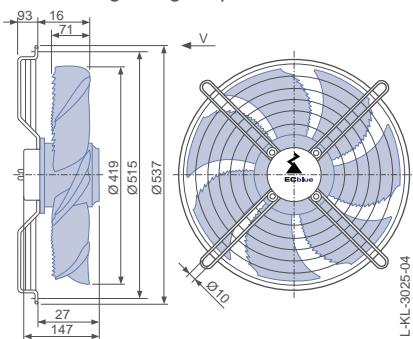

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN042-6I_.BD._7P1	I	1600	①	2.30	540	
			②	1.60	360	80
			③	1.20	270	76
	II	1280	④	1.20	270	
			⑤	0.84	190	72
			⑥	0.66	150	71
	III	960	⑦	0.56	120	
			⑧	0.40	85	63
			⑨	0.33	70	64
	IV	640	⑩	0.24	44	
			⑪	0.20	32	51
			⑫	0.18	28	54

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side) H (guard grille pressure side)
Type	FN042-6IW.BD.A7P1	FN042-6IL.BD.A7P1	FN042-6IK.BD.V7P1
Article no.	162118	162117	162136
Weight kg	7.30	9.70	7.80
			9.60


Control technology

Control modules



Page 452

Design H - pipe sockets with a flange, guard grille pressure side

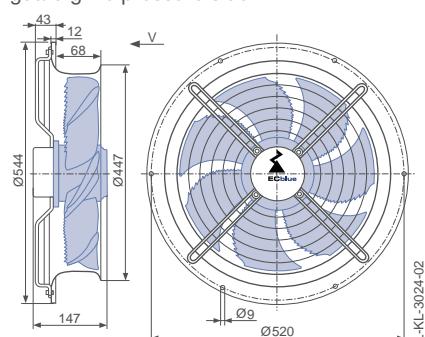

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 45



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 390 W*

Rated current I_N : 1.95- 1.40 A*

Rated speed n_N : 1470 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{startA} : 45.1 %


Efficiency: $N_{actual} = 54.1 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

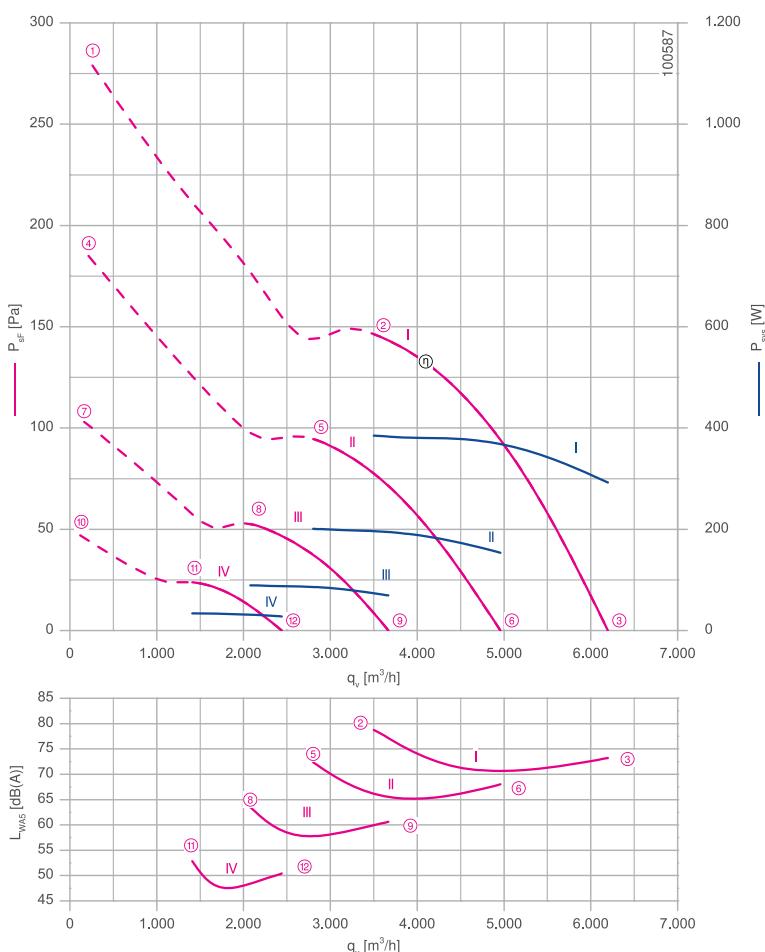

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

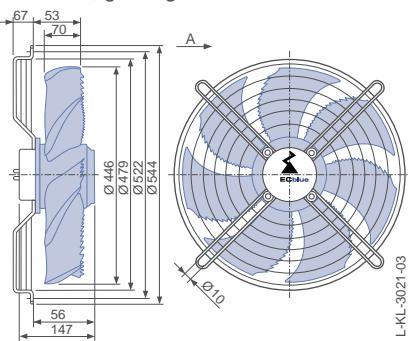


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

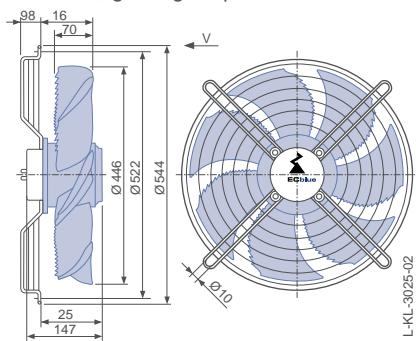

Fan ordering information

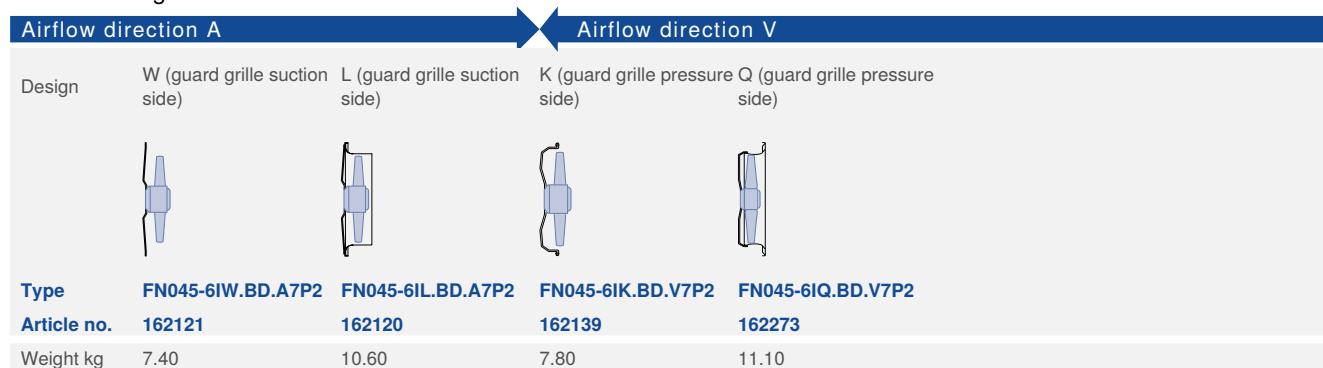


Control technology



Page 452

Design Q - square full bell mouth, guard grille pressure side

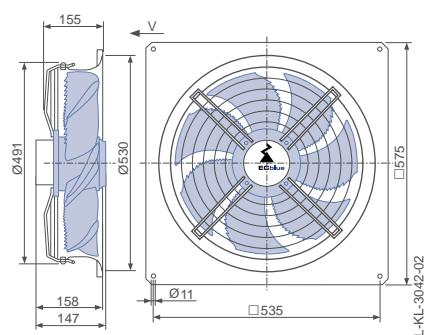

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 45



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 220 W*

Rated current I_N : 1.10-0.80 A*

Rated speed n_N : 1100 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 43.3 %


Efficiency: $N_{actual} = 53.8 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

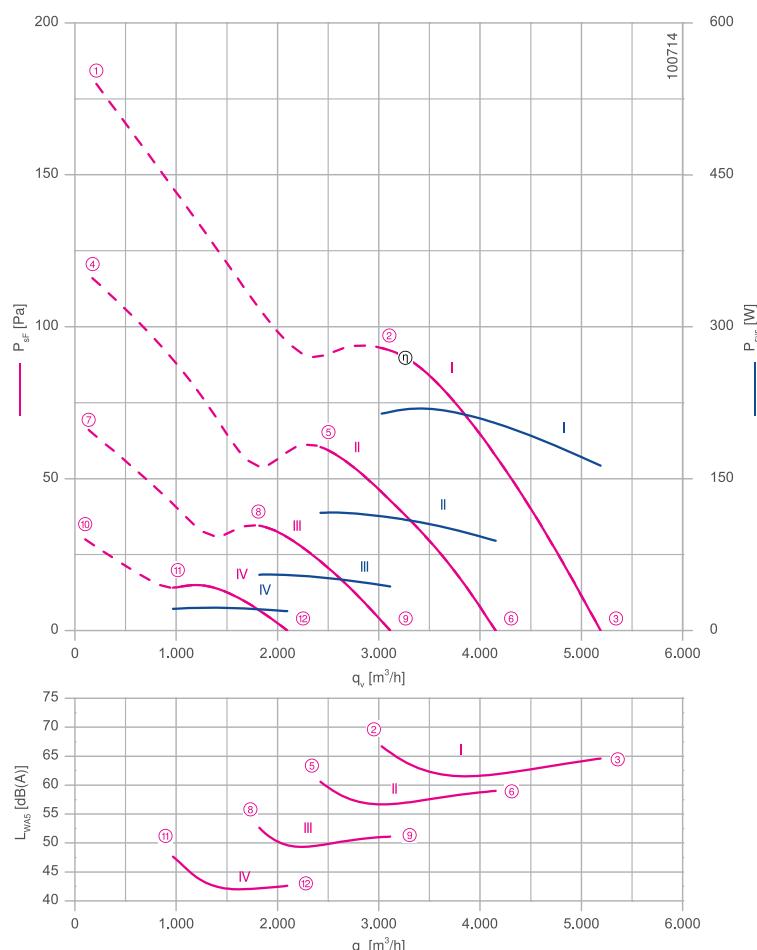

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

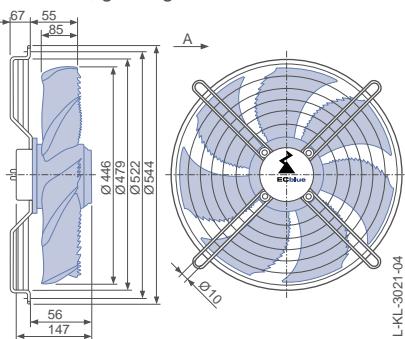


Design L - round full bell mouth, guard grille suction side

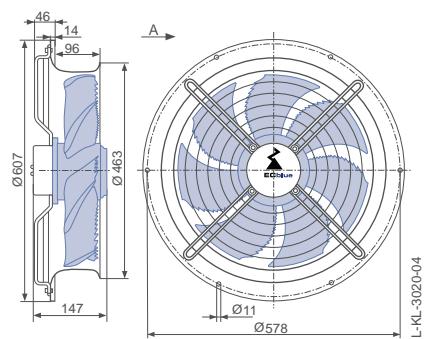

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

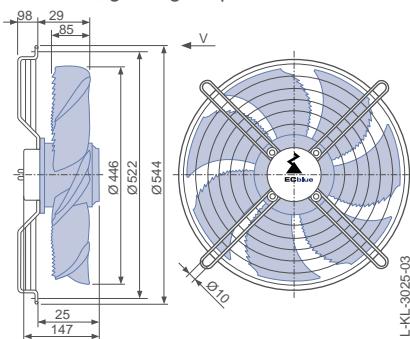

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN045-6I_.BD._7P3	I	1100	①	1.25	290	
			②	0.94	210	67
			③	0.72	160	65
	II	880	④	0.68	150	
			⑤	0.52	120	60
			⑥	0.40	90	59
	III	660	⑦	0.34	70	
			⑧	0.27	55	52
			⑨	0.23	44	51
	IV	440	⑩	0.18	28	
			⑪	0.16	22	43
			⑫	0.15	19	43

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side) Q (guard grille pressure side)
			
Type	FN045-6IW.BD.A7P3	FN045-6IL.BD.A7P3	FN045-6IK.BD.V7P3
Article no.	162124	162123	162142
Weight kg	7.50	10.60	7.90
			11.20


Control technology

Control modules



Page 452

Design Q - square full bell mouth, guard grille pressure side

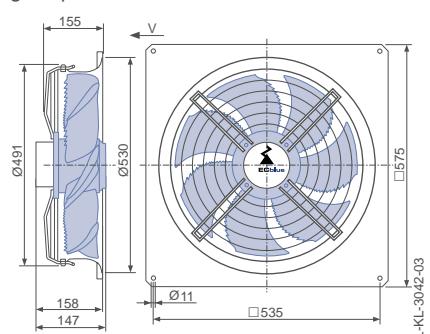

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 45



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.76 kW*

Rated current I_N : 3.90- 3.30 A*

Rated speed n_N : 1650 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 41.2 %


Efficiency: $N_{actual} = 48.3 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

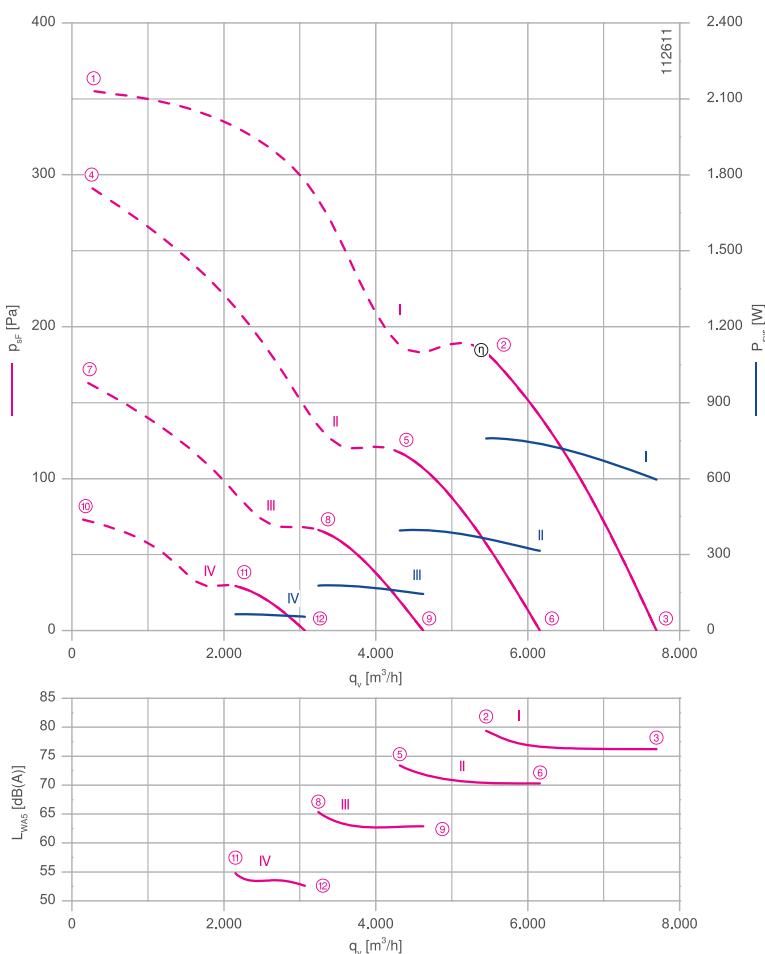

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

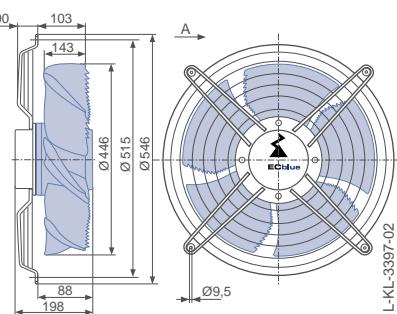


Design Q - square full bell mouth, guard grille suction side

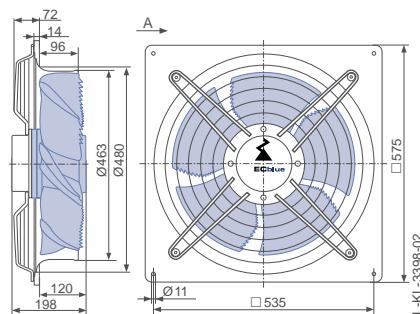

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

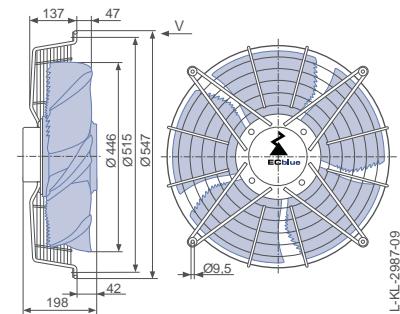

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN045-ZI_.DC._5P4	I	1650	①	3.50	780	
			②	3.40	760	80
			③	2.70	600	76
	II	1320	④	2.60	580	
			⑤	1.85	390	73
			⑥	1.50	310	70
	III	990	⑦	1.20	250	
			⑧	0.84	180	65
			⑨	0.68	140	63
	IV	660	⑩	0.44	85	
			⑪	0.37	65	55
			⑫	0.33	55	53

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type	FN045-ZIW.DC.A5P4	FN045-ZIQ.DC.A5P4	FN045-ZIK.DC.V5P4
Article no.	168971	168972	168974
Weight kg	12.20	15.60	12.50
			168975
			15.20

Control technology


Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

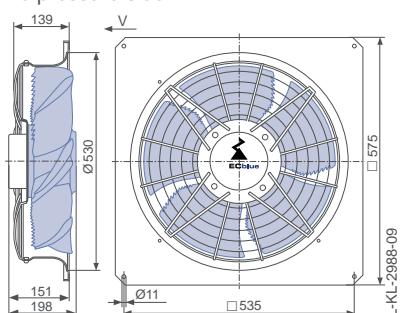

FE2owlet-ECblue

for three phase alternating current, 380-480 V

F N O 45



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.74 kW*

Rated current I_N : 1.35 - 1.10 A*

Rated speed n_N : 1650 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 41.4 %


Efficiency: $N_{actual} = 48.5 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

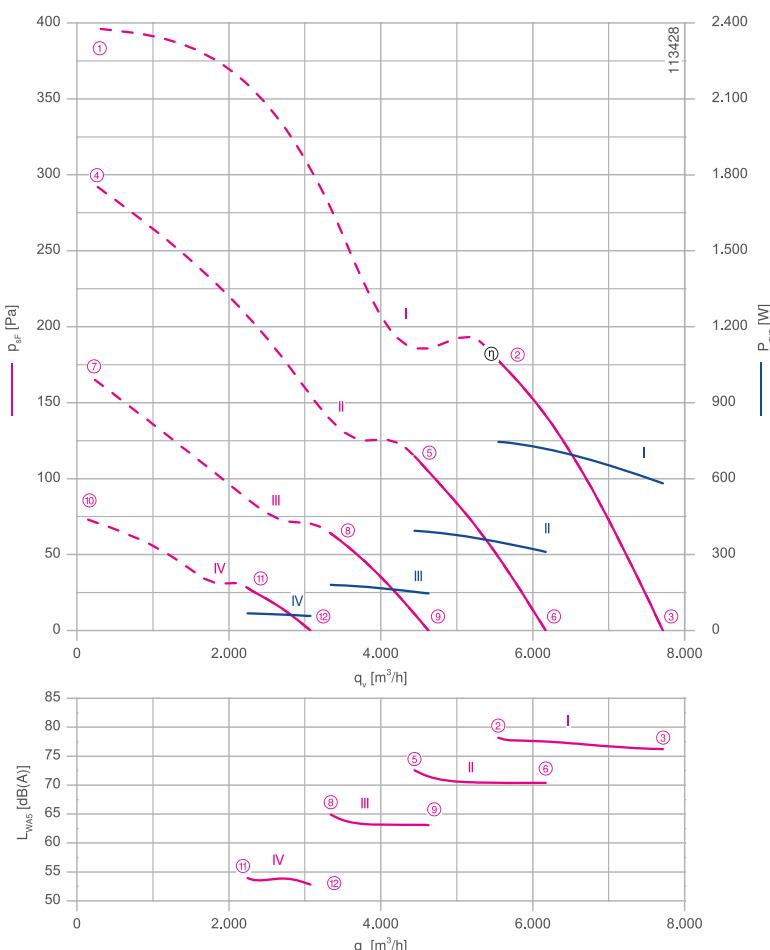

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

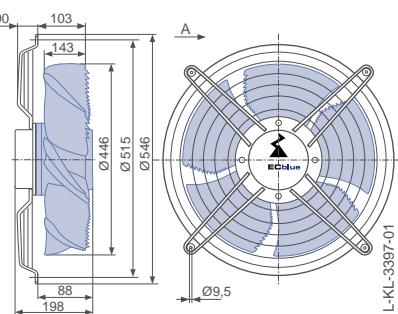


Design Q - square full bell mouth, guard grille suction side

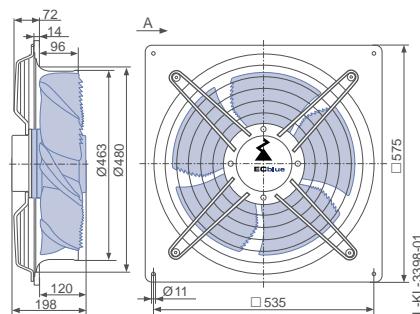

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

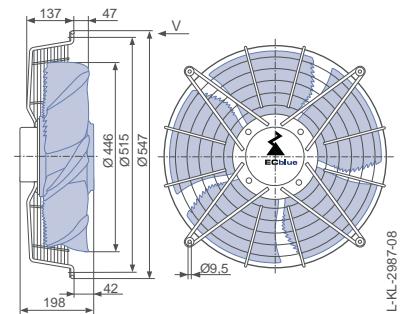


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN045-ZI_.DC._5P4	I	1650	①	1.45	860	
			②	1.30	740	78
			③	1.05	580	76
	II	1320	④	1.05	560	
			⑤	0.84	390	72
			⑥	0.74	310	70
	III	990	⑦	0.66	250	
			⑧	0.54	180	65
			⑨	0.46	150	63
	IV	660	⑩	0.37	90	
			⑪	0.34	65	54
			⑫	0.32	60	53

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
			
Type	FN045-ZIW.DC.A5P4	FN045-ZIQ.DC.A5P4	FN045-ZIK.DC.V5P4
Article no.	168965	168966	168968
Weight kg	12.20	15.60	12.50
			168969
			15.20

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

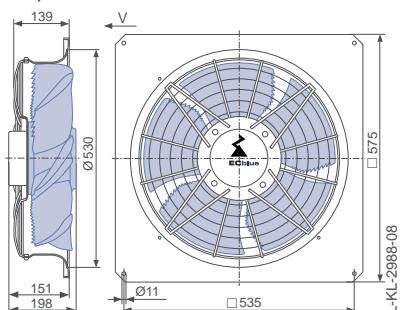

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FN050



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 380 W*

Rated current I_N : 1.95- 1.40 A*

Rated speed n_N : 1120 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 41.7 %


Efficiency: $N_{actual} = 50.8 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

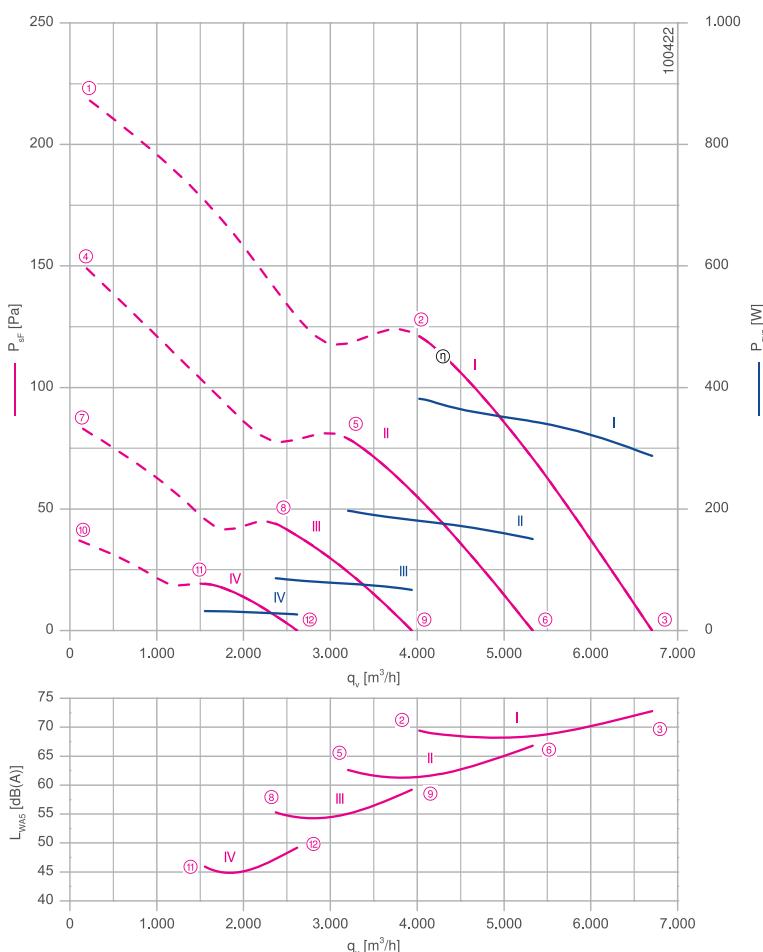

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

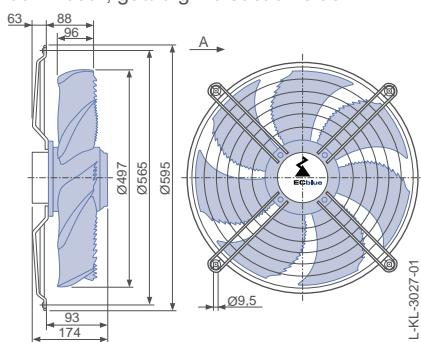


Design Q - square full bell mouth, guard grille suction side

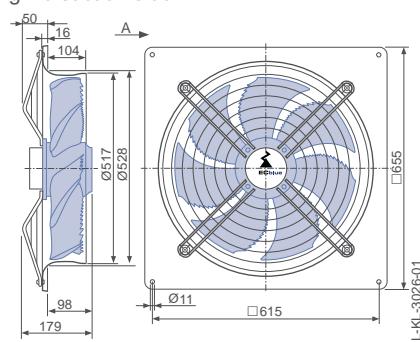

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

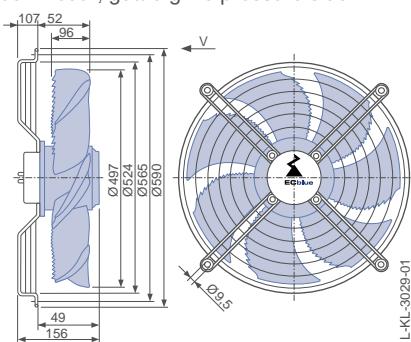

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN050-6I_.BD._7P2	I	1120	①	2.00	460	
			②	1.70	380	69
			③	1.25	290	73
	II	900	④	1.15	260	
			⑤	0.86	200	63
			⑥	0.68	150	67
	III	670	⑦	0.50	110	
			⑧	0.40	85	55
			⑨	0.32	65	59
	IV	450	⑩	0.22	40	
			⑪	0.19	32	46
			⑫	0.17	26	49

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
			
Type	FN050-6IW.BD.A7P2	FN050-6IQ.BD.A7P2	FN050-6IK.BD.V7P2
Article no.	162127	162126	162145
Weight kg	9.40	15.80	9.50
			14.30


Control technology

Control modules



Page 452

Design Q - square full bell mouth, guard grille pressure side

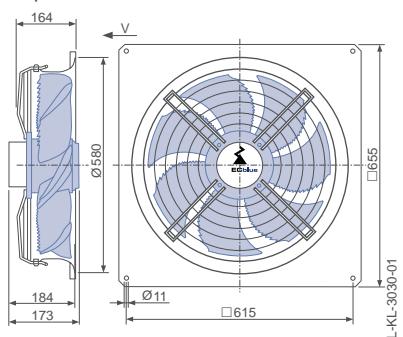

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FN050



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.84 kW*

Rated current I_N : 4.40- 3.20 A*

Rated speed n_N : 1440 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 40.1 %


Efficiency: $N_{actual} = 46.9 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

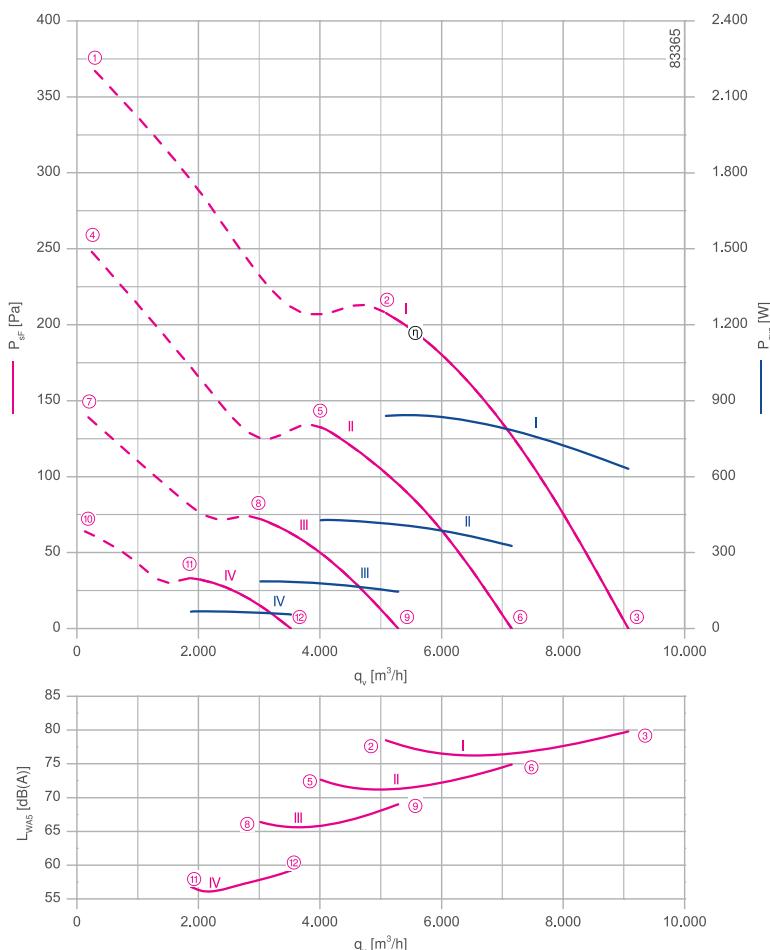

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

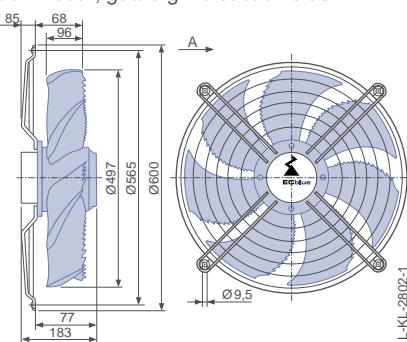


Design Q - square full bell mouth, guard grille suction side

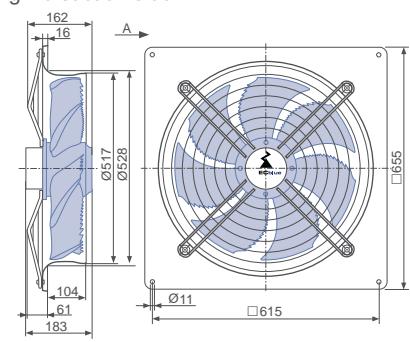

Airflow direction

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side


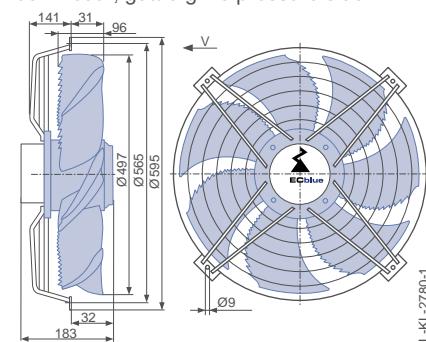


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN050-ZI_.DC._7P2	I	1440	①	4.80	1050	
			②	3.80	840	79
			③	2.90	640	80
	II	1150	④	2.70	580	
			⑤	2.00	420	73
			⑥	1.55	330	75
	III	860	⑦	1.15	250	
			⑧	0.86	190	66
			⑨	0.68	150	69
	IV	580	⑩	0.46	85	
			⑪	0.39	70	56
			⑫	0.35	55	59

Current values determined at 230V


Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
			
Type	FN050-ZIW.DC.A7P2	FN050-ZIQ.DC.A7P2	FN050-ZIK.DC.V7P2
Article no.	154375	154381	154399
Weight kg	12.30	18.70	13.90
			17.60

Control technology

Control modules	Add-on modules	Operating terminal
		
Page 452	Page 463	Page 472

Design Q - square full bell mouth, guard grille pressure side

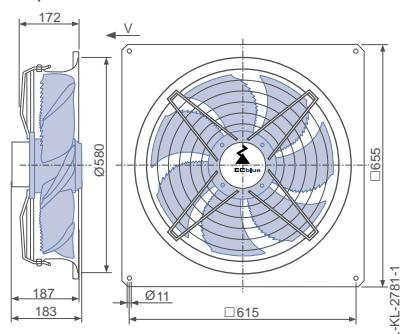

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN050



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.00 kW*

Rated current I_N : 3.00- 2.50 A*

Rated speed n_N : 1550 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 41.6 %


Efficiency: $N_{actual} = 47.9 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

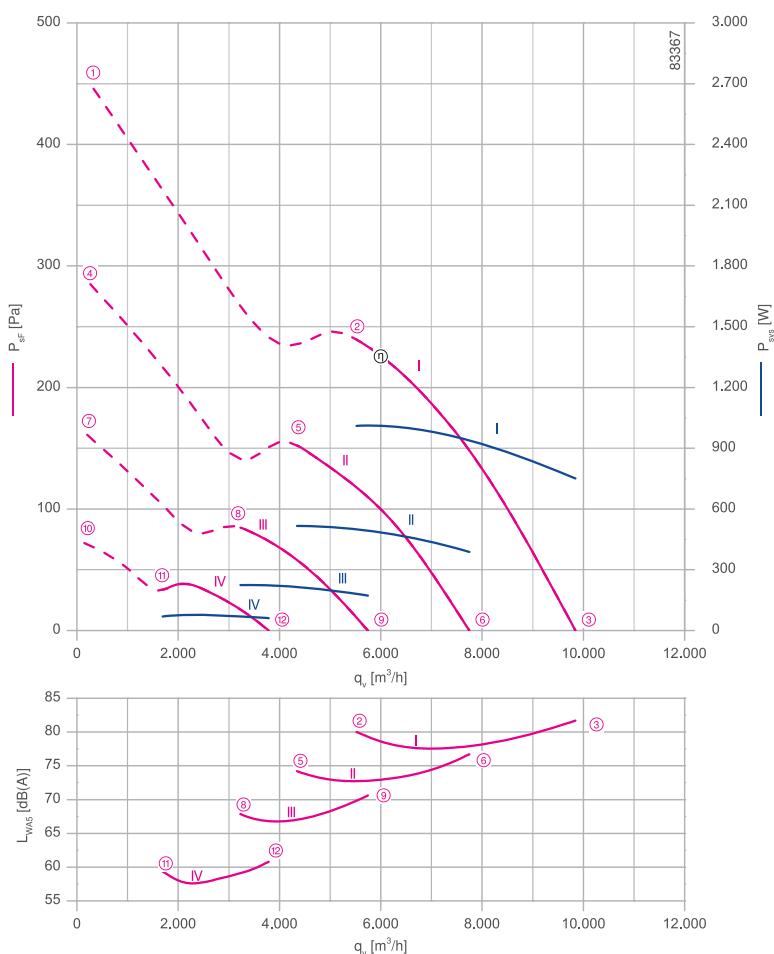

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

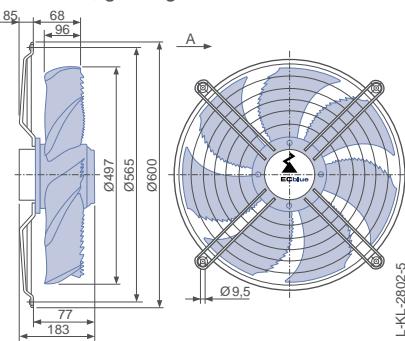


Design Q - square full bell mouth, guard grille suction side

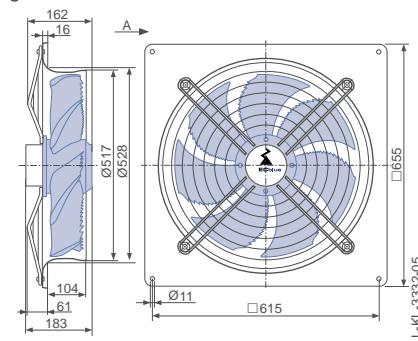

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

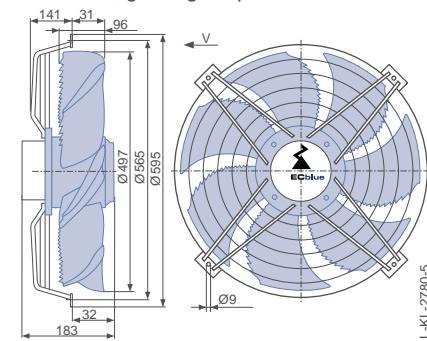

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN050-ZI_.DC._7P2	I	1550	①	3.60	1400	
			②	2.60	1000	80
			③	2.00	760	82
	II	1240	④	1.85	700	
			⑤	1.40	520	74
			⑥	1.05	390	77
	III	930	⑦	0.84	300	
			⑧	0.66	220	68
			⑨	0.54	170	71
	IV	620	⑩	0.38	100	
			⑪	0.32	75	57
			⑫	0.28	60	61

Current values determined at 230V

Fan ordering information

	Airflow direction A	Airflow direction V		
Design	W (guard grille suction side)	Q (guard grille suction side)		
	K (guard grille pressure side)	Q (guard grille pressure side)		
Type	FN050-ZIW.DC.A7P2	FN050-ZIQ.DC.A7P2	FN050-ZIK.DC.V7P2	FN050-ZIQ.DC.V7P2
Article no.	154373	154379	154397	154403
Weight kg	12.30	18.70	13.90	17.60

Control technology


	Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side


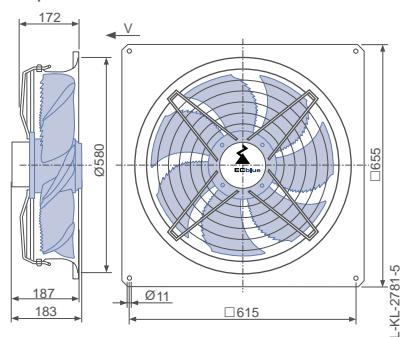


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN050-ZI_.DC._7P2	I	1550	①	2.10	1400	
			②	1.60	1000	80
			③	1.25	760	82
	II	1240	④	1.15	700	
			⑤	0.92	520	74
			⑥	0.76	390	77
	III	930	⑦	0.64	300	
			⑧	0.54	230	69
			⑨	0.46	180	71
	IV	620	⑩	0.33	100	
			⑪	0.29	80	58
			⑫	0.26	65	61

Current values determined at 400V


Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
			
Type	FN050-ZIW.DC.A7P2	FN050-ZIQ.DC.A7P2	FN050-ZIK.DC.V7P2
Article no.	154371	154377	154395
Weight kg	12.30	18.70	13.90
			17.60

Control technology

Control modules	Add-on modules	Operating terminal
		
Page 452	Page 463	Page 472

Design Q - square full bell mouth, guard grille pressure side

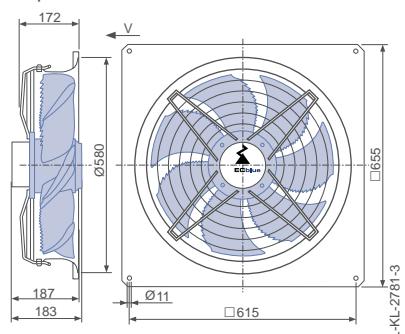

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FN 056



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 400 W*

Rated current I_N : 2.00- 1.45 A*

Rated speed n_N : 940 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 39.7 %


Efficiency: $N_{actual} = 48.6 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

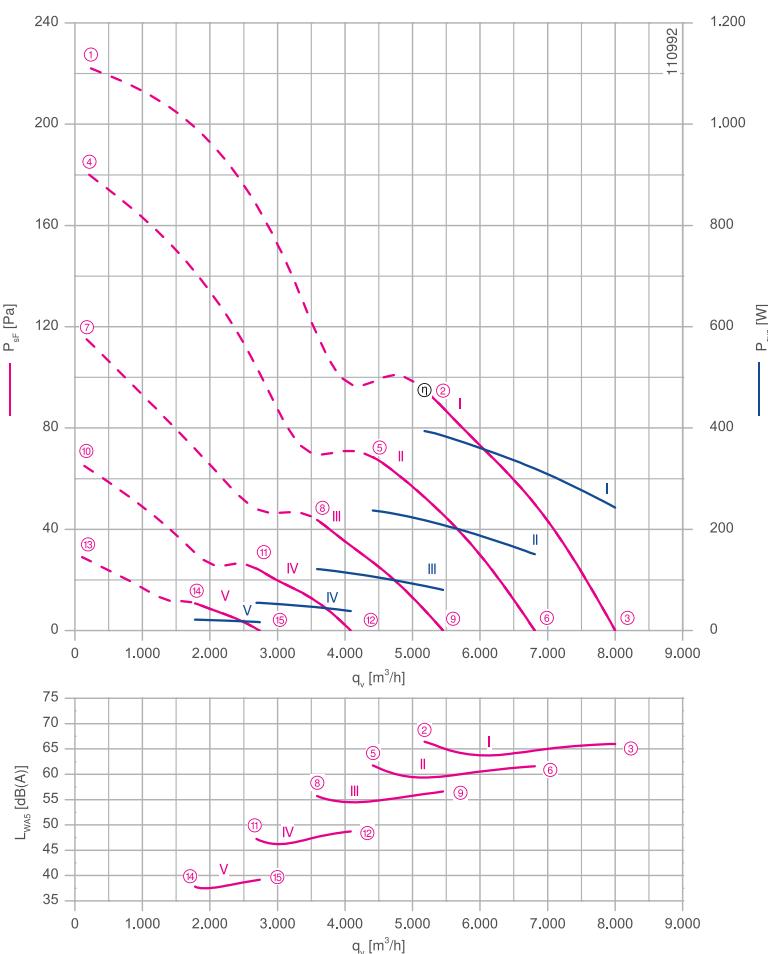

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

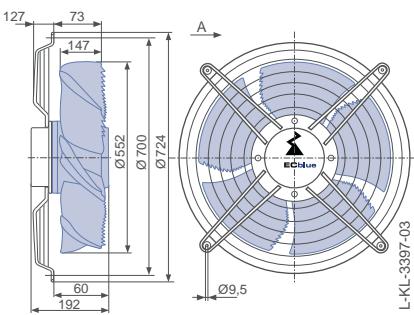


Design Q - square full bell mouth, guard grille suction side

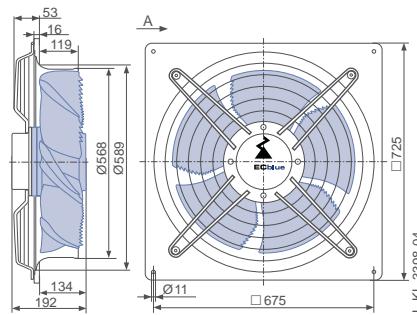

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

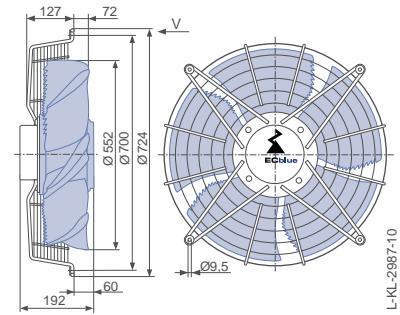

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
FN056-6I..BD..5P4	I	940	①	2.40	560	66	50
			②	1.70	390	66	
			③	1.05	240	66	
	II	800	④	1.65	390	62	60
			⑤	1.05	240	62	
			⑥	0.66	150	62	
	III	640	⑦	0.84	190	56	
			⑧	0.54	120	56	
			⑨	0.37	80	57	
	IV	480	⑩	0.39	85		
			⑪	0.27	55	47	
			⑫	0.22	38	49	
	V	320	⑬	0.18	30		
			⑭	0.16	22	38	
			⑮	0.15	17	39	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	Q (guard grille pressure side)	K (guard grille pressure side)
Type	FN056-6IW.BD.A5P4	FN056-6IQ.BD.A5P4	FN056-6IK.BD.V5P4	FN056-6IQ.BD.V5P4	
Article no.	165269	165259	165272	165273	
Weight kg	11.50	18.80	11.50	11.50	17.90


Control technology

Control modules



Page 452

Design Q - square full bell mouth, guard grille pressure side

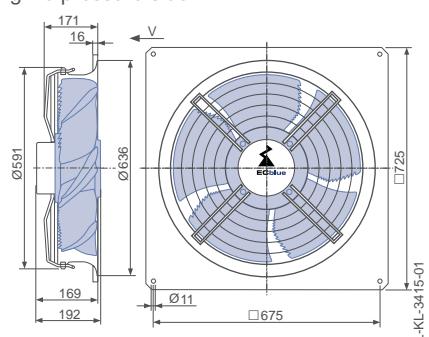

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FN056



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.05 kW*

Rated current I_N : 5.60- 4.00 A*

Rated speed n_N : 1350 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 43.9 %


Efficiency: $N_{actual} = 50.2 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

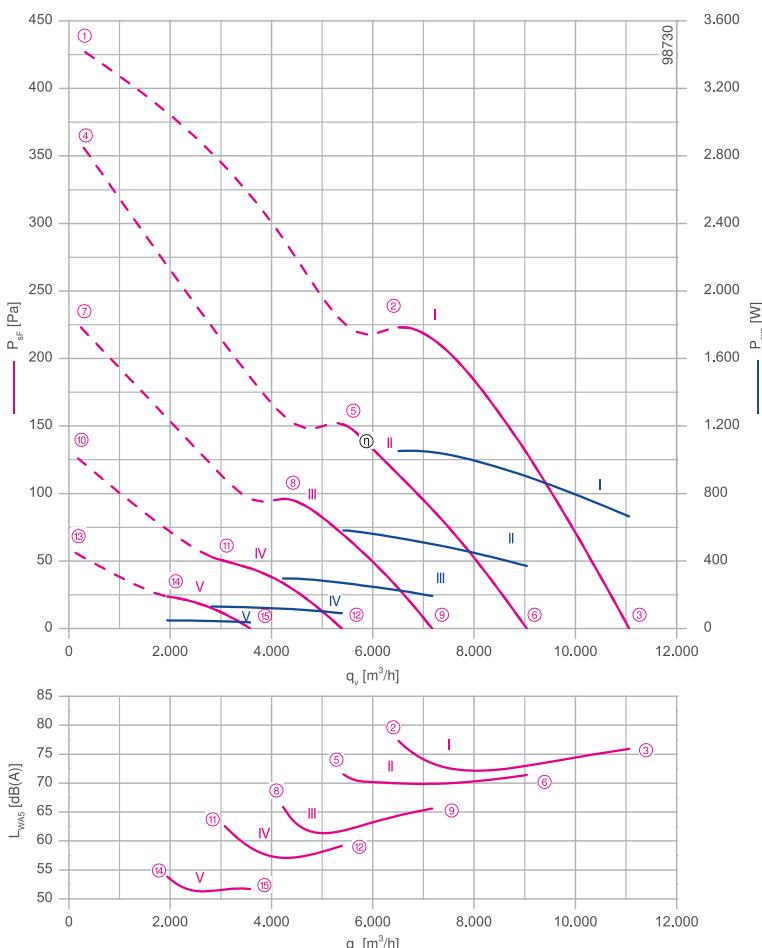

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

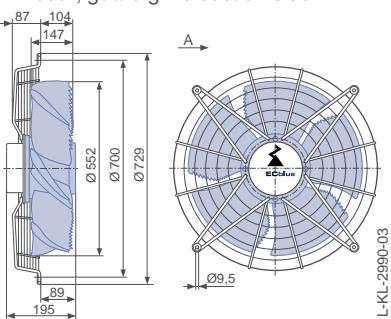


Design Q - square full bell mouth, guard grille suction side

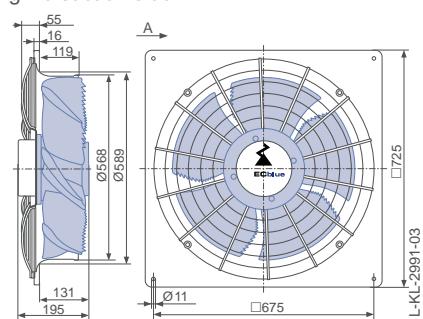

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

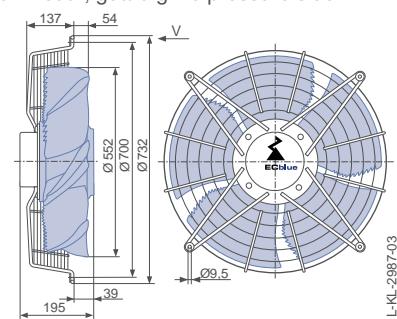

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN056-ZI_.DC._5P4	I	1350	①	5.80	1250	50	
			②	4.80	1050	78	
			③	3.10	660	76	
	II	1110	④	4.40	940		60
			⑤	2.80	580	72	
			⑥	1.80	370	71	
	III	880	⑦	2.30	460		70
			⑧	1.40	300	66	
			⑨	0.88	190	66	
	IV	660	⑩	0.92	200		
			⑪	0.64	130	59	
			⑫	0.46	90	59	
	V	440	⑬	0.39	70		
			⑭	0.31	50	52	
			⑮	0.28	36	52	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type	FN056-ZIW.DC.A5P4	FN056-ZIQ.DC.A5P4	FN056-ZIK.DC.V5P4
Article no.	162069	162067	162075
Weight kg	13.60	21.00	14.10
			20.40

Control technology


Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

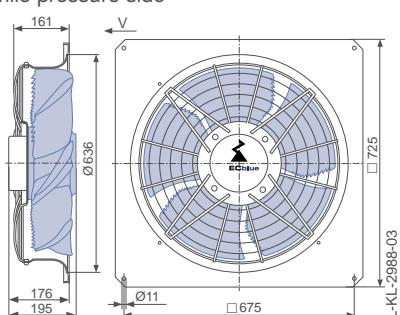

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN 056



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.10 kW*

Rated current I_N : 3.40- 2.80 A*

Rated speed n_N : 1380 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 45.4 %


Efficiency: $N_{actual} = 51.6 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

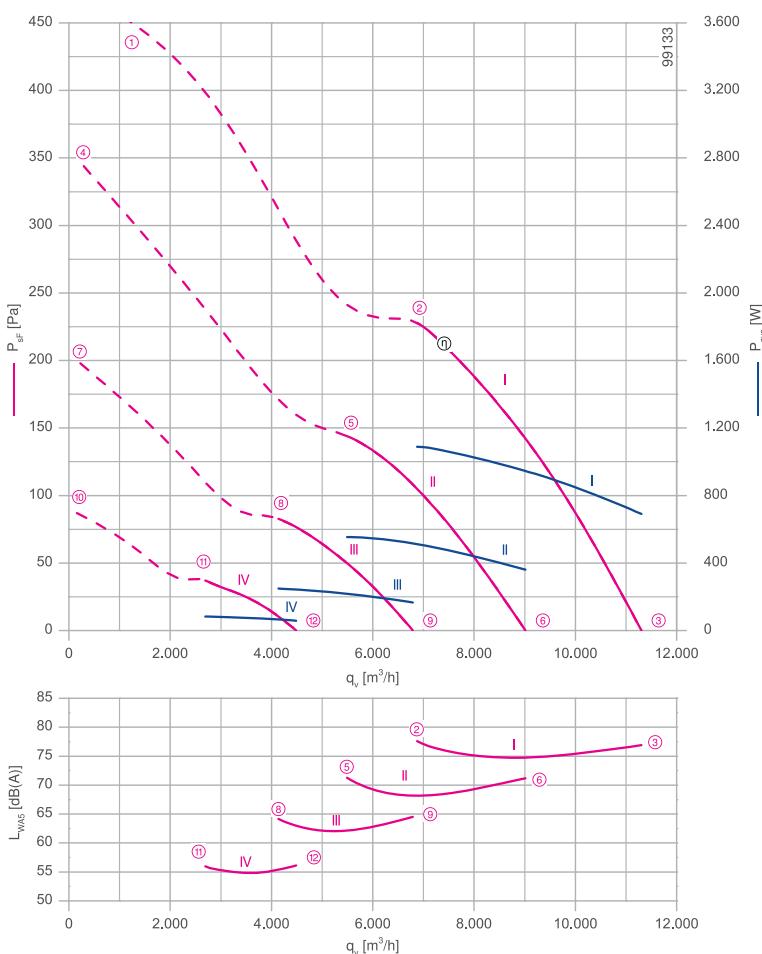

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

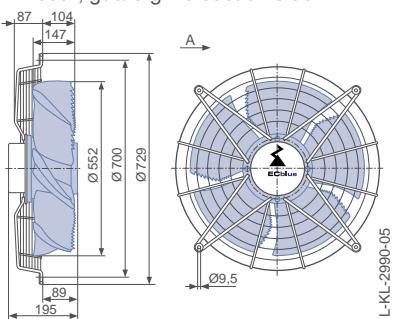


Design Q - square full bell mouth, guard grille suction side

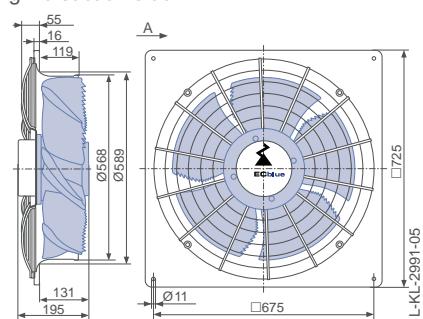

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

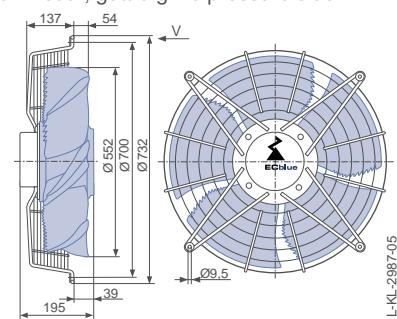


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
FN056-ZI_.DC._5P4	I	1380	①	3.90	1450	60	
			②	2.90	1100	78	
			③	1.90	700	77	
	II	1100	④	2.40	900		70
			⑤	1.55	560	72	
			⑥	1.05	360	71	
	III	830	⑦	1.15	390		
			⑧	0.78	250	64	
			⑨	0.60	170	65	
	IV	550	⑩	0.50	120		
			⑪	0.38	85	56	
			⑫	0.31	60	56	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
			
Type	FN056-ZIW.DC.A5P4	FN056-ZIQ.DC.A5P4	FN056-ZIK.DC.V5P4
Article no.	162053	162051	162059
Weight kg	13.60	21.00	14.10
			20.40

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

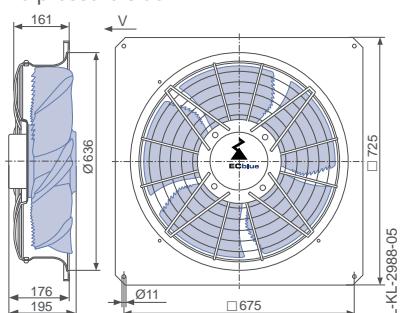

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FN056



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.25 kW*

Rated current I_N : 2.10- 1.65 A*

Rated speed n_N : 1450 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 45.2 %


Efficiency: $N_{actual} = 51.0 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

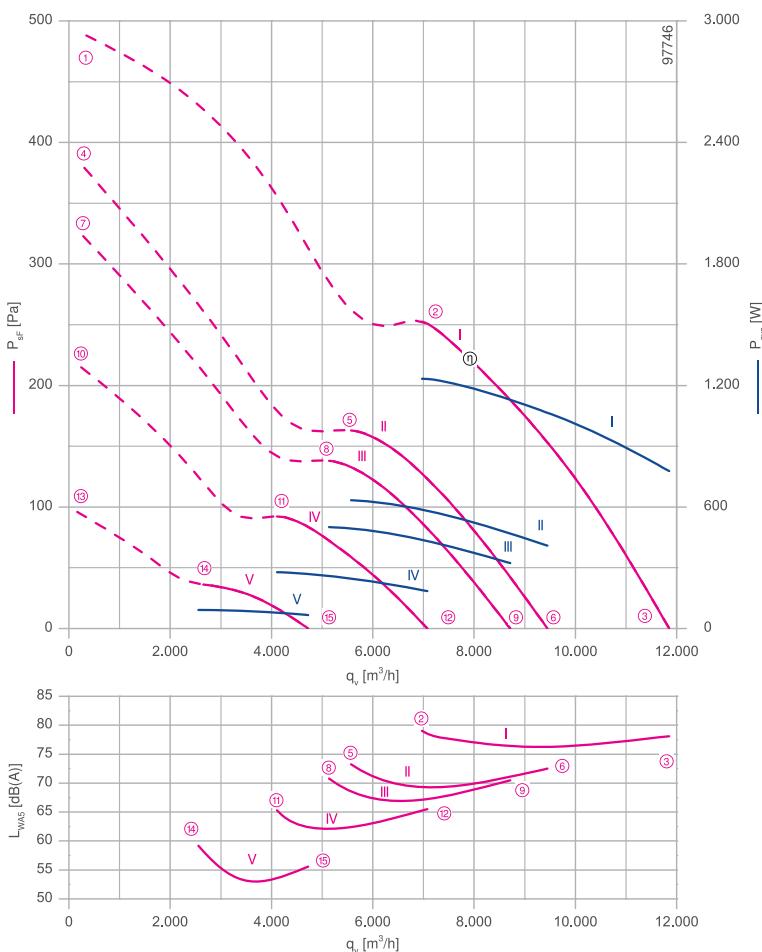

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

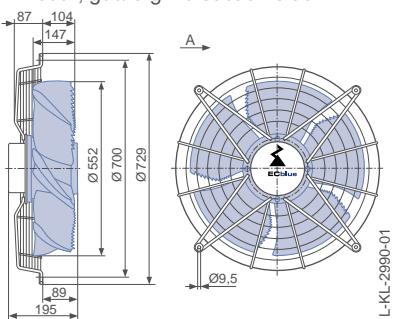


Design Q - square full bell mouth, guard grille suction side

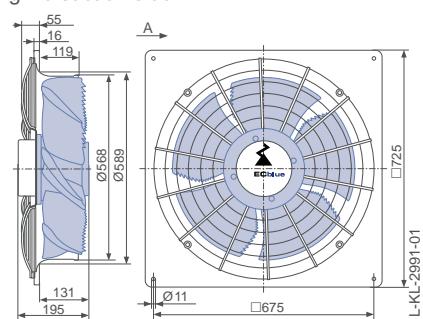

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

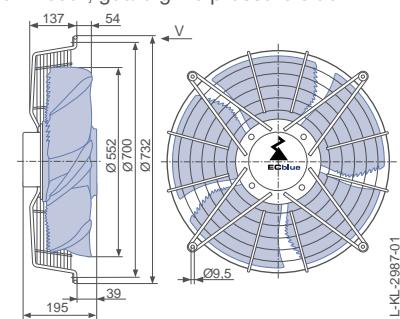

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
FN056-ZI_.DC._5P4	I	1450	①	2.40	1550	60	
			②	1.95	1250	79	
			③	1.30	780	78	
	II	1160	④	1.65	1000		
			⑤	1.10	640	73	
			⑥	0.80	400	73	
	III	1070	⑦	1.35	800		70
			⑧	0.94	500	71	
			⑨	0.72	320	71	
	IV	870	⑩	0.84	440		
			⑪	0.64	280	65	
			⑫	0.50	180	66	
	V	580	⑬	0.40	140		
			⑭	0.32	95	55	
			⑮	0.26	65	56	

Current values determined at 400V

Fan ordering information

	Airflow direction A		Airflow direction V
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type	FN056-ZIW.DC.A5P4	FN056-ZIQ.DC.A5P4	FN056-ZIK.DC.V5P4
Article no.	162037	162035	162043
Weight kg	13.60	21.00	14.10
			20.40

Control technology


Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

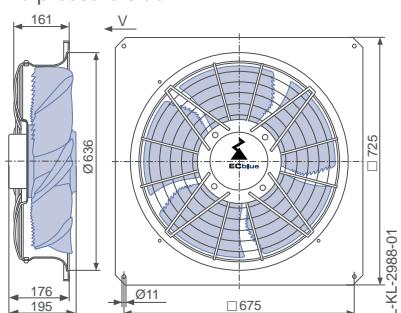

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN063-6I_.BD._7P2	I	660	①	1.40	320	
			②	0.98	220	67
			③	0.60	140	62
	II	530	④	0.70	160	
			⑤	0.52	120	60
			⑥	0.35	75	55
	III	400	⑦	0.34	70	
			⑧	0.27	55	52
			⑨	0.21	36	48
	IV	260	⑩	0.17	26	
			⑪	0.16	20	41
			⑫	0.15	15	38

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type	FN063-6IW.BD.A7P2	FN063-6IQ.BD.A7P2	FN063-6IK.BD.V7P2
Article no.	162130	162129	162148
Weight kg	11.30	21.40	12.00
			20.60


Control technology

Control modules



Page 452

Design Q - square full bell mouth, guard grille pressure side

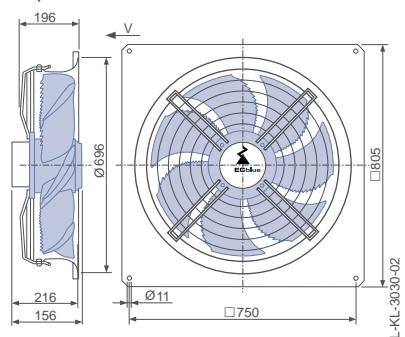

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO63



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.85 kW*

Rated current I_N : 4.30- 3.10 A*

Rated speed n_N : 1050 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 46.3 %


Efficiency: $N_{actual} = 53.3 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

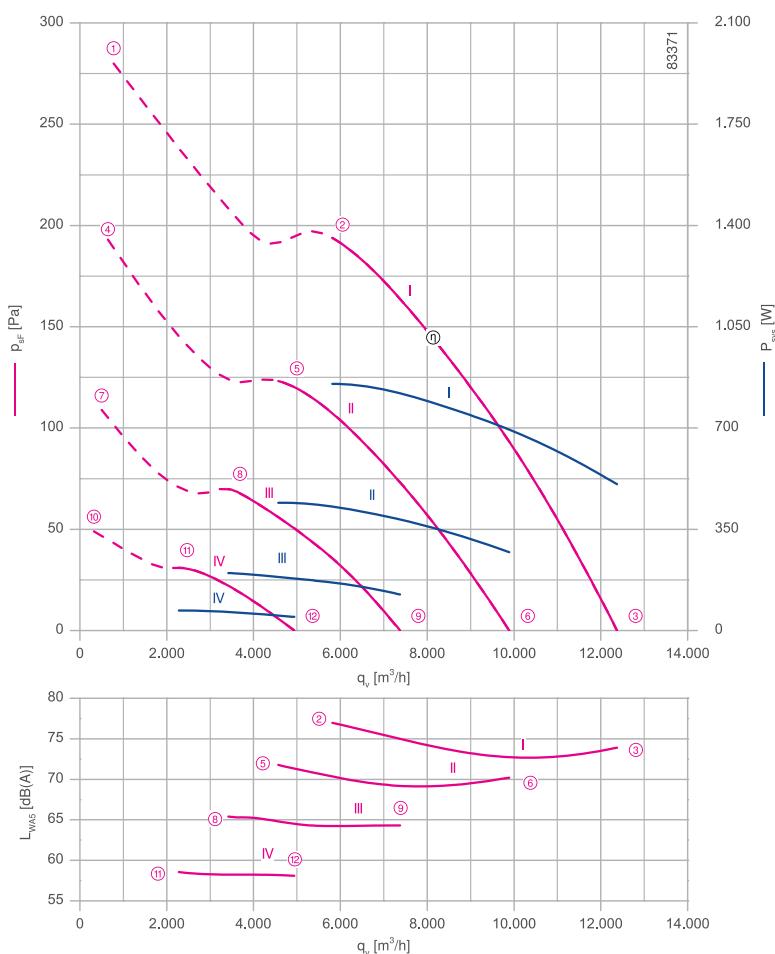

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

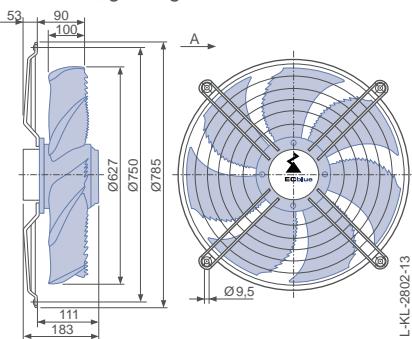


Design Q - square full bell mouth, guard grille suction side

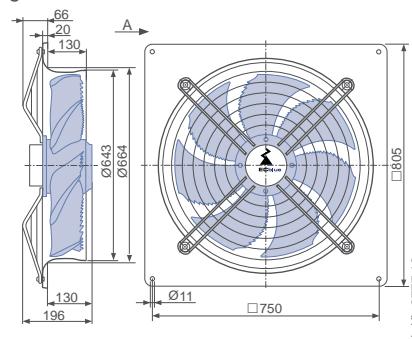

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side


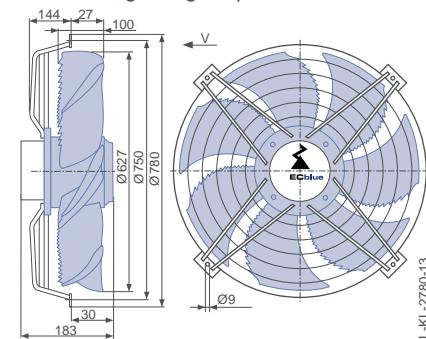


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN063-ZI_.DG._7P2	I	1050	①	4.20	940	
			②	3.70	860	77
			③	2.20	500	74
	II	840	④	2.40	540	
			⑤	2.00	440	72
			⑥	1.25	270	70
	III	630	⑦	1.10	240	
			⑧	0.90	200	66
			⑨	0.62	120	64
	IV	420	⑩	0.44	80	
			⑪	0.39	70	59
			⑫	0.42	48	58

Current values determined at 230V


Fan ordering information

	Airflow direction A	Airflow direction V		
Design	W (guard grille suction side)	Q (guard grille suction side)		
				
	K (guard grille pressure side)	Q (guard grille pressure side)		
				
Type	FN063-ZIW.DG.A7P2	FN063-ZIQ.DG.A7P2	FN063-ZIK.DG.V7P2	FN063-ZIQ.DG.V7P2
Article no.	152776	152782	152800	152806
Weight kg	15.40	25.60	17.30	25.20

Control technology

	Control modules	Add-on modules	Operating terminal
			
	Page 452	Page 463	Page 472

Design Q - square full bell mouth, guard grille pressure side

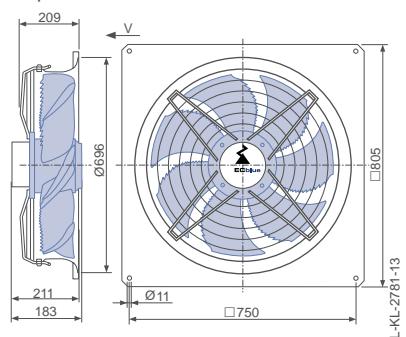

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO 63



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.25 kW*

Rated current I_N : 3.80- 3.10 A*

Rated speed n_N : 1200 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 49.1 %


Efficiency: $N_{actual} = 55.1 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

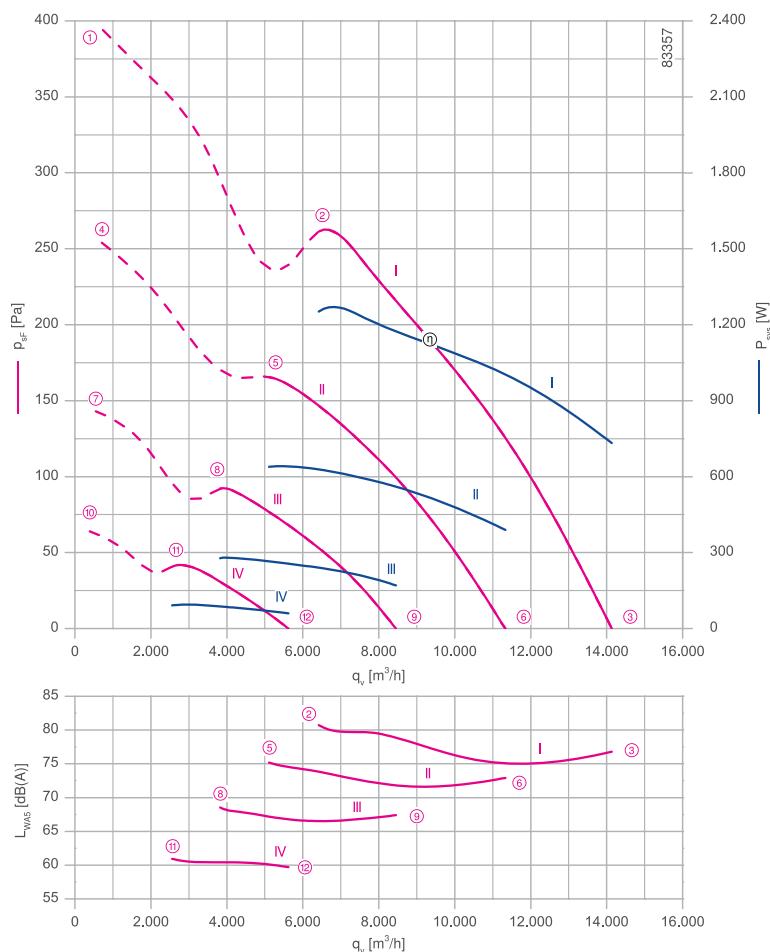

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

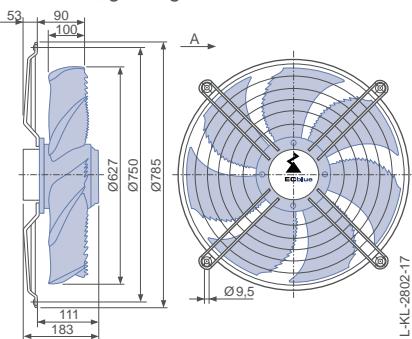


Design Q - square full bell mouth, guard grille suction side

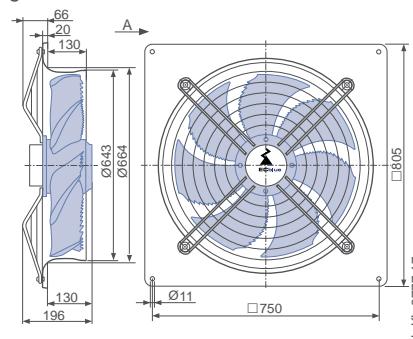

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side


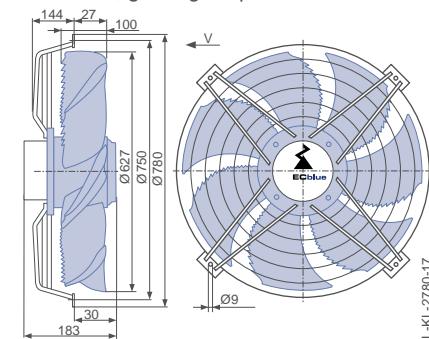


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN063-ZI_.DG._7P2	I	1200	①	4.00	1500	
			②	3.30	1250	81
			③	1.95	740	77
	II	960	④	2.10	780	
			⑤	1.70	640	75
			⑥	1.05	390	73
	III	720	⑦	0.94	340	
			⑧	0.78	280	69
			⑨	0.54	170	67
	IV	480	⑩	0.40	110	
			⑪	0.37	90	61
			⑫	0.29	60	60

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side) Q (guard grille pressure side)
			
Type	FN063-ZIW.DG.A7P2	FN063-ZIQ.DG.A7P2	FN063-ZIK.DG.V7P2
Article no.	152774	152780	152798
Weight kg	15.40	25.60	17.30
			25.30

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

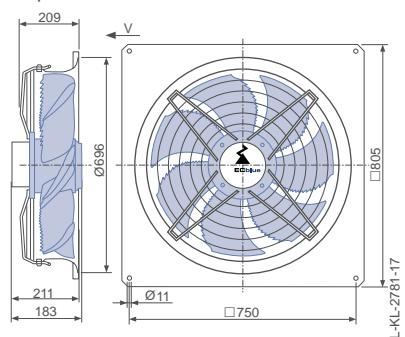

FE2owlet-ECblue

for three phase alternating current, 200-240 V

F N O 63



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.20 kW*

Rated current I_N : 9.70- 8.10 A*

Rated speed n_N : 1500 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 41.9 %


Efficiency: $N_{actual} = 45.0 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

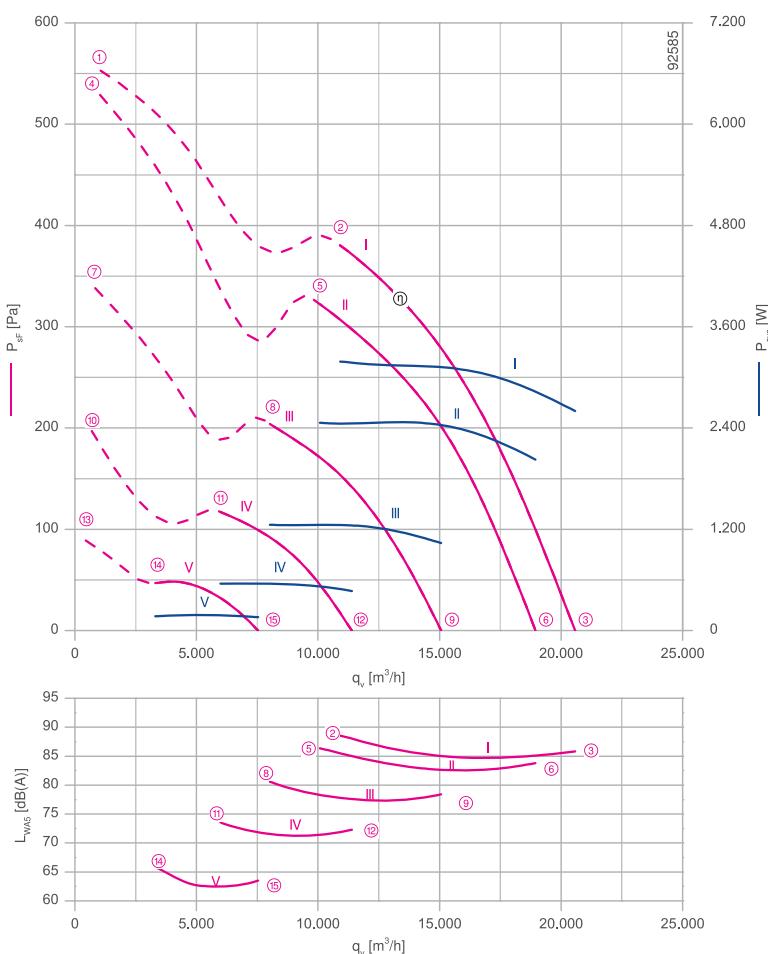

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

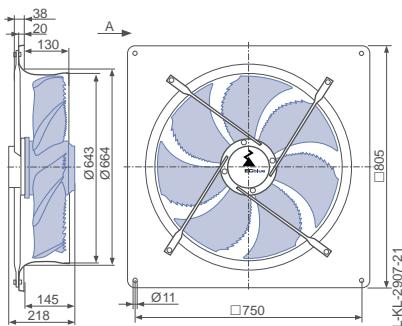


Design Q - square full bell mouth, guard grille suction side

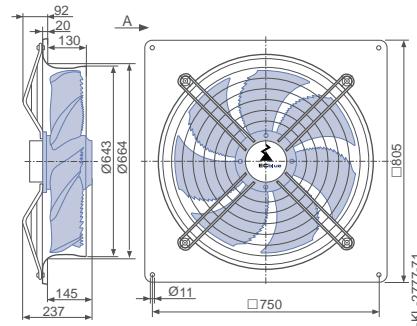

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

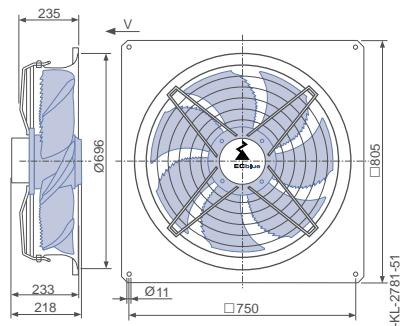

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN063-ZI_GG_7P3	I	1500	①	8.40	3200		50
			②	8.40	3200	89	
			③	6.80	2600	86	
	II	1380	④	8.00	3100		60
			⑤	6.60	2500	86	
			⑥	5.40	2000	84	
	III	1100	⑦	4.00	1550		
			⑧	3.30	1250	81	
			⑨	2.80	1050	78	
	IV	830	⑩	1.85	700		
			⑪	1.50	560	74	
			⑫	1.30	460	72	
	V	550	⑬	0.70	230		
			⑭	0.60	180	63	
			⑮	0.54	160	64	

Current values determined at 230V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
Q (guard grille pressure side)		
Type	FN063-ZIQ.GG.A7P3	FN063-ZIQ.GG.A7P3
Article no.	159529	159824
Weight kg	37.70	40.00
	40.40	

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO 63



Description


Motor technology: EC
Rated voltage U: 3~ 200-240 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 3.70 kW*
Rated current I: 11.20-9.40 A*
Rated speed n_{max} : 1600 min⁻¹
Thermal class: THCL155*
Min. permitted conveyor temperature $t_{R(min)}$: -35 °C
Max. permitted conveyor temperature $t_{R(max)}$: 55 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: Aluminium, uncoated
Rotor: Steel, 2 coat paint, Ultramarine blue
Conformity: ErP 2015, CE, UL

ErP Data

Efficiency η_{startA} : 43.3 %
Efficiency: $N_{actual} = 46.1 / N_{target} = 40^{**}$
EC controller integrated

* Rated data
**ErP 2015

Characteristic curve

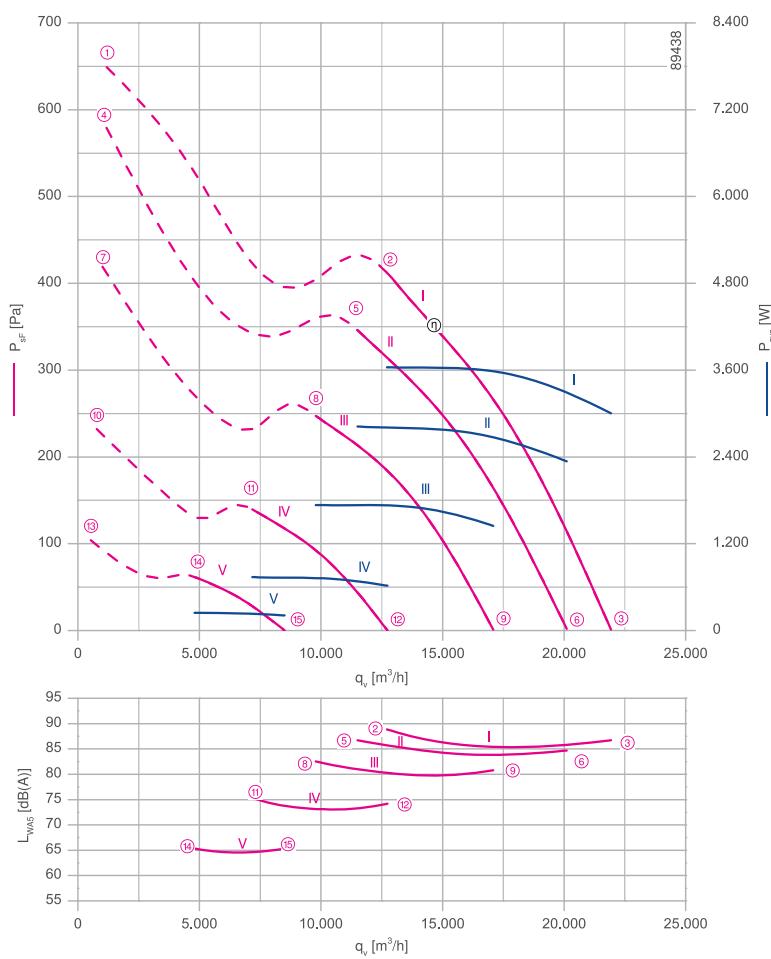

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction V

Design Q - square full bell mouth, without guard grille

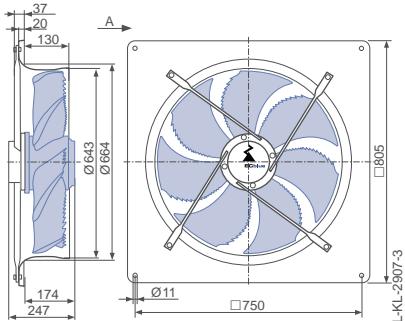


Design Q - square full bell mouth, guard grille suction side

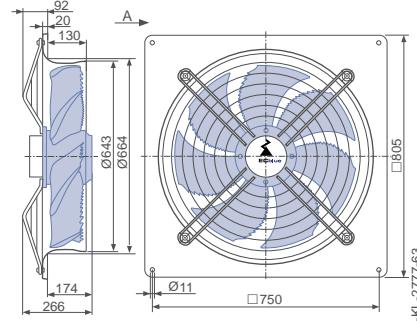

Airflow direction A

Design Q - square full bell mouth, guard grille pressure side

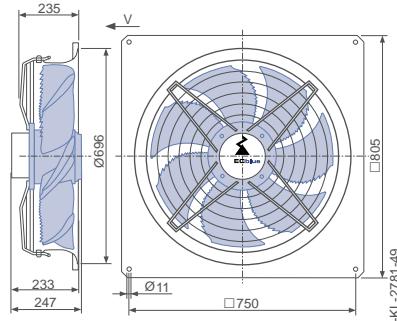

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN063-ZI_GL_7P3	I	1600	①	11.00	4200	55	
			②	9.80	3600	89	
			③	8.00	3000	87	
	II	1470	④	9.40	3500	60	
			⑤	7.60	2800	87	
			⑥	6.20	2300	85	
	III	1250	⑦	5.80	2200		
			⑧	4.60	1750	83	
			⑨	3.90	1450	81	
	IV	930	⑩	2.50	920		
			⑪	2.00	740	75	
			⑫	1.70	620	74	
	V	620	⑬	0.86	300		
			⑭	0.74	240	65	
			⑮	0.66	210	65	

Current values determined at 230V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
Q (guard grille pressure side)		
Type	FN063-ZIQ.GL.A7P3	FN063-ZIQ.GL.A7P3
Article no.	155687	155689
Weight kg	41.90	44.20
		44.60

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-EObule

FE2owlet

FE2owlet-EObule
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO 63



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.25 kW*

Rated current I_N : 2.00- 1.60 A*

Rated speed n_N : 1200 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 48.5 %


Efficiency: $N_{actual} = 54.6 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

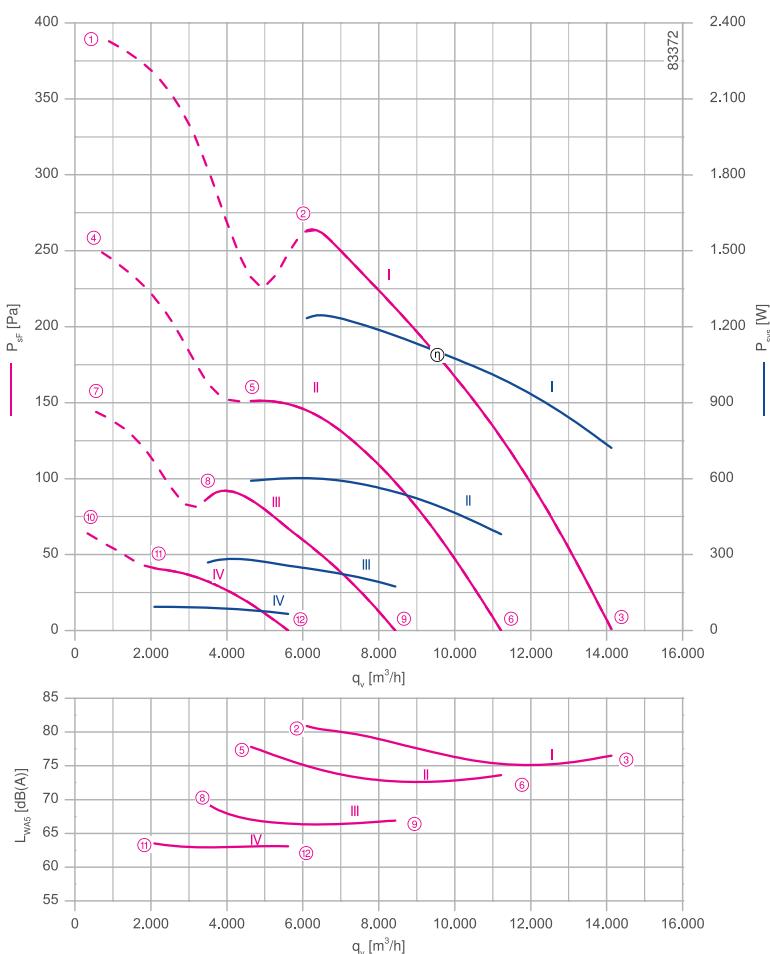

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

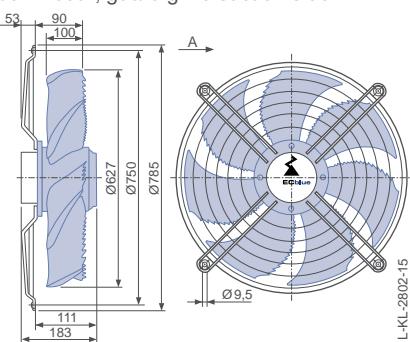


Design Q - square full bell mouth, guard grille suction side

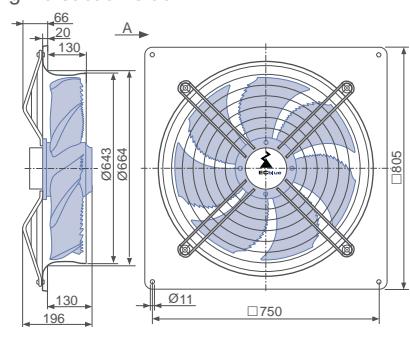

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

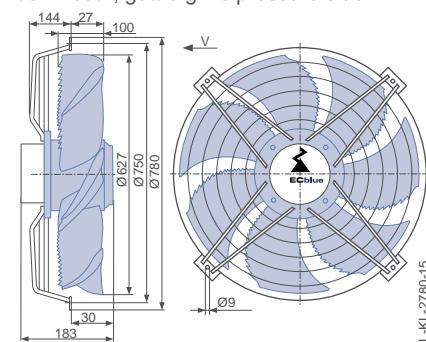

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN063-ZI_.DG._7P2	I	1200	①	2.30	1500	
			②	1.90	1250	81
			③	1.20	720	77
	II	960	④	1.25	760	
			⑤	1.05	580	78
			⑥	0.74	380	74
	III	720	⑦	0.70	340	
			⑧	0.60	270	69
			⑨	0.44	170	67
	IV	480	⑩	0.33	110	
			⑪	0.29	95	63
			⑫	0.25	65	63

Current values determined at 400V

Fan ordering information

Airflow direction		Airflow direction	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type	FN063-ZIW.DG.A7P2	FN063-ZIQ.DG.A7P2	FN063-ZIK.DG.V7P2
Article no.	152772	152778	152796
Weight kg	15.40	25.60	17.30
			25.20

Control technology


Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

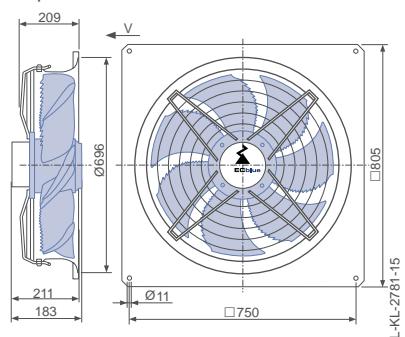

FE2owlet-ECblue

for three phase alternating current, 380-480 V

F N O 63



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.85 kW*

Rated current I_N : 3.10- 2.50 A*

Rated speed n_N : 1270 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 43.0 %


Efficiency: $N_{actual} = 47.6 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

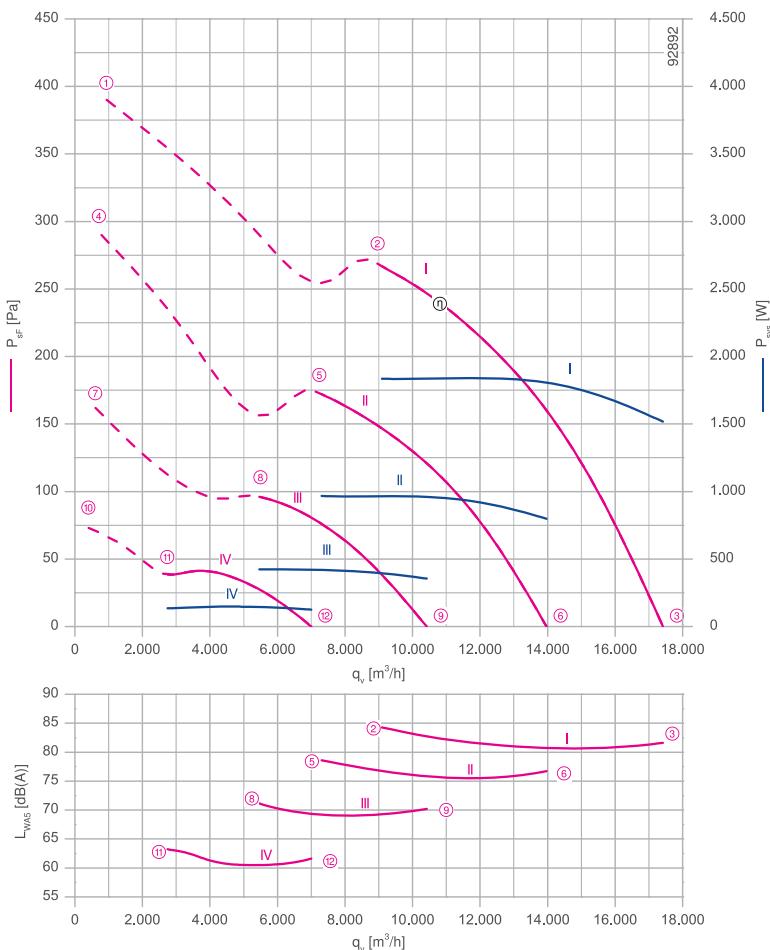

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

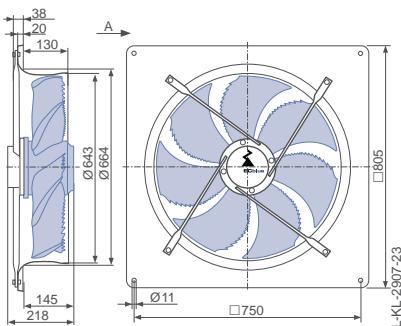


Design Q - square full bell mouth, guard grille suction side

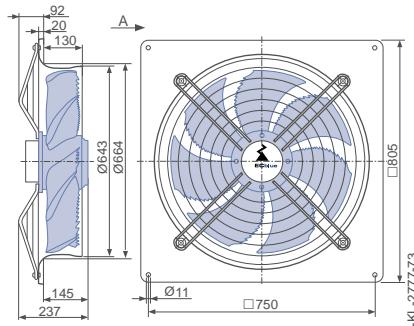

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

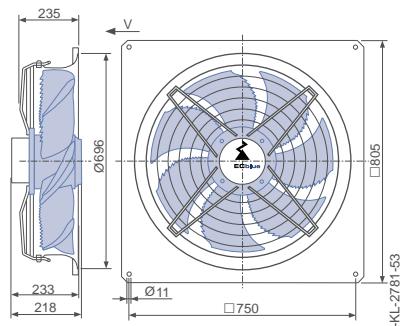

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN063-ZI_.GG._7P3	I	1270	①	3.00	1900	
			②	3.00	1850	84
			③	2.50	1500	82
	II	1020	④	2.00	1200	
			⑤	1.70	960	79
			⑥	1.45	800	77
	III	760	⑦	1.00	520	
			⑧	0.84	420	71
			⑨	0.72	360	70
	IV	510	⑩	0.42	180	
			⑪	0.36	150	61
			⑫	0.32	130	62

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
Type	FN063-ZIQ.GG.A7P3	FN063-ZIQ.GG.A7P3	FN063-ZIQ.GG.V7P3
Article no.	154982	154986	154970
Weight kg	37.70	40.00	40.40

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO 63



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.70 kW*

Rated current I_N : 5.90- 4.70 A*

Rated speed n_N : 1600 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 41.7 %


Efficiency: $N_{actual} = 44.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

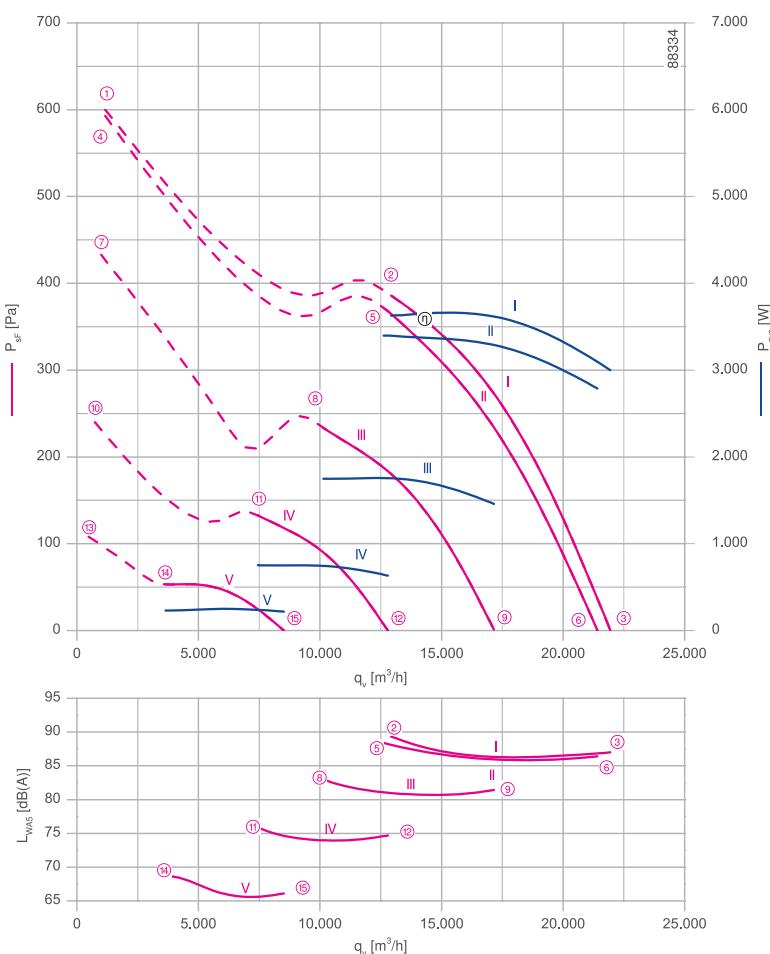

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

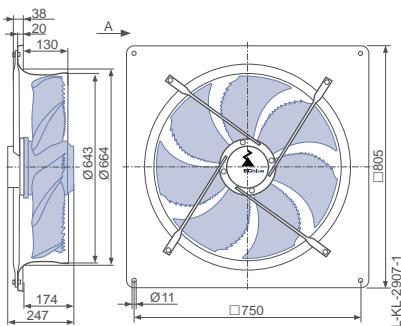


Design Q - square full bell mouth, guard grille suction side

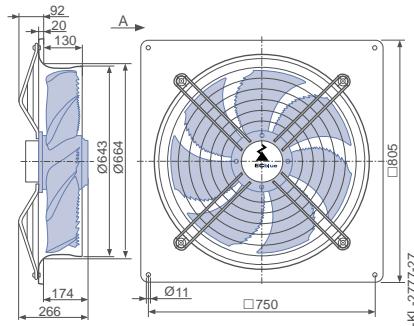

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

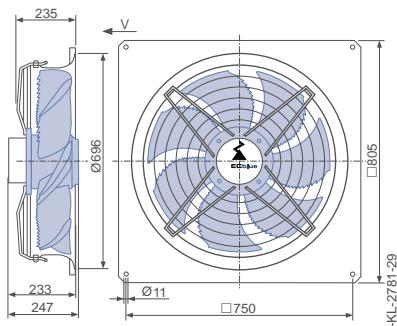

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN063-ZI_GL_7P3	I	1600	①	5.40	3500		55
			②	5.60	3600	91	
			③	4.60	3000	87	
	II	1560	④	5.40	3500		60
			⑤	5.20	3400	90	
			⑥	4.20	2800	86	
	III	1250	⑦	3.40	2200		
			⑧	2.70	1750	85	
			⑨	2.30	1450	81	
	IV	930	⑩	1.50	920		
			⑪	1.25	740	77	
			⑫	1.10	640	75	
	V	620	⑬	0.68	310		
			⑭	0.60	250	67	
			⑮	0.54	220	66	

Current values determined at 400V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
Q (guard grille pressure side)		
Type	FN063-ZIQ.GL.A7P3	FN063-ZIQ.GL.A7P3
Article no.	154984	154988
Weight kg	41.90	44.20
	44.60	

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-EObblue

FE2owlet

FE2owlet-EObblue
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 280 W*

Rated current I_N : 1.40- 1.00 A*

Rated speed n_N : 620 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 38.7 %


Efficiency: $N_{actual} = 48.7 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

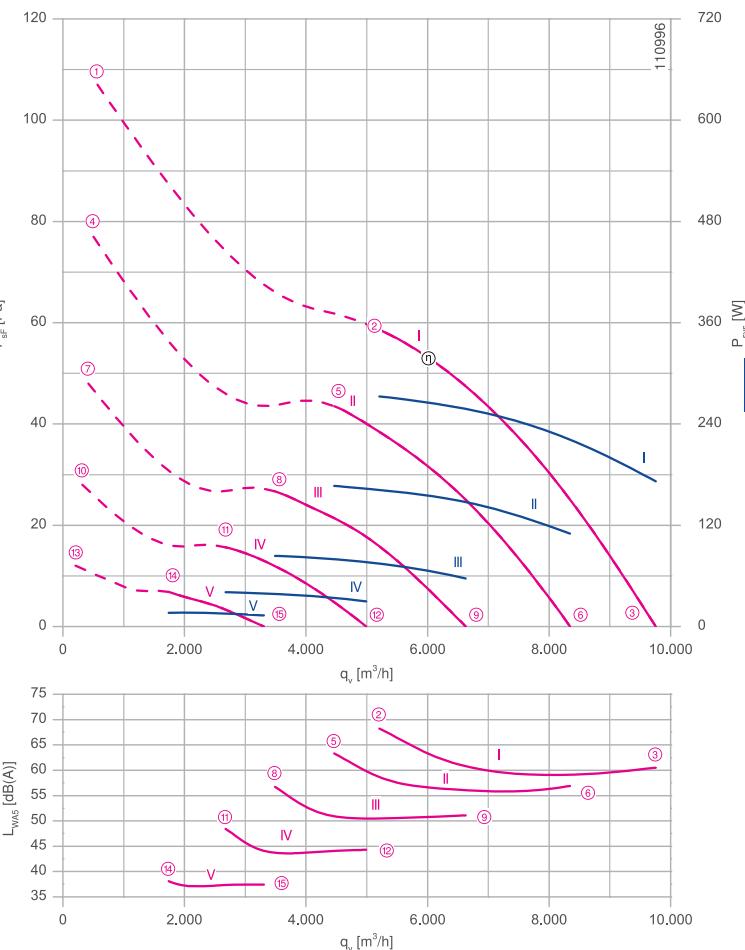

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 529

1360-384


System components

Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

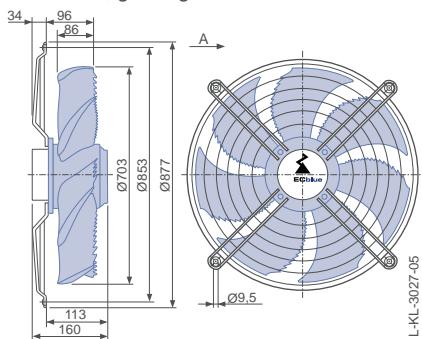


Design Q - square full bell mouth, guard grille suction side

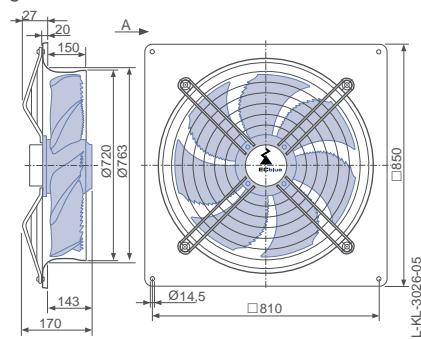

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

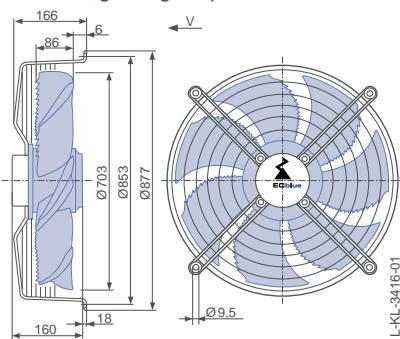

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN071-6I..BD..7P3	I	620	①	1.80	420	50	
			②	1.20	270	69	
			③	0.76	170	61	
	II	530	④	1.05	240		60
			⑤	0.74	170	64	
			⑥	0.50	110	57	
	III	420	⑦	0.52	110		
			⑧	0.39	85	57	
			⑨	0.28	55	51	
	IV	320	⑩	0.27	55		
			⑪	0.23	40	49	
			⑫	0.19	30	44	
	V	210	⑬	0.16	20		
			⑭	0.15	16	38	
			⑮	0.14	13	37	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	Q (guard grille pressure side)	K (guard grille pressure side)
Type	FN071-6IW.BD.A7P3	FN071-6IQ.BD.A7P3	FN071-6IK.BD.V7P3	FN071-6IQ.BD.V7P3	
Article no.	165275	168076	165278	165279	
Weight kg	10.30	21.70	11.80	20.90	


Control technology

Control modules



Page 452

Design Q - square full bell mouth, guard grille pressure side

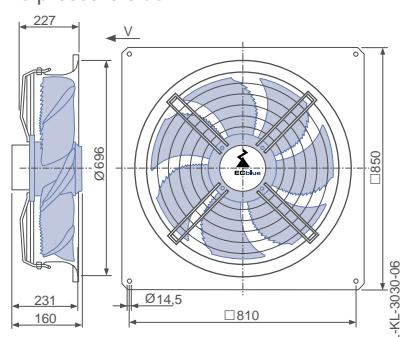

FE2owlet-ECblue

for single phase alternating current, 200-277 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.66 kW*

Rated current I_N : 3.40- 2.40 A*

Rated speed n_N : 890 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 46.5 %


Efficiency: $N_{actual} = 53.9 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

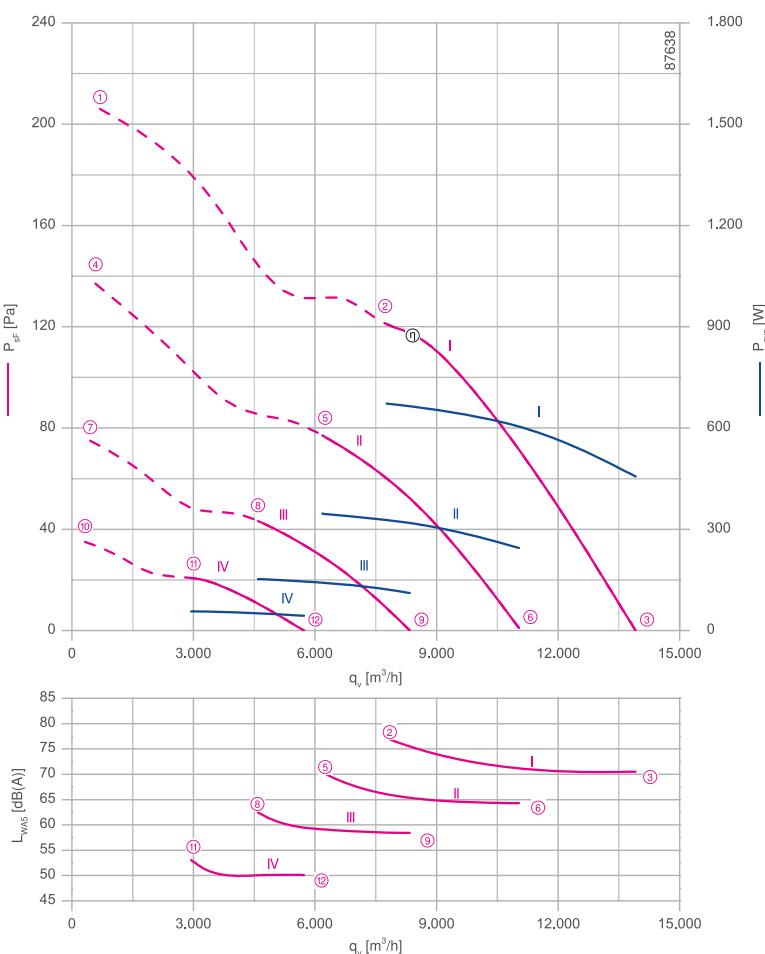

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

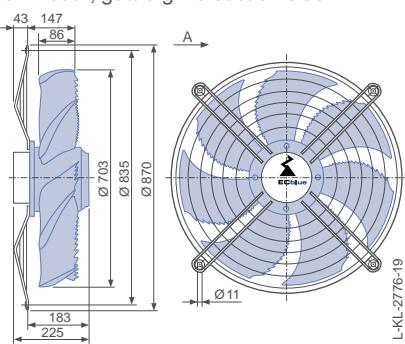


Design Q - square full bell mouth, guard grille suction side

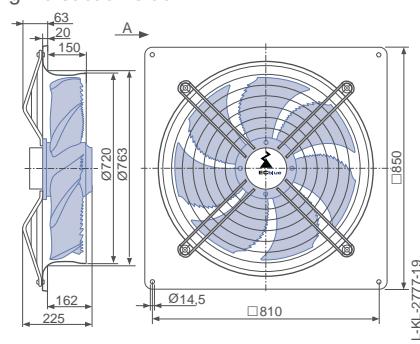

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

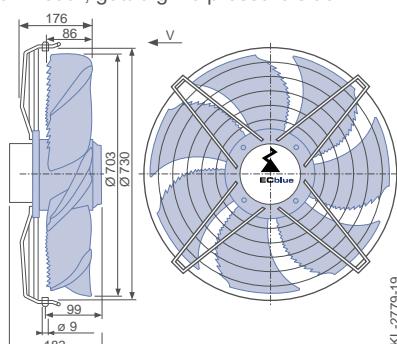

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level L_{WAS} dB(A)
FN071-ZI_.DG._7P3	I	890	①	3.90	880	
			②	3.10	680	78
			③	2.10	460	71
	II	710	④	2.20	480	
			⑤	1.65	350	71
			⑥	1.20	240	64
	III	530	⑦	0.98	200	
			⑧	0.74	150	63
			⑨	0.56	110	58
	IV	360	⑩	0.40	75	
			⑪	0.48	55	52
			⑫	0.44	44	50

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side) Q (guard grille pressure side)
			
Type	FN071-ZID.DG.A7P3	FN071-ZIQ.DG.A7P3	FN071-ZIS.DG.V7P3 FN071-ZIQ.DG.V7P3
Article no.	154321	154333	154345 154357
Weight kg	15.20	26.10	15.30 26.20

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

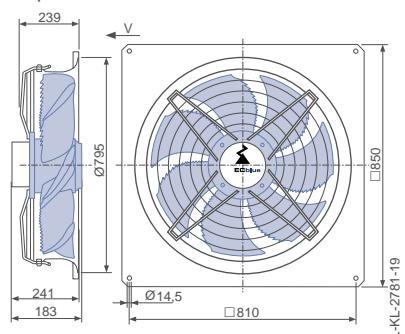

FE2owlet-ECblue

for three phase alternating current, 200-240 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.81 kW*

Rated current I_N : 2.50- 2.10 A*

Rated speed n_N : 960 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 48.3 %


Efficiency: $N_{actual} = 55.3 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

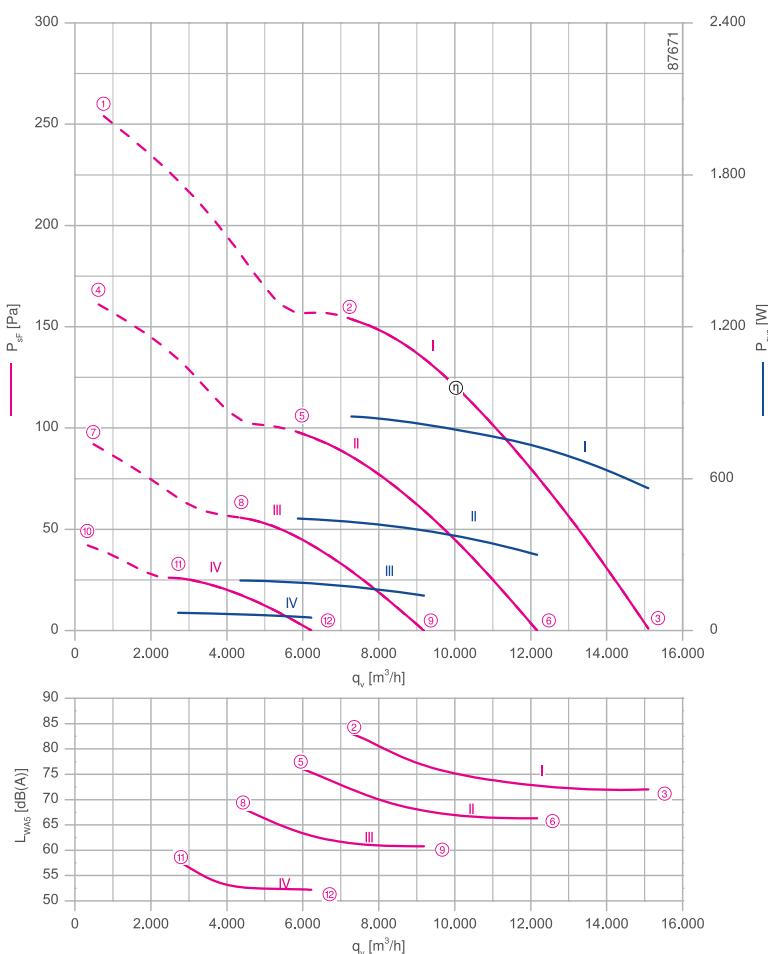

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

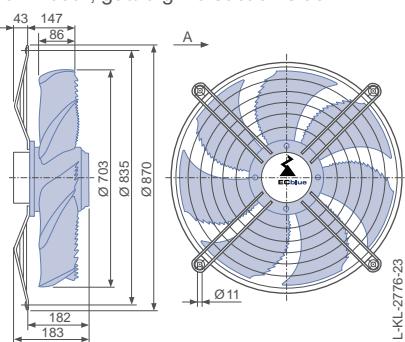


Design Q - square full bell mouth, guard grille suction side

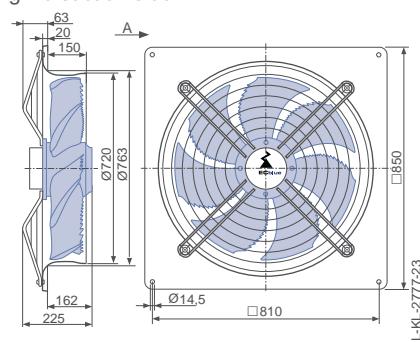

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

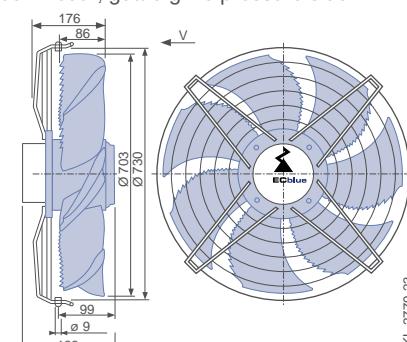


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN071-ZI_.DG._7P3	I	960	①	3.10	1150	
			②	2.20	840	83
			③	1.50	560	72
	II	770	④	1.55	580	
			⑤	1.20	440	77
			⑥	0.84	300	66
	III	580	⑦	0.76	260	
			⑧	0.60	200	69
			⑨	0.46	140	61
	IV	390	⑩	0.36	90	
			⑪	0.30	70	57
			⑫	0.23	50	52

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side) Q (guard grille pressure side)
			
Type	FN071-ZID.DG.A7P3	FN071-ZIQ.DG.A7P3	FN071-ZIS.DG.V7P3
Article no.	154319	154331	154343
Weight kg	15.20	26.10	15.30
			26.20

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Design Q - square full bell mouth, guard grille pressure side

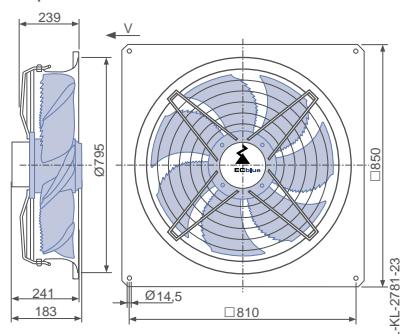

FE2owlet-ECblue

for three phase alternating current, 200-240 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.90 kW*

Rated current I_N : 8.60- 7.20 A*

Rated speed n_N : 1300 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 43.5 %


Efficiency: $N_{actual} = 47.1 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

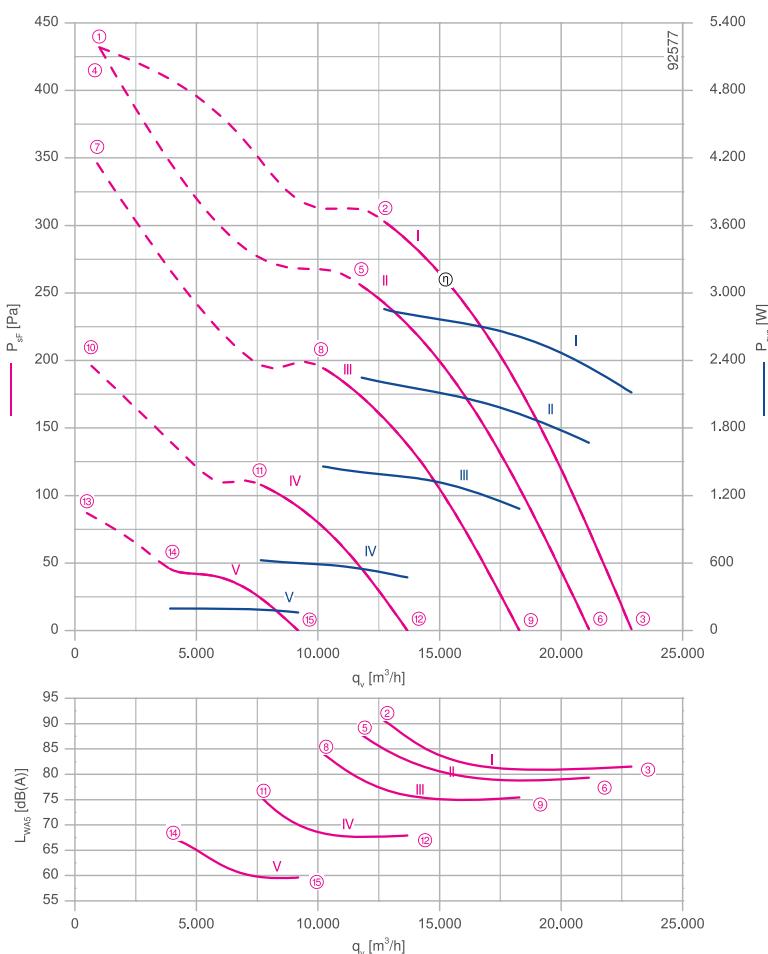

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530


1360-403

System components

Page 430



Airflow direction A

Design Q - square full bell mouth, without guard grille

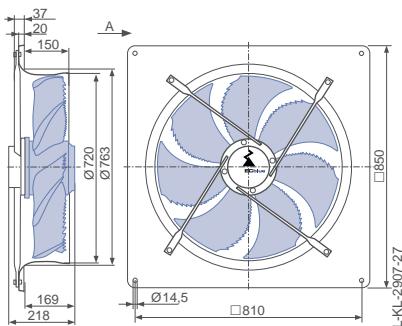

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

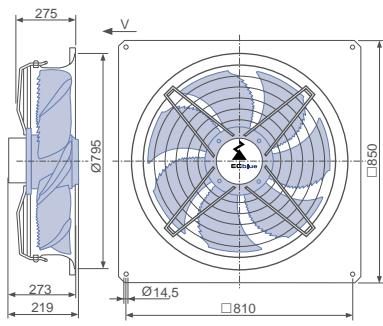
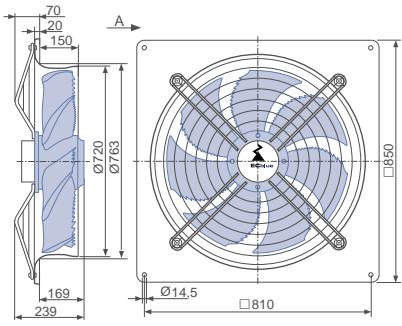


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN071-ZI_GG_7P4	I	1300	①	7.60	2900		50
			②	7.60	2900	91	
			③	5.60	2100	82	
	II	1200	④	7.60	2900		60
			⑤	6.00	2300	88	
			⑥	4.40	1650	79	
	III	1040	⑦	5.40	2000		
			⑧	3.90	1450	84	
			⑨	2.90	1100	75	
	IV	780	⑩	2.30	880		
			⑪	1.70	620	76	
			⑫	1.30	480	68	
	V	520	⑬	0.82	280		
			⑭	0.64	200	65	
			⑮	0.56	160	60	

Current values determined at 230V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
		
Type	FN071-ZIQ.GG.A7P4	FN071-ZIQ.GG.A7P4
Article no.	159838	159840
Weight kg	37.50	41.00
	41.00	41.00

Control technology

Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

FE2owlet-ECblue

for three phase alternating current, 200-240 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.50 kW*

Rated current I_N : 10.60- 8.80 A*

Rated speed n_N : 1400 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 44.4 %


Efficiency: $N_{actual} = 47.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

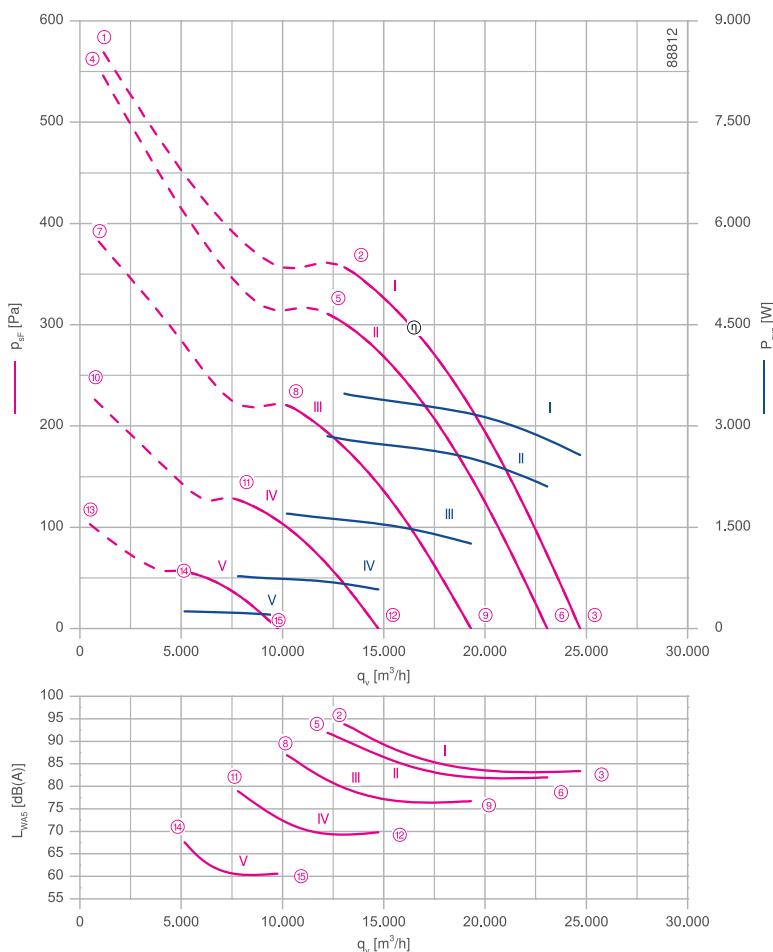

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

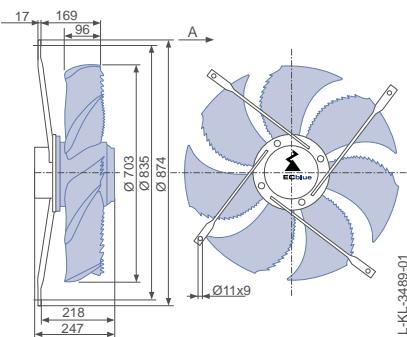

Design Q - square full bell mouth, without guard grille

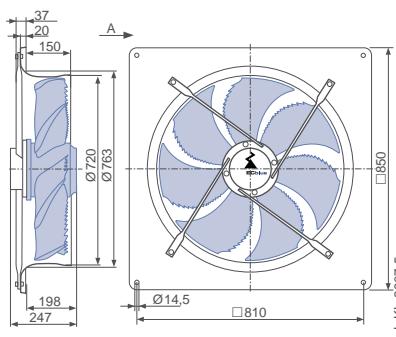

Design Q - square full bell mouth, guard grille suction side

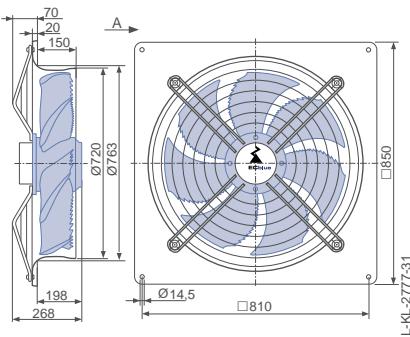

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN071-ZI_GL_7P4	I	1400	①	11.00	4200	55	
			②	9.20	3500	94	
			③	6.80	2600	83	
	II	1310	④	10.50	4000	60	
			⑤	7.60	2900	92	
			⑥	5.60	2100	82	
	III	1100	⑦	6.20	2300		
			⑧	4.40	1700	87	
			⑨	3.30	1250	77	
	IV	840	⑩	2.80	1050		
			⑪	2.10	780	79	
			⑫	1.55	580	70	
	V	560	⑬	0.98	340		
			⑭	0.76	250	68	
			⑮	0.64	200	61	

Current values determined at 230V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)
Type Article no.	FN071-ZID.GL.A7P4 155701	FN071-ZIQ.GL.A7P4 155703	FN071-ZIQ.GL.A7P4 155705	FN071-ZIS.GL.V7P4 155693
Weight kg	30.70	41.70	45.20	34.30
				34.00
				45.10

Control technology

Control modules	Add-on modules	Operating terminal
		


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

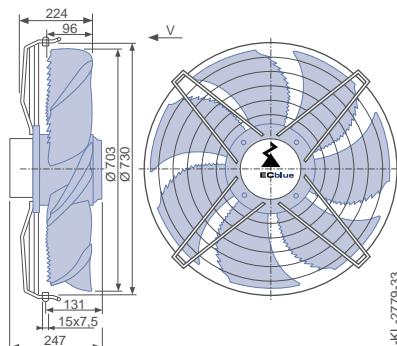

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

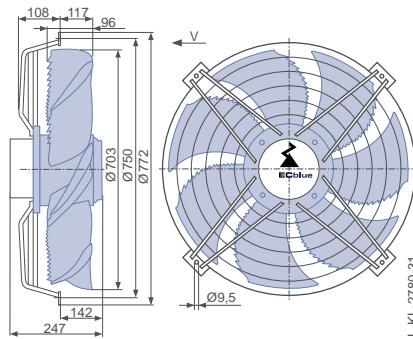

Design Q - square full bell mouth, guard grille pressure side

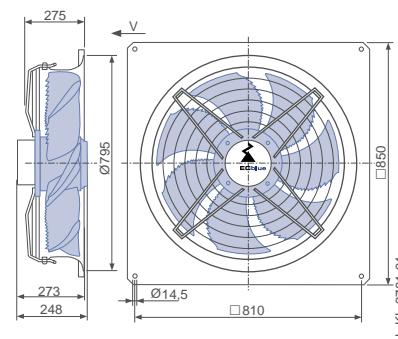

FE2owlet-ECblue

for three phase alternating current, 380-480 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.81 kW*

Rated current I_N : 1.40- 1.10 A*

Rated speed n_N : 960 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 48.2 %


Efficiency: $N_{actual} = 55.1 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

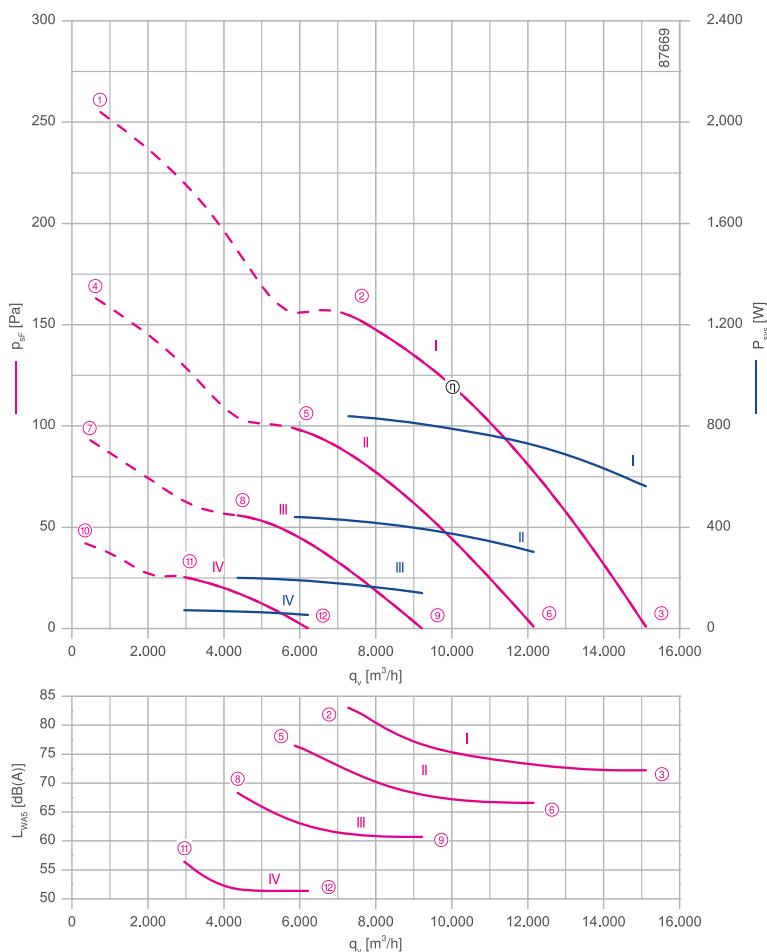

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

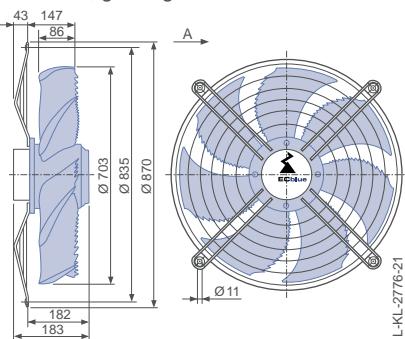


Design Q - square full bell mouth, guard grille suction side

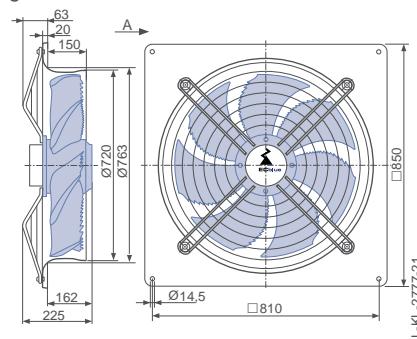

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side


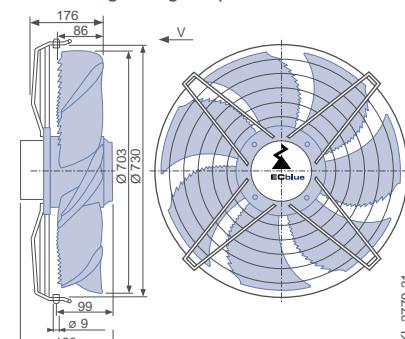


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN071-ZI_.DG._7P3	I	960	①	1.80	1150	
			②	1.35	840	83
			③	0.98	560	72
	II	770	④	1.00	600	
			⑤	0.82	440	77
			⑥	0.64	300	67
	III	580	⑦	0.58	260	
			⑧	0.48	200	68
			⑨	0.37	140	61
	IV	390	⑩	0.30	90	
			⑪	0.26	70	57
			⑫	0.23	55	51

Current values determined at 400V


Fan ordering information

Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side) Q (guard grille pressure side)
			
Type	FN071-ZID.DG.A7P3	FN071-ZIQ.DG.A7P3	FN071-ZIS.DG.V7P3
Article no.	154317	154329	154341
Weight kg	15.20	26.10	15.30
			26.20

Control technology

Control modules	Add-on modules	Operating terminal
		
Page 452	Page 463	Page 472

Design Q - square full bell mouth, guard grille pressure side

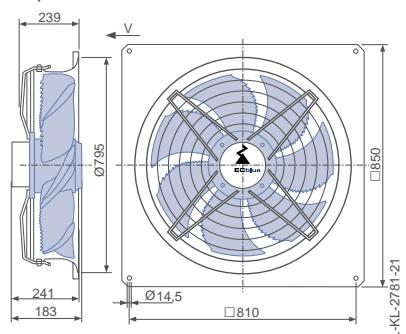

FE2owlet-ECblue

for three phase alternating current, 380-480 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.95 kW*

Rated current I_N : 3.20- 2.50 A*

Rated speed n_N : 1150 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 44.8 %


Efficiency: $N_{actual} = 49.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

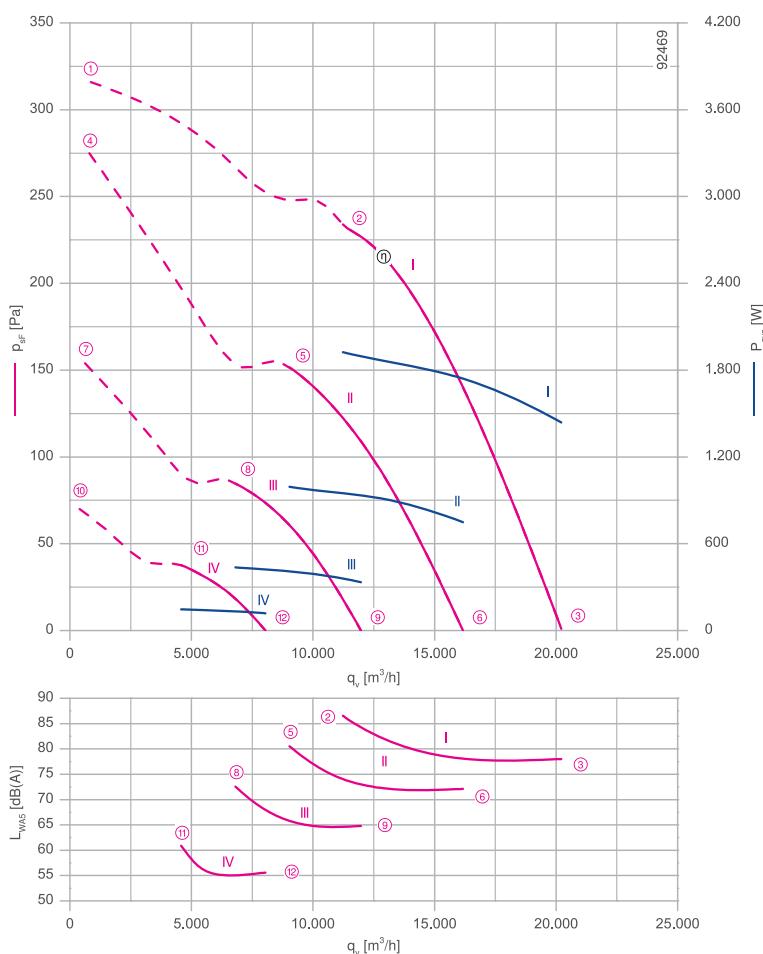

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

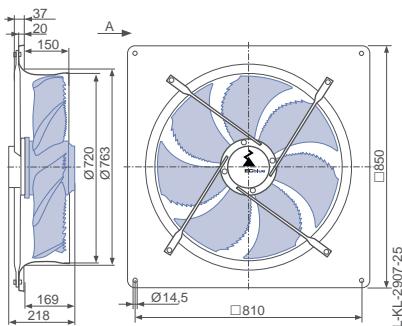


Design Q - square full bell mouth, guard grille suction side

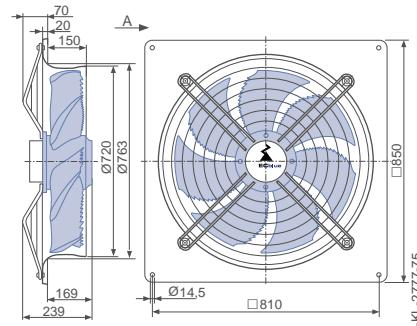

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side


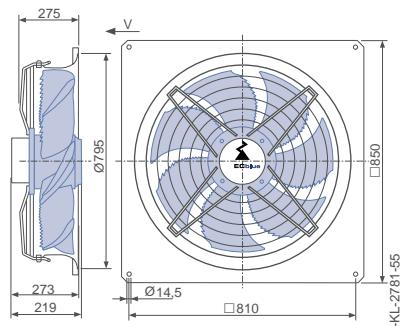


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN071-ZI_.GG._7P4	I	1150	①	2.80	1750	
			②	3.10	1950	87
			③	2.30	1450	78
	II	920	④	2.30	1400	
			⑤	1.70	1000	81
			⑥	1.30	740	72
	III	690	⑦	1.10	600	
			⑧	0.88	440	73
			⑨	0.70	330	65
	IV	460	⑩	0.48	200	
			⑪	0.39	150	61
			⑫	0.34	120	56

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
			
Type	FN071-ZIQ.GG.A7P4	FN071-ZIQ.GG.A7P4	FN071-ZIQ.GG.V7P4
Article no.	154920	154924	154908
Weight kg	37.50	41.00	41.00

Control technology

Control modules	Add-on modules	Operating terminal
		

Page 452

Page 463

Page 472

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 380-480 V

F N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.50 kW*

Rated current I_N : 5.40- 4.30 A*

Rated speed n_N : 1400 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 44.8 %


Efficiency: $N_{actual} = 47.8 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

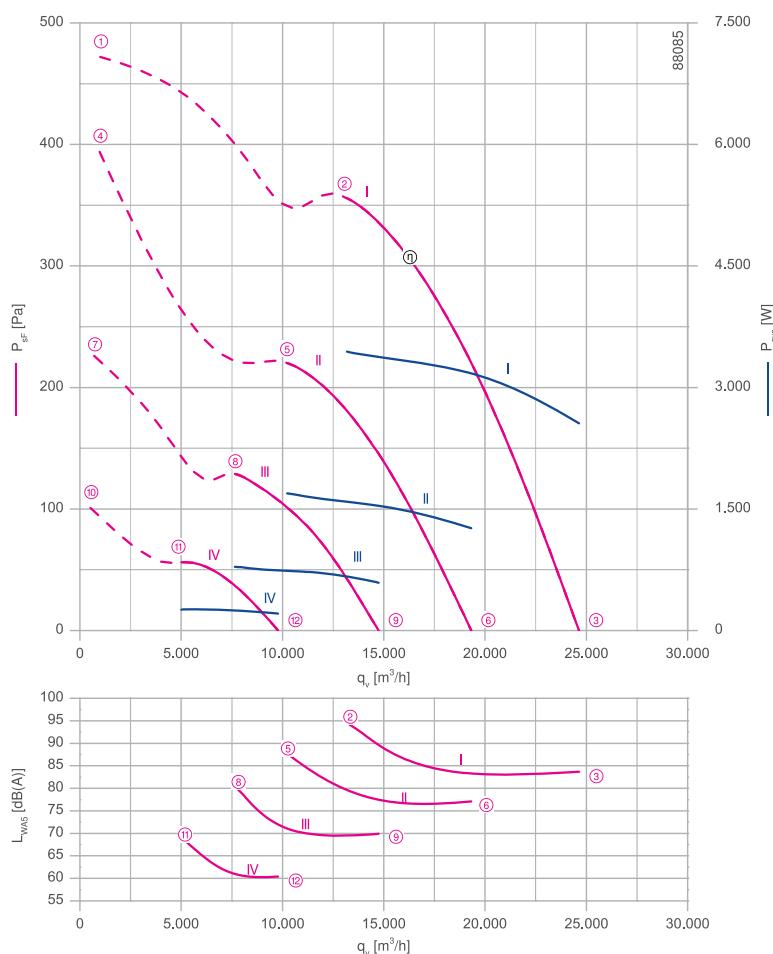

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

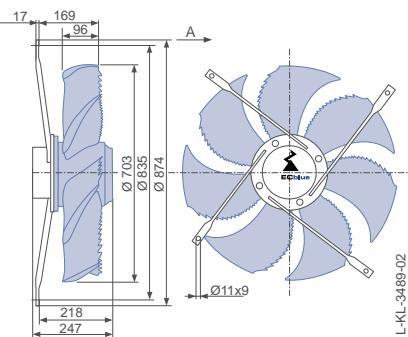

Design Q - square full bell mouth, without guard grille

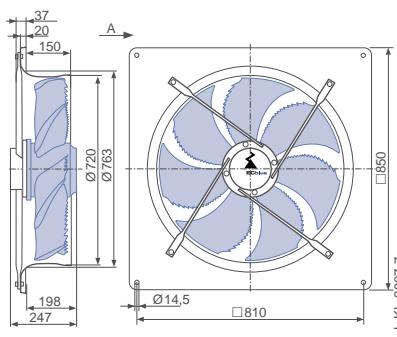

Design Q - square full bell mouth, guard grille suction side

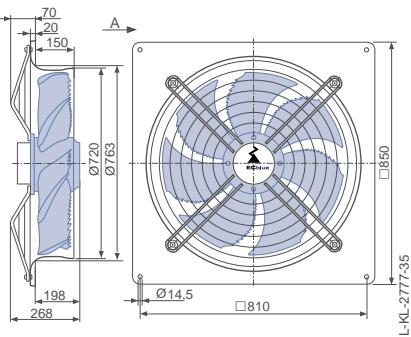

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN071-ZI.GL.7P4	I	1400	①	4.80	3100	
			②	5.20	3500	95
			③	3.90	2600	84
	II	1100	④	3.50	2300	
			⑤	2.60	1700	88
			⑥	1.95	1250	77
	III	840	⑦	1.70	1050	
			⑧	1.30	780	80
			⑨	1.00	600	70
	IV	560	⑩	0.72	350	
			⑪	0.60	260	69
			⑫	0.50	210	60

Current values determined at 400V

Fan ordering information

Airflow direction A	Airflow direction V					
Design	D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type Article no.	FN071-ZID.GL.A7P4 154918	FN071-ZIQ.GL.A7P4 154922	FN071-ZIQ.GL.A7P4 154926	FN071-ZIS.GL.V7P4 154996	FN071-ZII.GL.V7P4 154906	FN071-ZIQ.GL.V7P4 154910
Weight kg	30.70	41.70	45.20	34.30	34.00	45.10

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

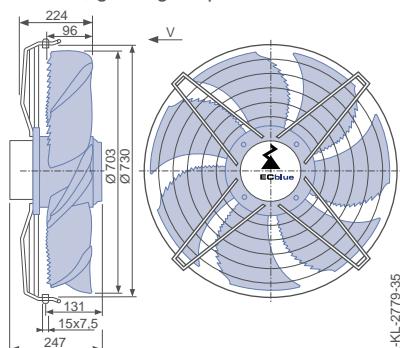

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

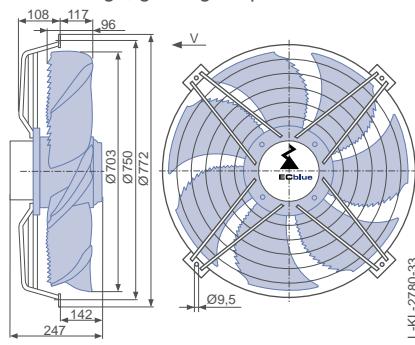

Design Q - square full bell mouth, guard grille pressure side

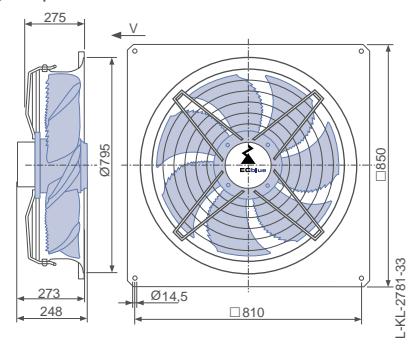

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO80



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.70 kW*

Rated current I_N : 3.70- 2.70 A*

Rated speed n_N : 650 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 42.0 %


Efficiency: $N_{actual} = 49.5 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

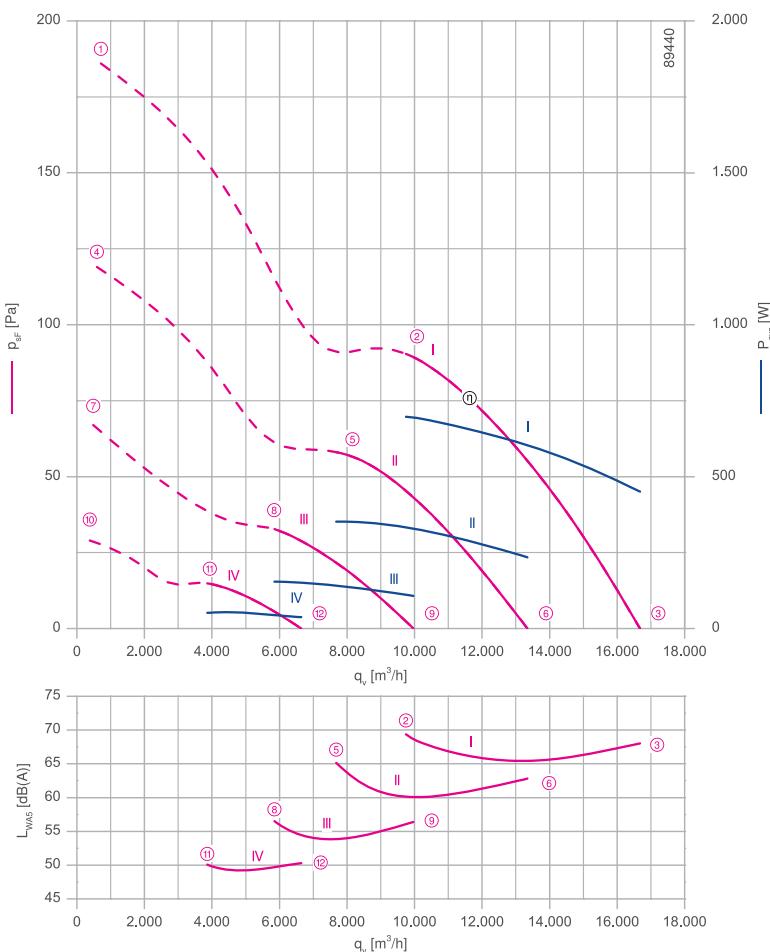

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

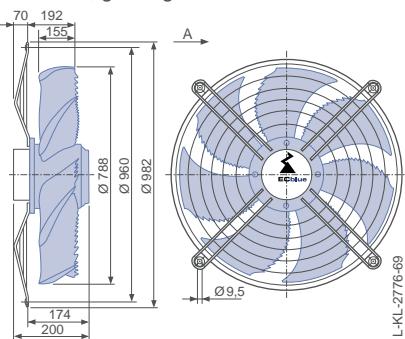


Design Q - square full bell mouth, guard grille suction side

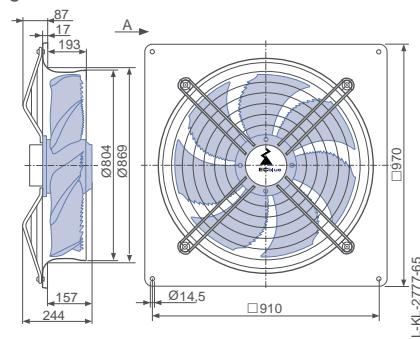

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

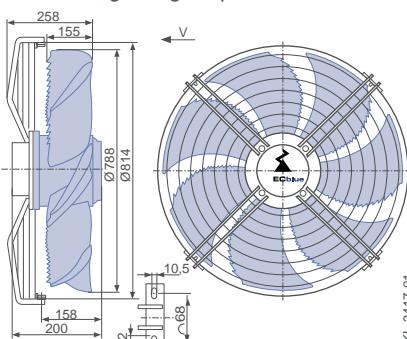

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN080-ZI_.DG._5P4	I	650	①	4.60	1000	
			②	3.20	700	70
			③	2.10	460	68
	II	520	④	2.40	500	
			⑤	1.65	350	65
			⑥	1.10	230	63
	III	390	⑦	1.00	220	
			⑧	0.72	150	57
			⑨	0.54	110	56
	IV	260	⑩	0.40	70	
			⑪	0.46	50	50
			⑫	0.40	38	50

Current values determined at 230V

Fan ordering information


Airflow direction A		Airflow direction V		
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN080-ZID.DG.A5P4	FN080-ZIQ.DG.A5P4	FN080-ZIS.DG.V5P4	FN080-ZII.DG.V5P4
Article no.	157181	157182	157186	157184
Weight kg	20.90	35.60	19.80	19.30
				34.10

Control technology


Control modules	Add-on modules	Operating terminal

Page 452 Page 463 Page 472

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

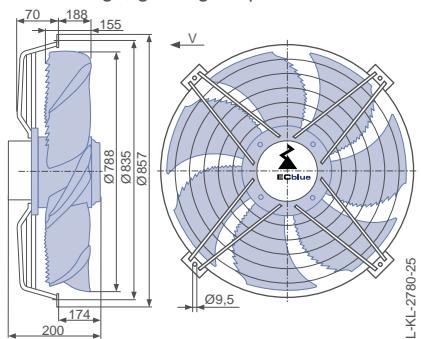

Design Q - square full bell mouth, guard grille pressure side

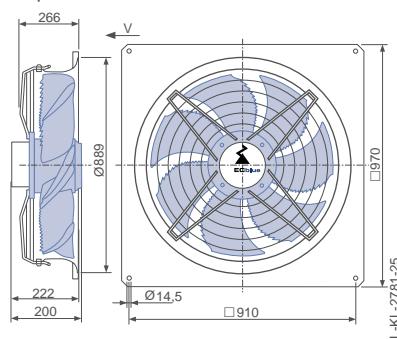

FE2owlet-ECblue

for three phase alternating current, 200-240 V


FNO80



Description

Motor technology: EC
Rated voltage U: 3~ 200-240 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 0.83 kW*
Rated current I: 2.60- 2.20 A*
Rated speed n_{max} : 700 min⁻¹*
Thermal class: THCL155*
Min. permitted conveyor temperature $t_{R(min)}$: -35 °C
Max. permitted conveyor temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 5
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, Ultramarine blue
Conformity: ErP 2015, CE, UL
ErP Data
Efficiency η_{start} : 43.2 %
Efficiency: $N_{actual} = 50.2 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

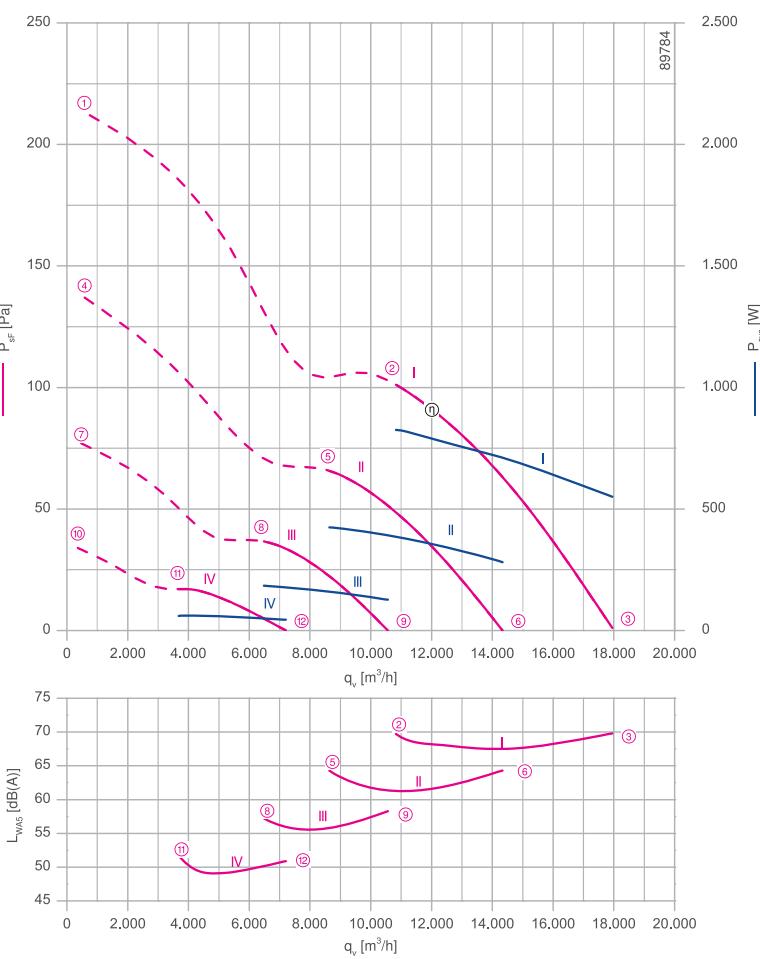

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

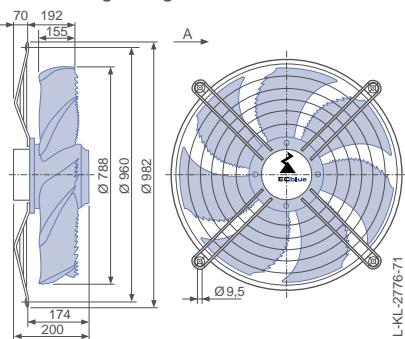


Design Q - square full bell mouth, guard grille suction side

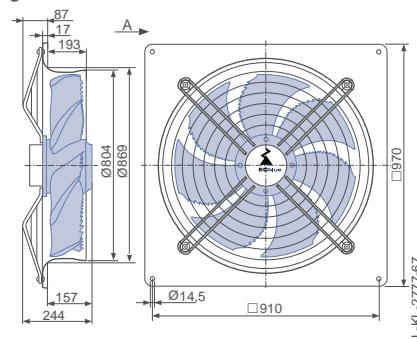

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

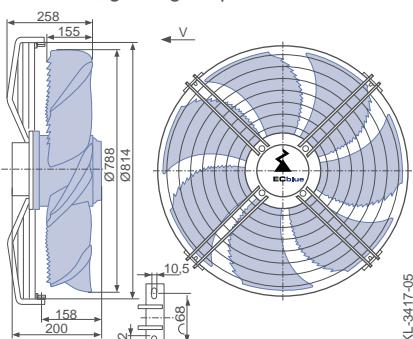

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN080-ZI_.DG._5P4	I	700	①	3.20	1200	
			②	2.20	820	70
			③	1.50	560	70
	II	560	④	1.65	600	
			⑤	1.20	420	64
			⑥	0.80	280	64
	III	420	⑦	0.74	260	
			⑧	0.58	190	57
			⑨	0.44	130	58
	IV	280	⑩	0.34	80	
			⑪	0.27	60	50
			⑫	0.21	44	51

Current values determined at 230V


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN080-ZID.DG.A5P4	FN080-ZIQ.DG.A5P4	FN080-ZIS.DG.V5P4	FN080-ZII.DG.V5P4
Article no.	157209	157210	157214	157212
Weight kg	20.90	35.60	19.80	19.30
				34.10


Control technology

	Control modules	Add-on modules	Operating terminal
Page 452	Page 463	Page 472	

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

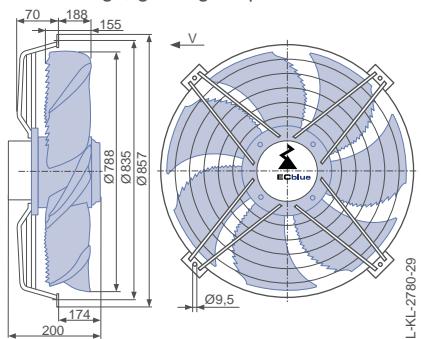

Design Q - square full bell mouth, guard grille pressure side

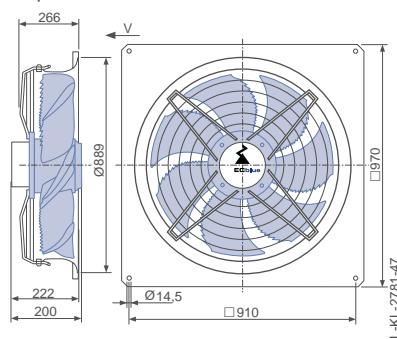

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN080



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.10 kW*

Rated current I_N : 6.60- 5.50 A*

Rated speed n_N : 970 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 47.7 %


Efficiency: $N_{actual} = 52.1 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

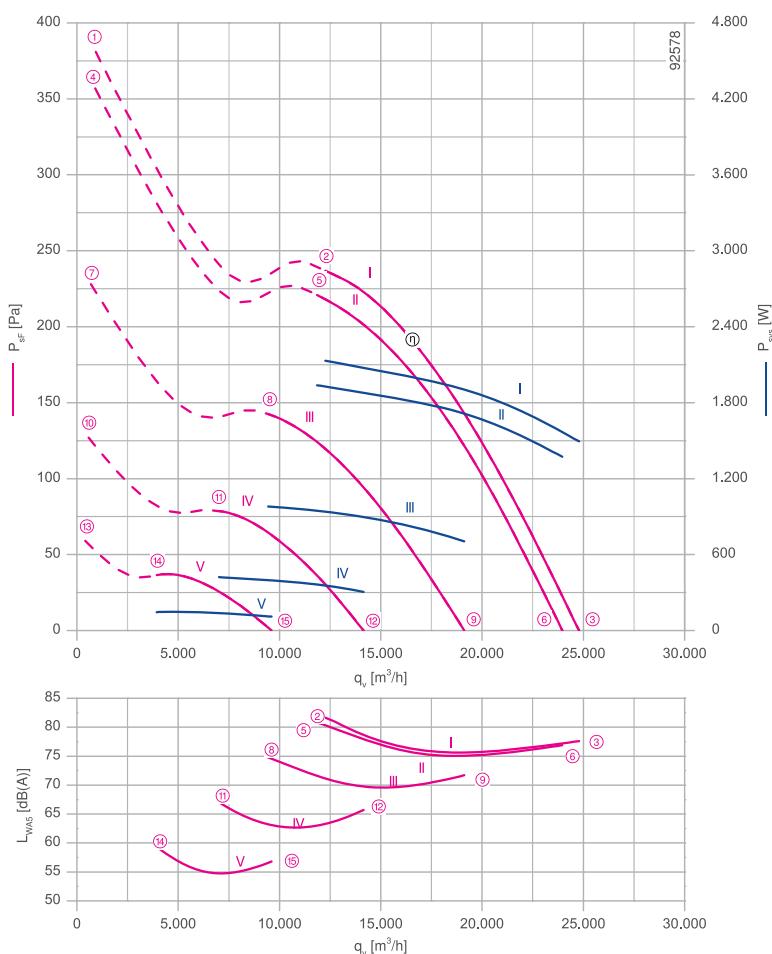

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

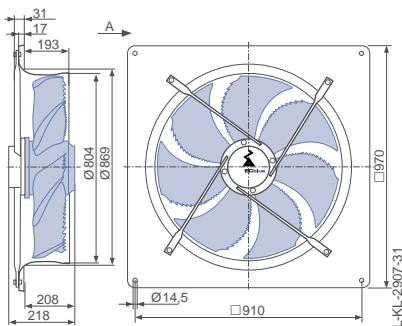


Design Q - square full bell mouth, guard grille suction side

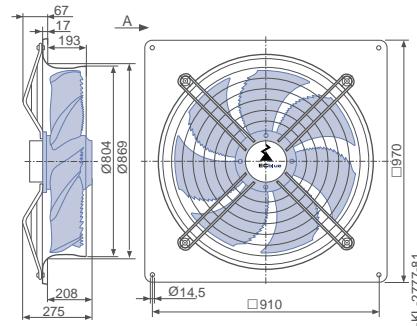

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

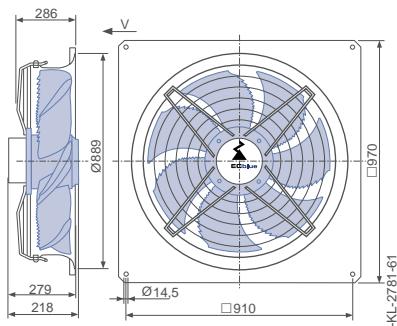

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN080-ZI_GG_7P3	I	970	①	8.00	3000		55
			②	5.80	2100	82	
			③	4.00	1500	78	
	II	940	④	7.20	2700		60
			⑤	5.20	1950	81	
			⑥	3.70	1350	77	
	III	750	⑦	3.60	1350		
			⑧	2.70	980	75	
			⑨	1.95	700	72	
	IV	560	⑩	1.55	560		
			⑪	1.20	420	67	
			⑫	0.88	300	66	
	V	380	⑬	0.62	190		
			⑭	0.52	150	57	
			⑮	0.42	110	57	

Current values determined at 230V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
Q (guard grille pressure side)		
Type	FN080-ZIQ.GG.A7P3	FN080-ZIQ.GG.A7P3
Article no.	159854	159856
Weight kg	45.90	49.00
		47.70

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-EObblue

FE2owlet

FE2owlet-EObblue
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO80



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.10 kW*

Rated current I_N : 9.40-7.80 A*

Rated speed n_N : 1100 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 40 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 47.2 %


Efficiency: $N_{actual} = 50.6 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

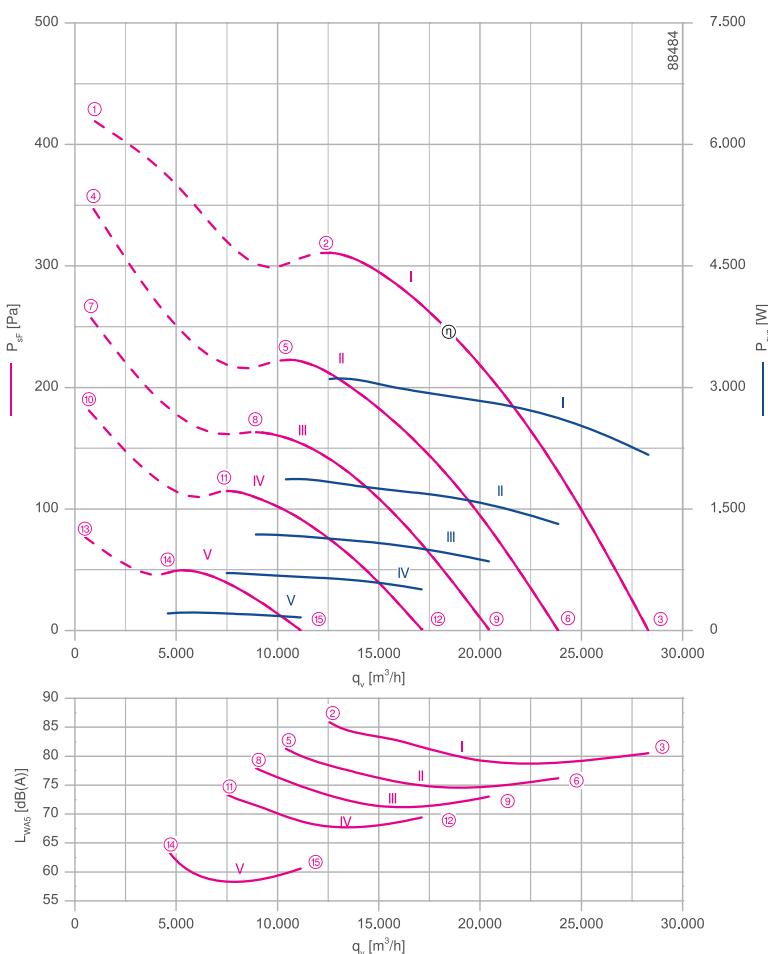

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

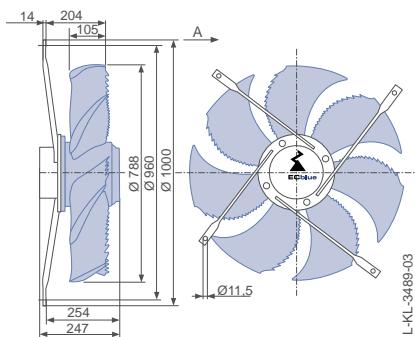

Design Q - square full bell mouth, without guard grille

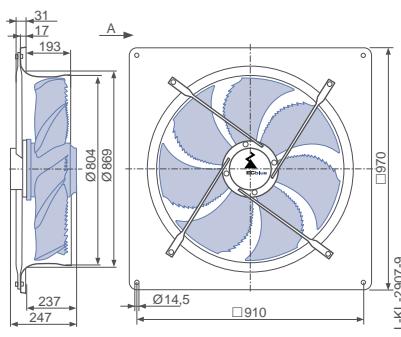

Design Q - square full bell mouth, guard grille suction side

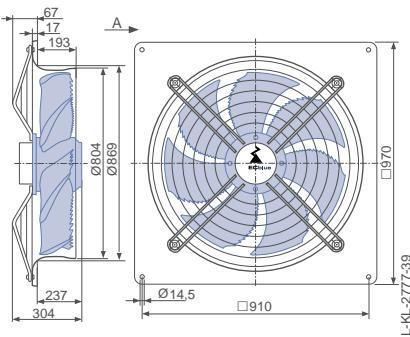

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN080-ZI_GL_7P3	I	1100	①	9.00	3400	86	40
			②	8.20	3100	81	
			③	5.60	2200	81	
	II	930	④	6.80	2600		60
			⑤	4.80	1850	81	
			⑥	3.50	1300	76	
	III	800	⑦	4.20	1600		
			⑧	3.10	1200	78	
			⑨	2.30	860	73	
	IV	670	⑩	2.50	940		
			⑪	1.90	700	74	
			⑫	1.40	500	69	
	V	440	⑬	0.84	280		
			⑭	0.68	220	62	
			⑮	0.56	160	61	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design		D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)
Design					
Type Article no.	FN080-ZID.GL.A7P3 155717	FN080-ZIQ.GL.A7P3 155719	FN080-ZIQ.GL.A7P3 155721	FN080-ZIS.GL.V7P3 155709	FN080-ZII.GL.V7P3 155711
Weight kg	35.30	50.10	53.90	37.50	36.80
					51.90

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

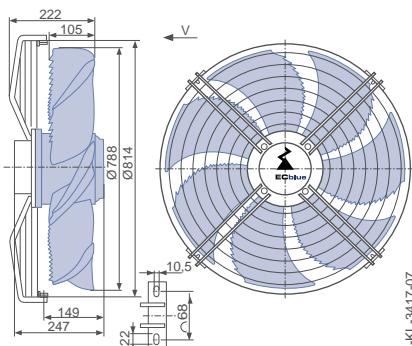

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

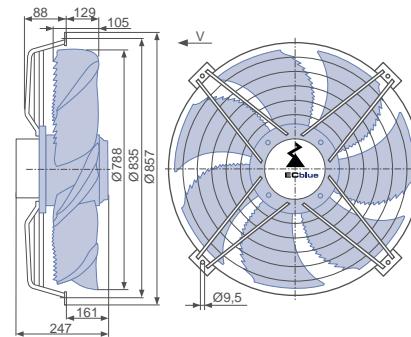

Design Q - square full bell mouth, guard grille pressure side

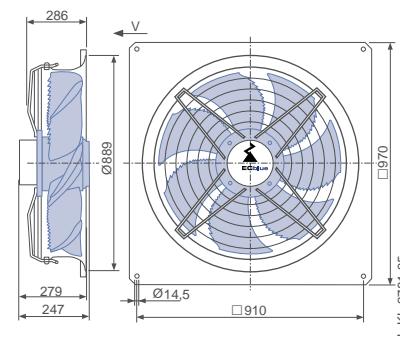

FE2owlet-ECblue

for three phase alternating current, 380-480 V


FNO80



Description

Motor technology: EC
Rated voltage U: 3~ 380-480 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 0.83 kW*
Rated current I: 1.45- 1.15 A*
Rated speed n_{max} : 700 min⁻¹*
Thermal class: THCL155*
Min. permitted conveyor temperature $t_{R(min)}$: -35 °C
Max. permitted conveyor temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 5
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, Ultramarine blue
Conformity: ErP 2015, CE, UL
ErP Data
Efficiency η_{start} : 44.3 %
Efficiency: $N_{actual} = 51.4 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

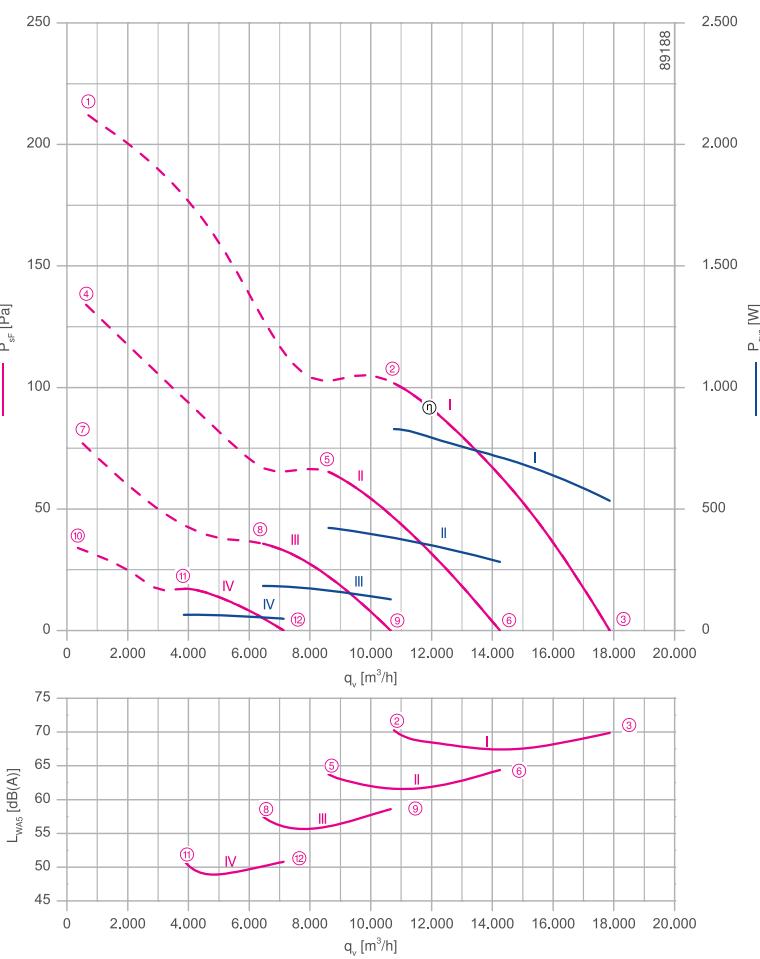

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

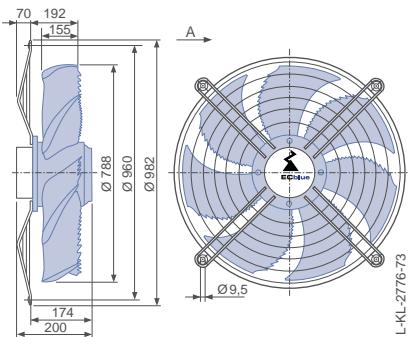


Design Q - square full bell mouth, guard grille suction side

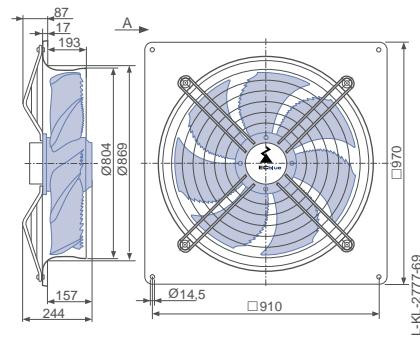

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

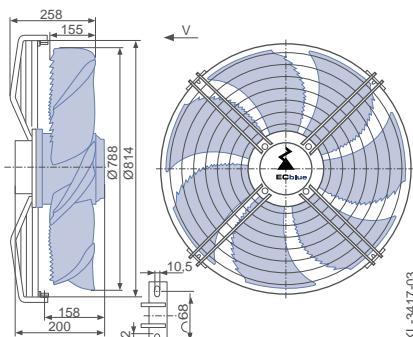

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN080-ZI_.DG._5P4	I	700	①	1.85	1200	
			②	1.35	820	70
			③	0.94	540	70
	II	560	④	1.05	600	
			⑤	0.80	420	64
			⑥	0.62	280	64
	III	420	⑦	0.58	250	
			⑧	0.46	180	58
			⑨	0.36	130	59
	IV	280	⑩	0.29	85	
			⑪	0.26	65	50
			⑫	0.23	48	51

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V		
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN080-ZID.DG.A5P4	FN080-ZIQ.DG.A5P4	FN080-ZIS.DG.V5P4	FN080-ZII.DG.V5P4
Article no.	157195	157196	157200	157198
Weight kg	20.90	35.60	19.80	19.30
				34.10

Control technology


Control modules	Add-on modules	Operating terminal

Page 452


Page 463

Page 472

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

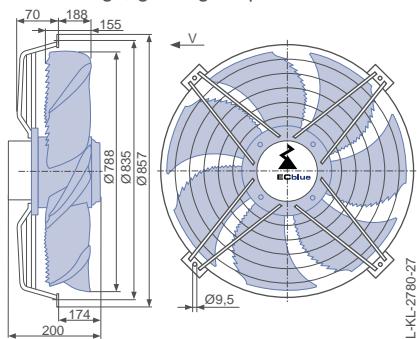

Design Q - square full bell mouth, guard grille pressure side

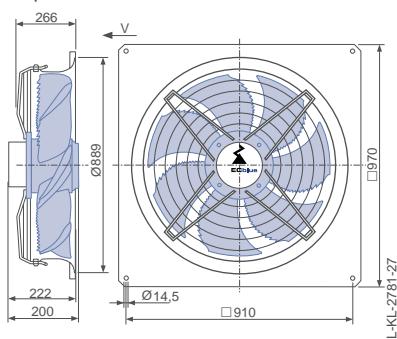

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO80



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.95 kW*

Rated current I_N : 3.30- 2.60 A*

Rated speed n_N : 950 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 48.7 %


Efficiency: $N_{actual} = 53.4 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

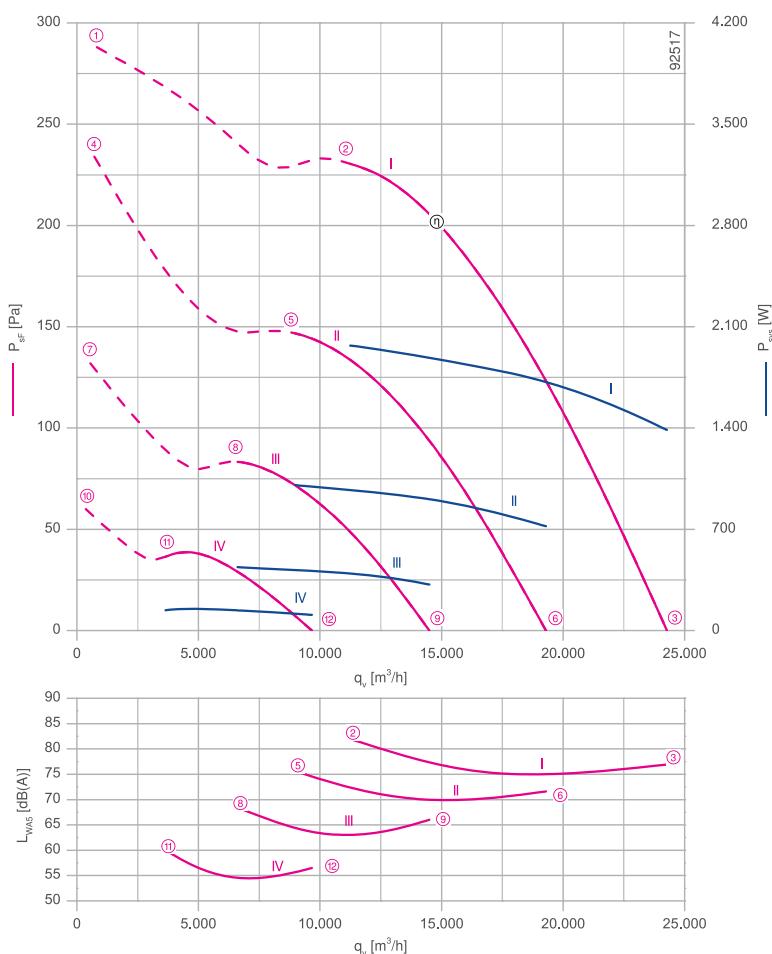

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

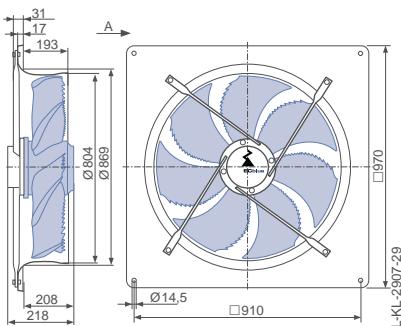


Design Q - square full bell mouth, guard grille suction side

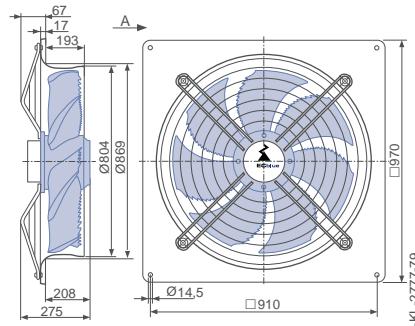

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

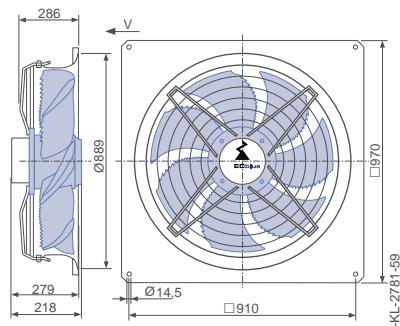

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN080-ZI_.GG._7P3	I	950	①	3.00	1900	
			②	3.10	1950	82
			③	2.20	1400	77
	II	760	④	2.20	1400	
			⑤	1.70	1000	76
			⑥	1.25	720	72
	III	570	⑦	1.05	580	
			⑧	0.84	440	68
			⑨	0.66	320	66
	IV	380	⑩	0.46	190	
			⑪	0.39	140	58
			⑫	0.32	110	57

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
Type	FN080-ZIQ.GG.A7P3	FN080-ZIQ.GG.A7P3	FN080-ZIQ.GG.V7P3
Article no.	154809	154813	154944
Weight kg	45.90	49.70	47.70

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-EObblue

FE2owlet

FE2owlet-EObblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO80



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.10 kW*

Rated current I_N : 4.80- 3.80 A*

Rated speed n_N : 1100 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 46.4 %


Efficiency: $N_{actual} = 49.9 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

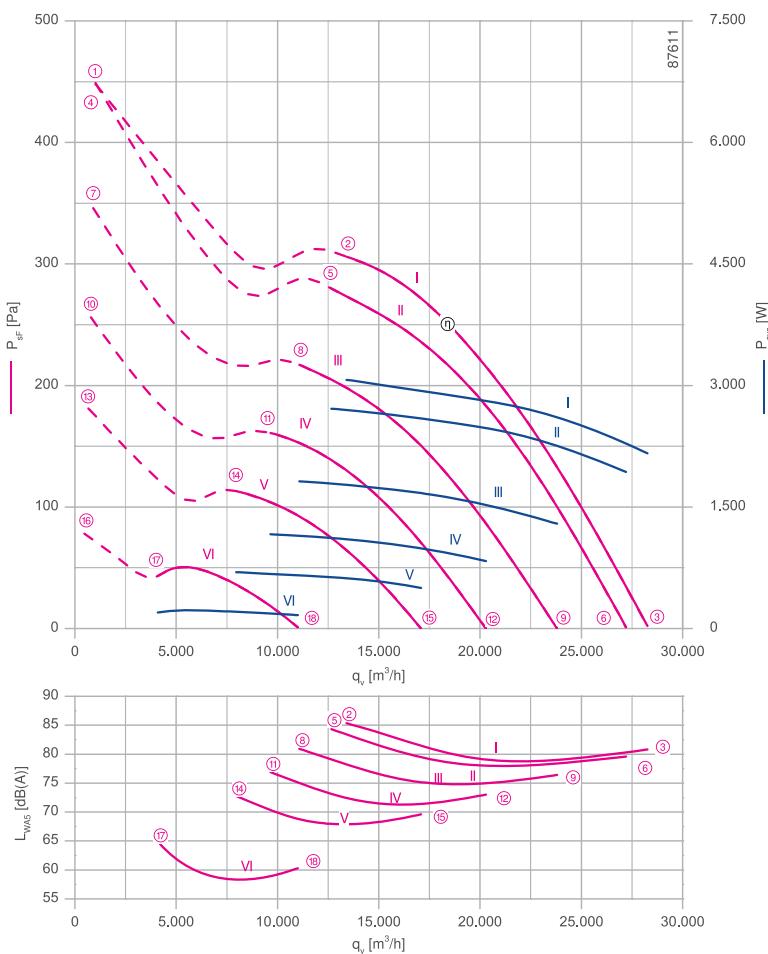

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

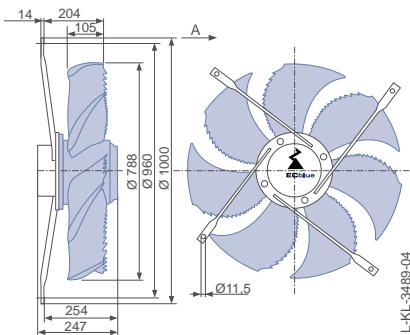

Design Q - square full bell mouth, without guard grille

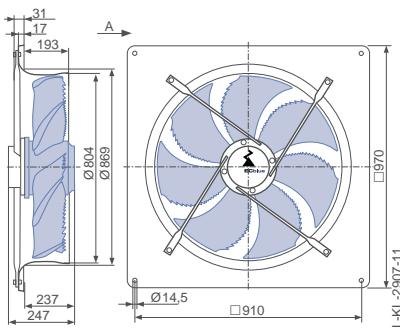

Design Q - square full bell mouth, guard grille suction side

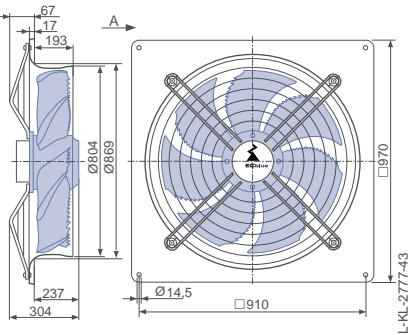

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN080-ZI_GL_7P3	I	1100	①	5.60	3700	55	
			②	4.60	3100	86	
			③	3.30	2200	81	
	II	1060	④	5.60	3700	60	
			⑤	4.20	2700	84	
			⑥	2.90	1950	80	
	III	930	⑦	3.80	2500		
			⑧	2.80	1800	81	
			⑨	2.00	1300	76	
	IV	800	⑩	2.40	1600		
			⑪	1.80	1150	77	
			⑫	1.35	840	73	
	V	670	⑬	1.50	940		
			⑭	1.15	680	73	
			⑮	0.90	500	70	
	VI	440	⑯	0.64	280		
			⑰	0.52	220	61	
			⑱	0.44	160	60	

Current values determined at 400V

Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)
Type Article no.	FN080-ZID.GL.A7P3 154807	FN080-ZIQ.GL.A7P3 154811	FN080-ZIQ.GL.A7P3 154815	FN080-ZIS.GL.V7P3 154934
Weight kg	35.30	50.10	53.90	37.50
				FN080-ZII.GL.V7P3 154942
				FN080-ZIQ.GL.V7P3 154946
				Q (guard grille pressure side)

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

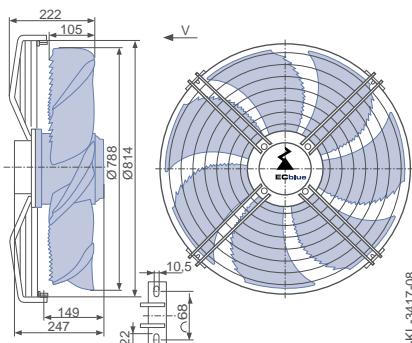

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

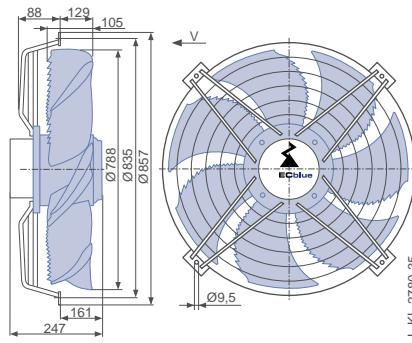

Design Q - square full bell mouth, guard grille pressure side

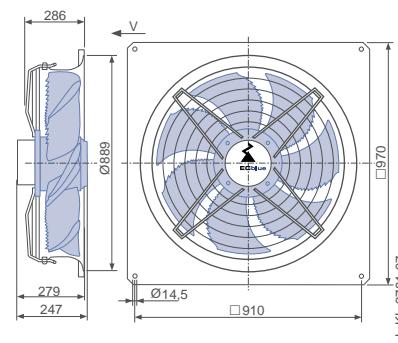

FE2owlet-ECblue

for single phase alternating current, 200-277 V

FNO 91



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 400 W*

Rated current I_N : 2.20- 1.60 A*

Rated speed n_N : 480 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 4

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 46.5 %


Efficiency: $N_{actual} = 55.4 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

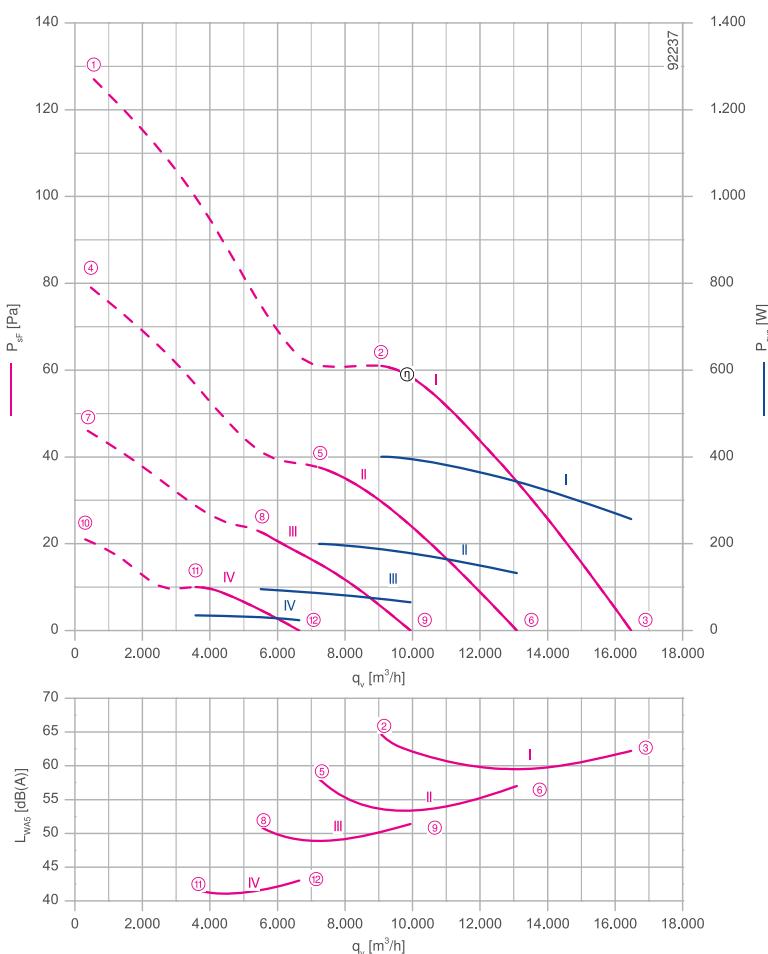

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

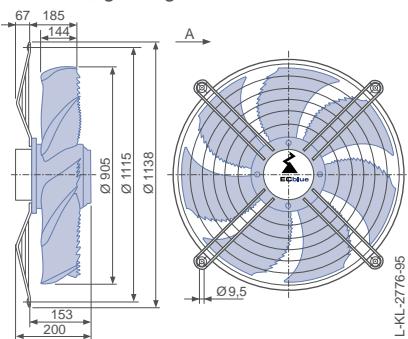


Design Q - square full bell mouth, guard grille suction side

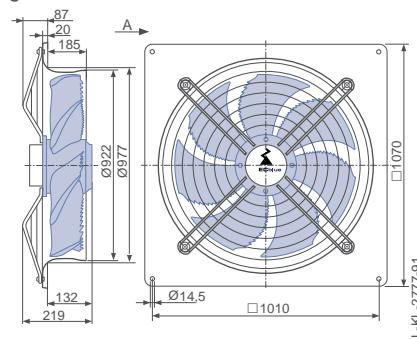

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

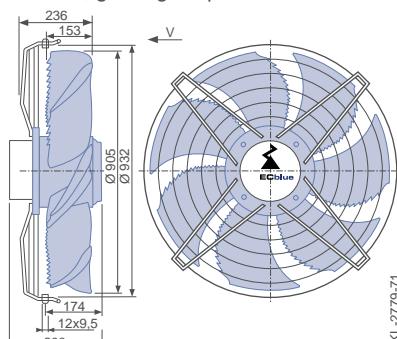

Performance data

Type	Characteristic curve	Speed <i>n</i> min ⁻¹	Operating point	Current <i>I</i> A	Input power <i>P_{sys}</i> W	Suction side sound power level <i>L_{WA5}</i> dB(A)
FN091-ZI_.DG._4P3	I	480	①	3.00	640	
			②	1.90	400	65
			③	1.15	260	62
	II	380	④	1.45	310	
			⑤	0.90	200	58
			⑥	0.62	130	57
	III	290	⑦	0.66	140	
			⑧	0.48	95	51
			⑨	0.37	65	51
	IV	190	⑩	0.31	48	
			⑪	0.25	34	42
			⑫	0.32	24	43

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V		
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN091-ZID.DG.A4P3	FN091-ZIQ.DG.A4P3	FN091-ZIS.DG.V4P3	FN091-ZII.DG.V4P3
Article no.	159819	159821	159815	159811
Weight kg	19.50	36.00	19.90	19.90
				36.50

Control technology


Control modules	Add-on modules	Operating terminal

Page 452


Page 463

Page 472

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

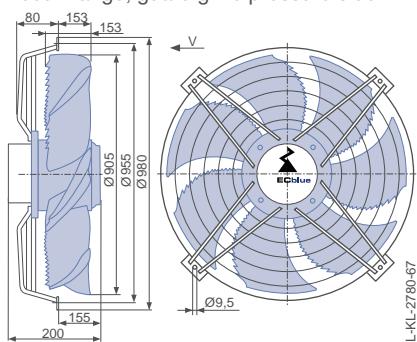

Design Q - square full bell mouth, guard grille pressure side

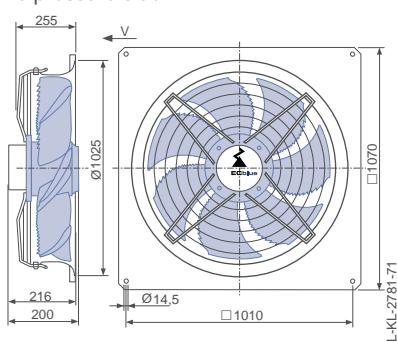

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.69 kW*

Rated current I_N : 2.10- 1.75 A*

Rated speed n_N : 570 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 4

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 46.4 %


Efficiency: $N_{actual} = 54.0 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

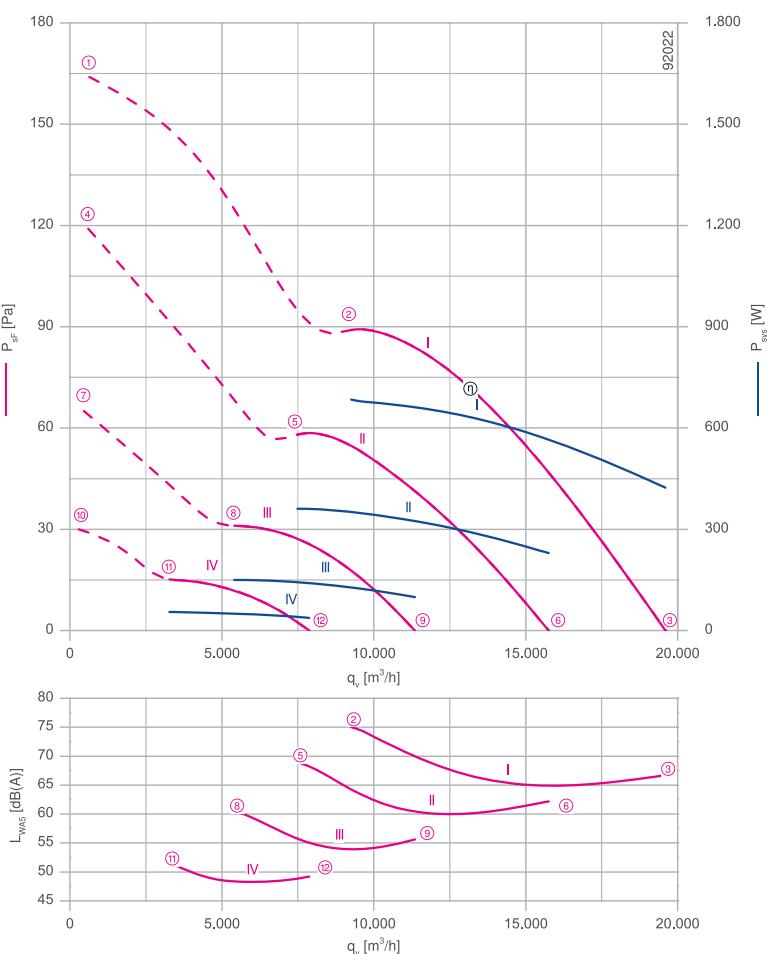

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

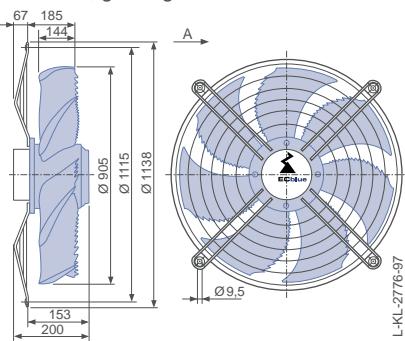


Design Q - square full bell mouth, guard grille suction side

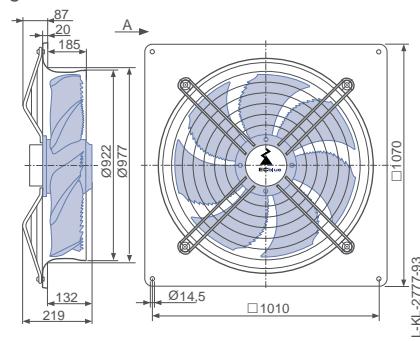

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side


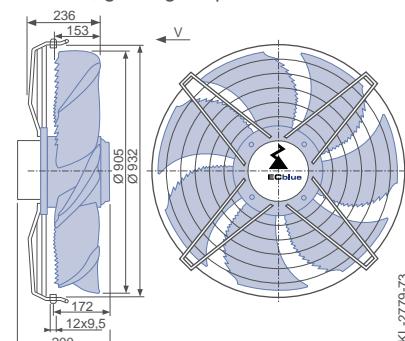


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
FN091-ZI_.DG_.4P3	I	570	①	2.50	940	
			②	1.85	680	75
			③	1.15	420	67
	II	460	④	1.55	560	
			⑤	1.00	360	69
			⑥	0.68	230	62
	III	340	⑦	0.68	230	
			⑧	0.52	150	60
			⑨	0.37	100	56
	IV	230	⑩	0.31	75	
			⑪	0.24	55	50
			⑫	0.18	38	49

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)	
					
Type	FN091-ZID.DG.A4P3	FN091-ZIQ.DG.A4P3	FN091-ZIS.DG.V4P3	FN091-ZII.DG.V4P3	FN091-ZIQ.DG.V4P3
Article no.	159805	159807	159801	159797	159799
Weight kg	19.50	36.00	19.90	19.90	36.50

Control technology


Control modules	Add-on modules	Operating terminal
		

Page 452


Page 463

Page 472

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

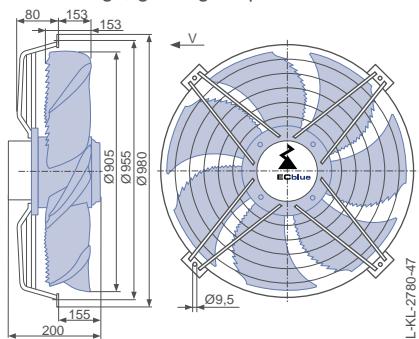

Design Q - square full bell mouth, guard grille pressure side

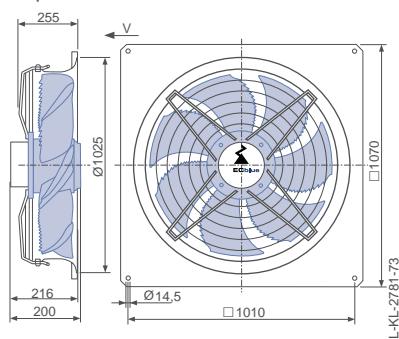

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.10 kW*

Rated current I_N : 6.40 - 5.40 A*

Rated speed n_N : 950 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 53.6 %


Efficiency: $N_{actual} = 58.0 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

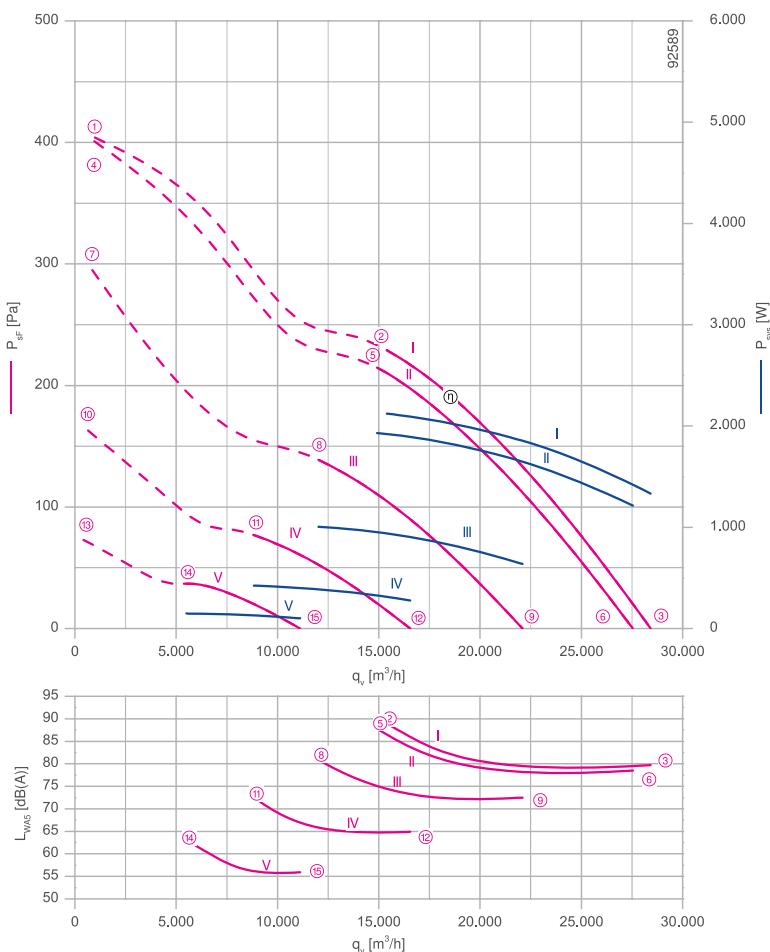

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

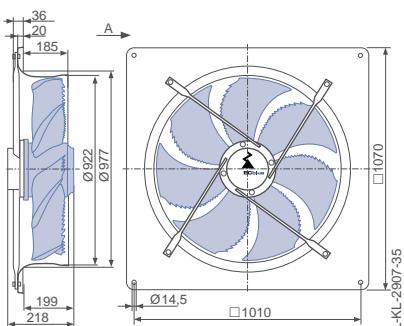


Design Q - square full bell mouth, guard grille suction side

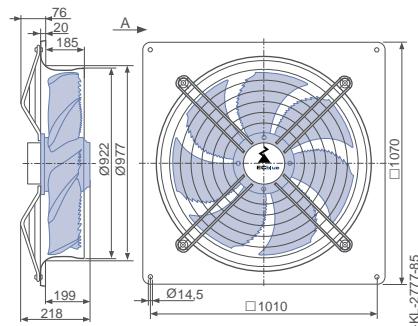

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

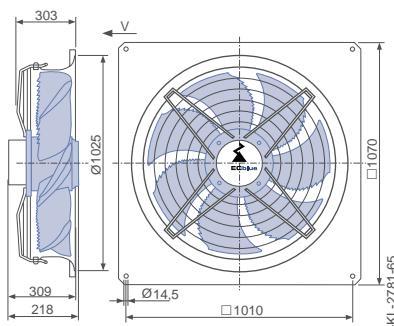

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
FN091-ZI_GG_5P1	I	950	①	8.20	3100		55
			②	5.60	2100	89	
			③	3.50	1350	80	
	II	920	④	8.20	3100		60
			⑤	5.00	1950	88	
			⑥	3.20	1200	79	
	III	740	⑦	4.80	1850		
			⑧	2.70	1000	81	
			⑨	1.70	640	73	
	IV	550	⑩	2.00	740		
			⑪	1.20	420	73	
			⑫	0.82	280	65	
	V	370	⑬	0.74	240		
			⑭	0.52	150	61	
			⑮	0.42	100	56	

Current values determined at 230V

Fan ordering information

Airflow direction A → Airflow direction V		
Design	Q (without guard grille)	Q (guard grille suction side)
Q (guard grille pressure side)		
Type	FN091-ZIQ.GG.A5P1	FN091-ZIQ.GG.A5P1
Article no.	159870	159872
Weight kg	47.30	56.10
		51.80

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-EObblue

FE2owlet

FE2owlet-EObblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix



FE2owlet-ECblue

for three phase alternating current, 200-240 V

FNO 91



Description

Motor technology: EC

Rated voltage U: 3 ~ 200-240 V*

Rated frequency f: 50/60 Hz*

Motor input power P_{sys} : 2.80 kW*

Rated current I: 8.60- 7.20 A*

Rated speed n_{max} : 1060 min⁻¹

Thermal class: THCL155*

Min. permitted conveyor temperature $t_{R(min)}$: -35 °C

Max. permitted conveyor temperature $t_{R(max)}$: 40 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, Ultramarine blue

Conformity: ErP 2015, CE, UL

ErP Data

Efficiency η_{startA} : 52.7 %


Efficiency: $N_{actual} = 56.3 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

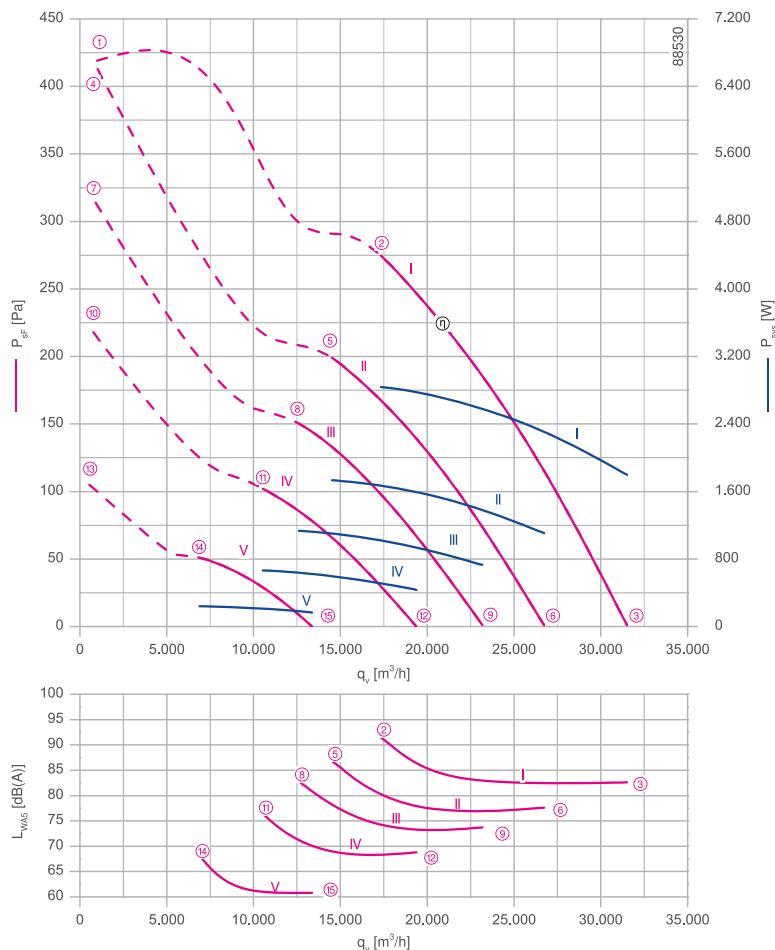

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

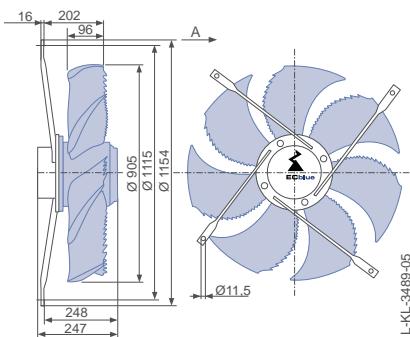

Design Q - square full bell mouth, without guard grille

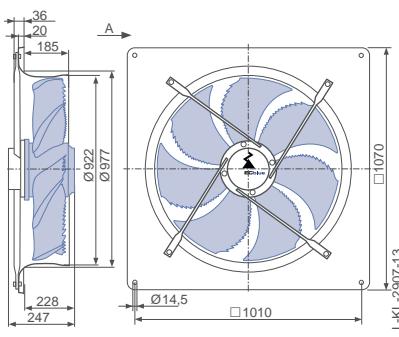

Design Q - square full bell mouth, guard grille suction side

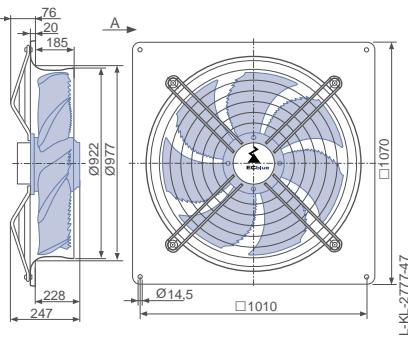

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN091-ZI_GL_5P1	I	1060	①	8.40	3200	92	40
			②	7.60	2800	83	
			③	4.80	1800		
	II	900	④	8.20	3100		60
			⑤	4.60	1750	87	
			⑥	2.90	1100	78	
	III	780	⑦	5.40	2000		
			⑧	3.00	1150	83	
			⑨	1.95	740	74	
	IV	650	⑩	3.10	1200		
			⑪	1.80	660	77	
			⑫	1.20	440	69	
	V	450	⑬	1.15	400		
			⑭	0.72	240	67	
			⑮	0.56	170	61	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design		D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)
Design					
Type Article no.	FN091-ZID.GL.A5P1 155735	FN091-ZIQ.GL.A5P1 155737	FN091-ZIQ.GL.A5P1 155739	FN091-ZIS.GL.V5P1 155725	FN091-ZII.GL.V5P1 155729
Weight kg	34.90	51.50	56.10	39.40	38.90
					56.00

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

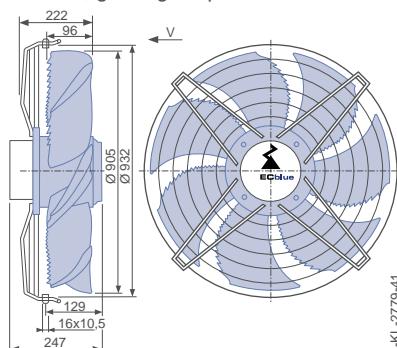

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

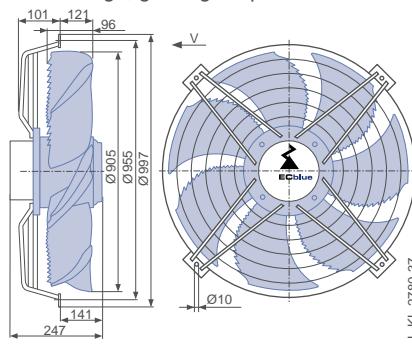

Design Q - square full bell mouth, guard grille pressure side

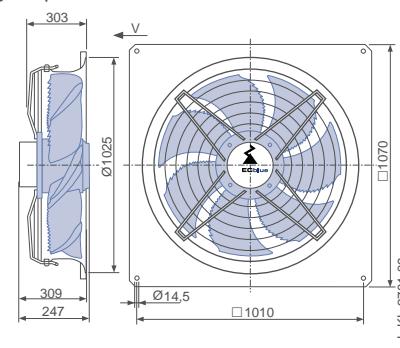

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.68 kW*

Rated current I_N : 1.28-0.98 A*

Rated speed n_N : 570 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 4

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 46.3 %


Efficiency: $N_{actual} = 53.7 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

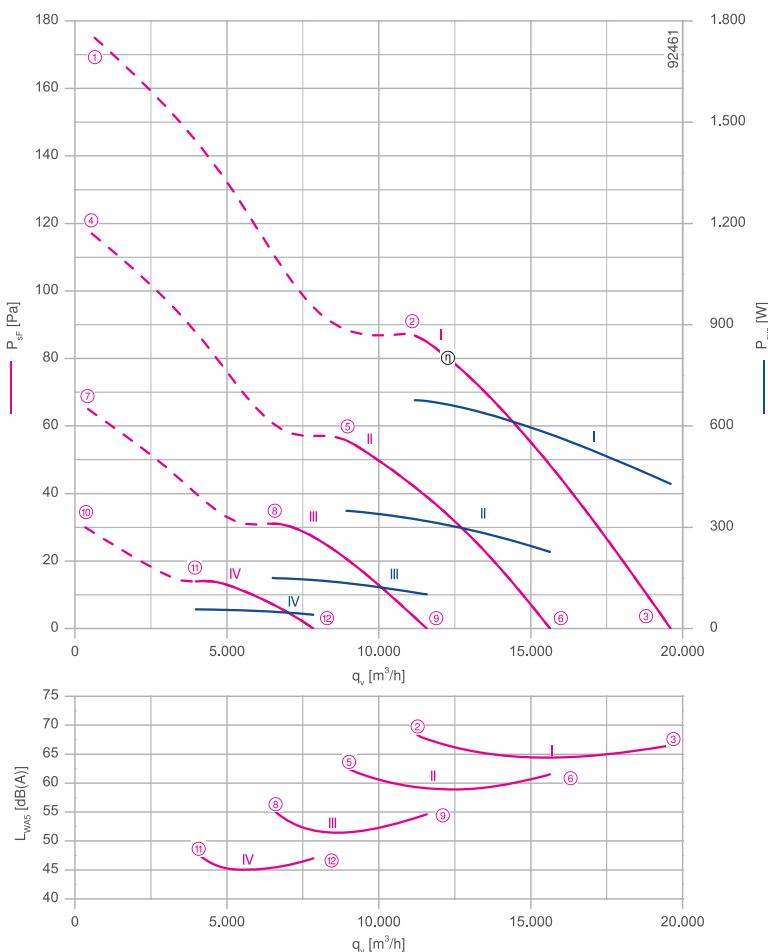

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

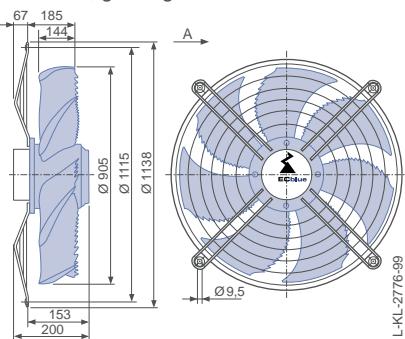


Design Q - square full bell mouth, guard grille suction side

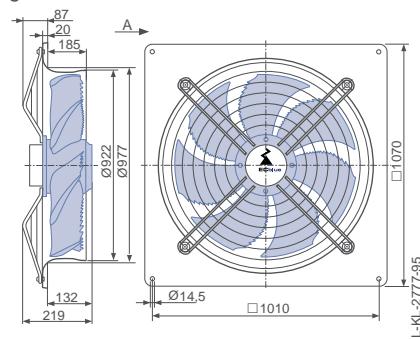

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

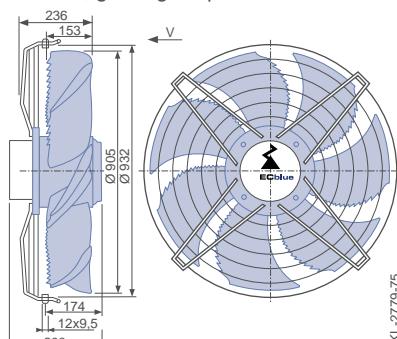

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
FN091-ZI_.DG._4P3	I	570	①	1.70	1050	
			②	1.15	680	69
			③	0.82	420	67
	II	460	④	1.00	540	
			⑤	0.72	350	63
			⑥	0.52	230	62
	III	340	⑦	0.52	230	
			⑧	0.38	150	55
			⑨	0.29	100	55
	IV	230	⑩	0.23	80	
			⑪	0.19	55	46
			⑫	0.17	42	47

Current values determined at 400V

Fan ordering information


Airflow direction A		Airflow direction V			
Design	D (guard grille suction side)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)	
Type	FN091-ZID.DG.A4P3	FN091-ZIQ.DG.A4P3	FN091-ZIS.DG.V4P3	FN091-ZII.DG.V4P3	FN091-ZIQ.DG.V4P3
Article no.	159791	159793	159787	159783	159785
Weight kg	19.50	36.00	19.90	19.90	36.50

Control technology


Control modules	Add-on modules	Operating terminal

Page 452 Page 463 Page 472

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

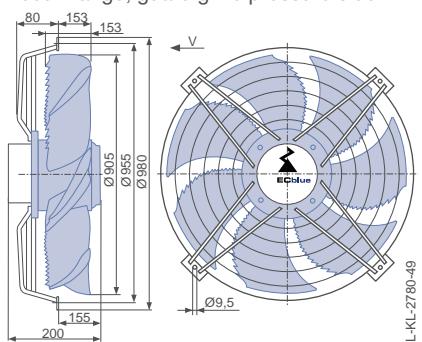

Design Q - square full bell mouth, guard grille pressure side

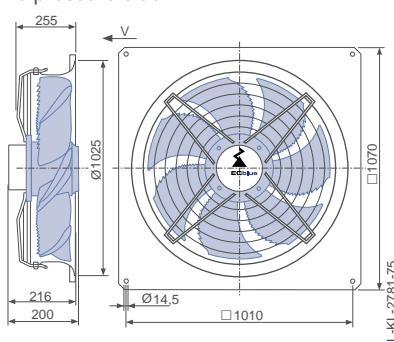

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FNO 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.95 kW*

Rated current I_N : 3.20- 2.50 A*

Rated speed n_N : 930 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 53.8 %


Efficiency: $N_{actual} = 58.4 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

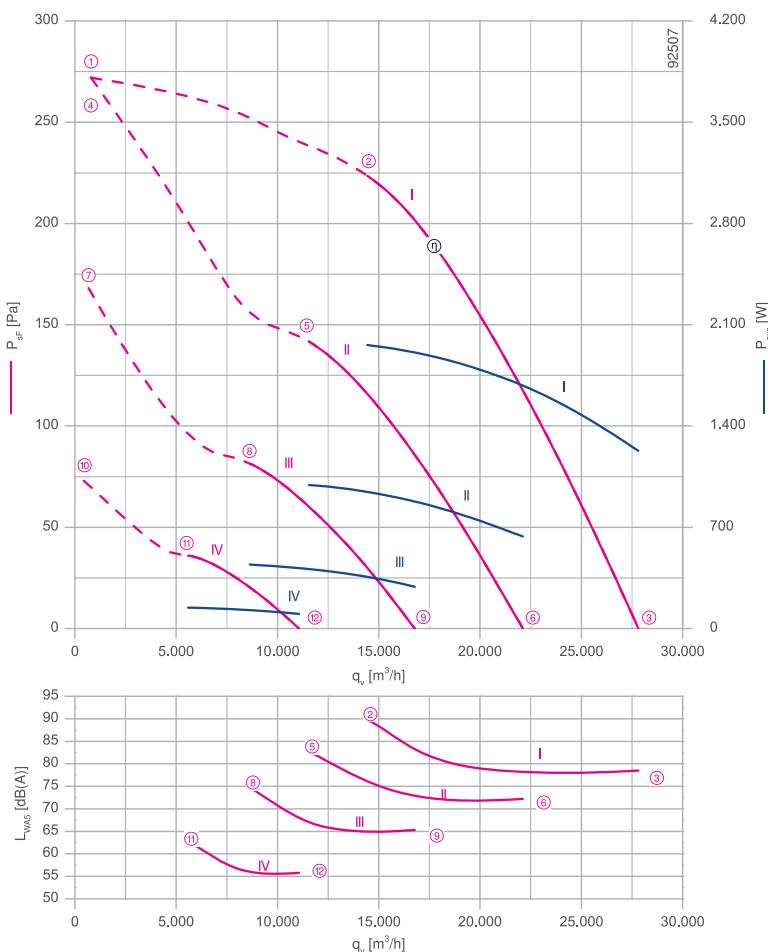

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm



Airflow direction A

Design Q - square full bell mouth, without guard grille

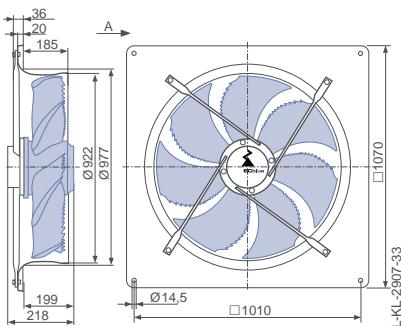

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

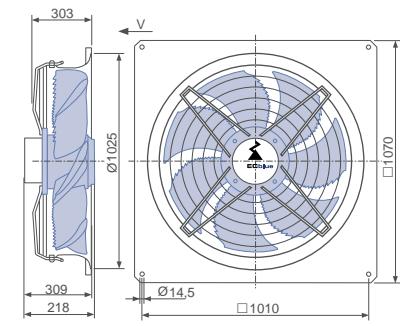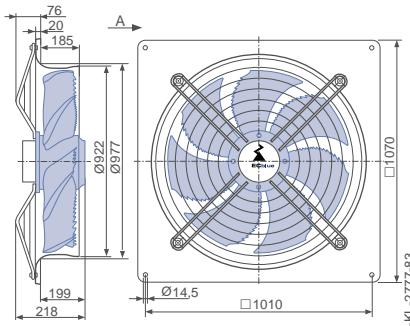

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN091-ZI.GG.5P1	I	930	①	2.50	1600	
			②	3.00	1950	90
			③	1.95	1250	79
	II	740	④	2.50	1600	
			⑤	1.60	1000	83
			⑥	1.10	640	72
	III	560	⑦	1.30	780	
			⑧	0.86	440	75
			⑨	0.64	290	65
	IV	370	⑩	0.56	230	
			⑪	0.40	140	62
			⑫	0.32	100	56

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
Type	FN091-ZIQ.GG.A5P1	FN091-ZIQ.GG.A5P1	FN091-ZIQ.GG.V5P1
Article no.	154845	154849	154833
Weight kg	47.30	51.90	51.80

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-E-Oblique

FE2owlet

FE2owlet-E-Oblique
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN091-ZI_GL_5P1	I	1100	① ② ③	5.00 4.80 3.00	3300 3200 2000	95 84	50
	II	1040	④ ⑤ ⑥	5.00 4.00 2.60	3300 2700 1700	93 81	60
	III	910	⑦ ⑧ ⑨	5.00 2.80 1.80	3300 1800 1150	89 78	
	IV	780	⑩ ⑪ ⑫	3.10 1.80 1.20	2000 1150 720	84 74	
	V	650	⑬ ⑭ ⑮	1.85 1.15 0.82	1200 660 440	78 69	
	VI	450	⑯ ⑰ ⑱	0.78 0.58 0.44	400 240 160	68 61	

Current values determined at 400V

Fan ordering information

	Airflow direction A		Airflow direction V
Design	D (without guard grille)	Q (without guard grille)	Q (guard grille suction side)
S (guard grille pressure side)			S (guard grille pressure side)
I (guard grille pressure side)			I (guard grille pressure side)
Q (guard grille pressure side)			
Type Article no.	FN091-ZID.GL.A5P1 154843	FN091-ZIQ.GL.A5P1 154847	FN091-ZIQ.GL.A5P1 154851
FN091-ZIS.GL.V5P1 154823			FN091-ZII.GL.V5P1 154831
FN091-ZIQ.GL.V5P1 154835			
Weight kg	34.90	51.50	56.10
	39.40	38.90	56.00

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

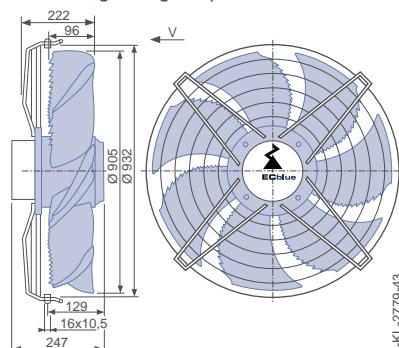

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

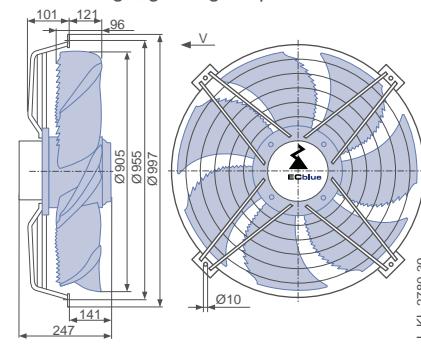

Design Q - square full bell mouth, guard grille pressure side

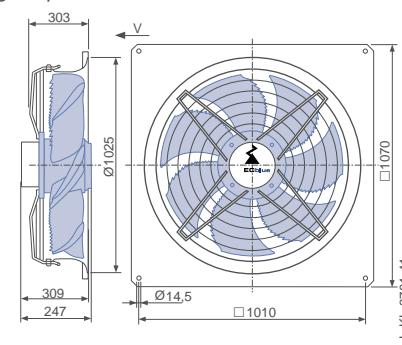

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN 100



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.40 kW*

Rated current I_N : 4.30- 3.60 A*

Rated speed n_N : 700 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 49.7 %


Efficiency: $N_{actual} = 55.2 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

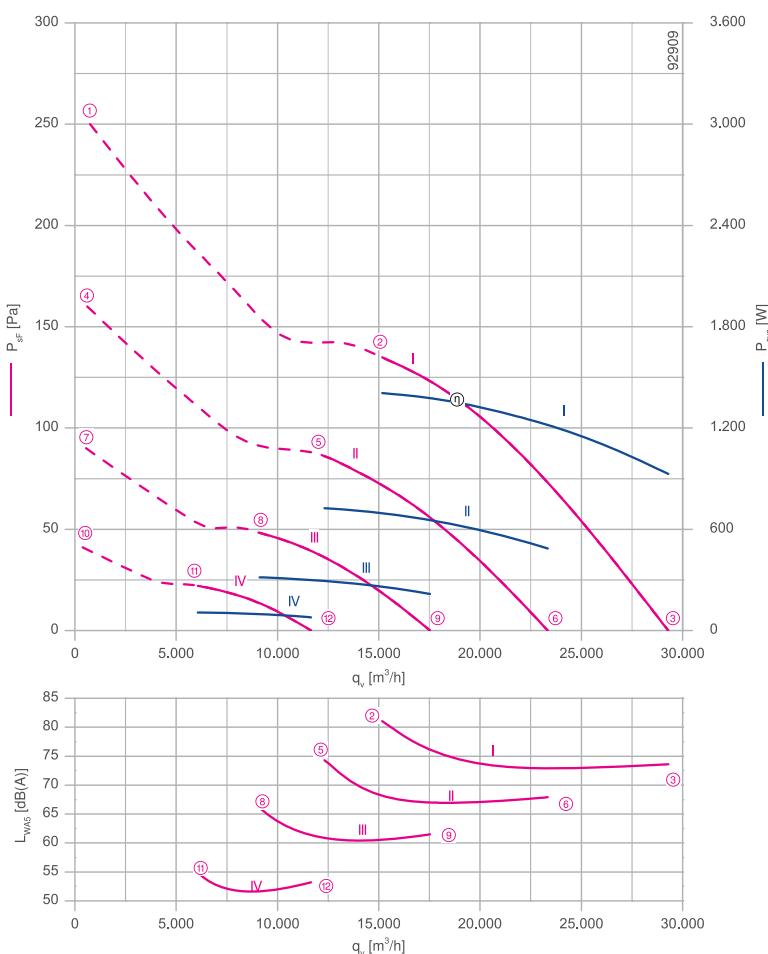

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A

Design Q - square full bell mouth, without guard grille

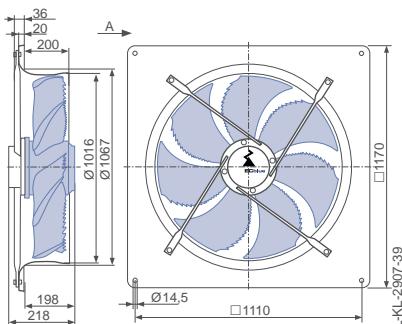


Design Q - square full bell mouth, guard grille suction side

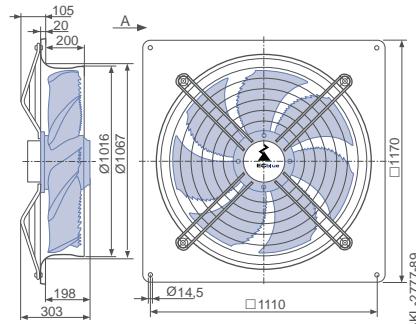

Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

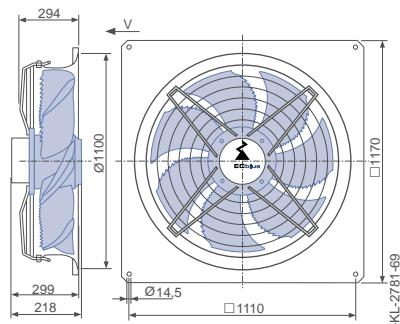

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN100-ZI_.GG._5P1	I	700	①	5.80	2200	
			②	3.70	1400	81
			③	2.50	920	74
	II	560	④	2.90	1100	
			⑤	1.95	720	75
			⑥	1.35	480	68
	III	420	⑦	1.30	480	
			⑧	0.90	320	66
			⑨	0.68	220	62
	IV	280	⑩	0.54	150	
			⑪	0.44	110	55
			⑫	0.36	80	53

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
Type	FN100-ZIQ.GG.A5P1	FN100-ZIQ.GG.A5P1	FN100-ZIQ.GG.V5P1
Article no.	159886	159888	159880
Weight kg	51.90	56.60	56.50

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-E-Oblique

FE2owlet

FE2owlet-E-Oblique
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN 100



Description

Motor technology: EC

Rated voltage U: 3~ 200-240 V*

Rated frequency f: 50/60 Hz*

Motor input power P_{sys} : 2.60 kW*

Rated current I: 7.90-6.60 A*

Rated speed n_{max} : 850 min⁻¹*

Thermal class: THCL155*

Min. permitted conveyor temperature $t_{R(min)}$: -35 °C

Max. permitted conveyor temperature $t_{R(max)}$: 40 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, Ultramarine blue

Conformity: ErP 2015, CE, UL

ErP Data

Efficiency η_{startA} : 47.6 %


Efficiency: $N_{actual} = 51.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

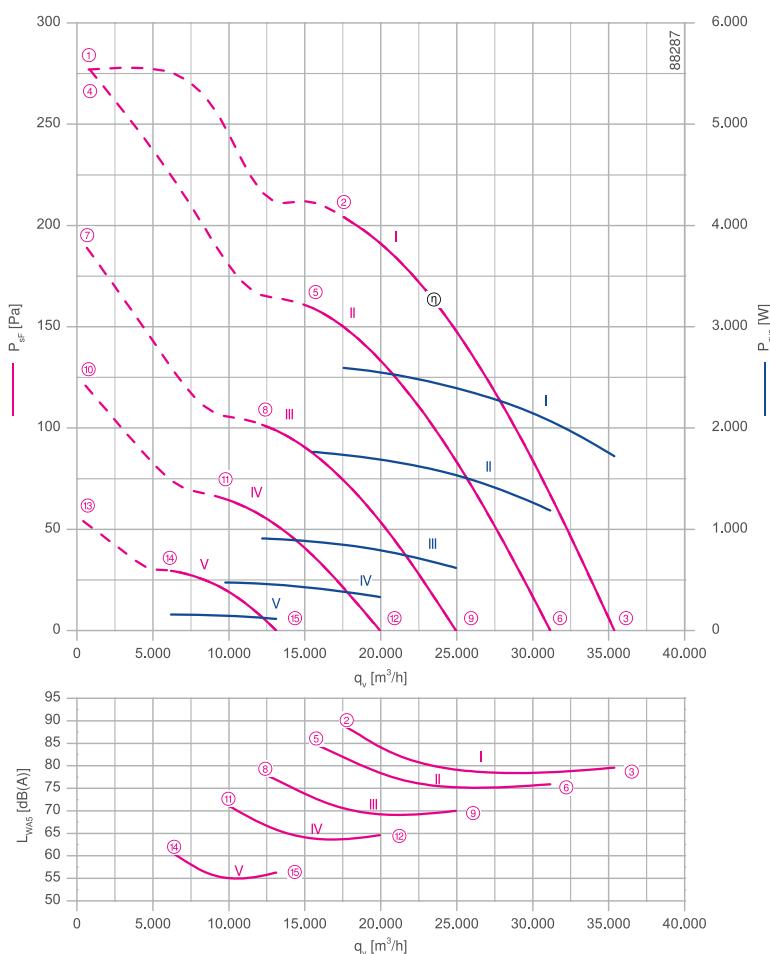

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

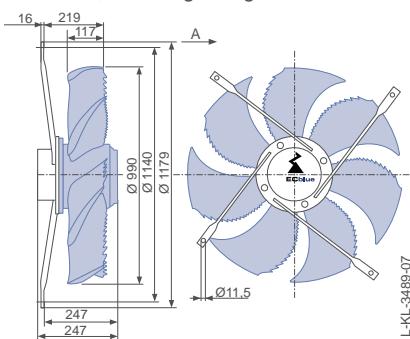

Design Q - square full bell mouth, without guard grille

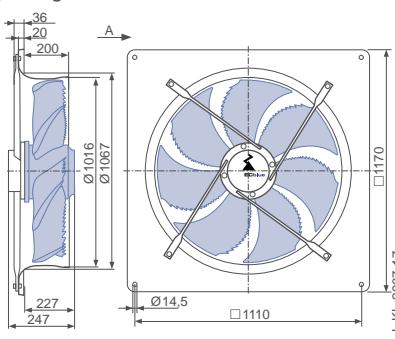

Design Q - square full bell mouth, guard grille suction side

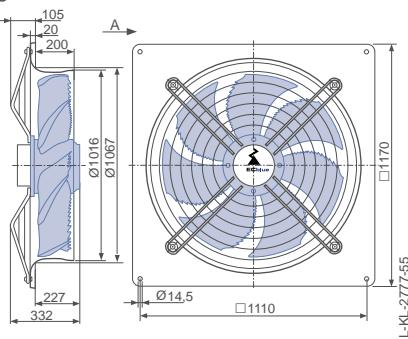

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
FN100-ZI_GL_5P1	I	850	①	6.60	2500	89	40
			②	6.80	2600	80	
			③	4.60	1700		
	II	750	④	6.60	2500		60
			⑤	4.60	1750	85	
			⑥	3.10	1200	76	
	III	600	⑦	3.70	1400		
			⑧	2.40	900	78	
			⑨	1.65	620	70	
	IV	480	⑩	1.90	720		
			⑪	1.30	480	72	
			⑫	0.94	330	65	
	V	320	⑬	0.70	230		
			⑭	0.54	160	60	
			⑮	0.44	110	56	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	D (without guard grille) Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type Article no.	FN100-ZID.GL.A5P1 155751	FN100-ZIQ.GL.A5P1 155753	FN100-ZIQ.GL.A5P1 155755	FN100-ZIS.GL.V5P1 155743	FN100-ZII.GL.V5P1 155745
Weight kg	36.60	56.10	60.60	42.20	41.70
					60.90

Control technology

Control modules	Add-on modules	Operating terminal


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

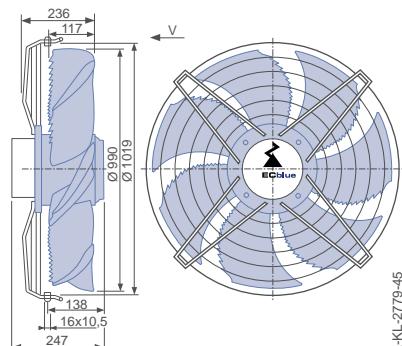

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

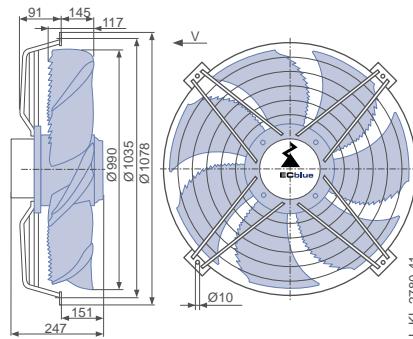

Design Q - square full bell mouth, guard grille pressure side

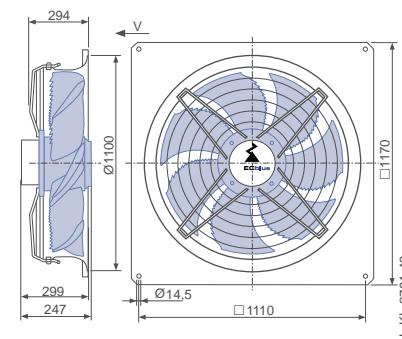

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FN 100



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.50 kW*

Rated current I_N : 2.60- 2.00 A*

Rated speed n_N : 710 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 49.9 %


Efficiency: $N_{actual} = 55.4 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

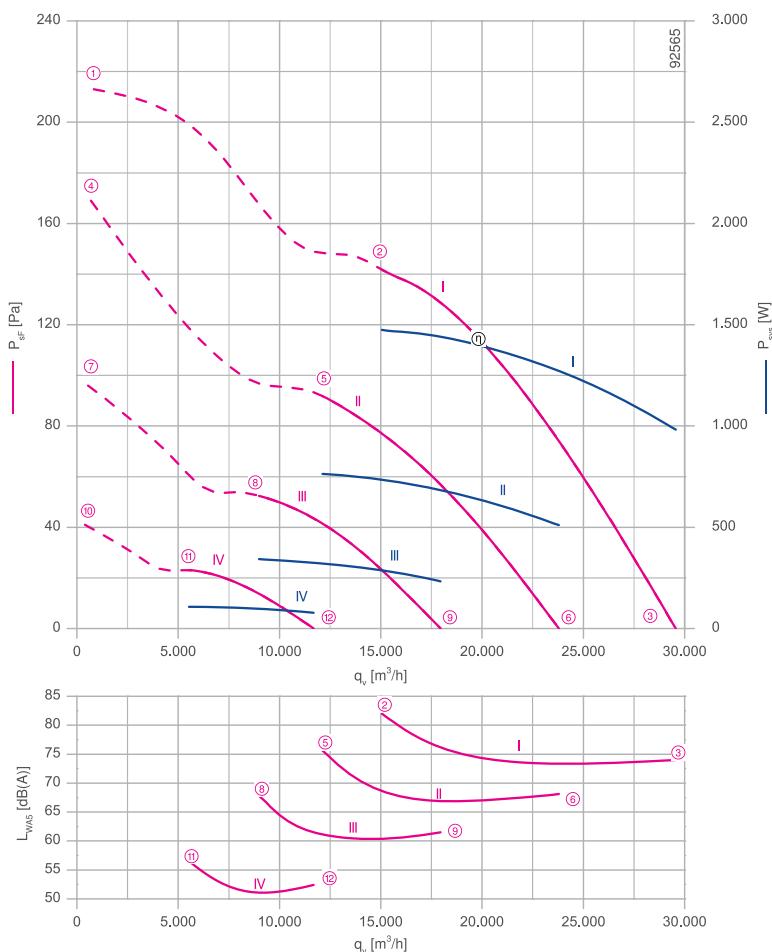

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

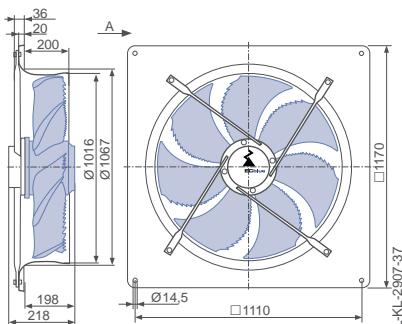


Airflow direction V

Design Q - square full bell mouth, guard grille pressure side

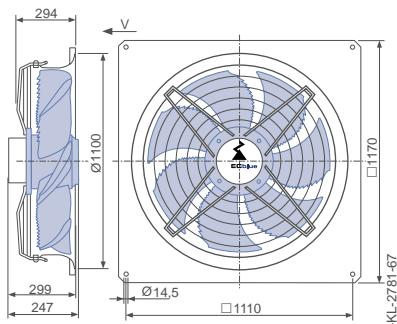

Design Q - square full bell mouth, guard grille suction side

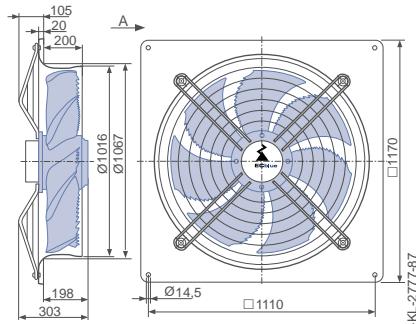

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN100-ZI_.GG._5P1	I	710	①	2.70	1700	
			②	2.40	1500	82
			③	1.65	980	74
	II	570	④	1.95	1150	
			⑤	1.35	760	76
			⑥	0.94	520	68
	III	430	⑦	0.96	500	
			⑧	0.70	340	68
			⑨	0.52	230	62
	IV	280	⑩	0.38	150	
			⑪	0.30	110	55
			⑫	0.25	80	52

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (without guard grille)	Q (guard grille suction side)	Q (guard grille pressure side)
Type	FN100-ZIQ.GG.A5P1	FN100-ZIQ.GG.A5P1	FN100-ZIQ.GG.V5P1
Article no.	154881	154885	154869
Weight kg	51.90	56.40	56.50

Control technology

Control modules	Add-on modules	Operating terminal

Page 452

Page 463

Page 472

Information

FE2owlet-E-Cblue

FE2owlet

FE2owlet-E-Cblue
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FN 100



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.50 kW*

Rated current I_N : 4.00- 3.20 A*

Rated speed n_N : 850 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 48.7 %


Efficiency: $N_{actual} = 52.7 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

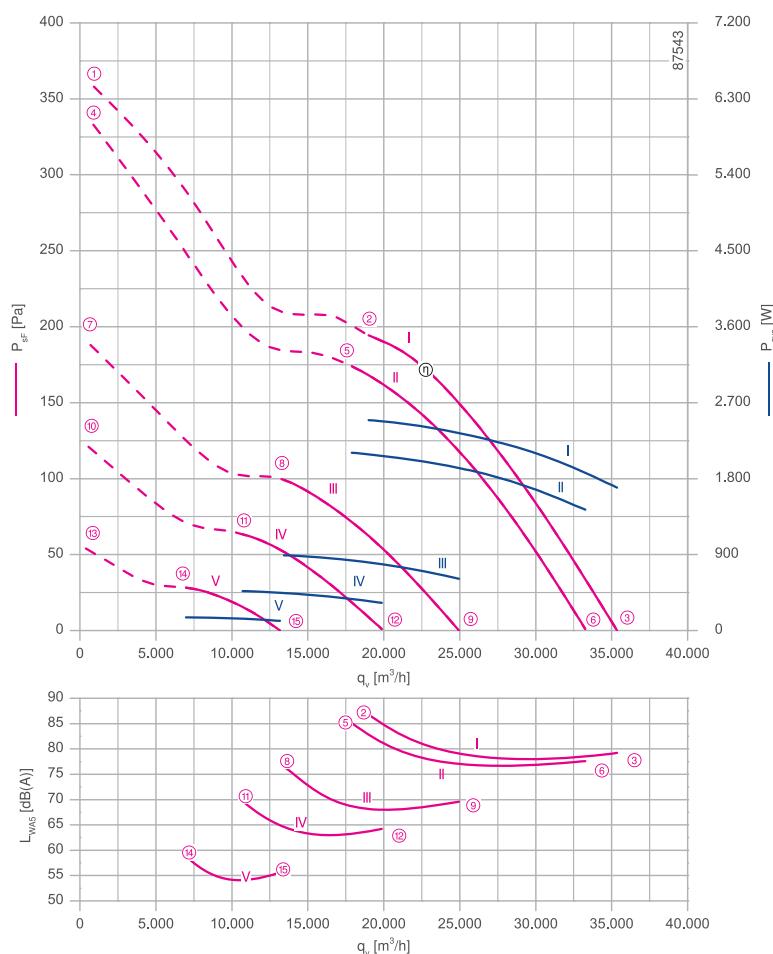

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, without guard grille

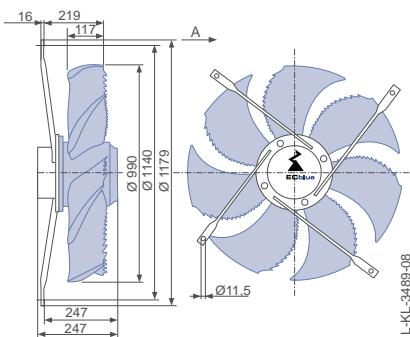

Design Q - square full bell mouth, without guard grille

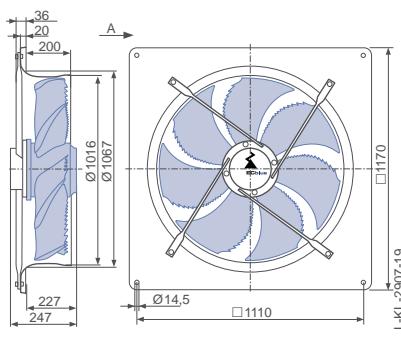

Design Q - square full bell mouth, guard grille suction side



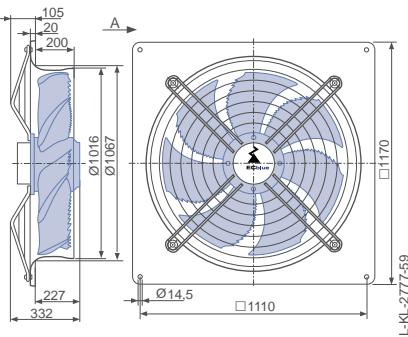


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
FN100-ZI_GL_5P1	I	850	①	5.40	3600	87	55
			②	3.80	2500	79	
			③	2.60	1700		
	II	800	④	5.00	3300		60
			⑤	3.20	2100	86	
			⑥	2.20	1450	78	
	III	600	⑦	2.10	1350		70
			⑧	1.45	900	77	
			⑨	1.05	620	70	
	IV	480	⑩	1.20	700		
			⑪	0.86	460	70	
			⑫	0.68	330	64	
	V	320	⑬	0.54	230		
			⑭	0.42	160	59	
			⑮	0.36	110	56	

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	D (without guard grille) Q (without guard grille)	Q (guard grille suction side)	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
					
Type Article no.	FN100-ZID.GL.A5P1 154879	FN100-ZIQ.GL.A5P1 154883	FN100-ZIQ.GL.A5P1 154887	FN100-ZIS.GL.V5P1 154859	FN100-ZII.GL.V5P1 154867
Weight kg	36.60	56.10	60.70	42.20	41.70
					60.90

Control technology

Control modules	Add-on modules	Operating terminal
		


Page 452

Page 463


Page 472

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

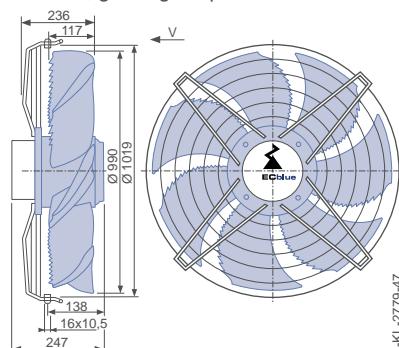

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

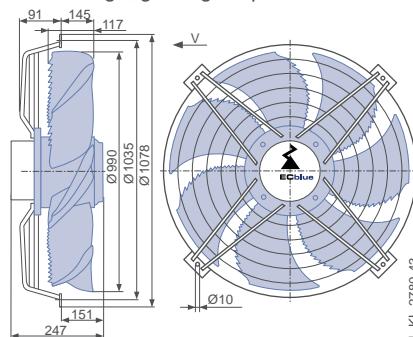

Design Q - square full bell mouth, guard grille pressure side

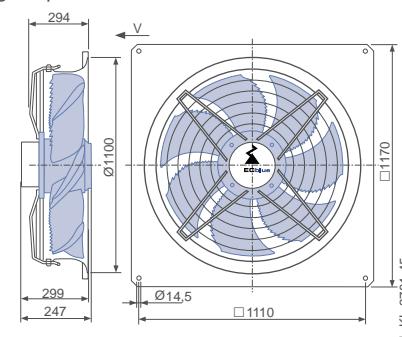

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN 125



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.70 kW*

Rated current I_N : 5.20- 4.40 A*

Rated speed n_N : 550 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 3

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Aluminium, 1 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 49.6 %


Efficiency: $N_{actual} = 54.7 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

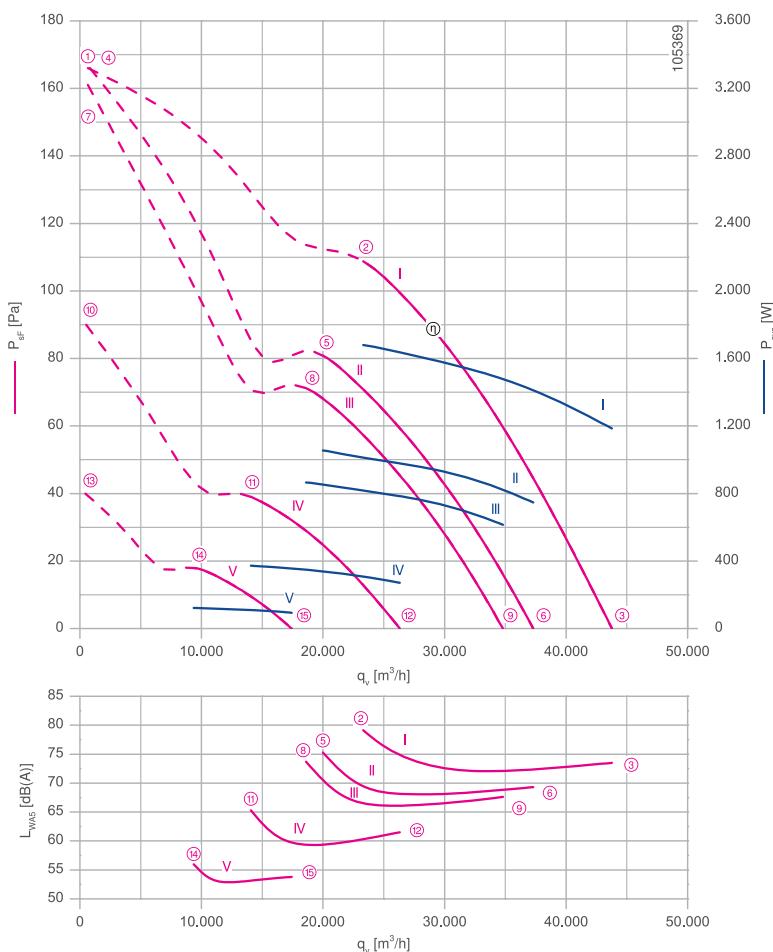

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design F - flange ring with two flanges, without guard grille



Design L - round full bell mouth, guard grille suction side

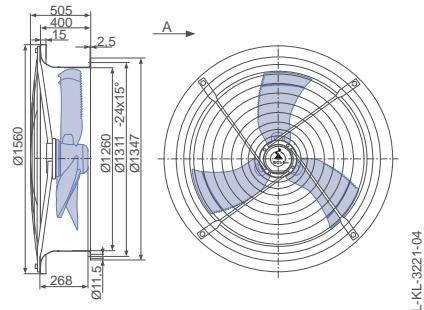

Design L - round full bell mouth, guard grille two-sided


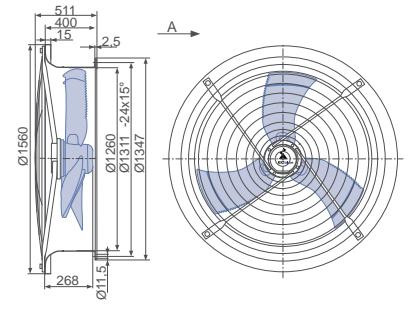


Performance data


Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN125-ZI_GL_3P1	I	550	①	4.20	1600	79	60
			②	4.40	1700	74	
			③	3.20	1200	74	
	II	470	④	4.20	1600		70
			⑤	2.80	1050	75	
			⑥	2.00	740	69	
	III	440	⑦	4.00	1500		
			⑧	2.30	860	74	
			⑨	1.70	620	68	
	IV	330	⑩	1.70	620		
			⑪	1.05	370	66	
			⑫	0.84	270	62	
	V	220	⑬	0.64	190		
			⑭	0.48	120	56	
			⑮	0.40	95	54	

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V				
Design	F (without guard grille)	L (guard grille suction side)	L (guard grille two-sided)	I (guard grille pressure side)	L (guard grille pressure L (guard grille two-sided)	
						
Type Article no.	FN125-ZIF.GL.A3P1 167516	FN125-ZIL.GL.A3P1 167510	FN125-ZIL.GL.A3P1 167511	FN125-ZII.GL.V3P1 167515	FN125-ZIL.GL.V3P1 167509	FN125-ZIL.GL.V3P1 167508
Weight kg	70.50	91.40	97.50	43.90	89.60	97.30

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			

Page 452


Page 454

Page 463


Page 472

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

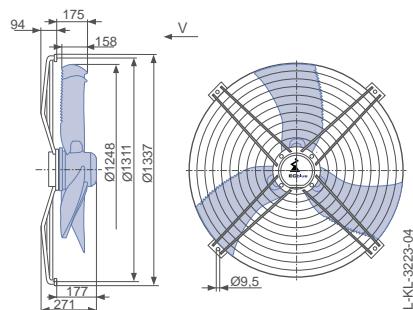

Design L - round full bell mouth, guard grille pressure side

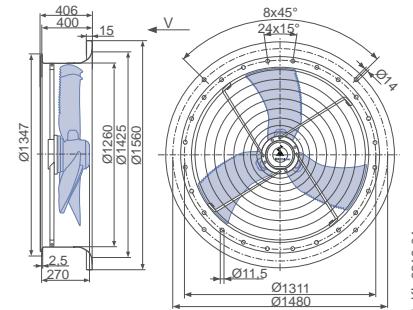

Design L - round full bell mouth, guard grille two-sided

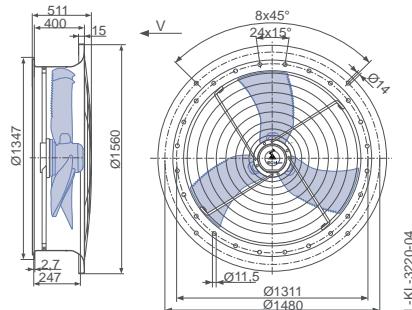

FE2owlet-ECblue

for three phase alternating current, 200-240 V

FN 125



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.30 kW*

Rated current I_N : 7.20-6.00 A*

Rated speed n_N : 620 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 3

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Aluminium, 1 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 50.1 %


Efficiency: $N_{actual} = 54.3 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

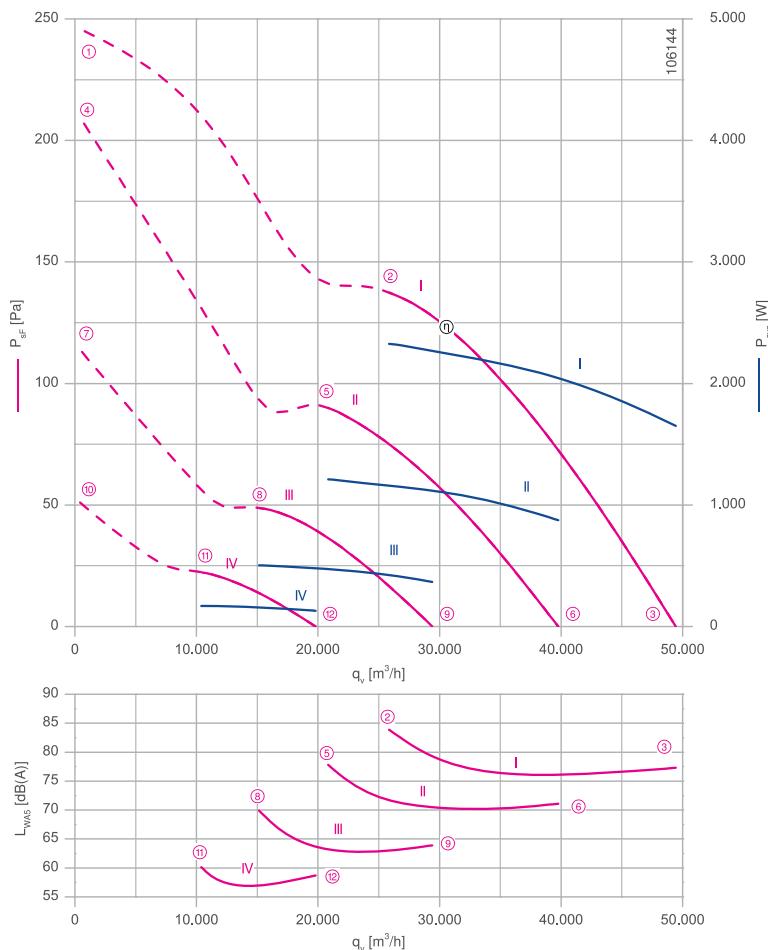

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design F - flange ring with two flanges, without guard grille



Design L - round full bell mouth, guard grille suction side

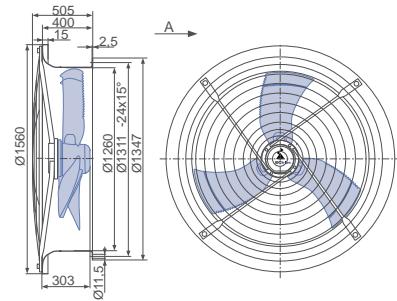

Design L - round full bell mouth, guard grille two-sided

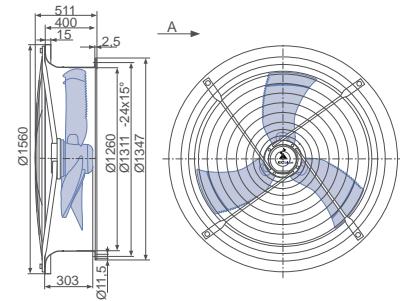

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN125-ZI_.GQ._3P1	I	620	①	7.20	2800	
			②	6.20	2300	84
			③	4.40	1650	77
	II	500	④	5.60	2100	
			⑤	3.20	1200	78
			⑥	2.40	880	71
	III	370	⑦	2.30	840	
			⑧	1.40	500	70
			⑨	1.05	370	64
	IV	250	⑩	0.84	270	
			⑪	0.60	170	60
			⑫	0.52	130	59

Current values determined at 230V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	F (without guard grille)	L (guard grille suction side)	L (guard grille two-sided)	I (guard grille pressure side)	L (guard grille pressure L (guard grille two-sided)
Type Article no.	FN125-ZIF.GQ.A3P1 167496	FN125-ZIL.GQ.A3P1 167490	FN125-ZIL.GQ.A3P1 167491	FN125-ZII.GQ.V3P1 167495	FN125-ZIL.GQ.V3P1 167489
Weight kg	76.40	97.30	103.40	49.80	95.50
					103.20

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal

Page 452


Page 454

Page 463


Page 472

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

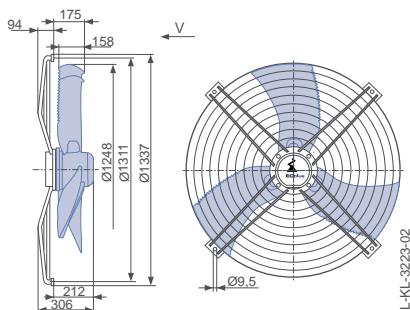

Design L - round full bell mouth, guard grille pressure side

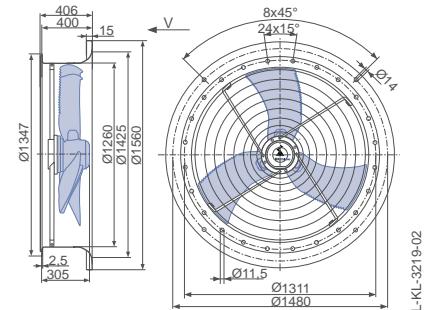

Design L - round full bell mouth, guard grille two-sided

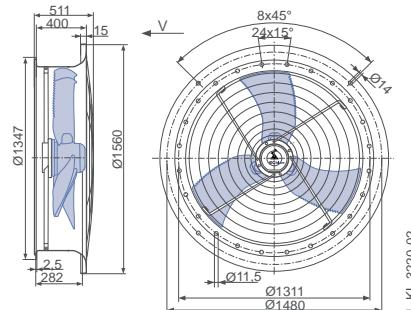

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FN 125



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.90 kW*

Rated current I_N : 3.10- 2.40 A*

Rated speed n_N : 570 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 3

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Aluminium, 1 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 47.8 %


Efficiency: $N_{actual} = 52.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

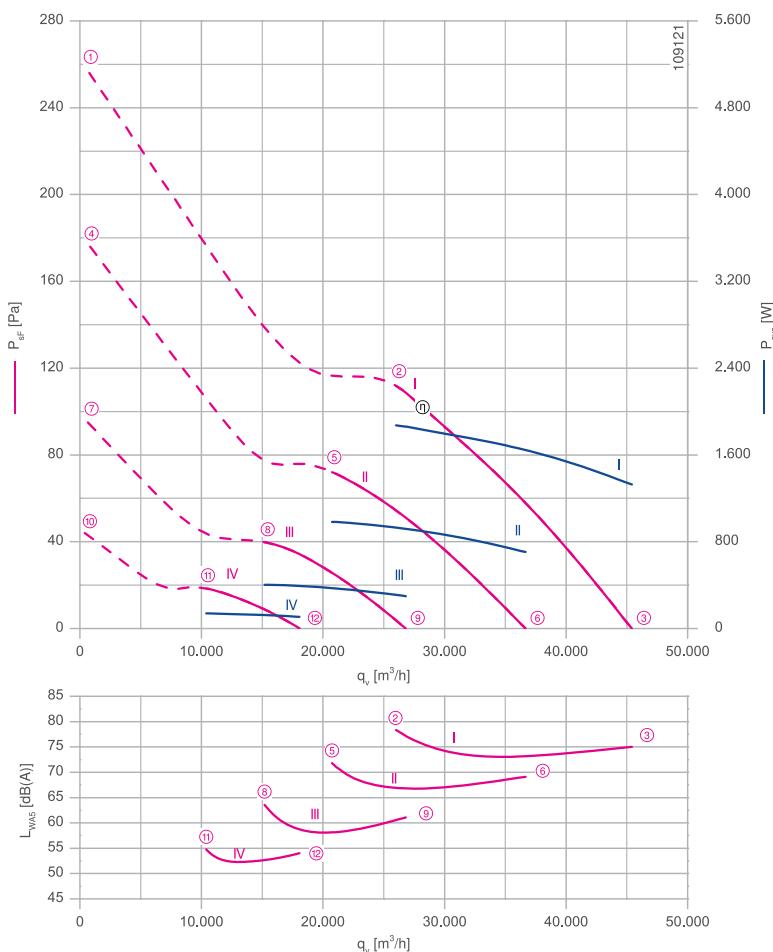

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 530

1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design F - flange ring with two flanges, without guard grille



Design L - round full bell mouth, guard grille suction side

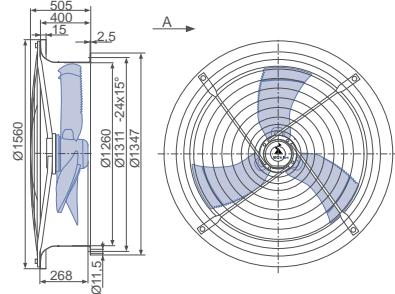

Design L - round full bell mouth, guard grille two-sided

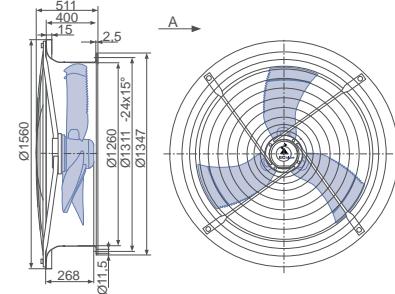

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
FN125-ZI_GL_3P1	I	570	①	4.80	3200	79	60
			②	2.90	1900	75	
			③	2.10	1350		
	II	460	④	2.70	1700		70
			⑤	1.60	980	72	
			⑥	1.20	700	69	
	III	340	⑦	1.20	680		
			⑧	0.86	400	63	
			⑨	0.70	300	61	
	IV	230	⑩	0.60	220		
			⑪	0.46	140	55	
			⑫	0.39	110	54	

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	F (without guard grille)	L (guard grille suction side)	L (guard grille two-sided)	I (guard grille pressure side)	L (guard grille pressure side)
Type	FN125-ZIF.GL.A3P1	FN125-ZIL.GL.A3P1	FN125-ZIL.GL.A3P1	FN125-ZII.GL.V3P1	FN125-ZIL.GL.V3P1
Article no.	167506	167500	167501	167505	167499
Weight kg	70.50	91.40	97.50	43.90	89.60
					97.30


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		
Page 452	Page 454	Page 463


Operating terminal

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

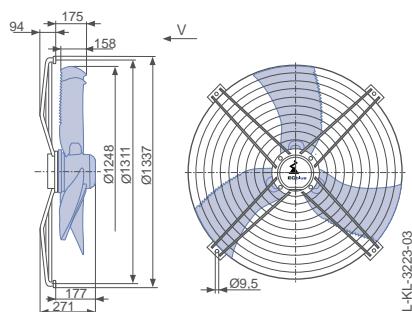

Design L - round full bell mouth, guard grille pressure side

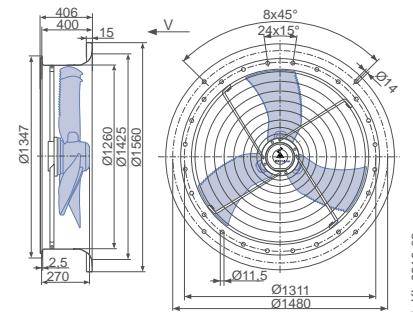

Design L - round full bell mouth, guard grille two-sided

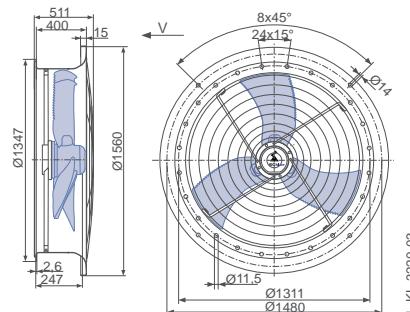

FE2owlet-ECblue

for three phase alternating current, 380-480 V

FN 125



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.70 kW*

Rated current I_N : 4.40- 3.40 A*

Rated speed n_N : 650 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 3

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Aluminium, 1 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{data} : 51.0 %


Efficiency: $N_{actual} = 54.7 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

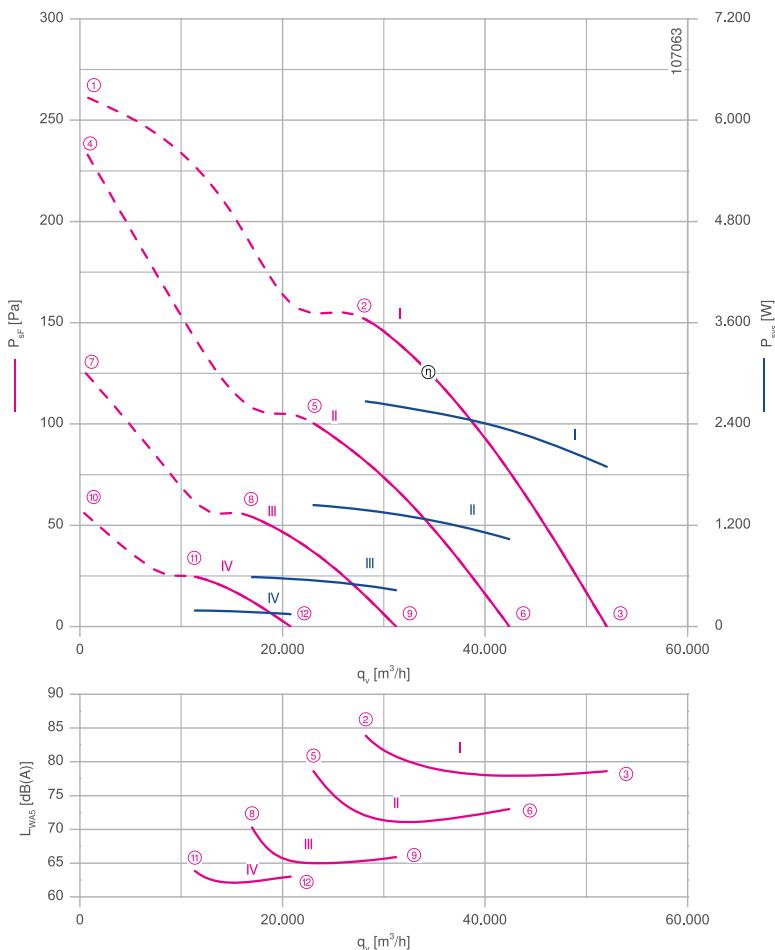

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

Connection diagram

Page 530
1360-403


System components

Page 430


Dimensions mm

Airflow direction A


Design F - flange ring with two flanges, without guard grille



Design L - round full bell mouth, guard grille suction side

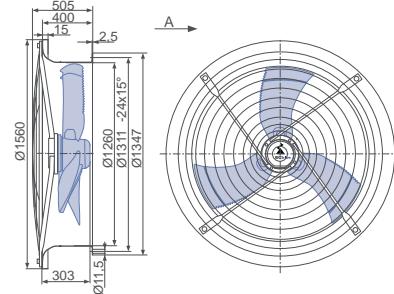

Design L - round full bell mouth, guard grille two-sided

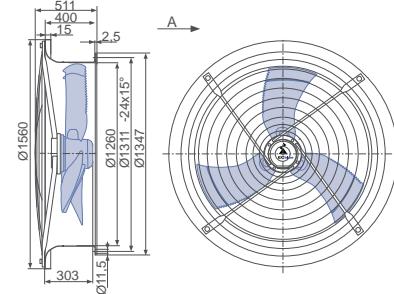

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
FN125-ZI_.GQ_.3P1	I	650	①	4.60	3000	
			②	4.00	2700	84
			③	2.90	1900	79
	II	530	④	3.80	2500	
			⑤	2.30	1450	79
			⑥	1.65	1050	73
	III	390	⑦	1.60	980	
			⑧	1.05	580	71
			⑨	0.84	440	66
	IV	260	⑩	0.70	310	
			⑪	0.50	190	64
			⑫	0.42	150	63

Current values determined at 400V

Fan ordering information

Airflow direction A		Airflow direction V			
Design	F (without guard grille)	L (guard grille suction side)	L (guard grille two-sided)	I (guard grille pressure side)	L (guard grille pressure L (guard grille two-sided)
Type Article no.	FN125-ZIF.GQ.A3P1 167486	FN125-ZIL.GQ.A3P1 167480	FN125-ZIL.GQ.A3P1 167481	FN125-ZII.GQ.V3P1 167485	FN125-ZIL.GQ.V3P1 167479
Weight kg	76.40	97.30	103.40	49.80	95.50
					103.20

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal

Page 452


Page 454

Page 463


Page 472

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

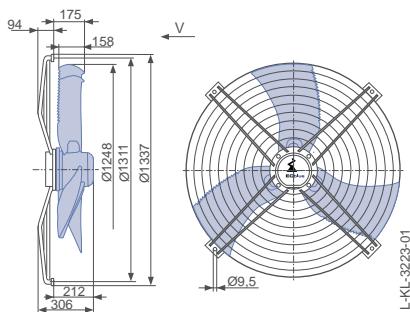

Design L - round full bell mouth, guard grille pressure side

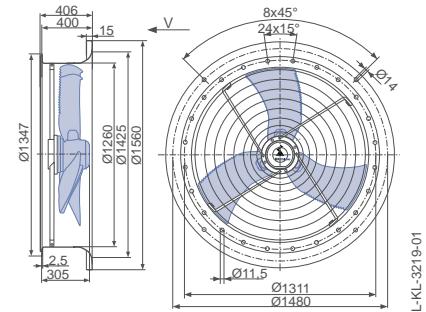

Design L - round full bell mouth, guard grille two-sided

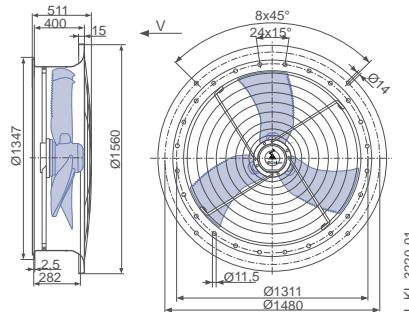





FE2owlet

AC - Technology

Product overview

Quick selection	Page 142
Size 200	Page 146
Size 250	Page 150
Size 300	Page 154
Size 310	Page 158
Size 350	Page 164
Size 400	Page 172
Size 420	Page 182
Size 450	Page 190
Size 500	Page 200
Size 560	Page 212
Size 630	Page 218
Size 710	Page 230
Size 800	Page 240
Size 910	Page 252
Size 1000	Page 262
Size 1250	Page 274

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology


Appendix

Size	Voltage	Number of poles	Type	Airflow direction	ErP	Page
200	1~ 230 V	2 4	FN020-2E_.W6..7	→ A ← V	-	146
			FN020-4E_.W6..7	→ A ← V	-	148
250	1~ 230 V	2 4	FN025-2E_.WA..7	→ A ← V	-	150
			FN025-4E_.W8..7	→ A ← V	-	152
300	1~ 230 V	4	FN030-4E_.WA..7	→ A ← V	-	154
			FN030-4E_.WC..7	→ A ← V	-	156
310	1~ 230 V 3~ 400 V	4	FN031-4E_.WD..7	→ A ← V	-	158
			FN031-4E_.OF.V7P2	→ V	-	160
			FN031-4D_.OF.V7P2	→ V	-	162
350	1~ 230 V	4	FN035-4E_.WD..7	→ A ← V	-	164
			FN035-4E_.OF..7P3	→ A ← V	2015	166
	3~ 400 V	6 4-4	FN035-6E_.OC..7P2	→ A ← V	-	168
			FN035-VD_.OF..7P2	→ A ← V	2015	170
400	1~ 230 V	4	FN040-4E_.OF..7P1	→ A ← V	2015	172
			FN040-4E_.OF..7P2	→ A ← V	2015	174
	3~ 400 V	6	FN040-6E_.OF..7P1	→ A ← V	-	176
			FN040-VD_.OF..7P1	→ A ← V	2015	178
	3~ 400 V	4-4	FN040-VD_.OF..7P2	→ A ← V	2015	180
420	1~ 230 V	4	FN042-4E_.4I.A7P2	→ A ← V	2015	182
			FN042-6E_.OF..7P1	→ A ← V	-	184
	3~ 400 V	4-4 6-6	FN042-VD_.2F..7P1	→ A ← V	2015	186
			FN042-SD_.2C..7P1	→ A ← V	-	188
450	1~ 230 V	4	FN045-4E_.4I..7P1	→ A ← V	2015	190
			FN045-6E_.2F..7P3	→ A ← V	-	192
	3~ 400 V	4-4 6-6	FN045-VD_.2F..7P2	→ A ← V	2015	194
			FN045-VD_.4F..7P1	→ A ← V	2015	196
	3~ 400 V	6-6 8-8	FN045-SD_.4F..7P1	→ A ← V	2015	198
500	1~ 230 V	4	FN050-4E_.4I..7P1	→ A ← V	2015	200
			FN050-6E_.4F..7P3	→ A ← V	2015	202
	3~ 400 V	6 8	FN050-8E_.4C..7P1	→ A ← V	-	204
			FN050-VD_.4I..7P1	→ A ← V	2015	206
	3~ 400 V	4-4 6-6	FN050-SD_.4F..7P1	→ A ← V	2015	208
			FN050-AD_.4C..7P1	→ A ← V	-	210
560	1~ 230 V	6	FN056-6E_.4I..7P2	→ A ← V	2015	212
			FN056-VD_.4M.V7P2	→ V	2015	214
			FN056-SD_.4F.V7P2	→ V	2015	216

* with ZIEHL-ABEGG frequency inverter




Air flow q_v in m^3/h

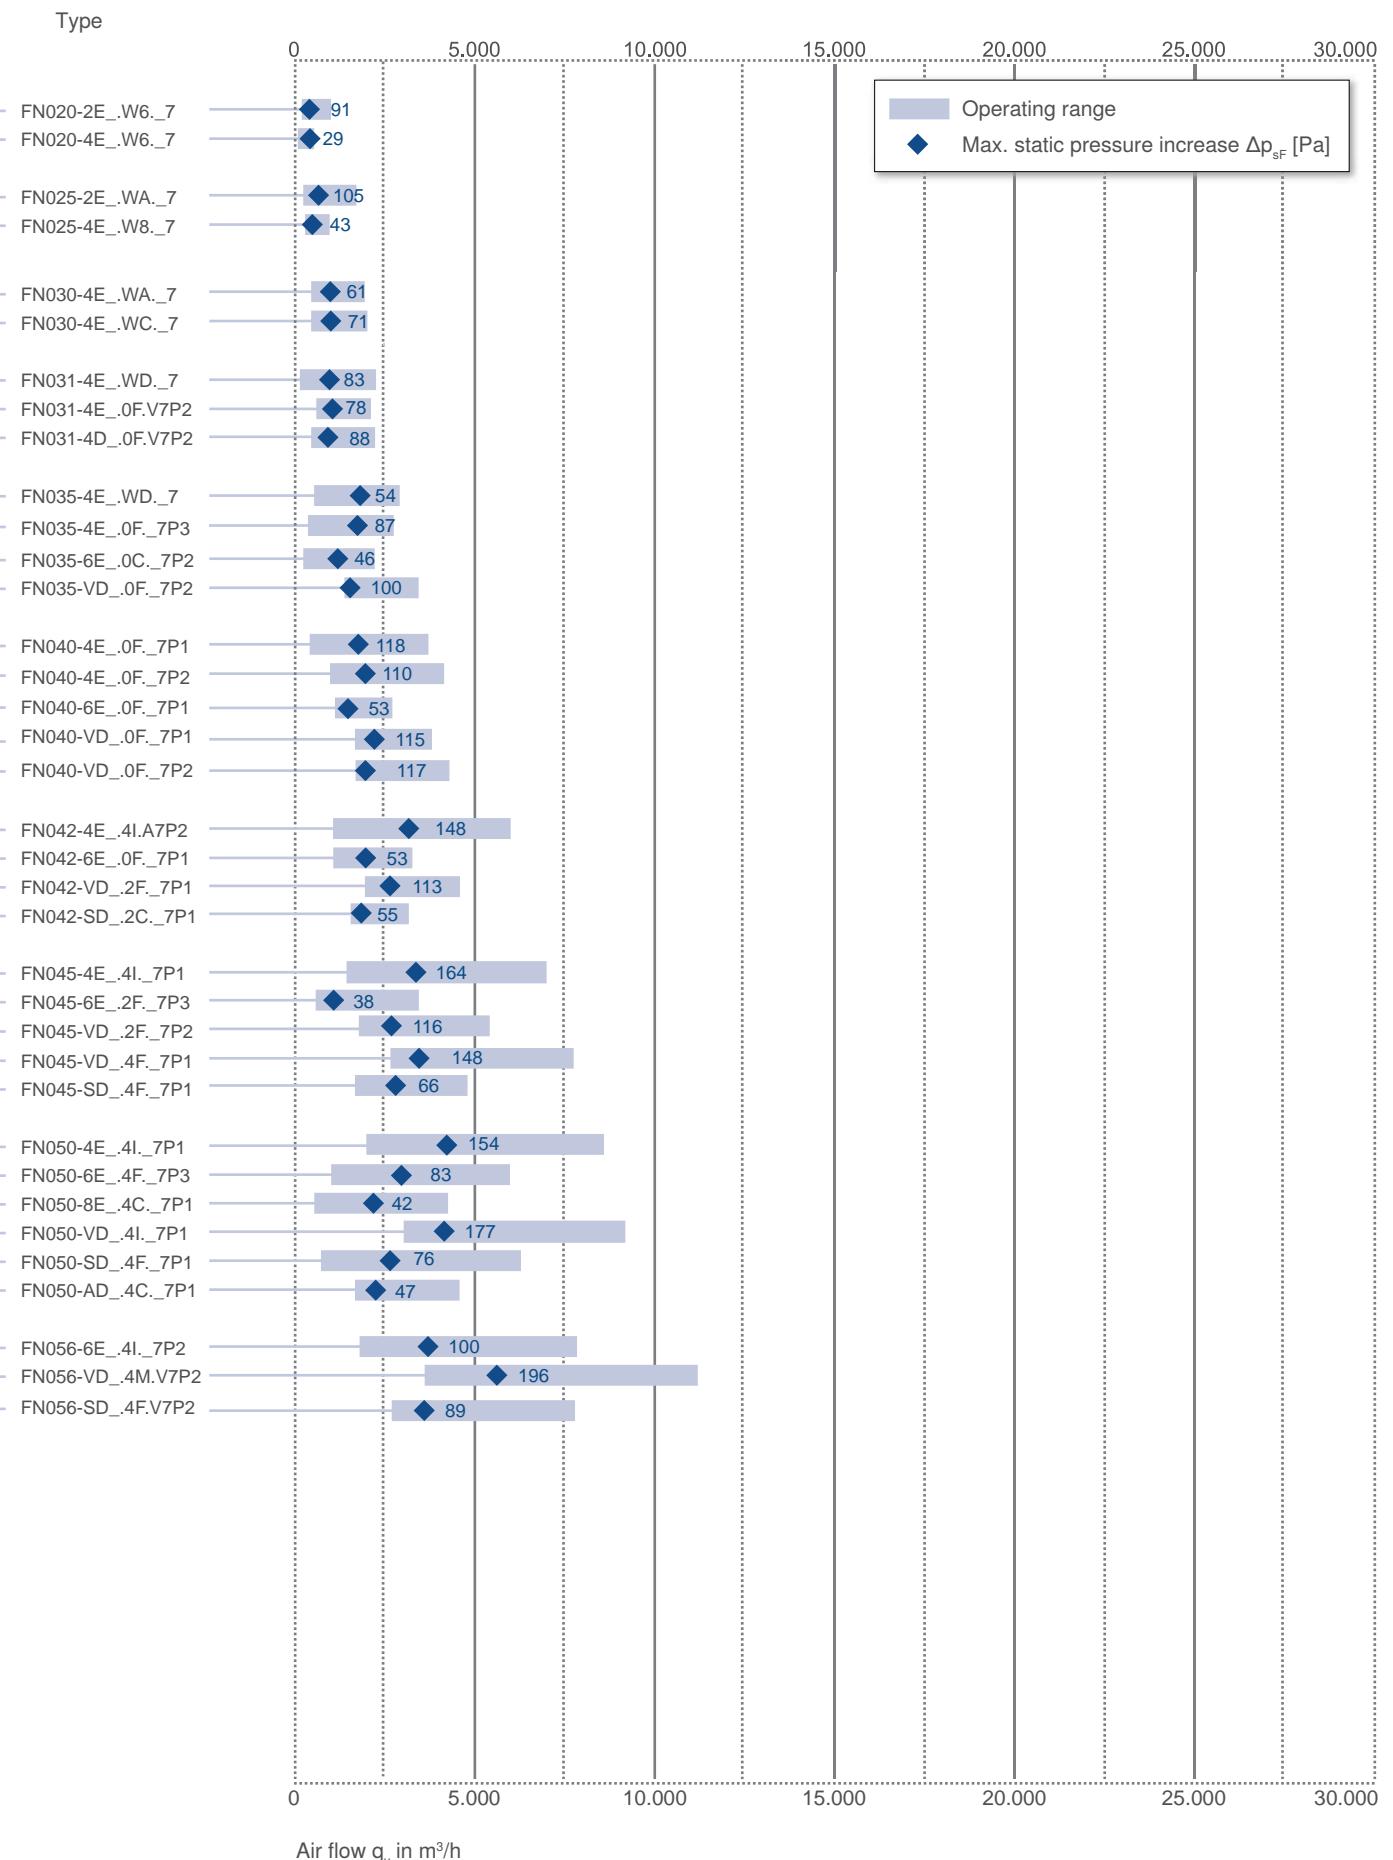

Size	Voltage	Number of poles	Type	Airflow direction	ErP	Page
630	1~ 230 V	4	FN063-4E_.6N_.7P6	→ A ↗ V	2015	218
		6	FN063-6E_.4I_.7P1	→ A ↗ V	2015	220
		4-4	FN063-VD_.6N_.7P6	→ A ↗ V	2015	222
	3~ 400 V	FN063-VD_.6N.V7P7		→ V	2015	224
		6-6	FN063-SD_.4I_.7P1	→ A ↗ V	2015	226
		12-12	FN063-ND_.4F_.7P1	→ A ↗ V	-	228
710	3~ 400 V	4-4	FN071-VD_.6N_.7P2	→ A ↗ V	2015	230
		6-6	FN071-SD_.6F_.7P1	→ A ↗ V	2015	232
		FN071-SD_.6K_.7P1		→ V	2015	234
		8-8	FN071-AD_.6F_.7P1	→ A ↗ V	2015	236
		12-12	FN071-ND_.6N_.7P2	→ A ↗ V	2015*	238
800	3~ 400 V	4-4	FN080-VD_.7Q_.5P7	→ A ↗ V	2015	240
		FN080-SD_.6N.V7		→ V	2015	242
		6-6	FN080-SD_.6N.V7P5		2015	244
		FN080-SD_.6N.V7P5		→ V	2015	246
		8-8	FN080-AD_.6N.V7		2015	248
		FN080-AD_.6N.V7P5		→ V	2015	250
910	3~ 400 V	4-4	FN091-VD_.7Q_.5P1	→ A ↗ V	2015	252
		FN091-SD_.6N.V7P2		→ V	2015	254
		6-6	FN091-SD_.7M_.5P1	→ A ↗ V	2015	256
		FN091-AD_.6N.V7P2		→ V	2015	258
		12-12	FN091-ND_.6N.V7P2		2015	260
1000	3~ 400 V	6-6	FN100-SD_.7Q_.5P1	→ A ↗ V	2015	262
		FN100-SD_.7Q_.5P1		→ V	2015	264
		8-8	FN100-AD_.7M_.5P1	→ A ↗ V	2015	266
		FN100-AD_.7M_.5P1		→ V	2015	268
		10-10	FN100-MD_.7M_.5P1	→ A ↗ V	2015	270
1250	3~ 400 V	10-10	FN125-MD_.7Q_.3P1	→ A ↗ V	2015	274
		12-12	FN125-ND_.7Q_.3P1	→ A ↗ V	2015	276

* with ZIEHL-ABEGG frequency inverter



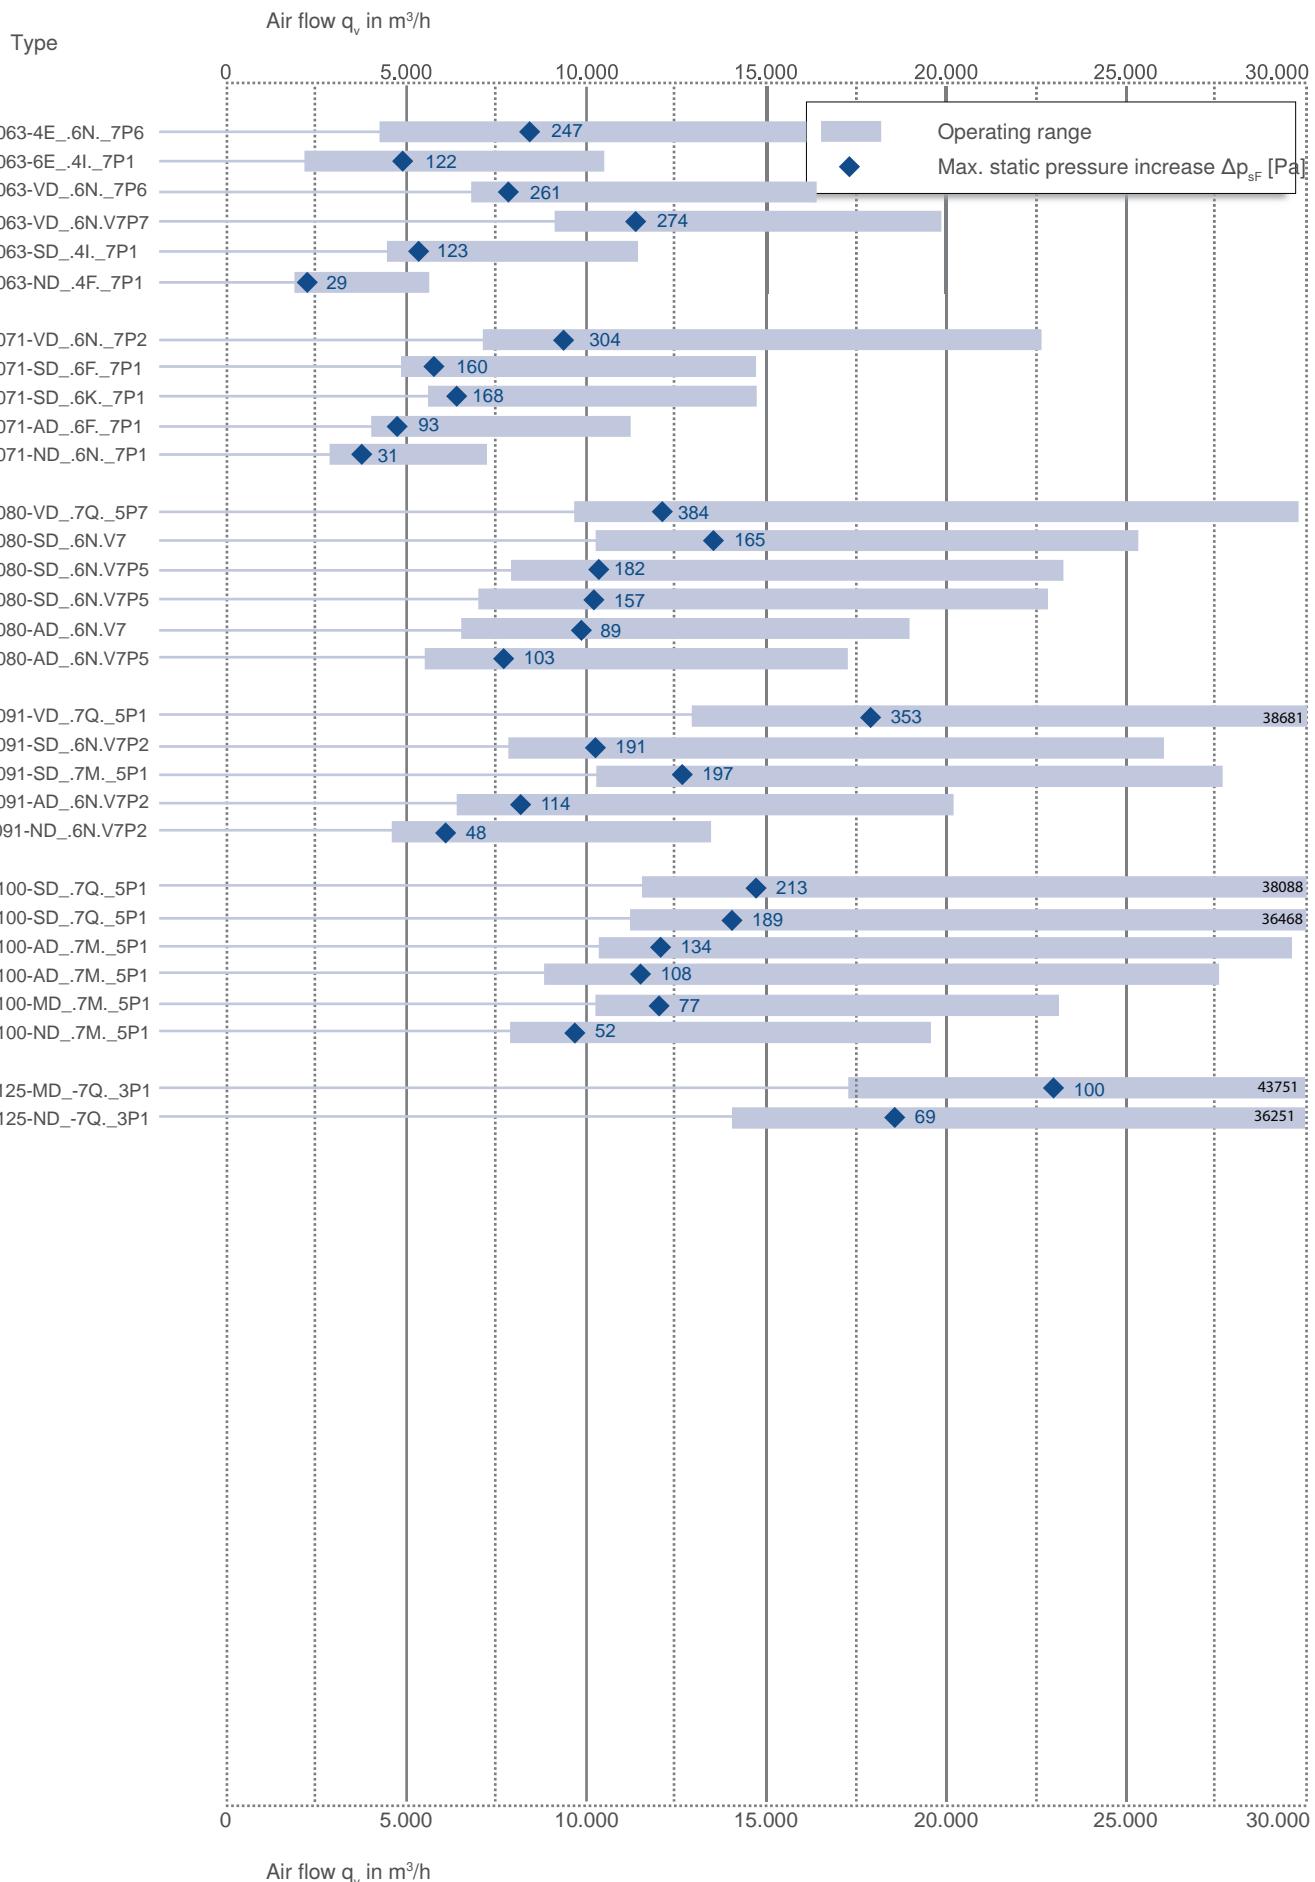

FE2owlet

for single phase alternating current, 2 pole



FNO20-2E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.08 kW*
Rated current I_N : 0.38 A*
Rated speed n_N : 2550 min⁻¹*
Starting current I_A : 0.65 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 1.5 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

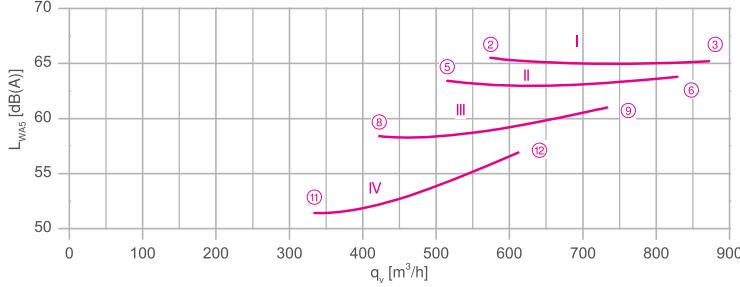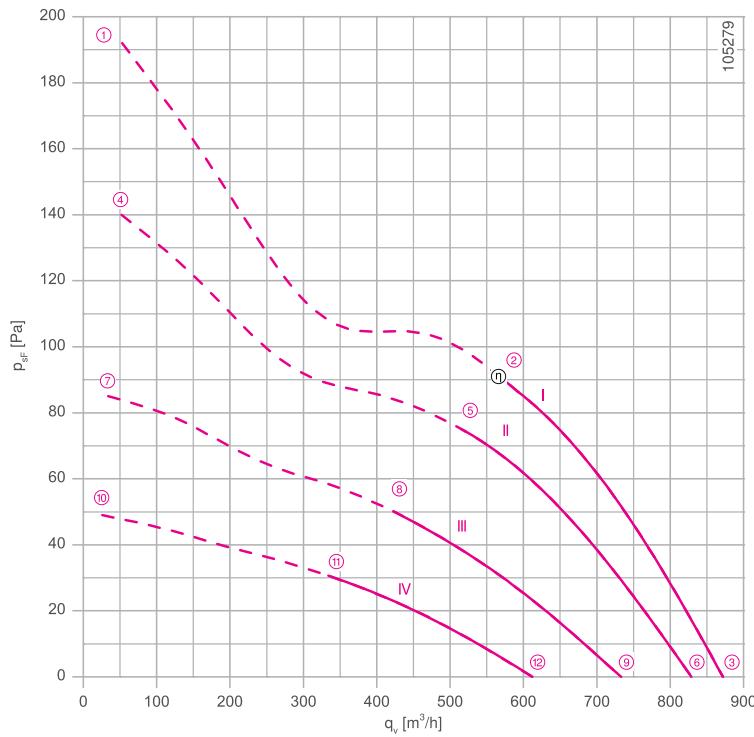

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532
1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, guard grille suction side

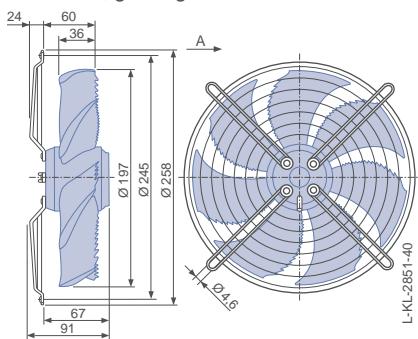

Design L - round full bell mouth, guard grille suction side

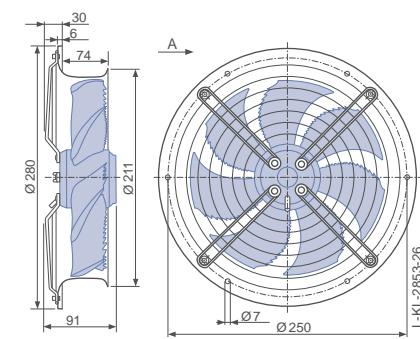

Design Q - square full bell mouth, guard grille suction side

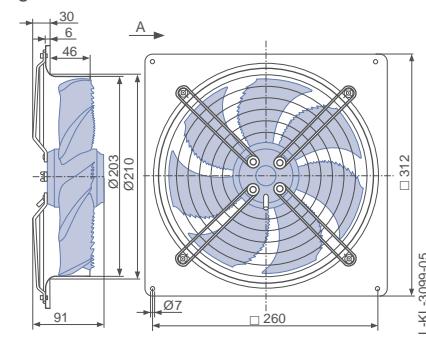

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN020-2E_.W6._7	I	230	①	0.39	80	2430	
		230*	②	0.38*	75*	2550*	66
		230	③	0.36	70	2670	65
	II	170	④	0.34	55	2080	
		170	⑤	0.30	50	2300	63
		170	⑥	0.25	42	2530	64
	III	135	⑦	0.32	42	1600	
		135	⑧	0.29	38	1900	59
		135	⑨	0.25	32	2230	61
	IV	110	⑩	0.28	30	1210	
		110	⑪	0.27	30	1490	52
		110	⑫	0.24	26	1880	57

*rated data

Fan ordering information


Airflow direction A		Airflow direction V			
Design	D (guard grille suction side)	L (guard grille suction side)	Q (guard grille suction side)	I (guard grille pressure side)	H (guard grille pressure Q (guard grille pressure side))
Type Article no.	FN020-2ED.W6.A7 164257	FN020-2EL.W6.A7 164258	FN020-2EQ.W6.A7 164259	FN020-2EI.W6.V7 164261	FN020-2EH.W6.V7 164260
Weight kg	1.90	2.60	3.00	1.90	2.60
					3.00

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

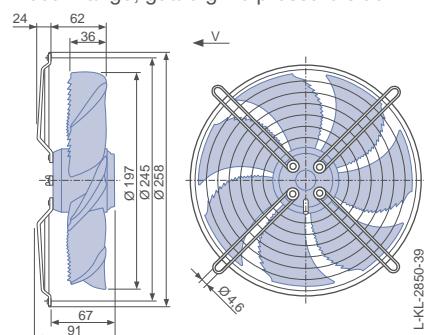

Design H - pipe sockets with a flange, guard grille pressure side

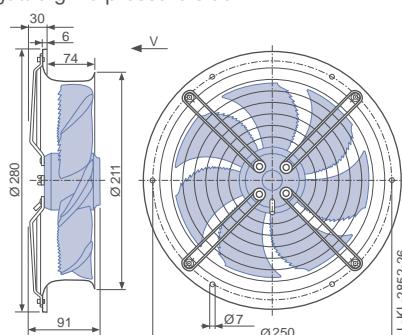

Design Q - square full bell mouth, guard grille pressure side

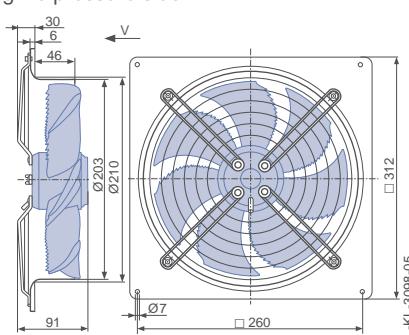

FE2owlet

for single phase alternating current, 4 pole

FNO20-4E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V*

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 0.03 kW*

Rated current I_N : 0.15 A*

Rated speed n_N : 1420 min⁻¹*

Starting current I_A : 0.28 A

Current increase ΔI : 0 %

Service capacitor C_{400V} : 1.0 μ F

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Supply cable variable 45 cm

Number of blades: 7

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, ultramarine blue



Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

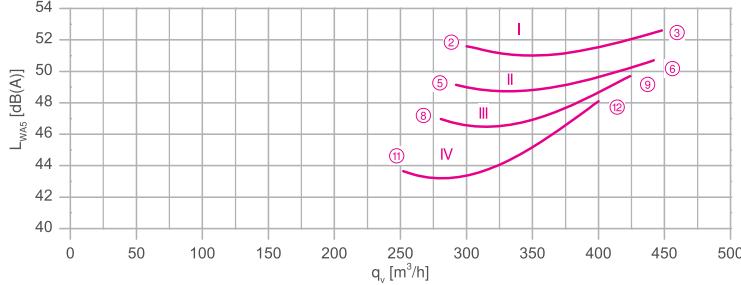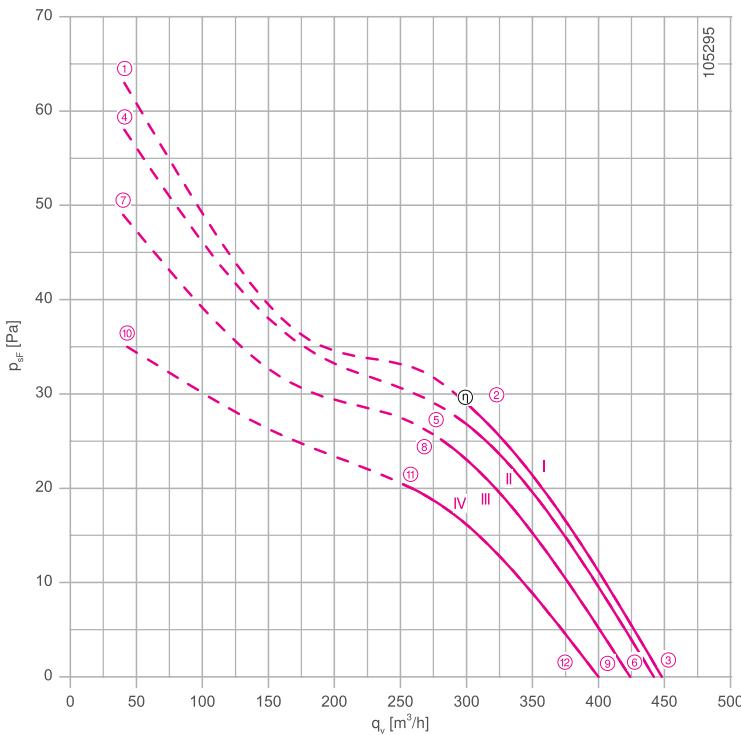

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532

1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design D - axial bolted, suspension for full bell mouth, guard grille suction side

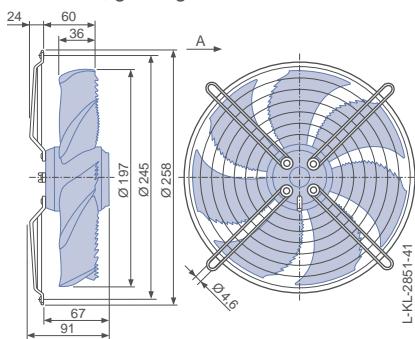

Design L - round full bell mouth, guard grille suction side

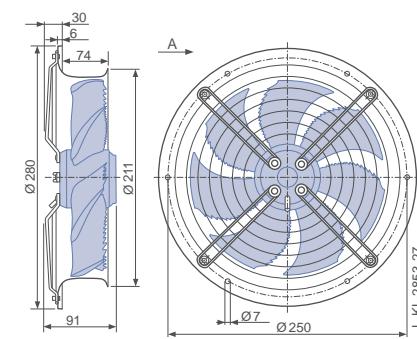

Design Q - square full bell mouth, guard grille suction side

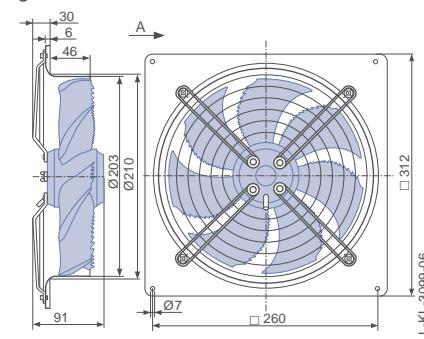

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WA5} dB(A)
FN020-4E_.W6._7	I	230	①	0.15	32	1400	
		230*	②	0.15*	30*	1420*	52
		230	③	0.15	30	1440	53
	II	170	④	0.11	19	1340	
		170	⑤	0.11	17	1380	49
		170	⑥	0.10	16	1410	51
	III	135	⑦	0.10	14	1240	
		135	⑧	0.09	13	1310	47
		135	⑨	0.08	11	1370	50
	IV	110	⑩	0.10	11	1080	
		110	⑪	0.09	10	1190	44
		110	⑫	0.08	9	1290	48

*rated data

Fan ordering information


Airflow direction A		Airflow direction V			
Design	D (guard grille suction side)	L (guard grille suction side)	Q (guard grille suction side)	I (guard grille pressure side)	H (guard grille pressure Q (guard grille pressure side))
Type Article no.	FN020-4ED.W6.A7 164263	FN020-4EL.W6.A7 164264	FN020-4EQ.W6.A7 164265	FN020-4EI.W6.V7 164267	FN020-4EH.W6.V7 164266
Weight kg	1.90	2.60	3.00	1.90	2.60
					3.00

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

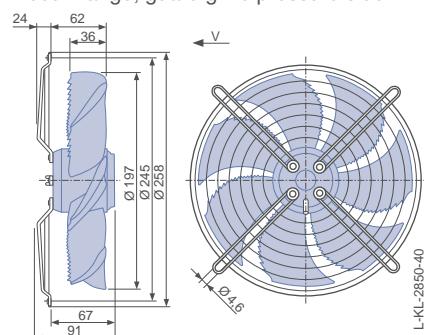

Design H - pipe sockets with a flange, guard grille pressure side

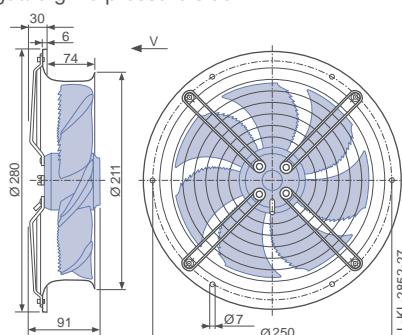

Design Q - square full bell mouth, guard grille pressure side

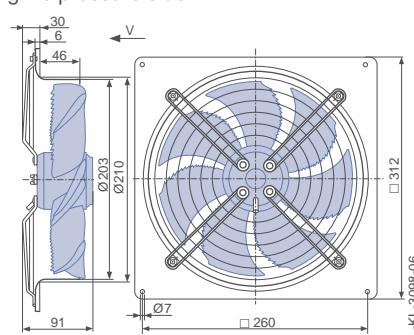

FE2owlet

for single phase alternating current, 2 pole



FNO25-2E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.12 kW*
Rated current I_N : 0.54 A*
Rated speed n_N : 2160 min⁻¹*
Starting current I_A : 0.75 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 3.5 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 65 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

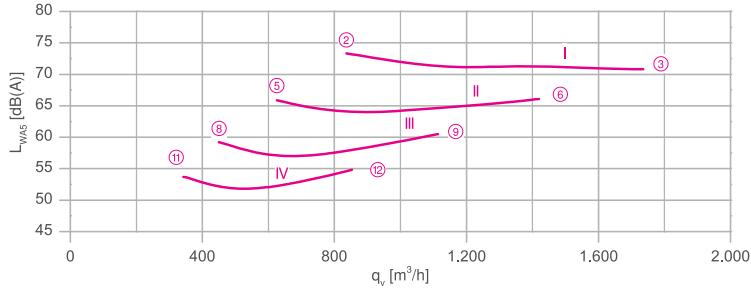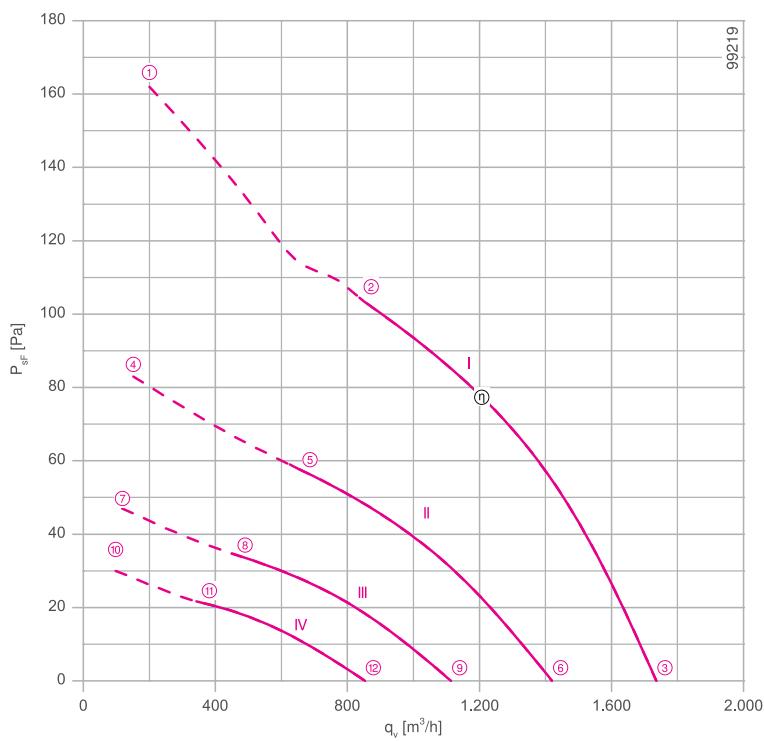

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532
1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

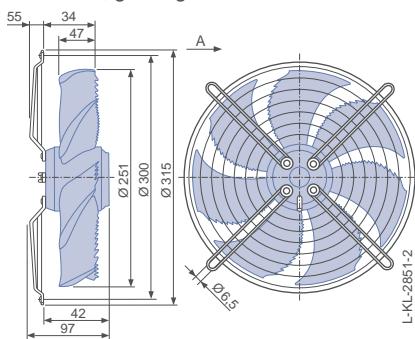

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

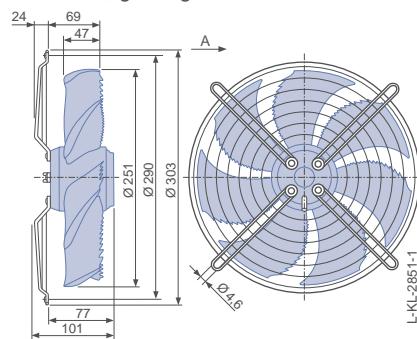

Design L - round full bell mouth, guard grille suction side

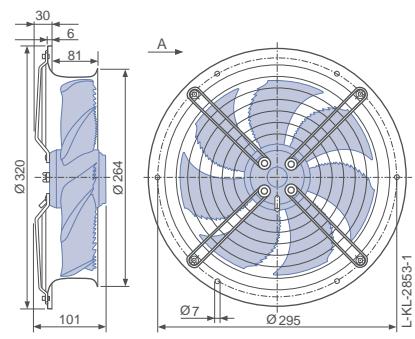

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WA5} dB(A)
FN025-2E_.WA._7	I	230	①	0.58	140	1900	
		230*	②	0.54*	120*	2160*	73
		230	③	0.48	110	2410	71
	II	170	④	0.48	85	1370	
		170	⑤	0.46	80	1630	66
		170	⑥	0.44	75	1970	66
	III	135	⑦	0.40	55	1040	
		135	⑧	0.39	55	1240	59
		135	⑨	0.38	50	1550	61
	IV	110	⑩	0.33	36	830	
		110	⑪	0.33	36	980	53
		110	⑫	0.32	36	1200	55

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN025-2EW.WA.A7 162556	FN025-2ED.WA.A7 161633	FN025-2EL.WA.A7 161634	FN025-2EK.WA.V7 161631	FN025-2EI.WA.V7 162557	FN025-2EH.WA.V7 161630	
Weight kg	2.70	2.50	3.50	2.70	2.50	3.40	

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

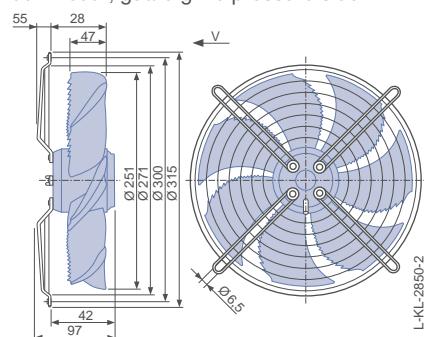

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

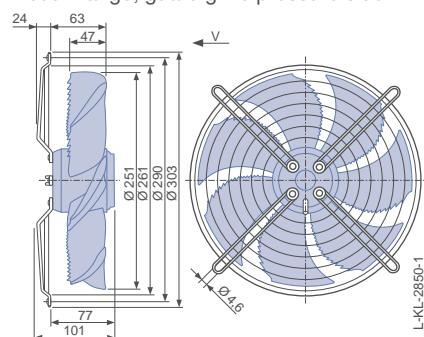

Design H - pipe sockets with a flange, guard grille pressure side

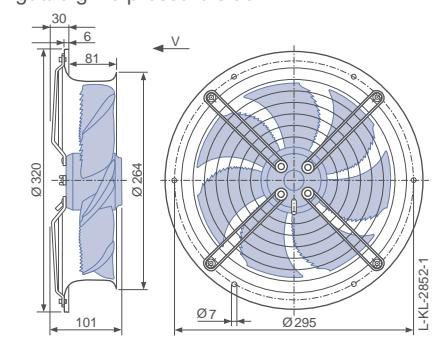

FE2owlet

for single phase alternating current, 4 pole



FNO25-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.05 kW*
Rated current I_N : 0.24 A*
Rated speed n_N : 1370 min⁻¹*
Starting current I_A : 0.40 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 1.5 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 55 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

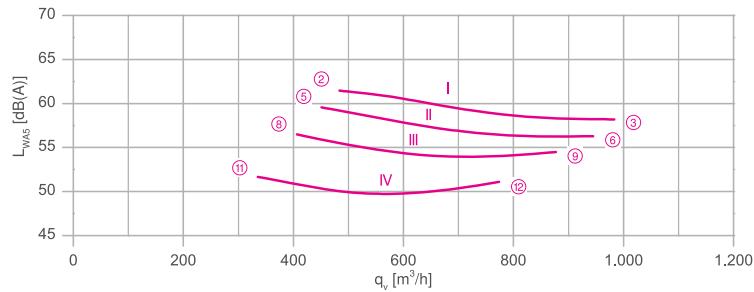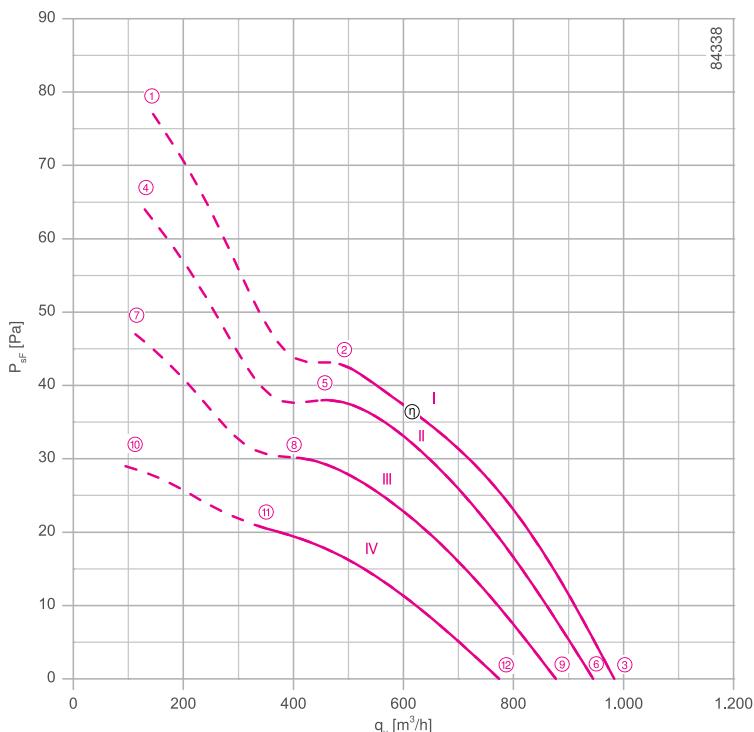

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532

1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

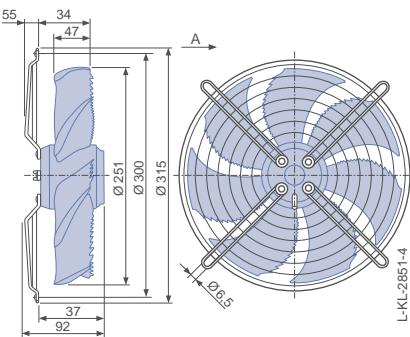

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

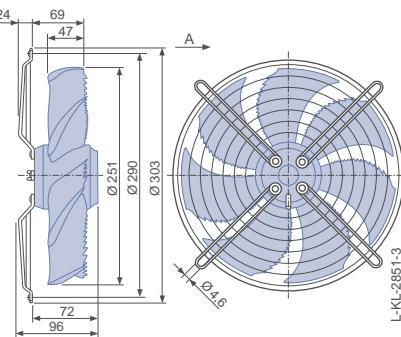

Design L - round full bell mouth, guard grille suction side

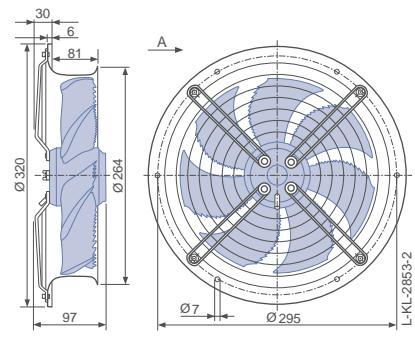

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN025-4E_.W8._7	I	230	①	0.24	50	1330	
		230*	②	0.24*	48*	1370*	62
		230	③	0.23	46	1400	58
	II	170	④	0.19	32	1210	
		170	⑤	0.17	28	1280	60
		170	⑥	0.16	26	1340	56
	III	135	⑦	0.18	24	1030	
		135	⑧	0.16	22	1150	57
		135	⑨	0.14	19	1250	55
	IV	110	⑩	0.17	18	820	
		110	⑪	0.16	17	960	52
		110	⑫	0.14	15	1110	51

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)	
Type Article no.	FN025-4EW.W8.A7 139726	FN025-4ED.W8.A7 139712	FN025-4EL.W8.A7 139719	FN025-4EK.W8.V7 139754	FN025-4EI.W8.V7 139740	FN025-4EH.W8.V7 139747	
Weight kg	2.50	2.30	3.30	2.50	2.30	3.30	

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

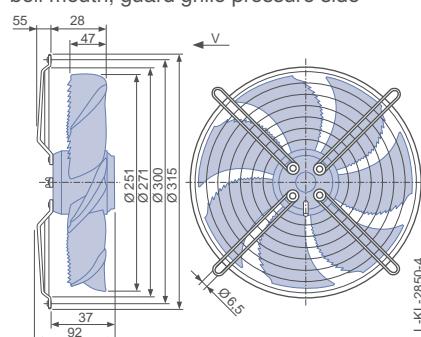

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

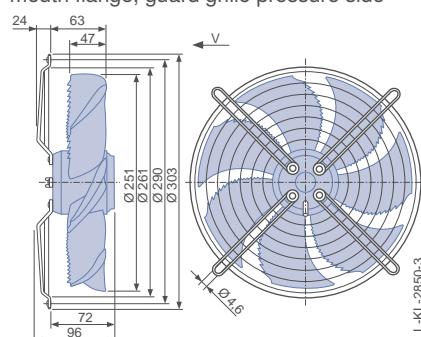

Design H - pipe sockets with a flange, guard grille pressure side

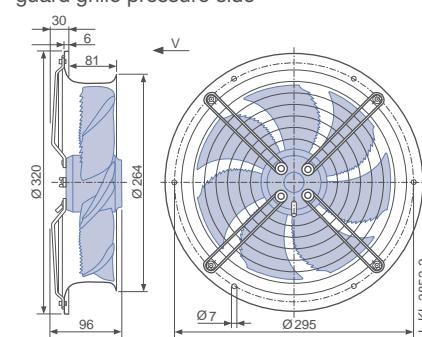

FE2owlet

for single phase alternating current, 4 pole



FNO30-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.09 kW*
Rated current I_N : 0.39 A*
Rated speed n_N : 1290 min⁻¹*
Starting current I_A : 0.63 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 2.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

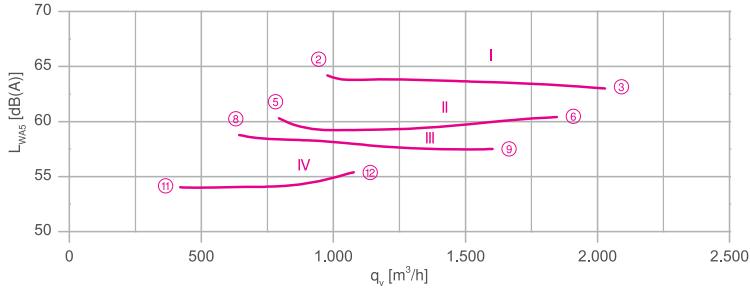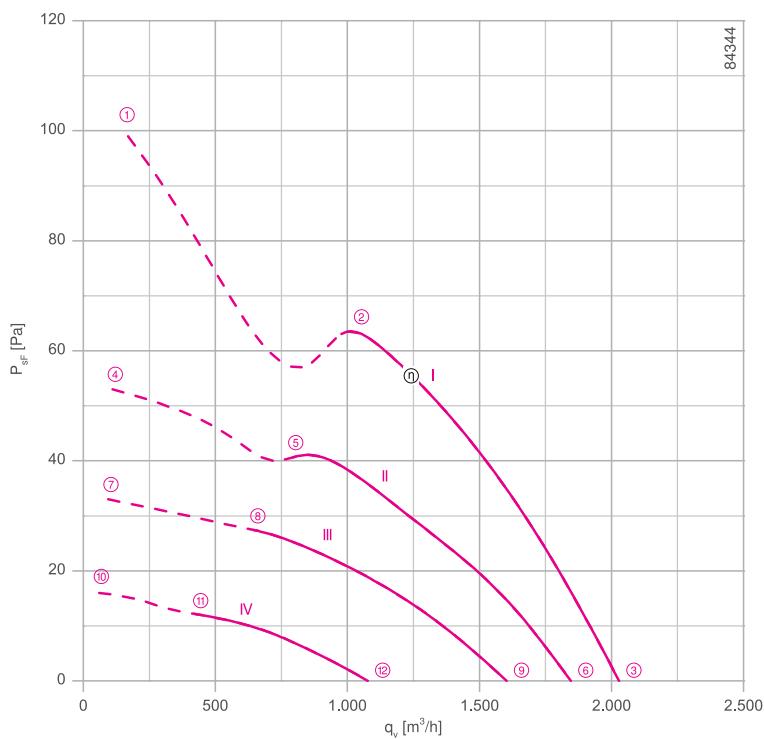

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532
1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

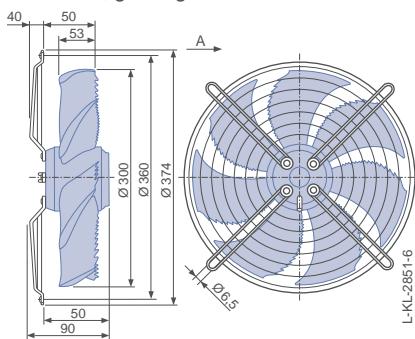

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

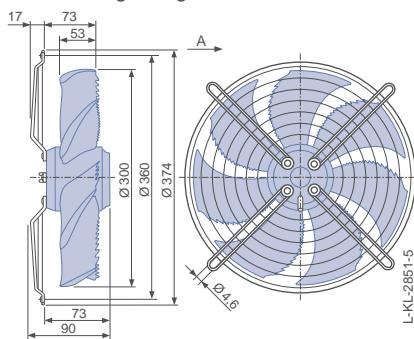

Design L - round full bell mouth, guard grille suction side

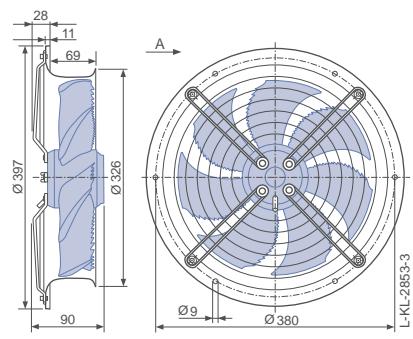

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WA5} dB(A)
FN030-4E_.WA._7	I	230	①	0.44	95	1220	
		230*	②	0.39*	85*	1290*	64
		230	③	0.34	75	1370	63
	II	170	④	0.39	65	890	
		170	⑤	0.36	60	1050	60
		170	⑥	0.30	50	1240	60
	III	145	⑦	0.34	48	710	
		145	⑧	0.33	46	870	59
		145	⑨	0.30	42	1100	58
	IV	110	⑩	0.27	28	490	
		110	⑪	0.26	28	570	54
		110	⑫	0.26	26	740	55

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN030-4EW.WA.A7 141658	FN030-4ED.WA.A7 141656	FN030-4EL.WA.A7 141657	FN030-4EK.WA.V7 141661	FN030-4EI.WA.V7 141659	FN030-4EH.WA.V7 141660	
Weight kg	3.10	3.60	4.50	3.30	2.90	4.50	

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

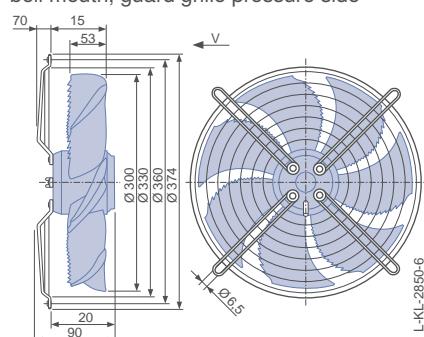

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

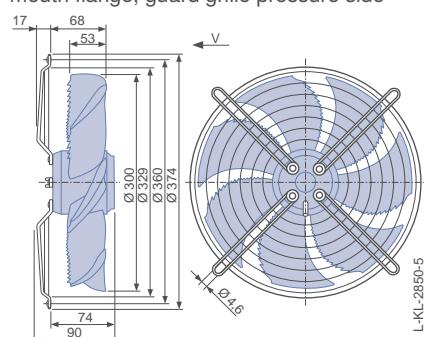

Design H - pipe sockets with a flange, guard grille pressure side

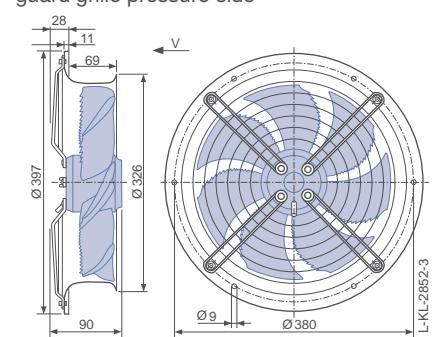

FE2owlet

for single phase alternating current, 4 pole



FNO30-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.09 kW*
Rated current I_N : 0.42 A*
Rated speed n_N : 1330 min⁻¹*
Starting current I_A : 0.77 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 3.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

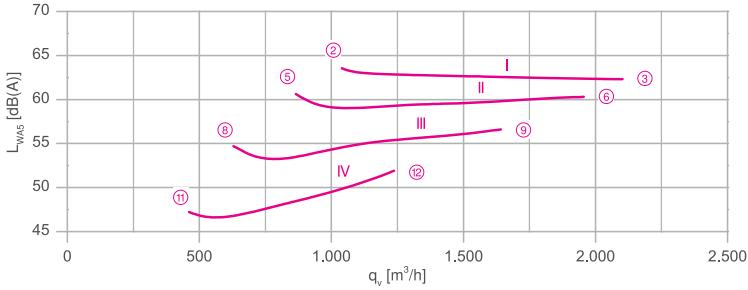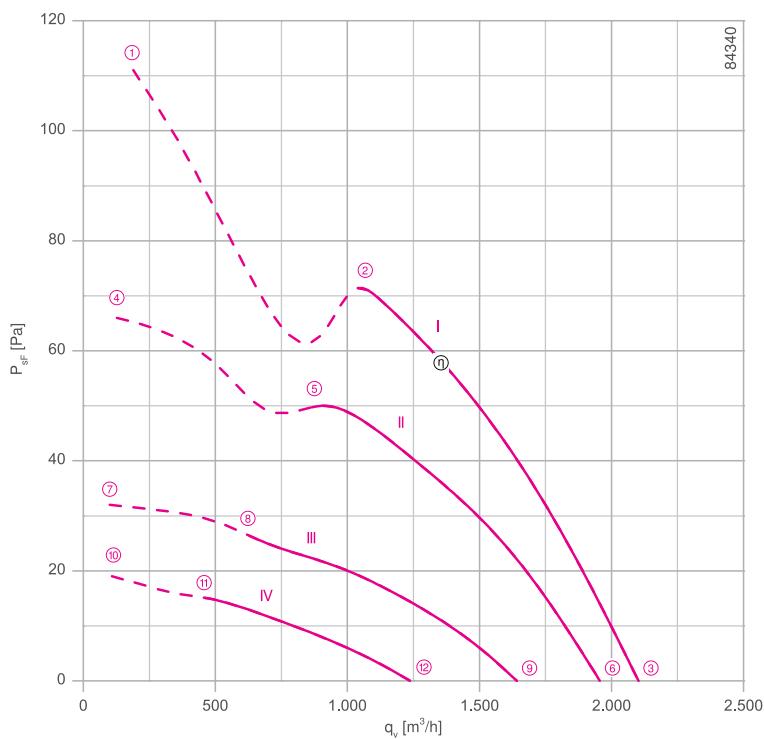

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532
1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

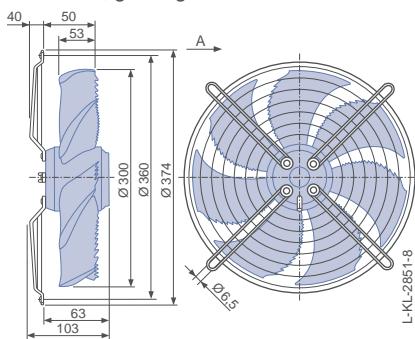

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

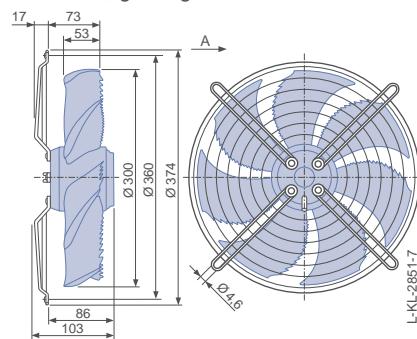

Design L - round full bell mouth, guard grille suction side

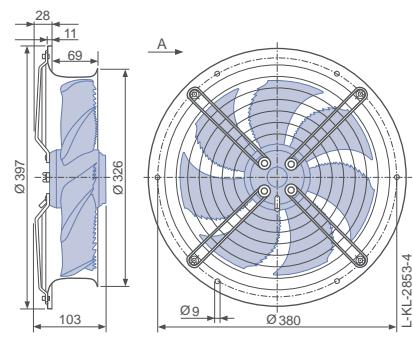

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN030-4E_.WC_.7	I	230	①	0.46	110	1280	
		230*	②	0.42*	95*	1330*	64
		230	③	0.35	80	1400	62
	II	170	④	0.46	75	970	
		170	⑤	0.40	70	1140	61
		170	⑥	0.33	55	1300	60
	III	135	⑦	0.39	50	680	
		135	⑧	0.38	50	830	55
		135	⑨	0.33	44	1100	57
	IV	110	⑩	0.33	36	520	
		110	⑪	0.33	34	600	47
		110	⑫	0.31	34	830	52

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN030-4EW.WC.A7 141633	FN030-4ED.WC.A7 141631	FN030-4EL.WC.A7 141632	FN030-4EK.WC.V7 141636	FN030-4EI.WC.V7 141634	FN030-4EH.WC.V7 141635	
Weight kg	3.70	3.60	5.10	3.80	3.60	5.10	

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

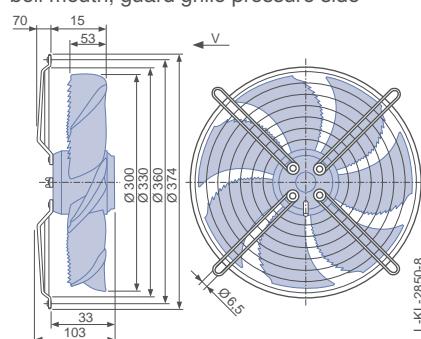

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

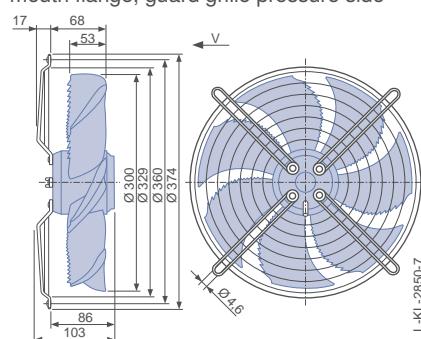

Design H - pipe sockets with a flange, guard grille pressure side

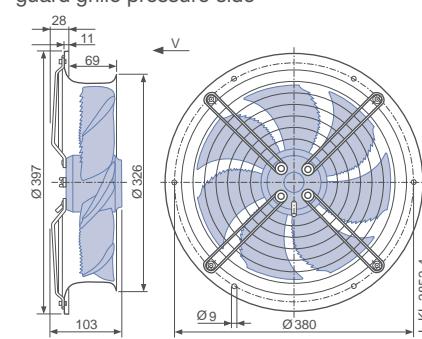

FE2owlet

for single phase alternating current, 4 pole



FNO31-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.12 kW*
Rated current I_N : 0.54 A*
Rated speed n_N : 1330 min⁻¹*
Starting current I_A : 1.00 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 5.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

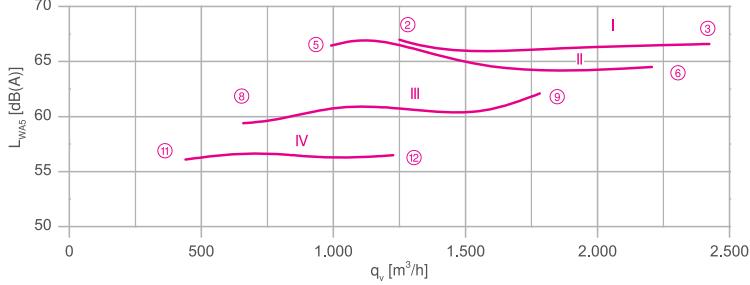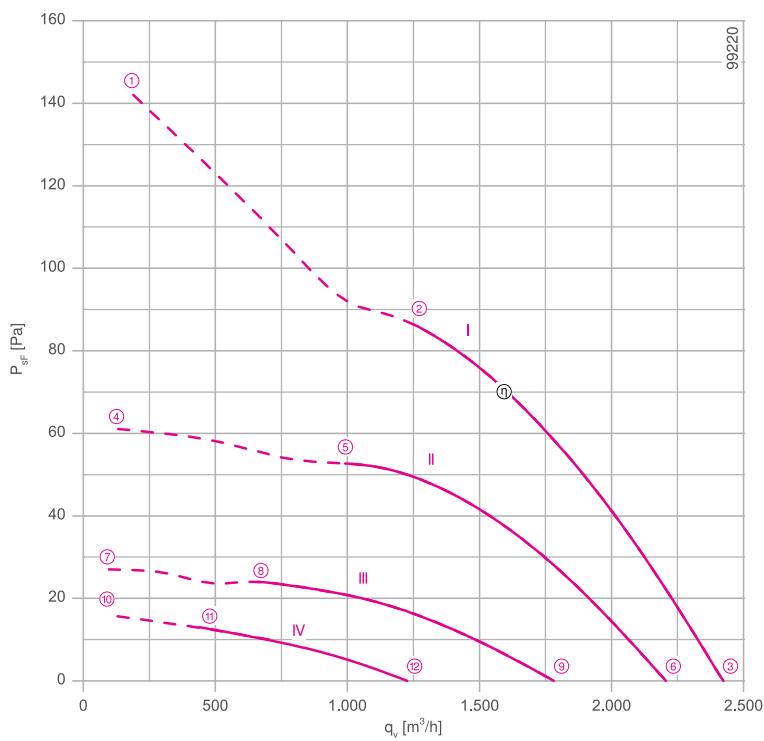

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532
1360-177X


System components

Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

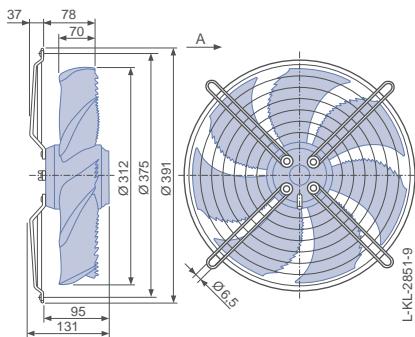


Design L - round full bell mouth, guard grille suction side

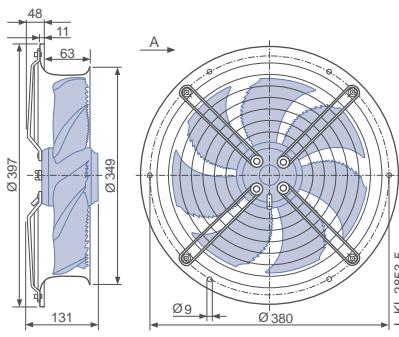

Airflow direction V

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

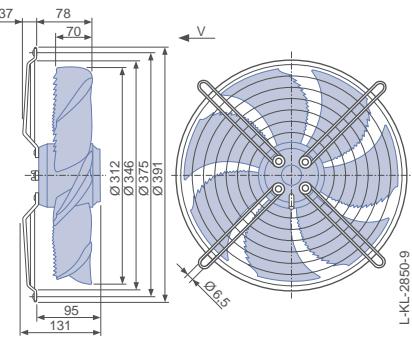

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN031-4E_.WD._7	I	230	(1)	0.64	140	1250	
		230*	(2)	0.54*	120*	1330*	67
		230	(3)	0.44	100	1400	66
	II	170	(4)	0.62	100	860	
		170	(5)	0.56	95	1070	66
		170	(6)	0.44	75	1290	65
	III	135	(7)	0.52	70	580	
		135	(8)	0.50	70	720	59
		135	(9)	0.44	60	1050	62
	IV	110	(10)	0.42	46	450	
		110	(11)	0.42	46	520	56
		110	(12)	0.42	44	720	57

*rated data


Fan ordering information

Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	L (guard grille suction side)	I (guard grille pressure side)
Type	FN031-4ED.WD.A7	FN031-4EL.WD.A7	FN031-4EI.WD.V7
Article no.	161640	161641	161637
Weight kg	4.30	5.80	4.30
			5.80

Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Design H - pipe sockets with a flange,
guard grille pressure side

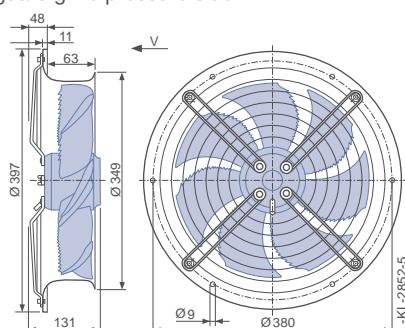

FE2owlet

for single phase alternating current, 4 pole



FNO31-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 120 W*
Rated current I_N : 0.62 A*
Rated speed n_N : 1440 min $^{-1}$ *
Starting current I_A : 2.40 A
Current increase ΔI : 35 %
Service capacitor C_{400V} : 3.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

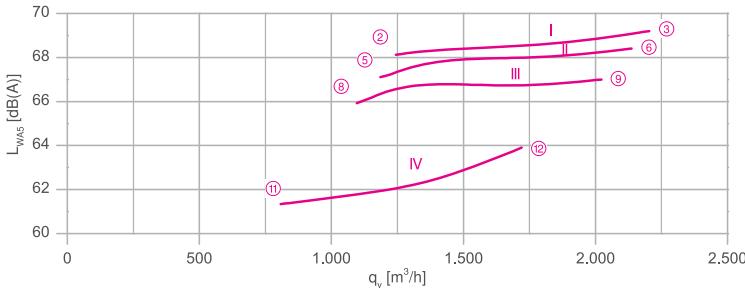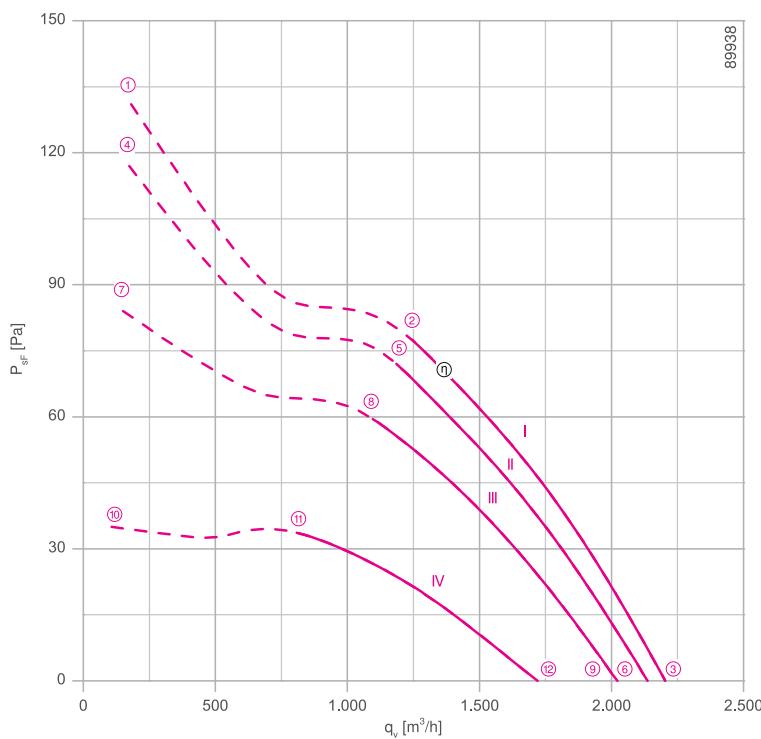

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm

← Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

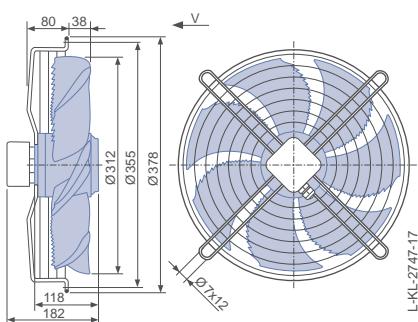

Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level
		U V	I	A	P ₁ W	n min ⁻¹	L _{WAS} dB(A)
FN031-4E_.0F._7P2	I	230	①	0.66	130	1430	
		230*	②	0.61*	120*	1440*	68
		230	③	0.58	110	1450	69
	II	170	④	0.68	110	1350	
		170	⑤	0.58	95	1390	67
		170	⑥	0.50	80	1410	68
	III	135	⑦	0.86	110	1150	
		135	⑧	0.70	90	1270	66
		135	⑨	0.58	75	1340	67
	IV	110	⑩	0.92	90	740	
		110	⑪	0.84	85	950	61
		110	⑫	0.72	75	1140	64

*rated data

Fan ordering information

Airflow direction V	
Design	K (guard grille pressure side)
	
Type	FN031-4EK.0F.V7P2
Article no.	159478
Weight kg	4.90

Control technology

Frequency inverters Fcontrol 1~		Motor protection units 1~		Electronic voltage controllers 1~	
Page 474		Page 518		Page 492	

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

FE2owlet

for three phase alternating current, 4 pole

F N O 3 1 - 4 D



Description

Motor technology: AC

Rated voltage U_N : 3~ 230/400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 120 W*

Rated current I_N : 0.68/0.39 A*

Rated speed n_N : 1450 min $^{-1}$ *

Starting current I_A : 2.80 / 1.70 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminum, 1 coat paint, jet black



Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

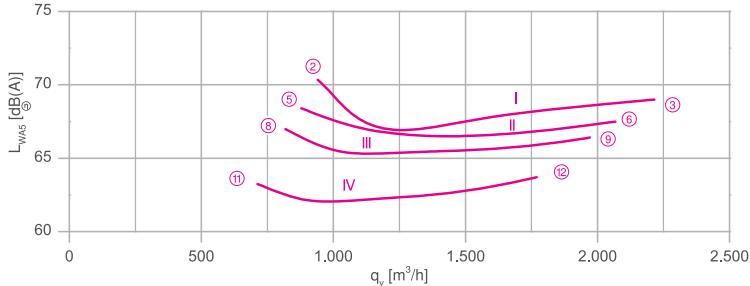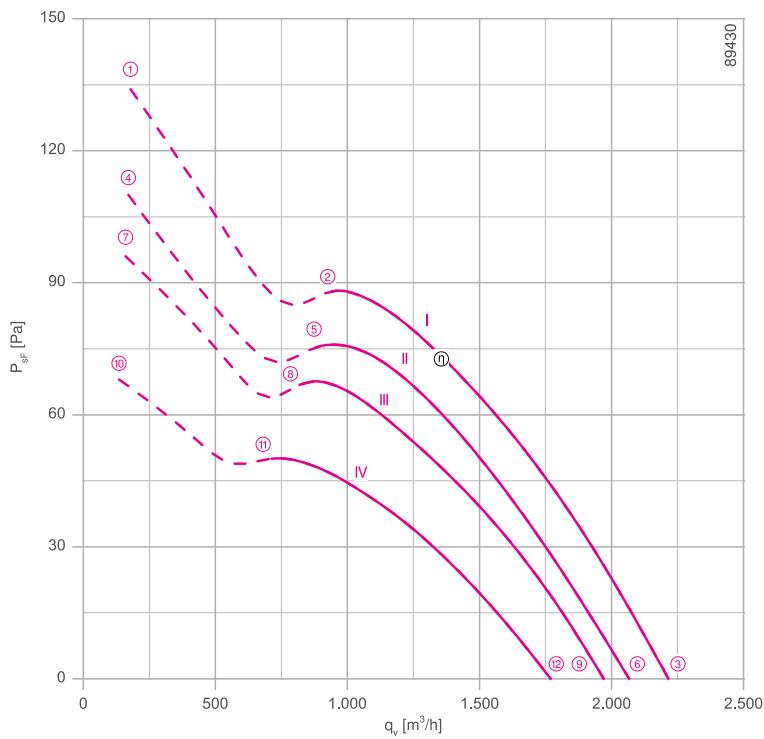

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-106XA


System components

Page 430

Dimensions mm

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

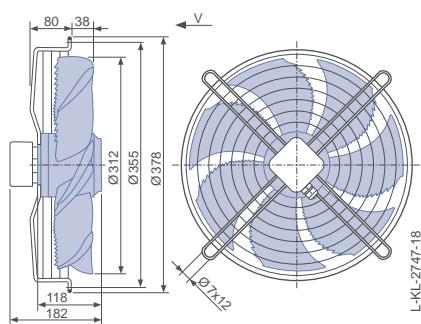


Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
		U V	I	A	P W	n min ⁻¹	
FN031-4D_.0F._7P2	I	400	①	0.40	140	1440	
		400*	②	0.39*	120*	1450*	70
		400	③	0.39	110	1460	69
	II	230	④	0.30	100	1310	
		230	⑤	0.28	90	1340	69
		230	⑥	0.25	75	1380	68
	III	190	⑦	0.32	90	1220	
		190	⑧	0.29	80	1260	67
		190	⑨	0.25	70	1320	66
	IV	145	⑩	0.33	75	1030	
		145	⑪	0.30	70	1090	63
		145	⑫	0.27	60	1180	64

*rated data

Fan ordering information

Airflow direction V	
Design	K (guard grille pressure side)
	
Type	FN031-4DK.0F.V7P2
Article no.	159471
Weight kg	4.90

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components

Control
technology

Appendix

FE2owlet

for single phase alternating current, 4 pole



FNO35-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.13 kW*
Rated current I_N : 0.56 A*
Rated speed n_N : 1070 min⁻¹*
Starting current I_A : 0.70 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 5.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Supply cable variable 45 cm
Number of blades: 7
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, ultramarine blue
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

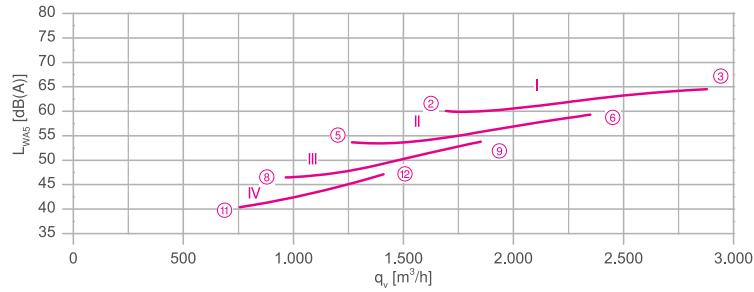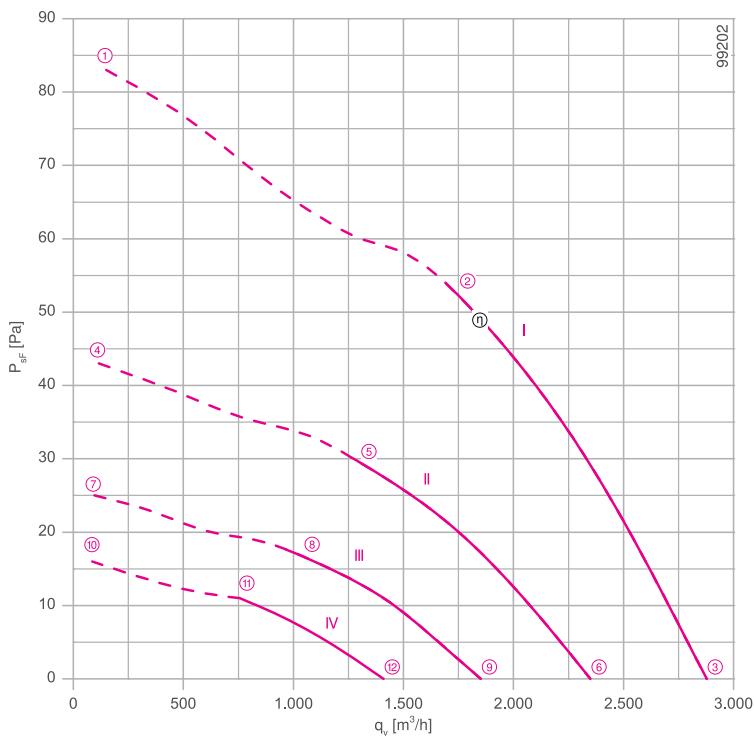

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 532

1360-177X


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

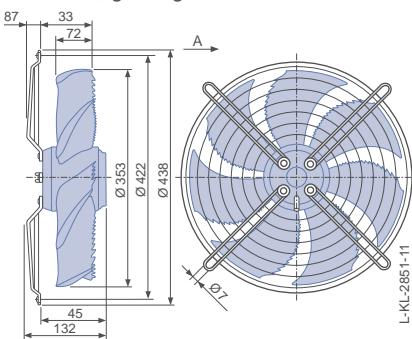

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

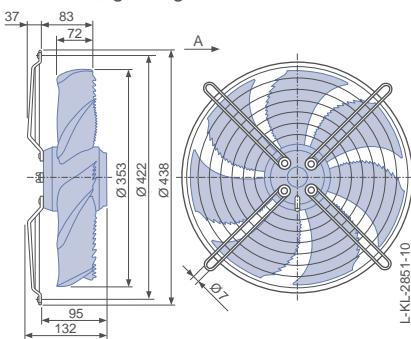

Design L - round full bell mouth, guard grille suction side

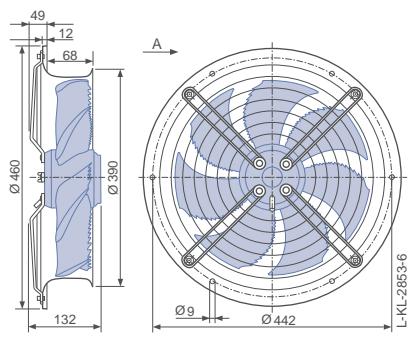


Performance data


Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
		U		I	P ₁	n	
		V		A	W	min ⁻¹	
FN035-4E_WD_7	I	230	①	0.60	140	910	
		230*	②	0.56*	130*	1070*	60
		230	③	0.50	110	1220	65
	II	170	④	0.48	80	660	
		170	⑤	0.46	80	810	54
		170	⑥	0.44	70	1000	59
	III	135	⑦	0.39	55	510	
		135	⑧	0.38	50	620	47
		135	⑨	0.37	50	780	54
	IV	110	⑩	0.32	36	400	
		110	⑪	0.32	36	490	40
		110	⑫	0.32	34	610	47

*rated data

Fan ordering information

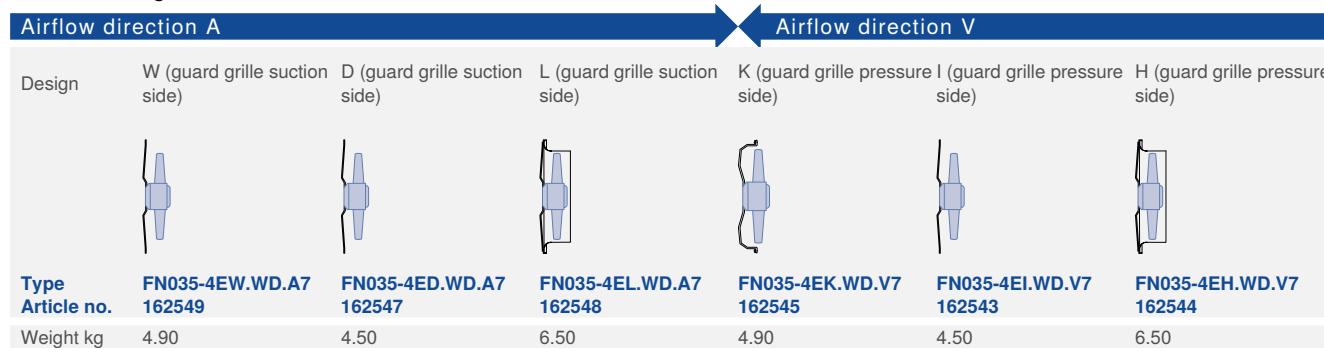

Control technology

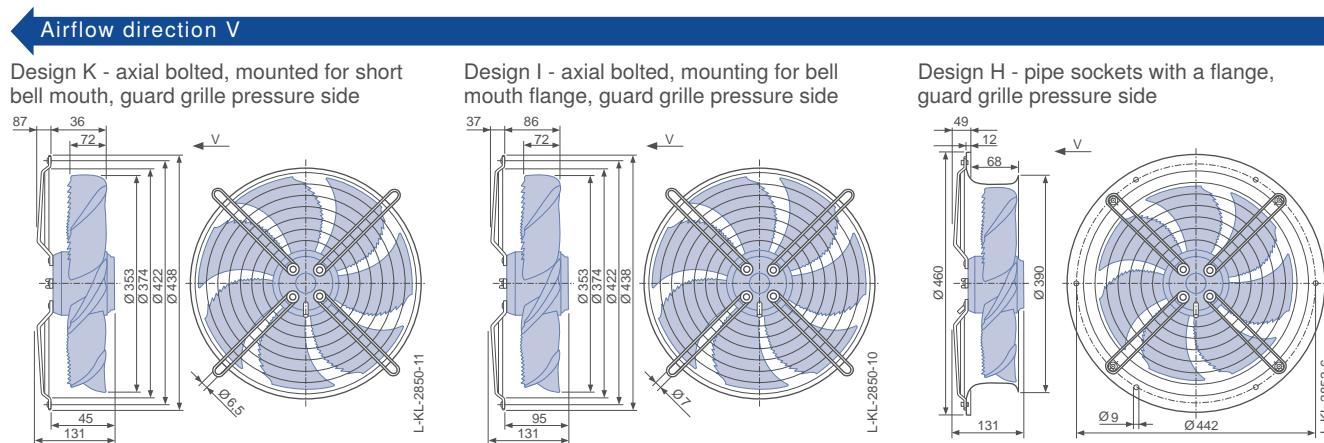

FE2owlet

for single phase alternating current, 4 pole

FNO35-4E





Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 150 W*
Rated current I_N : 0.65 A*
Rated speed n_N : 1390 min $^{-1}$ *
Starting current I_A : 2.00 A
Current increase ΔI : 35 %
Service capacitor C_{400V} : 3.0 μF
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 29.2 %
Efficiency: $N_{actual} = 40.9 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Connection diagram
for airflow direction A Page 531
1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

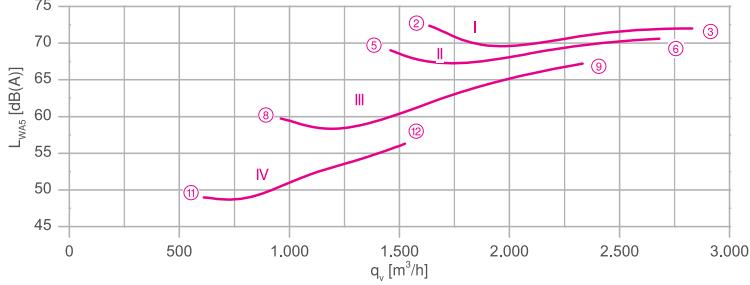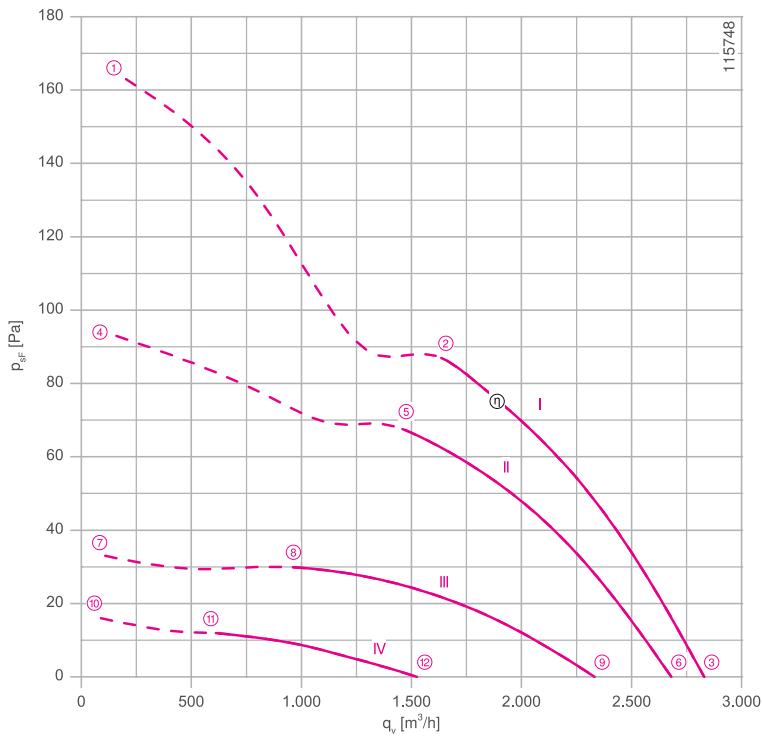


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

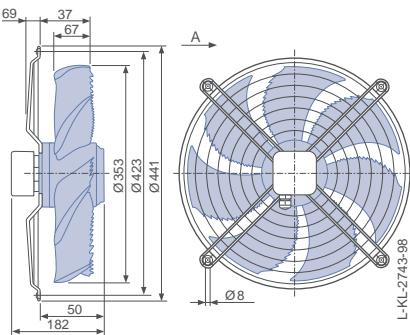

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

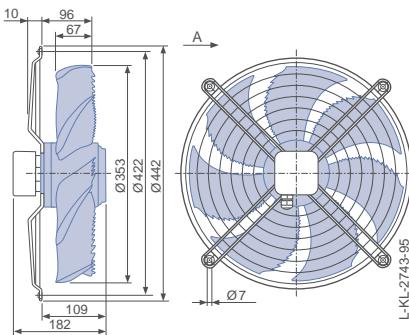

Design Q - square full bell mouth, guard grille suction side

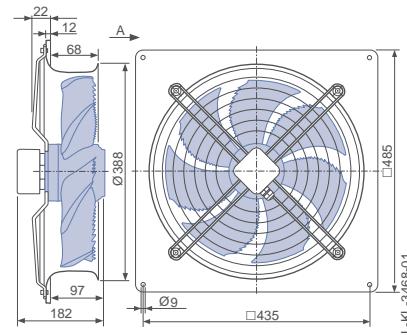

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN035-4E_.0F._7P3	I	230	①	0.82	180	1350	
		230*	②	0.66*	150*	1390*	72
		230	③	0.52	110	1430	72
	II	170	④	1.05	170	1030	
		170	⑤	0.80	130	1240	69
		170	⑥	0.56	95	1360	71
	III	135	⑦	0.96	120	610	
		135	⑧	0.90	120	820	60
		135	⑨	0.70	90	1180	67
	IV	110	⑩	0.80	80	430	
		110	⑪	0.80	80	520	49
		110	⑫	0.74	75	770	56

*rated data


Fan ordering information

Airflow direction A		Airflow direction V		
Design		W (guard grille suction side)	D (guard grille suction side)	Q (guard grille suction side)
Design				
Type Article no.	FN035-4EW.0F.A7P3 171264	FN035-4ED.0F.A7P3 171263	FN035-4EQ.0F.A7P3 171265	FN035-4EK.0F.V7P3 171261
Type Article no.	FN035-4EQ.0F.V7P3 171262			
Weight kg	5.10	4.80	7.60	5.30
Weight kg				7.80


Control technology

Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V
Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

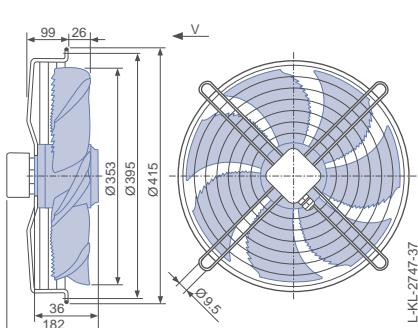

Design Q - square full bell mouth, guard grille pressure side

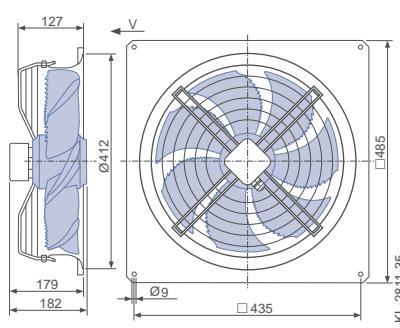

FE2owlet

for single phase alternating current, 6 pole

FNO35-6E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 85 W*

Rated current I_N : 0.39 A*

Rated speed n_N : 930 min⁻¹*

Starting current I_A : 0.75 A

Current increase ΔI : 0 %

Service capacitor C_{400V} : 3.0 µF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black



Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

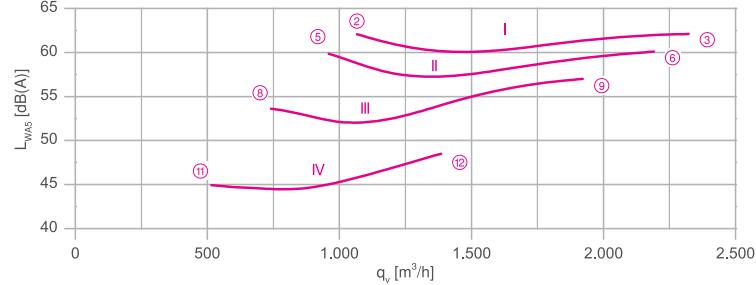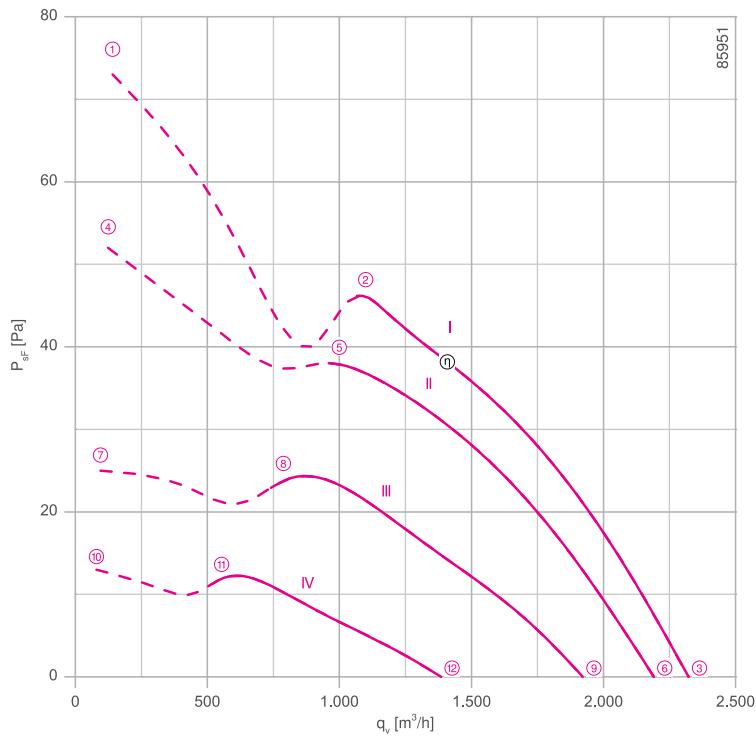

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

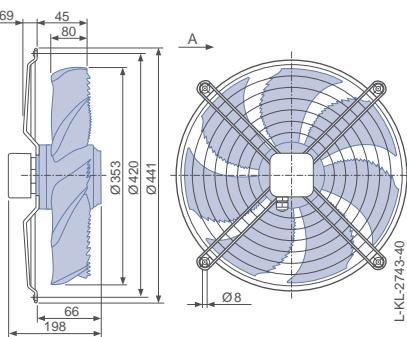

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

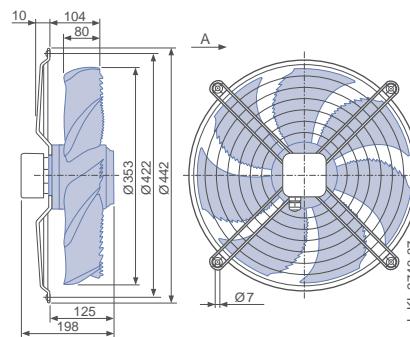

Design L - round full bell mouth, guard grille suction side

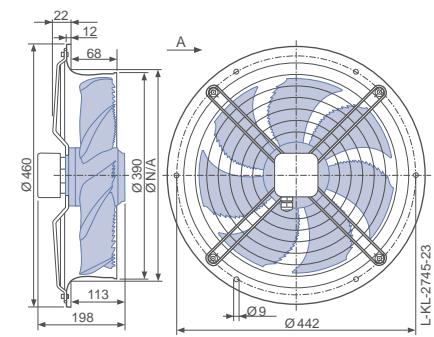

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN035-6E_.0C._7P2	I	230	①	0.42	95	900	62
		230*	②	0.39*	85*	930*	62
		230	③	0.37	80	940	62
	II	170	④	0.42	70	760	60
		170	⑤	0.36	60	850	60
		170	⑥	0.31	55	890	60
	III	135	⑦	0.38	50	530	54
		135	⑧	0.36	48	670	54
		135	⑨	0.32	42	780	57
	IV	110	⑩	0.33	36	390	45
		110	⑪	0.32	34	470	45
		110	⑫	0.31	34	570	49

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN035-6EW.0C.A7P2 155897	FN035-6ED.0C.A7P2 155895	FN035-6EL.0C.A7P2 155896	FN035-6EK.0C.V7P2 155901	FN035-6EI.0C.V7P2 155899	FN035-6EH.0C.V7P2 155900	
Weight kg	4.50	4.10	6.10	4.60	4.10	6.10	

Control technology


Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

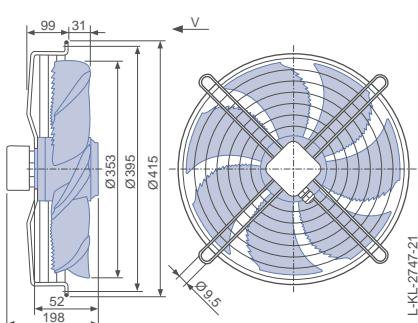

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

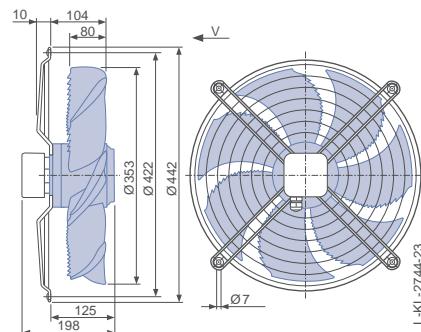

Design H - pipe sockets with a flange, guard grille pressure side

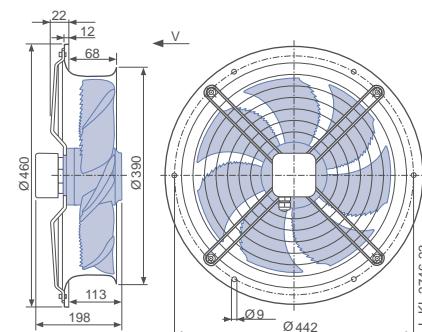

FE2owlet

for three phase alternating current, 4-4 pole

FNO35-VD



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 190/140 W*

Rated current I_N : 0.40/0.23 A*

Rated speed n_N : 1390/1170 min⁻¹*

Starting current I_A : 1.60 / 0.55 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 29.3 %

Efficiency: $N_{actual} = 40.3 / N_{target} = 40^{**}$



* Rated data

**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

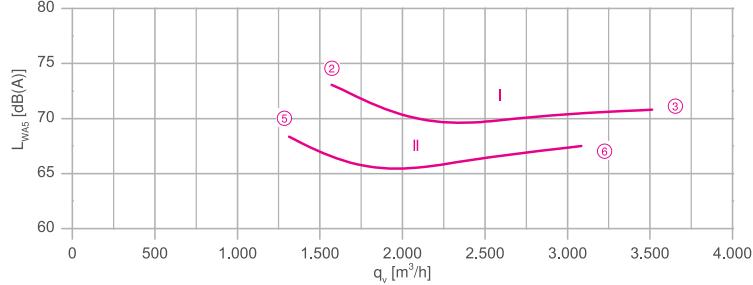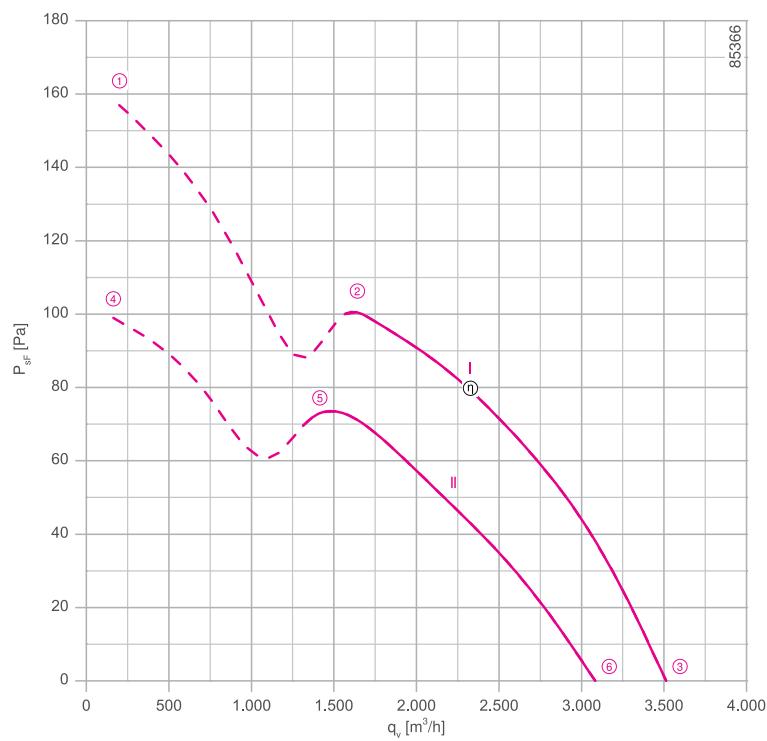


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

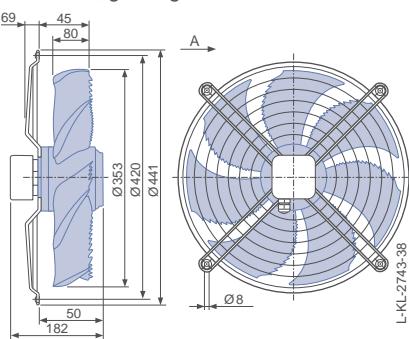

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

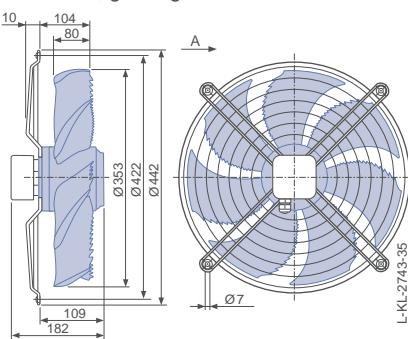

Design L - round full bell mouth, guard grille suction side

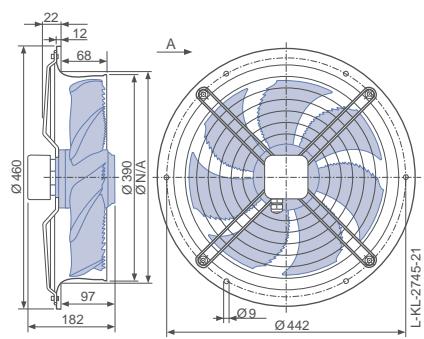

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN035-VD_0F_7P2	Δ	I	400	①	0.44	230	1360	
			400*	②	0.40*	190*	1390*	73
			400	③	0.37	150	1420	71
	Y	II	400	④	0.27	170	1080	
			400*	⑤	0.23*	140*	1170*	68
			400	⑥	0.19	120	1240	68

*rated data

Fan ordering information


	Airflow direction A			Airflow direction V	
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type Article no.	FN035-VDW.0F.A7P2 155888	FN035-VDD.0F.A7P2 155886	FN035-VDL.0F.A7P2 155887	FN035-VDK.0F.V7P2 155892	FN035-VDI.0F.V7P2 155890
Weight kg	5.10	4.80	6.80	5.30	4.70
					6.80

Control technology


Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

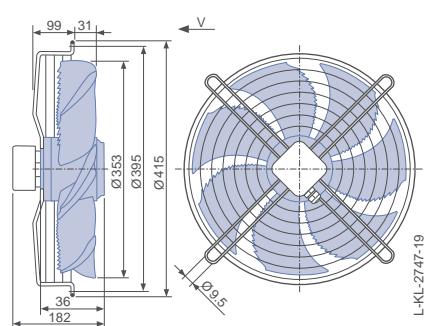

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

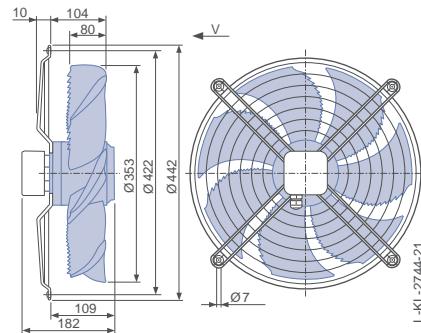

Design H - pipe sockets with a flange, guard grille pressure side

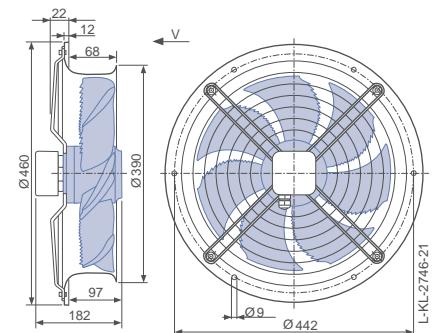

FE2owlet

for single phase alternating current, 4 pole

FNO40-4E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 240 W*

Rated current I_N : 1.05 A*

Rated speed n_N : 1340 min⁻¹*

Starting current I_A : 2.40 A

Current increase ΔI : 15 %

Service capacitor C_{400V} : 5.0 µF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 31.1 %

Efficiency: $N_{actual} = 41.3 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

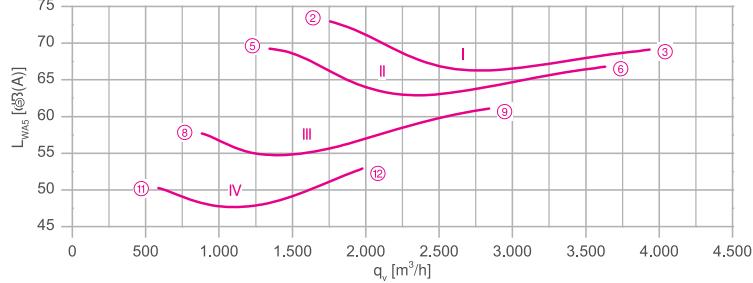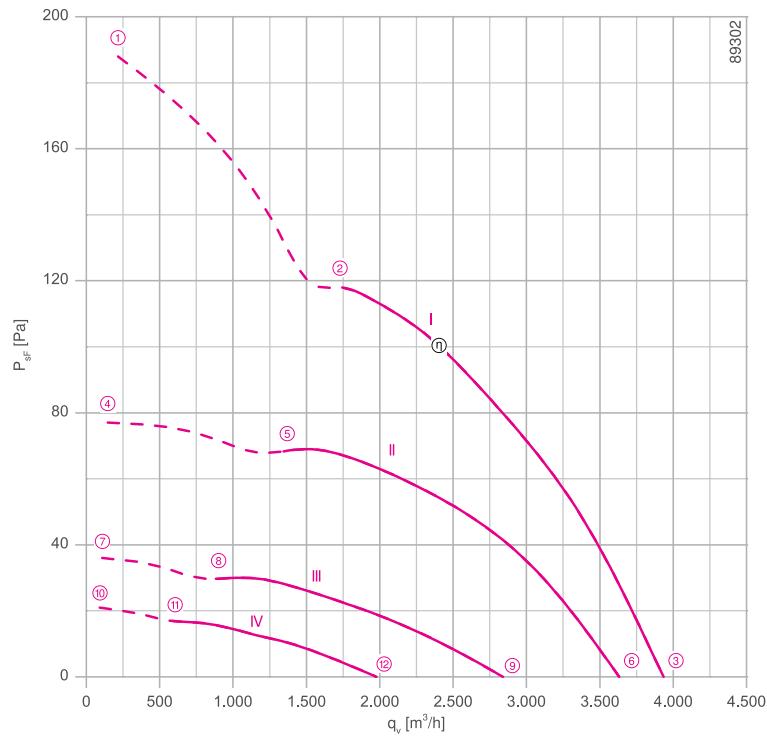

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

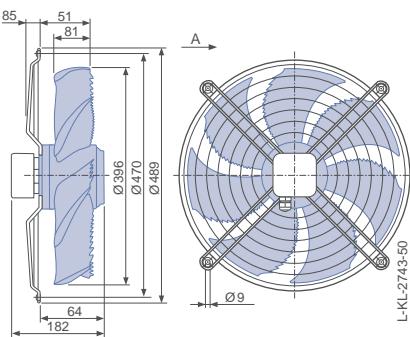

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

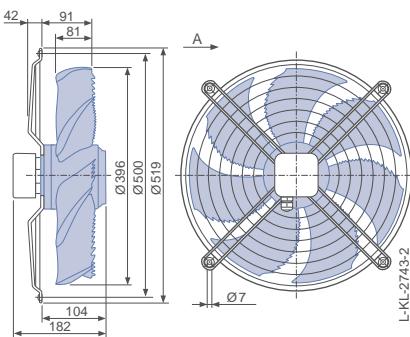

Design L - round full bell mouth, guard grille suction side

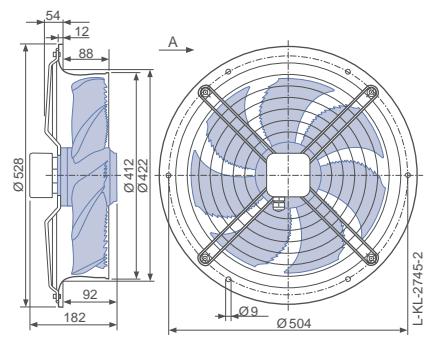

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN040-4E_.0F._7P1	I	230	①	1.30	300	1260	
		230*	②	1.05*	240*	1340*	73
		230	③	0.80	180	1410	69
	II	170	④	1.35	220	810	
		170	⑤	1.20	200	1030	69
		170	⑥	0.86	150	1310	67
	III	135	⑦	1.10	150	550	
		135	⑧	1.10	140	690	57
		135	⑨	0.96	130	1020	61
	IV	110	⑩	0.94	100	430	
		110	⑪	0.92	95	510	50
		110	⑫	0.88	95	710	53


*rated data

Fan ordering information

Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN040-4EW.0F.A7P1 156650	FN040-4ED.0F.A7P1 152722	FN040-4EL.0F.A7P1 152723	FN040-4EK.0F.V7P1 152728	FN040-4EI.0F.V7P1 152726	FN040-4EH.0F.V7P1 152727	
Weight kg	5.60	5.10	7.80	5.50	5.10	7.80	

Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

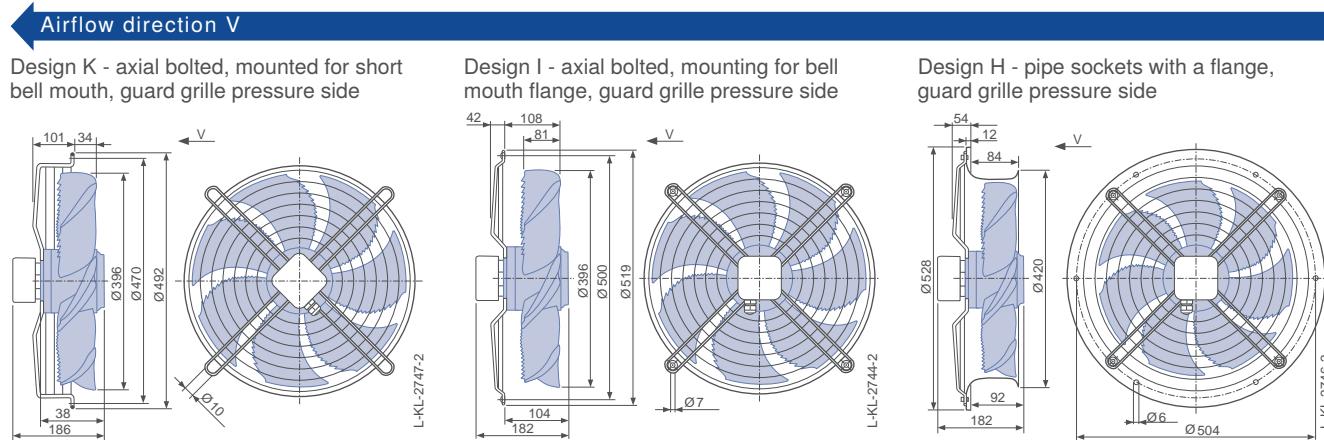

FE2owlet

for single phase alternating current, 4 pole

FNO40-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_i : 260 W*
Rated current I_N : 1.15 A*
Rated speed n_N : 1320 min $^{-1}$ *
Starting current I_A : 2.40 A
Current increase ΔI : 10 %
Service capacitor C_{400V} : 5.0 μF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -25 °C
Max. permitted ambient temperature $t_{R(\max)}$: 55 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 30.0 %

Efficiency: $N_{\text{actual}} = 40.1 / N_{\text{target}} = 40^{**}$



* Rated data

**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

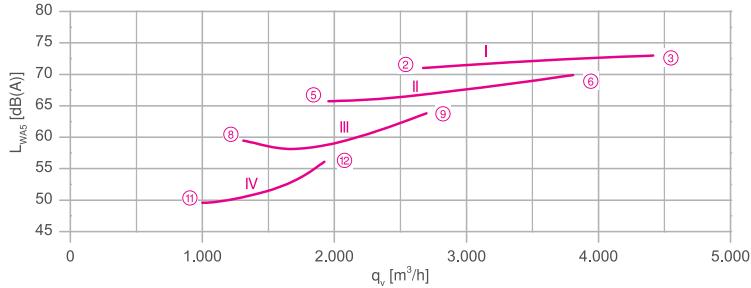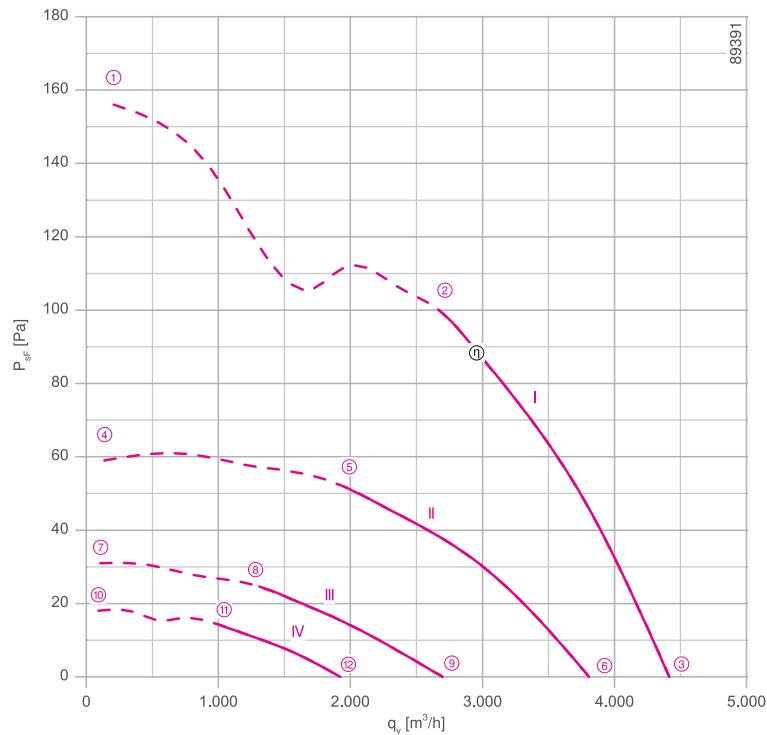


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

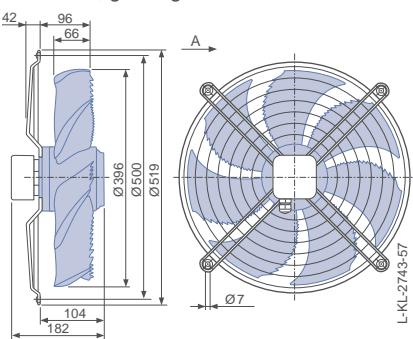

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side


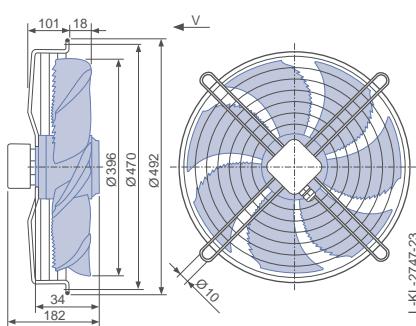


Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN040-4E_.0F._7P2	I	230	①	1.45	330	1190	
		230*	②	1.15*	260*	1320*	71
		230	③	0.92	210	1380	73
	II	170	④	1.35	220	730	
		170	⑤	1.25	210	960	66
		170	⑥	1.05	180	1200	70
	III	135	⑦	1.10	150	540	
		135	⑧	1.10	140	660	59
		135	⑨	1.05	140	850	64
	IV	110	⑩	0.92	95	420	
		110	⑪	0.92	95	500	50
		110	⑫	0.90	95	610	56

*rated data

Fan ordering information

Airflow direction A	Airflow direction V
Design	D (guard grille suction side) K (guard grille pressure side)
	 
Type	FN040-4ED.0F.A7P2
Article no.	156231
Weight kg	5.10
	5.70

Control technology

Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components

Control
technology

Appendix

FE2owlet

for single phase alternating current, 6 pole

FNO40-6E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V ±10 %^{*}
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 130 W*
Rated current I_N : 0.60 A*
Rated speed n_N : 950 min⁻¹*
Starting current I_A : 1.20 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 5.0 μ F

Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact



Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black

Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

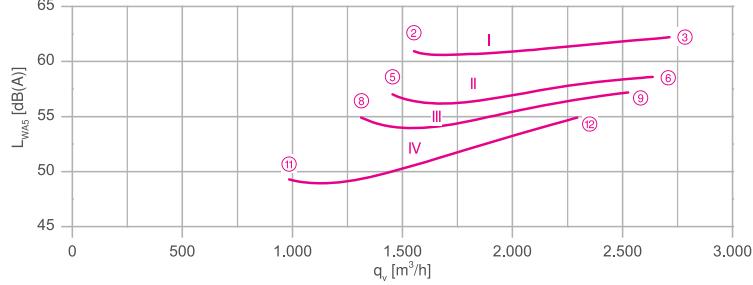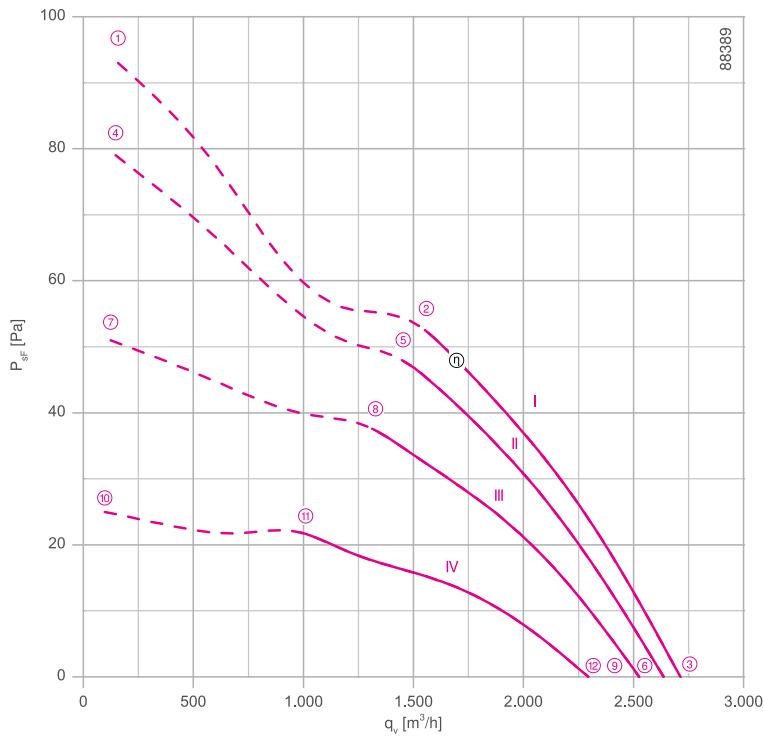

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

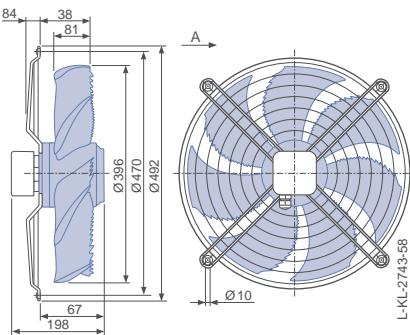

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

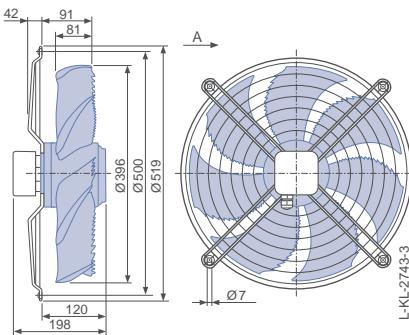

Design L - round full bell mouth, guard grille suction side

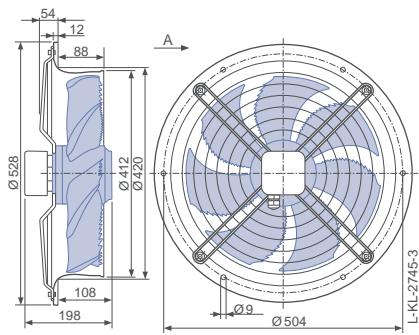

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN040-6E_0F_7P1	I	230	①	0.64	140	930	
		230*	②	0.60*	130*	950*	61
		230	③	0.56	120	970	62
	II	170	④	0.56	95	860	
		170	⑤	0.50	85	900	57
		170	⑥	0.42	70	940	59
	III	135	⑦	0.58	75	690	
		135	⑧	0.50	70	800	55
		135	⑨	0.40	55	900	57
	IV	110	⑩	0.52	55	490	
		110	⑪	0.50	55	610	49
		110	⑫	0.42	46	820	55

*rated data

Fan ordering information


Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN040-6EW.0F.A7P1 15290	FN040-6ED.0F.A7P1 152910	FN040-6EL.0F.A7P1 152911	FN040-6EK.0F.V7P1 152915	FN040-6EH.0F.V7P1 152914
Weight kg	5.70	5.10	7.80	5.50	7.80
					8.70

Control technology


Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

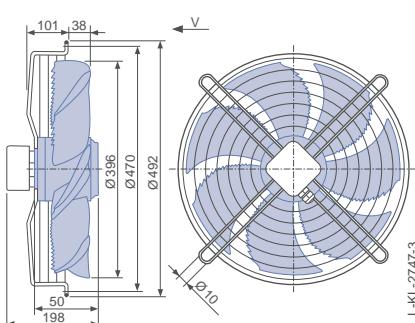

Design H - pipe sockets with a flange, guard grille pressure side

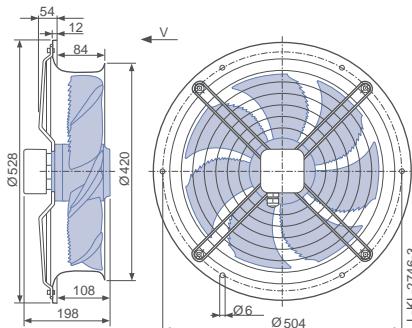

Design Q - square full bell mouth, guard grille pressure side

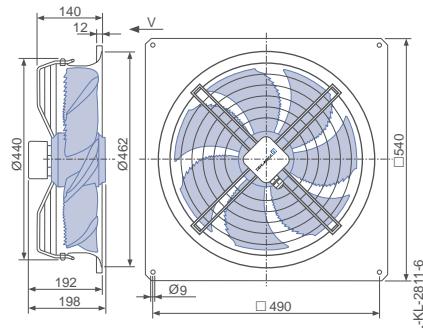

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN040-VD_0F_7P1	Δ	I	400	①	0.54	300	1310	
			400*	②	0.46*	230*	1360*	69
			400	③	0.40	170	1410	69
	Y	II	400	④	0.31	200	950	
			400*	⑤	0.27*	170*	1080*	64
			400	⑥	0.21	130	1230	65

*rated data

Fan ordering information


	Airflow direction A			Airflow direction V	
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type Article no.	FN040-VDW.0F.A7P1 156642	FN040-VDD.0F.A7P1 152902	FN040-VDL.0F.A7P1 152903	FN040-VDK.0F.V7P1 152907	FN040-VDI.0F.V7P1 152905
Weight kg	5.60	5.10	7.80	5.50	5.10
					7.80

Control technology


Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

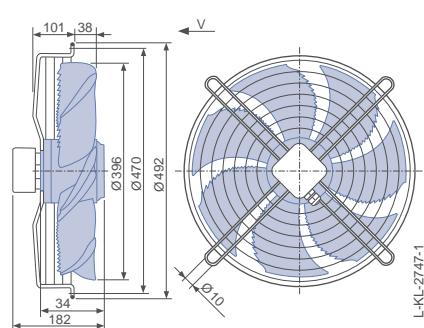

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

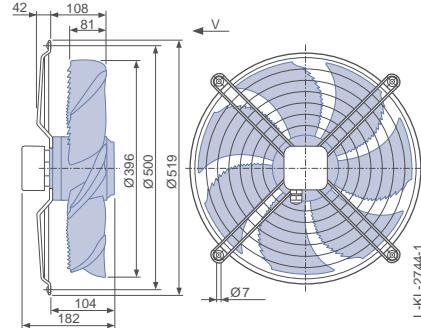

Design H - pipe sockets with a flange, guard grille pressure side

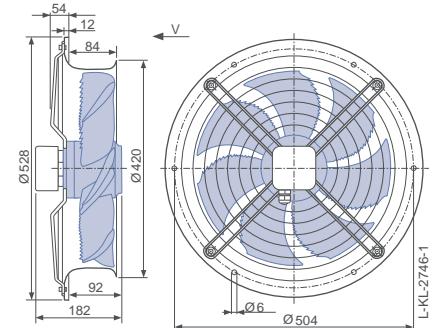

FE2owlet

for three phase alternating current, 4-4 pole

FNO40-VD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 260/180 W*
Rated current I_N : 0.50/0.29 A*
Rated speed n_N : 1340/1020 min⁻¹*
Starting current I_A : 1.60 / 0.55 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 31.9 %
Efficiency: $N_{actual} = 42.0 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

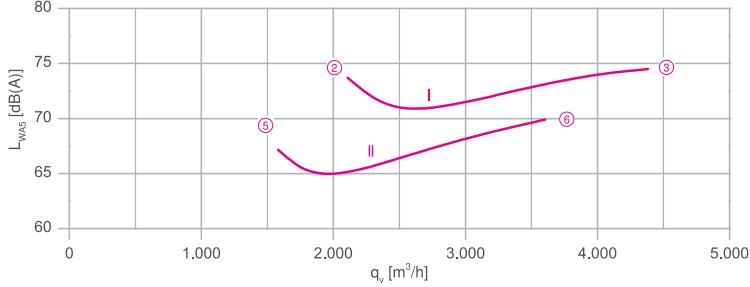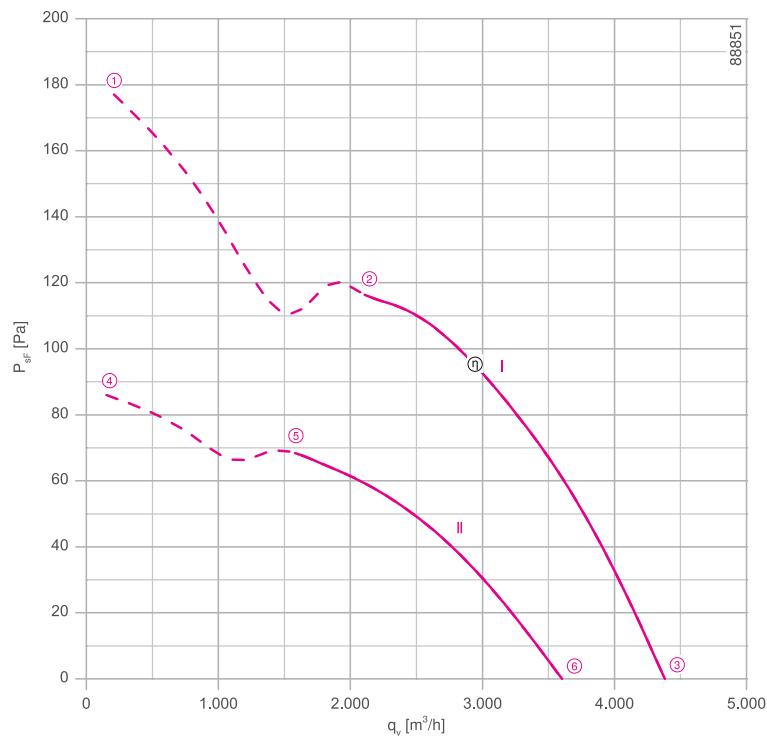


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

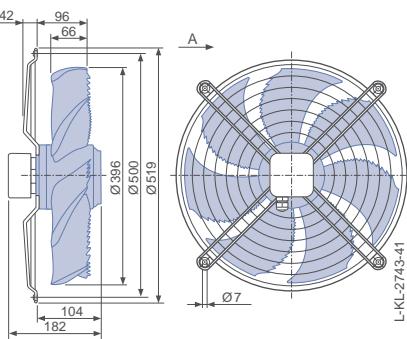

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side


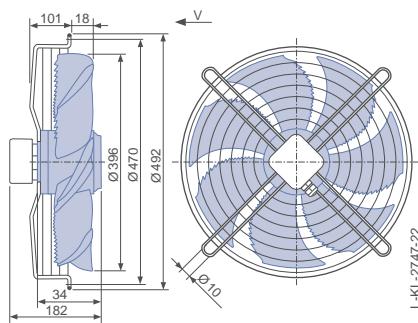


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN040-VD_.0F._7P2	Δ	I	400	①	0.56	330	1290	
			400*	②	0.50*	260*	1340*	74
			400	③	0.44	200	1390	75
	Y	II	400	④	0.32	200	900	
			400*	⑤	0.29*	180*	1020*	67
			400	⑥	0.24	150	1150	70

*rated data

Fan ordering information

Airflow direction A		Airflow direction V	
Design		D (guard grille suction side)	K (guard grille pressure side)
			
Type	FN040-VDD.0F.A7P2	FN040-VDK.0F.V7P2	
Article no.	156239	156244	
Weight kg	5.10	5.70	

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components

Control
technology

Appendix

FE2owlet

for single phase alternating current, 4 pole

FNO 42-4 E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 0.50 kW*

Rated current I_N : 2.30 A*

Rated speed n_N : 1400 min $^{-1}$ *

Current increase ΔI : 40 %

Service capacitor C_{400V} : 10.0 μF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, 1 coat paint, jet black

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 31.8 %

Efficiency: $N_{actual} = 40.2 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

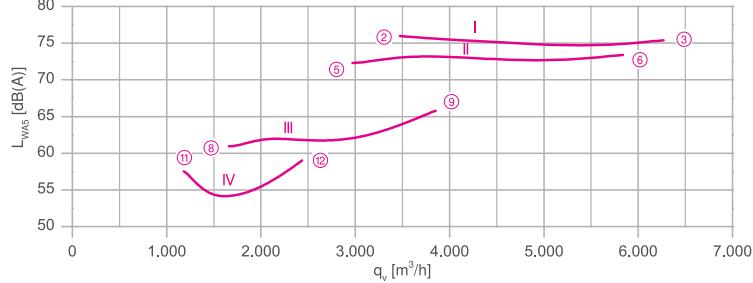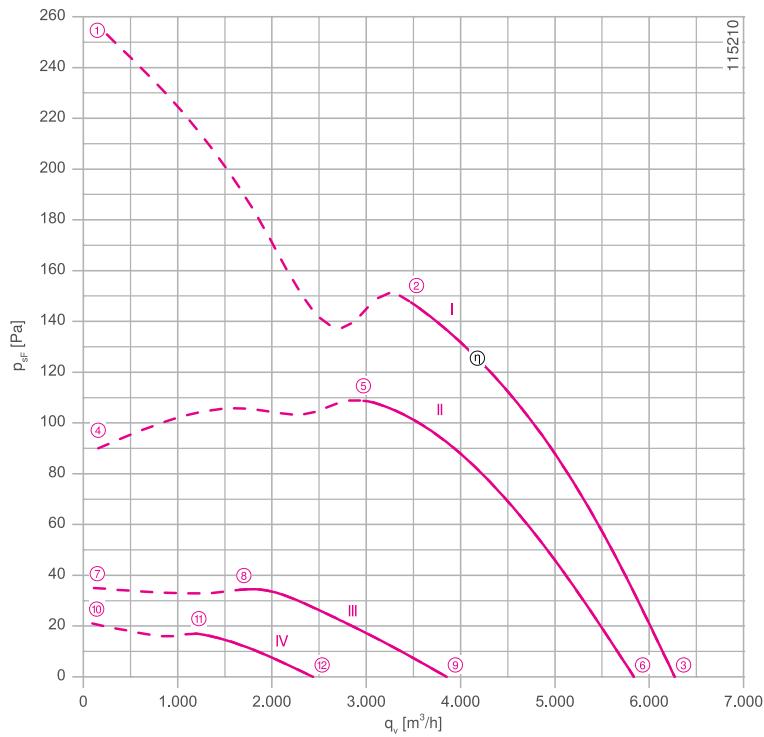

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XB


System components

Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

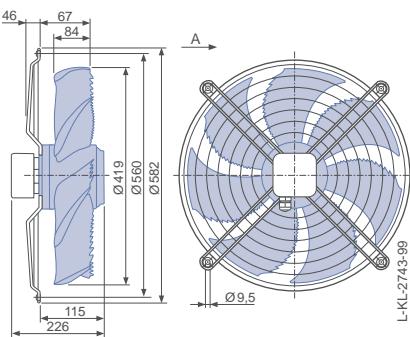

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

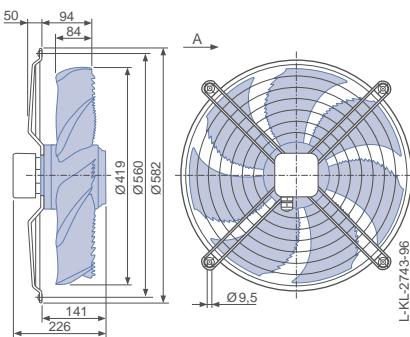

Design Q - square full bell mouth, guard grille suction side


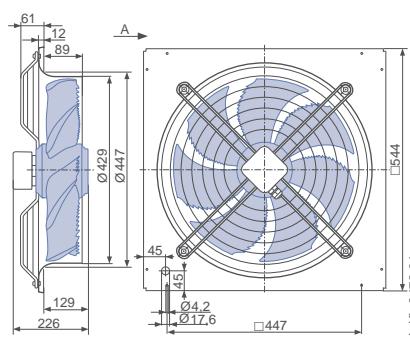


Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level
		U V		I A	P W	n min ⁻¹	L _{WAS} dB(A)
FN042-4E_4I_7P2	I	230	①	3.10	640	1340	
		230*	②	2.30*	500*	1400*	76
		230	③	1.95	420	1420	75
	II	170	④	4.20	580	790	
		170	⑤	3.00	460	1200	73
		170	⑥	2.30	370	1320	73
	III	135	⑦	3.40	370	500	
		135	⑧	3.30	370	680	61
		135	⑨	3.10	350	890	66
	IV	110	⑩	2.80	250	380	
		110	⑪	2.80	240	480	58
		110	⑫	2.70	240	560	59

*rated data

Fan ordering information

Airflow direction A			
Design	W (guard grille suction side)	D (guard grille suction side)	Q (guard grille suction side)
			
Type	FN042-4EW.4I.A7P2 171258	FN042-4ED.4I.A7P2 171257	FN042-4EQ.4I.A7P2 171259
Weight kg	11.90	12.10	15.60

Control technology

Frequency inverters Fcontrol 1~		Motor protection units 1~		Electronic voltage controllers 1~	
Page 474		Page 518		Page 492	

FE2owlet

for single phase alternating current, 6 pole

FNO42-6E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 120 W*

Rated current I_N : 0.56 A*

Rated speed n_N : 930 min⁻¹*

Starting current I_A : 1.20 A

Current increase ΔI : 0 %

Service capacitor C_{400V} : 4.0 µF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black



Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

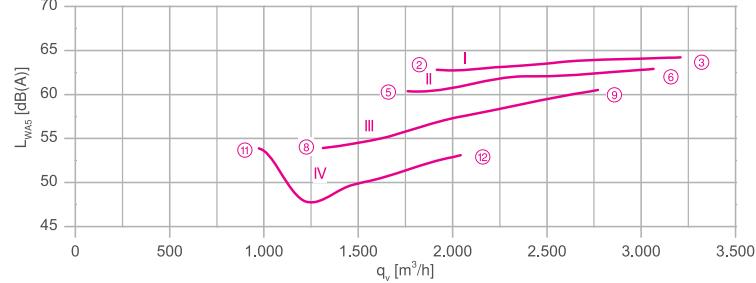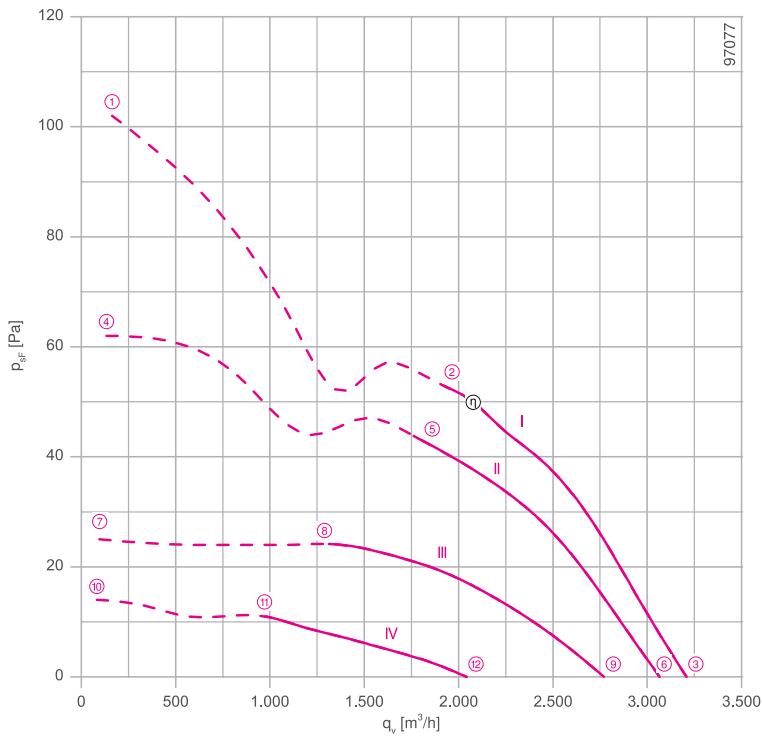

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram	Page
for airflow direction A	1360-104XB
for airflow direction V	1360-104XA

System components	Page
	430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

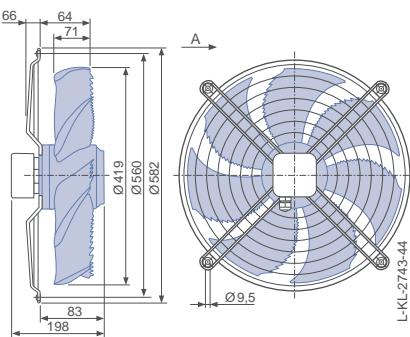

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

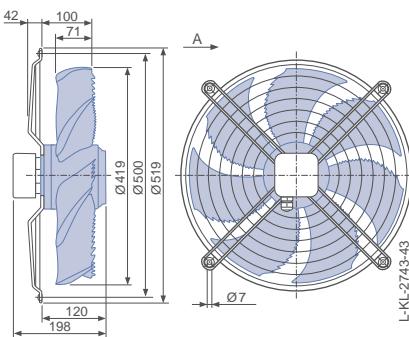

Design L - round full bell mouth, guard grille suction side

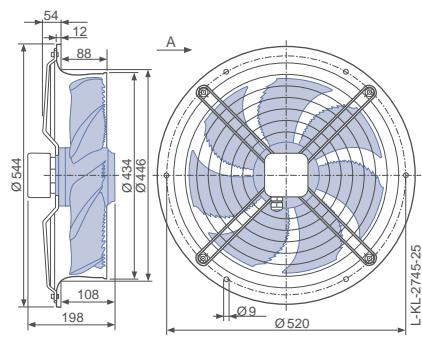

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN042-6E_.0F_.7P1	I	230	①	0.66	150	890	
		230*	②	0.56*	120*	930*	63
		230	③	0.50	110	950	64
	II	170	④	0.70	120	700	
		170	⑤	0.54	90	850	60
		170	⑥	0.42	70	920	63
	III	135	⑦	0.62	80	440	
		135	⑧	0.58	75	620	54
		135	⑨	0.46	60	830	61
	IV	110	⑩	0.52	55	330	
		110	⑪	0.52	55	420	52
		110	⑫	0.48	50	620	53

*rated data

Fan ordering information


Airflow direction A		Airflow direction V				
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	I (guard grille pressure side)	H (guard grille pressure side)	
Type Article no.	FN042-6EW.0F.A7P1 155780	FN042-6ED.0F.A7P1 155778	FN042-6EL.0F.A7P1 155779	FN042-6EI.0F.V7P1 155782	FN042-6EH.0F.V7P1 155783	
Weight kg	5.70	5.30	8.00	5.30	7.70	

Control technology


Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

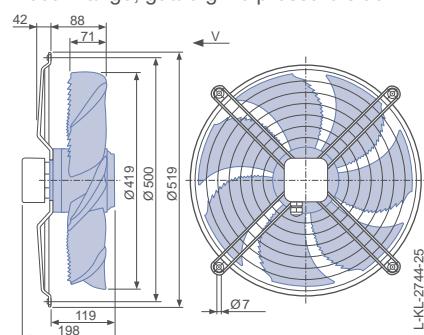

Design H - pipe sockets with a flange, guard grille pressure side

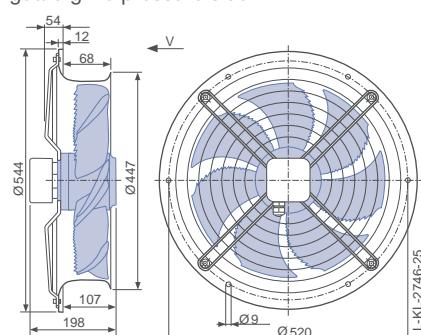

FE2owlet

for three phase alternating current, 4-4 pole

FNO 42-VD



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 280/190 W*

Rated current I_N : 0.58/0.31 A*

Rated speed n_N : 1340/1080 min⁻¹*

Starting current I_A : 1.90 / 0.65 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP44

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 31.3 %

Efficiency: $N_{actual} = 41.2 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

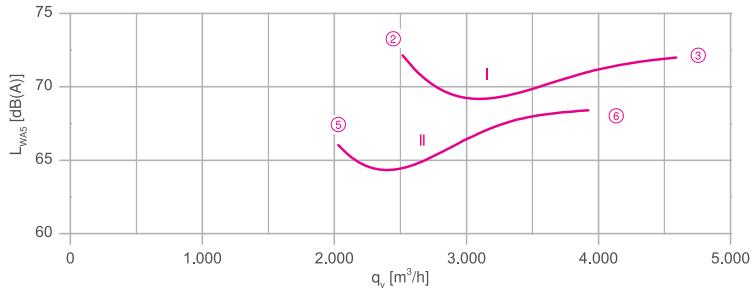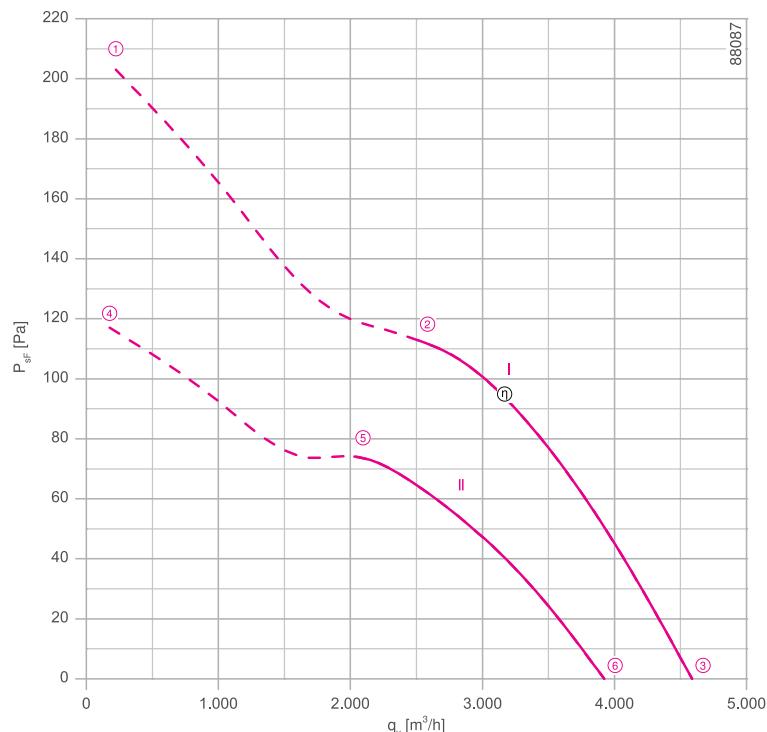

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

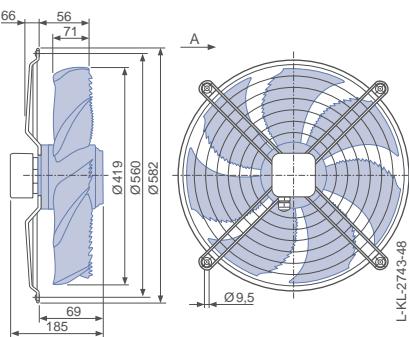

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

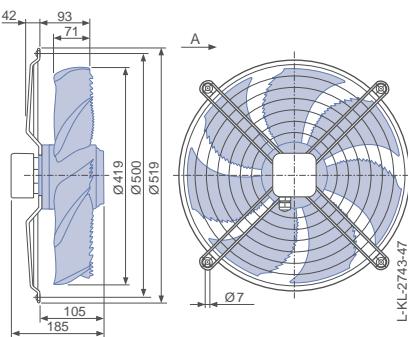

Design L - round full bell mouth, guard grille suction side

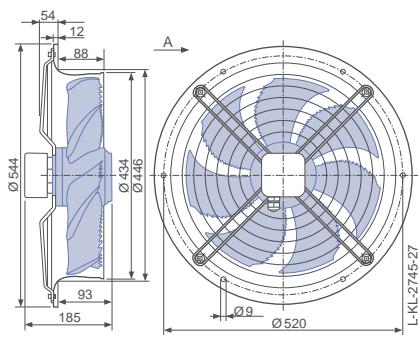


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN042-VD_2F_7P1	Δ	I	400	①	0.64	350	1290	
			400*	②	0.58*	280*	1340*	72
			400	③	0.52	220	1380	72
	Y	II	400	④	0.36	220	980	
			400*	⑤	0.31*	190*	1080*	66
			400	⑥	0.26	160	1190	68

*rated data

Fan ordering information


	Airflow direction A			Airflow direction V
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	I (guard grille pressure side)
				
Type Article no.	FN042-VDW.2F.A7P1 155773	FN042-VDD.2F.A7P1 155771	FN042-VDL.2F.A7P1 155772	FN042-VDI.2F.V7P1 155775
Weight kg	6.20	5.90	8.50	5.90
				8.20

Control technology


Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Airflow direction V

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

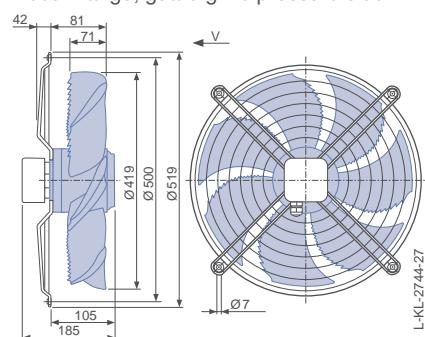

Design H - pipe sockets with a flange, guard grille pressure side

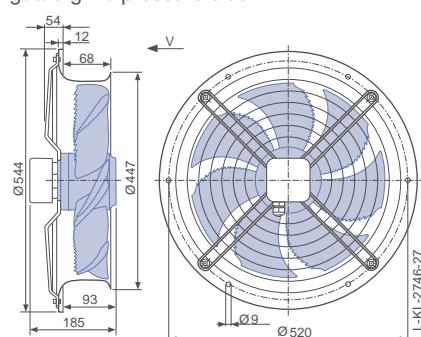

FE2owlet

for three phase alternating current, 6-6 pole



FNO42-SD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 130/80 W*
Rated current I_N : 0.35/0.15 A*
Rated speed n_N : 920/ 780 min⁻¹*
Starting current I_A : 0.85 / 0.26 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminum, 1 coat paint, jet black
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

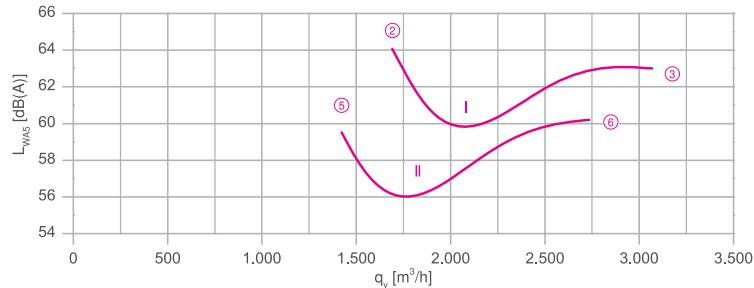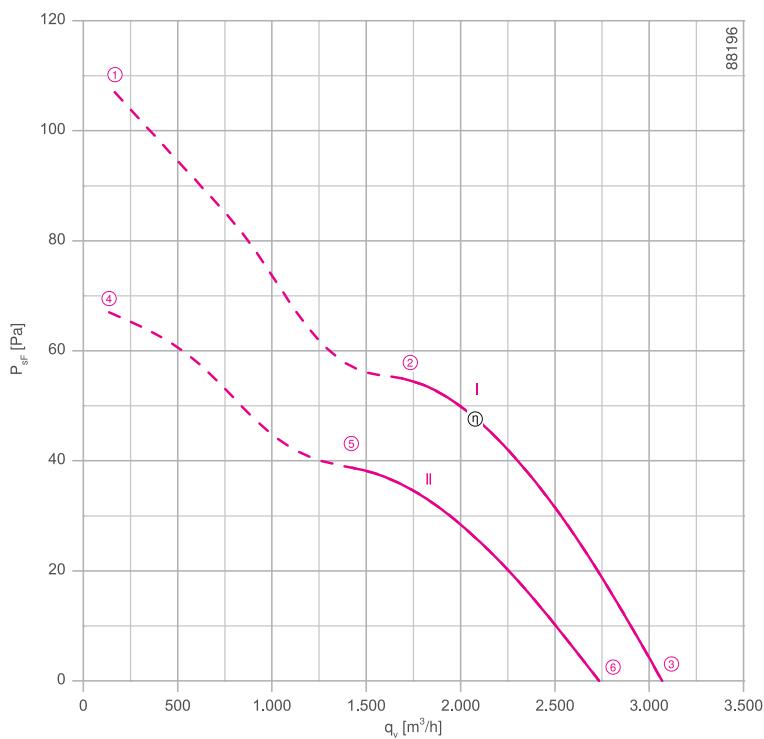

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

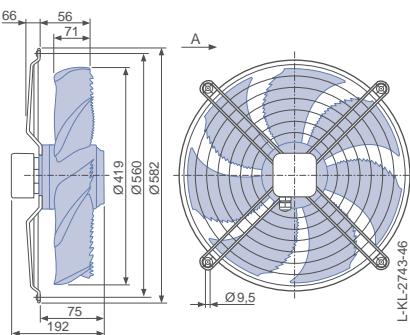

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

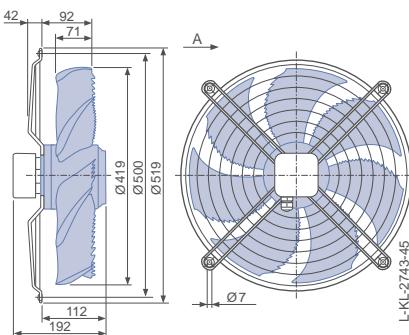

Design L - round full bell mouth, guard grille suction side

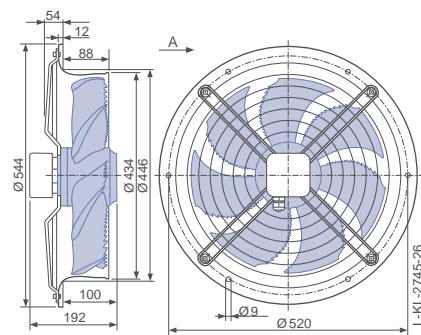

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN042-SD_.2C._7P1	Δ	I	400	①	0.37	150	890	
			400*	②	0.35*	130*	920*	64
			400	③	0.35	100	940	63
	Y	II	400	④	0.17	90	700	
			400*	⑤	0.15*	80*	780*	60
			400	⑥	0.13	60	850	60

*rated data

Fan ordering information


	Airflow direction A			Airflow direction V
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	I (guard grille pressure side)
				
Type Article no.	FN042-SDW.2C.A7P1 155787	FN042-SDD.2C.A7P1 155785	FN042-SDL.2C.A7P1 155786	FN042-SDI.2C.V7P1 155789
Weight kg	5.50	5.10	7.80	5.10
				7.00

Control technology


Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Airflow direction V

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

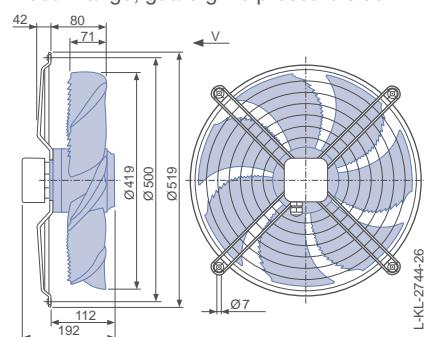

Design H - pipe sockets with a flange, guard grille pressure side

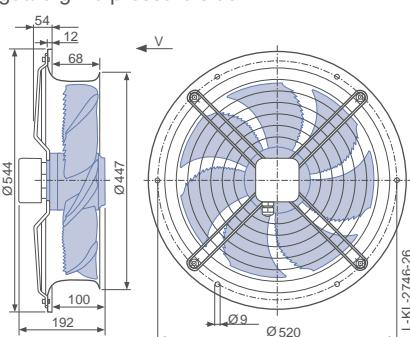

FE2owlet

for single phase alternating current, 4 pole

FNO 45-4 E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz*

Input power P_i : 0.60 kW*

Rated current I_N : 2.90 A*

Rated speed n_N : 1390 min⁻¹*

Starting current I_A : 6.50 A

Current increase ΔI : 25 %

Service capacitor C_{400V} : 14.0 µF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 34.0 %

Efficiency: $N_{actual} = 41.8 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

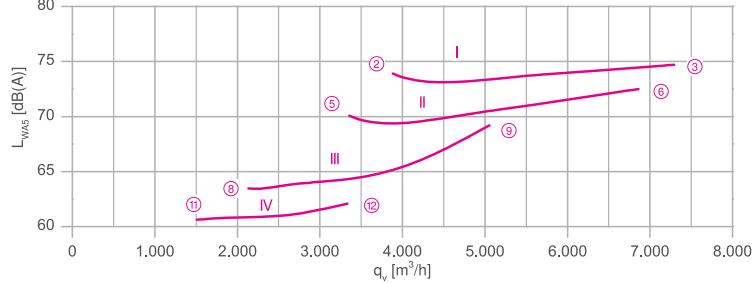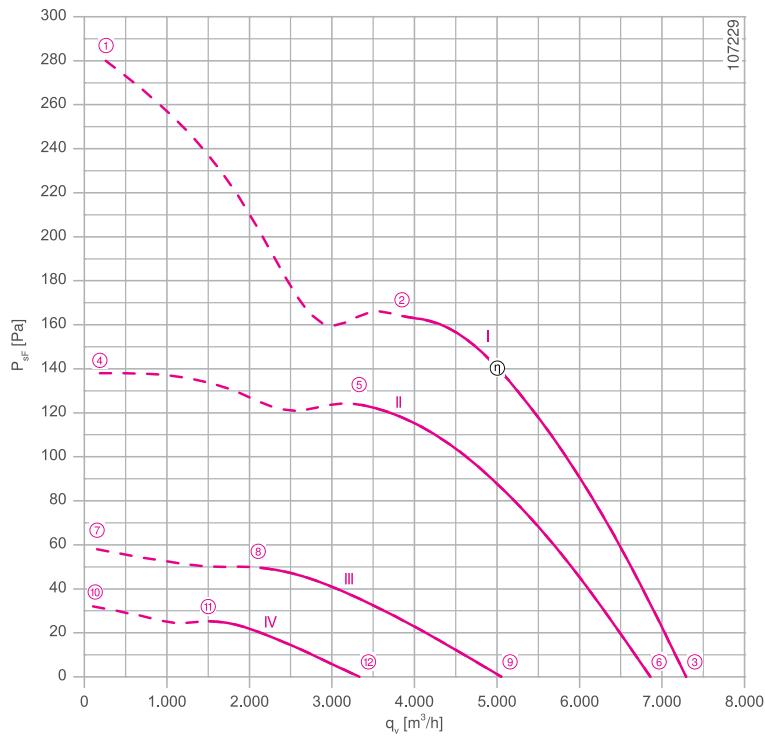

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

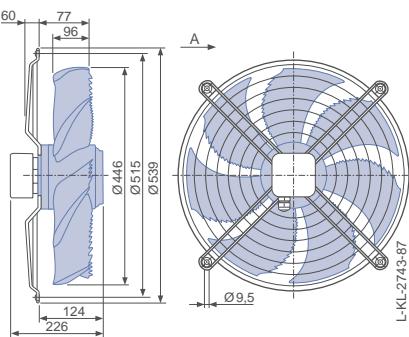


Design Q - square full bell mouth, guard grille suction side

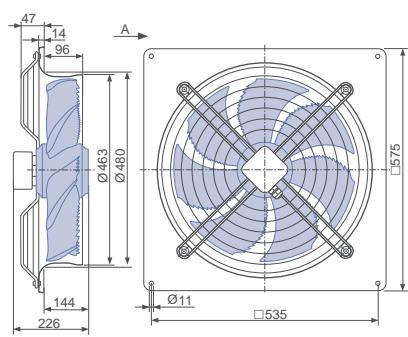

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

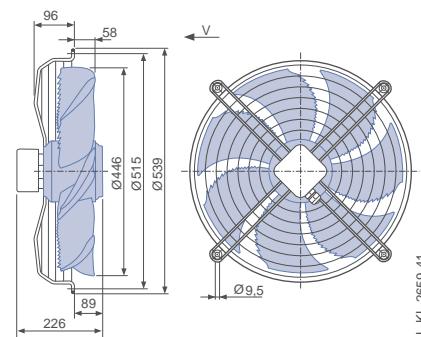

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN045-4E_4I_7P1	I	230	①	3.50	740	1350	
		230*	②	2.90*	600*	1390*	74
		230	③	2.40	500	1420	75
		170	④	4.40	620	940	
	II	170	⑤	3.50	540	1200	70
		170	⑥	2.70	420	1330	73
		135	⑦	3.70	390	610	
	III	135	⑧	3.50	390	760	64
		135	⑨	3.30	370	980	69
		110	⑩	3.00	250	450	
	IV	110	⑪	2.90	250	530	61
		110	⑫	2.90	250	650	62

*rated data


Fan ordering information

Airflow direction A		Airflow direction V		
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille) Q (guard grille pressure side)
Type	FN045-4EW.4I.A7P1	FN045-4EQ.4I.A7P1	FN045-4EK.4I.V7P1	FN045-4EF.4I.V7P1
Article no.	167870	167871	167804	167872
Weight kg	12.60	16.20	12.60	15.70
				16.30


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Design F - flange ring with two flanges,
without guard grille

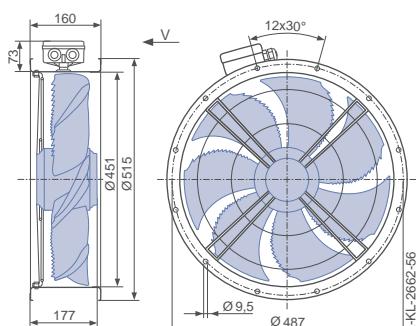

Design Q - square full bell mouth, guard grille pressure side

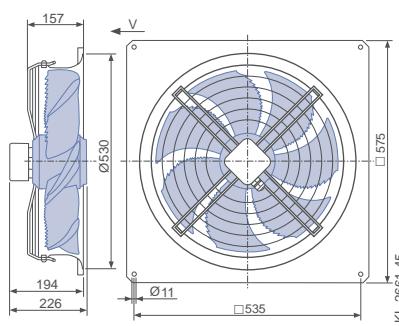

FE2owlet

for single phase alternating current, 6 pole

FNO45-6E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 120 W*

Rated current I_N : 0.50 A*

Rated speed n_N : 700 min⁻¹*

Starting current I_A : 0.65 A

Current increase ΔI : 0 %

Service capacitor C_{400V} : 3.0 μ F

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black



Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

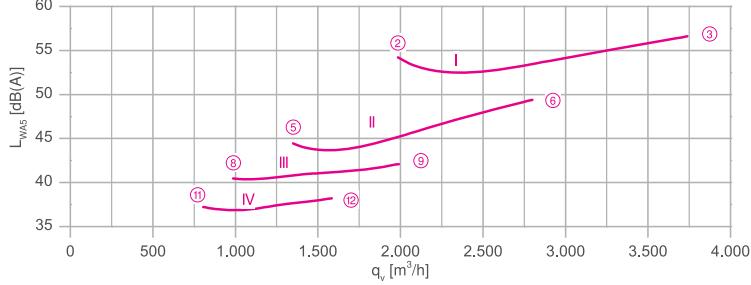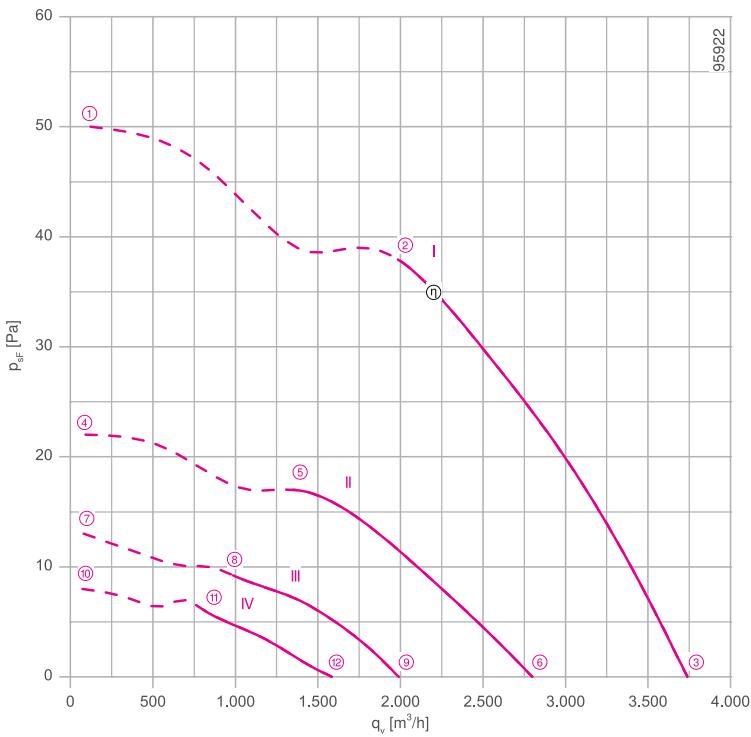

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

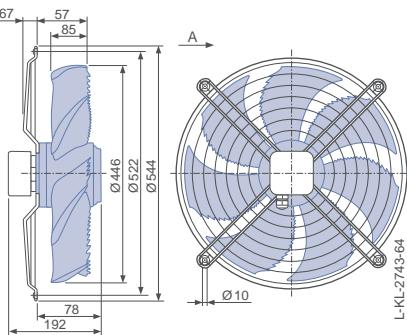

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

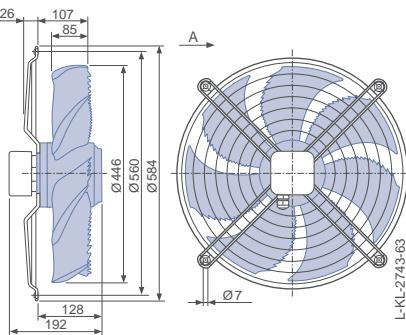

Design L - round full bell mouth, guard grille suction side

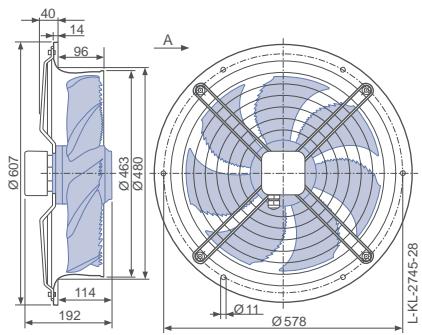

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN045-6E_.2F._7P3	I	230	①	0.56	130	570	54
		230*	②	0.50*	120*	700*	57
		230	③	0.46	100	790	57
	II	170	④	0.44	75	380	45
		170	⑤	0.42	75	480	49
		170	⑥	0.40	70	590	49
	III	135	⑦	0.35	48	280	40
		135	⑧	0.35	46	350	42
		135	⑨	0.34	46	430	42
	IV	110	⑩	0.29	32	220	37
		110	⑪	0.29	32	270	38
		110	⑫	0.29	32	330	38

*rated data

Fan ordering information


Airflow direction A		Airflow direction V					
Design	W (guard grille suction side)		D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)	H (guard grille pressure side)
Type Article no.	FN045-6EW.2F.A7P3 160038	FN045-6ED.2F.A7P3 160036	FN045-6EL.2F.A7P3 160037	FN045-6EK.2F.V7P3 160042	FN045-6EI.2F.V7P3 160040	FN045-6EH.2F.V7P3 160041	
Weight kg	6.30	6.10	9.50	6.50	6.10	9.50	

Control technology


Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

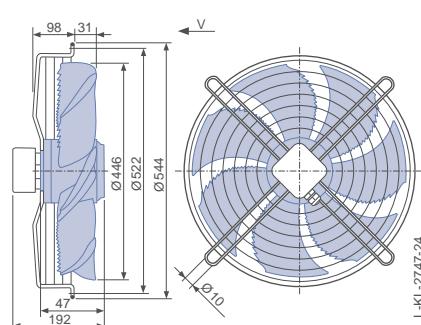

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

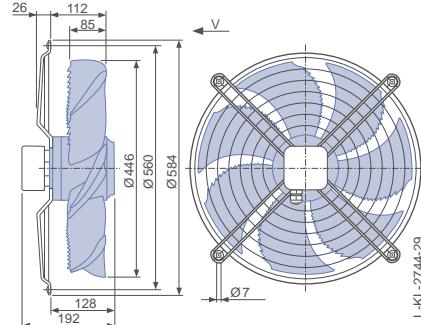

Design H - pipe sockets with a flange, guard grille pressure side

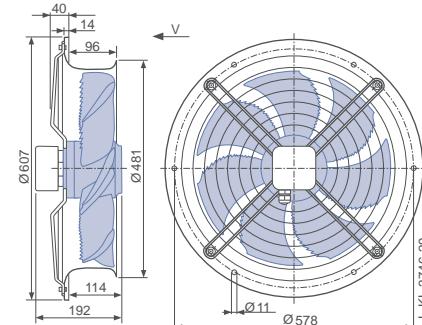

FE2owlet

for three phase alternating current, 4-4 pole

FNO 45-VD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.34/0.21 kW*
Rated current I_N : 0.64/0.34 A*
Rated speed n_N : 1280/ 970 min⁻¹*
Starting current I_A : 1.90 / 0.65 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 31.3 %
Efficiency: $N_{actual} = 40.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

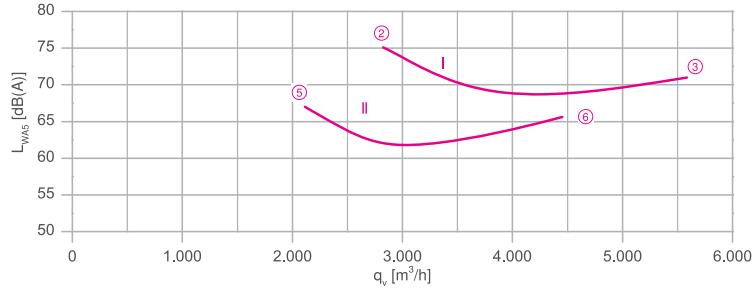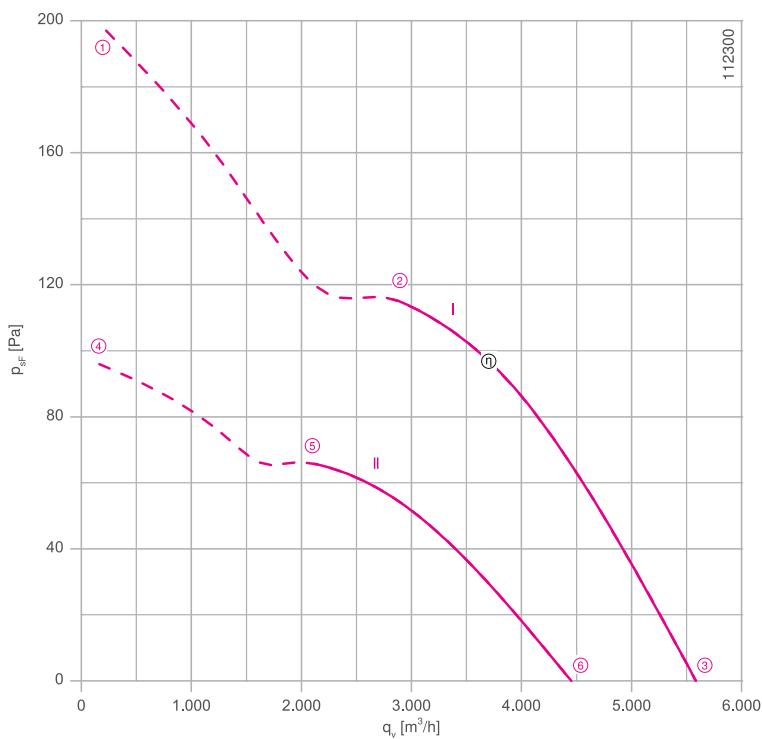

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram Page 531
for airflow direction A 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

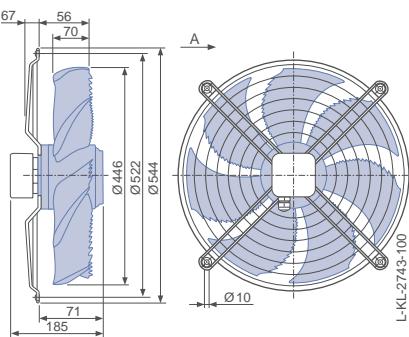

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

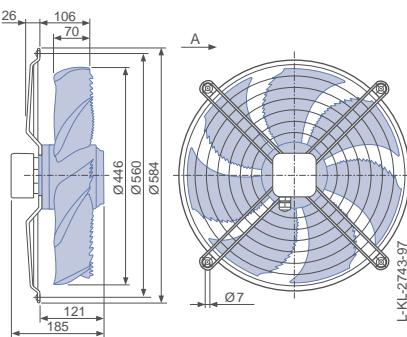

Design L - round full bell mouth, guard grille suction side

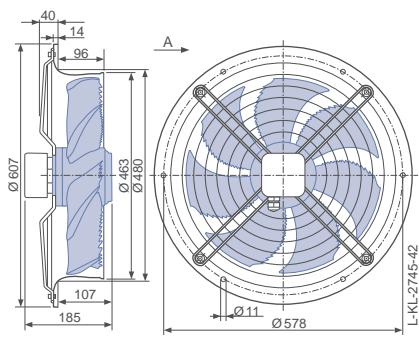

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN045-VD_.2F._7P2	Δ	I	400	①	0.74	440	1210	
			400*	②	0.62*	340*	1280*	75
			400	③	0.56	280	1330	71
	Y	II	400	④	0.39	250	840	
			400*	⑤	0.34*	210*	970*	67
			400	⑥	0.30	190	1070	66

*rated data

Fan ordering information


	Airflow direction A			Airflow direction V	
Design	W (guard grille suction side)	D (guard grille suction side)	L (guard grille suction side)	K (guard grille pressure side)	I (guard grille pressure side)
Type Article no.	FN045-VDW.2F.A7P2 170371	FN045-VDD.2F.A7P2 170370	FN045-VDL.2F.A7P2 170372	FN045-VDK.2F.V7P2 170368	FN045-VDI.2F.V7P2 170369
Weight kg	6.30	6.10	9.50	6.60	6.10
					FN045-VDH.2F.V7P2 170367

Control technology


Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

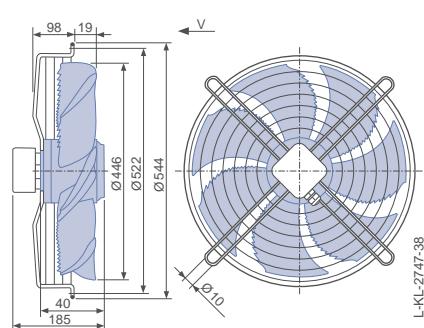

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

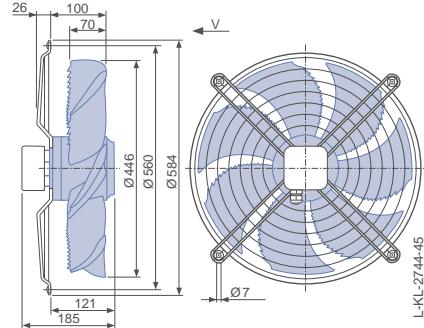

Design H - pipe sockets with a flange, guard grille pressure side

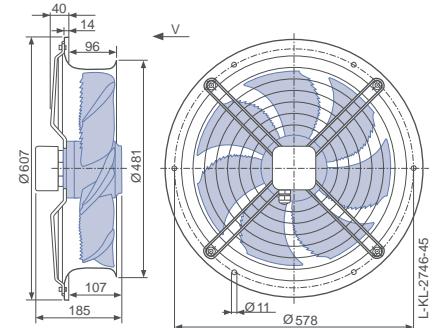

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN045-VD_.4F._7P1	Δ	I	400	①	1.30	680	1300	
			400*	②	1.10*	540*	1350*	74
			400	③	0.96	440	1390	74
	Y	II	400	④	0.76	420	900	
			400*	⑤	0.66*	360*	1020*	69
			400	⑥	0.60	330	1130	71

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)		
Type	FN045-VDW.4F.A7P1	FN045-VDQ.4F.A7P1	FN045-VDK.4F.V7P1	FN045-VDF.4F.V7P1		
Article no.	153504	140106	140110	140118	140538	140114
Weight kg	11.00	14.60	11.00	14.20	14.50	14.40


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design F - flange ring with two flanges, without guard grille

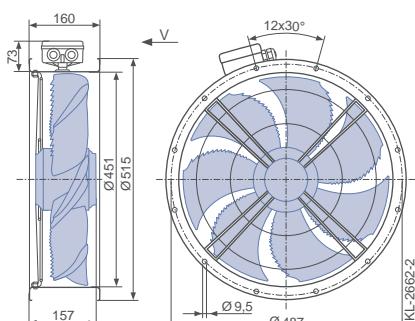

Design F - flange ring with two flanges, guard grille pressure side

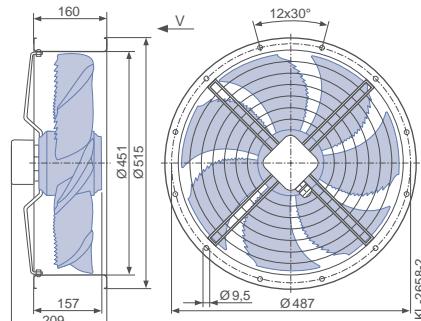


Design Q - square full bell mouth, guard grille pressure side

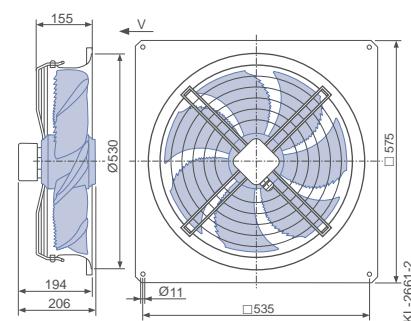

FE2owlet

for three phase alternating current, 6-6 pole

FNO45-SD

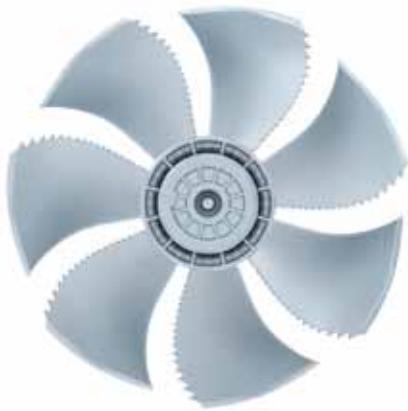



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 180/100 W*
Rated current I_N : 0.50/0.24 A*
Rated speed n_N : 900/ 630 min⁻¹*
Starting current I_A : 1.10 / 0.32 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 29.0 %
Efficiency: $N_{actual} = 40.0 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

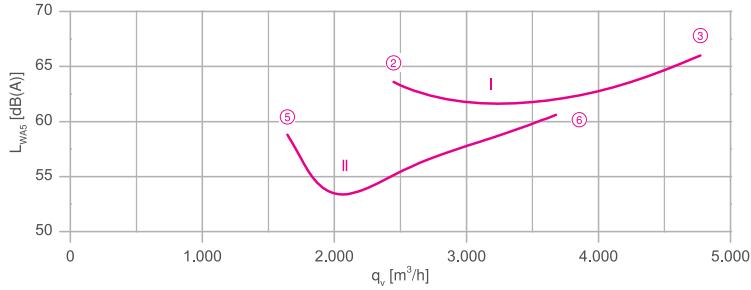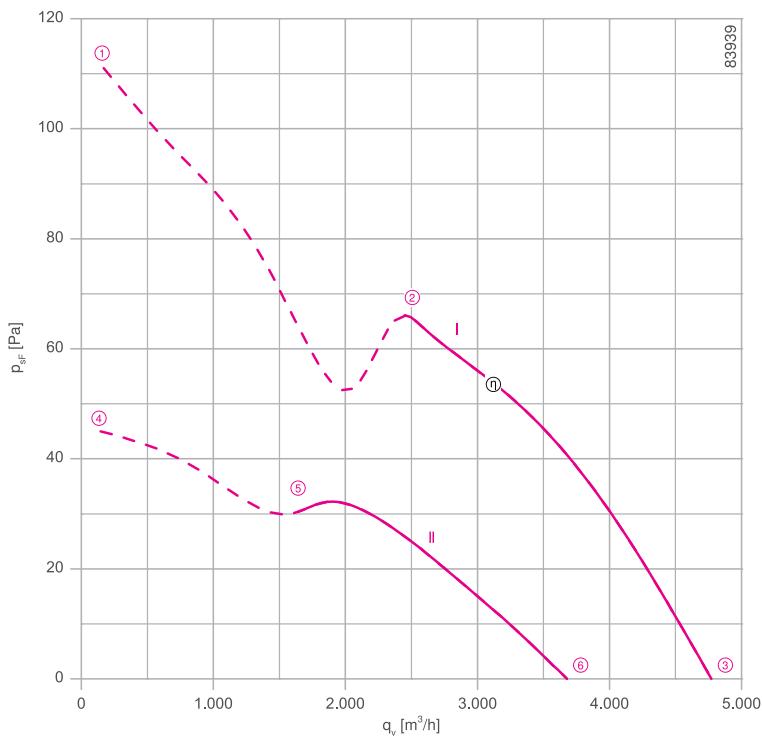


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

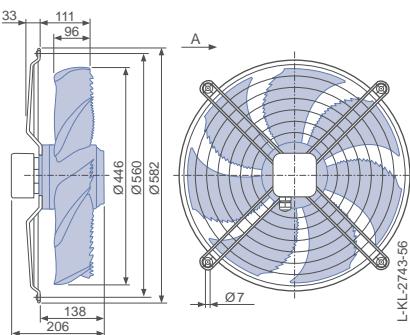


Design Q - square full bell mouth, guard grille suction side

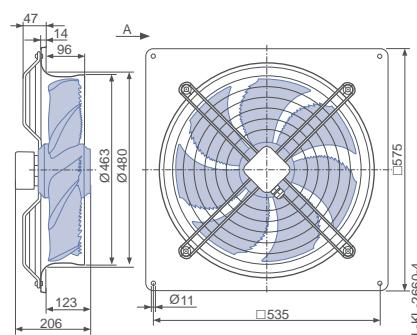

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

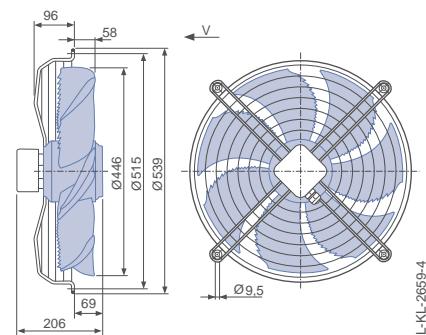

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN045-SD_.4F._7P1	Δ	I	400	①	0.56	220	860	
			400*	②	0.50*	180*	900*	64
			400	③	0.46	150	920	66
	Y	II	400	④	0.27	110	550	
			400*	⑤	0.24*	100*	630*	59
			400	⑥	0.24	95	710	61

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V			
Design	D (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)		
Design	F (guard grille pressure Q (guard grille pressure side))					
Type	FN045-SDD.4F.A7P1	FN045-SDQ.4F.A7P1	FN045-SDK.4F.V7P1	FN045-SDF.4F.V7P1	FN045-SDF.4F.V7P1	FN045-SDQ.4F.V7P1
Article no.	155139	140108	140112	140120	140540	140116
Weight kg	10.70	14.60	11.00	14.20	14.50	14.40


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design F - flange ring with two flanges, without guard grille

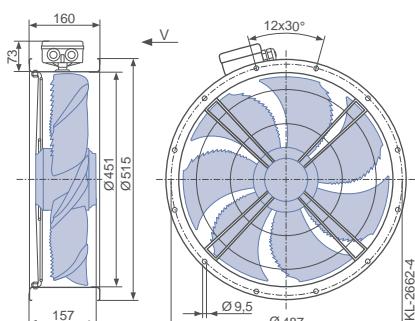

Design F - flange ring with two flanges, guard grille pressure side

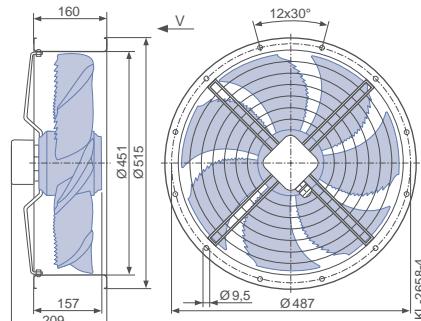


Design Q - square full bell mouth, guard grille pressure side

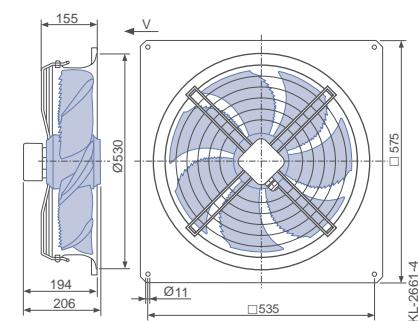

FE2owlet

for single phase alternating current, 4 pole

FNO50-4E

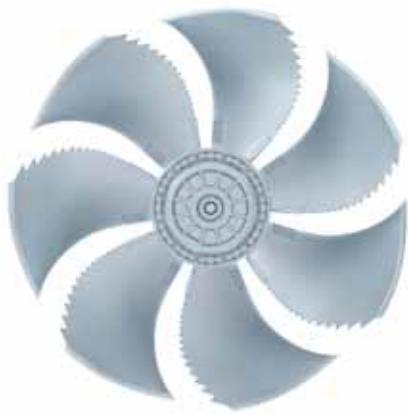

Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.72 kW*
Rated current I_N : 3.20 A*
Rated speed n_N : 1240 min $^{-1}$ *
Starting current I_A : 6.50 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 16.0 μF
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54

Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE



ErP-data

Efficiency η_{statA} : 32.9 %
Efficiency: $N_{actual} = 40.3 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

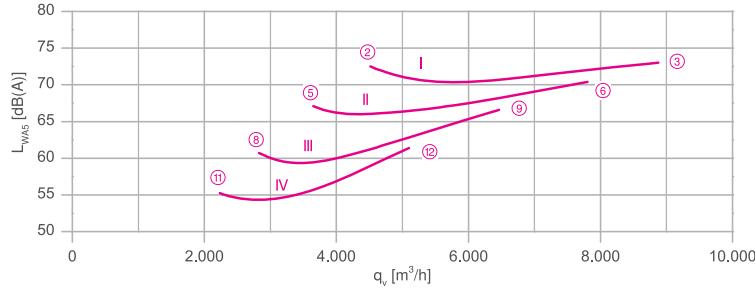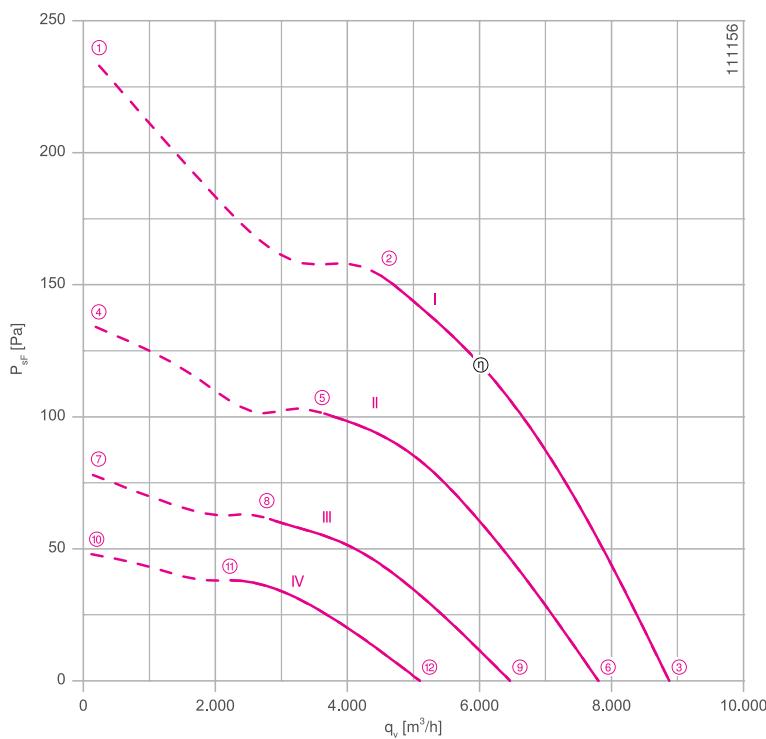


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

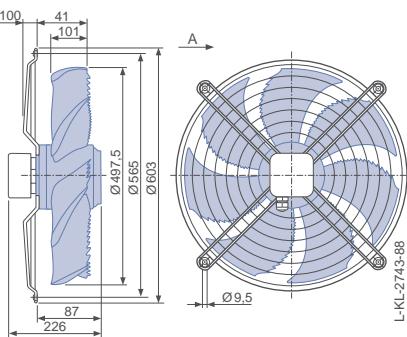


Design Q - square full bell mouth, guard grille suction side

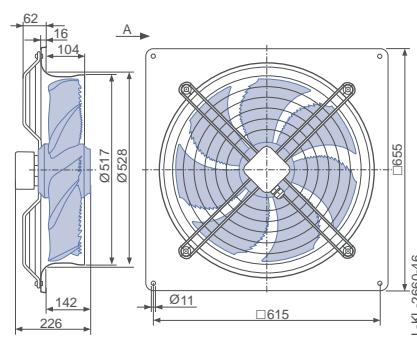

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

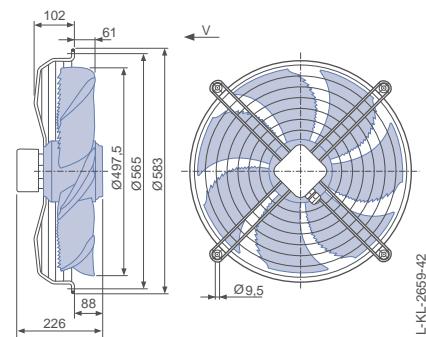

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN050-4E_4I_7	I	230	①	3.70	840	1150	
		230*	②	3.20*	720*	1240*	73
		230	③	2.60	600	1320	73
	II	170	④	3.50	580	880	
		170	⑤	3.20	520	1010	67
		170	⑥	2.70	460	1160	70
	III	135	⑦	3.10	390	660	
		135	⑧	2.90	380	780	61
		135	⑨	2.60	350	960	67
	IV	110	⑩	2.60	270	520	
		110	⑪	2.60	270	620	55
		110	⑫	2.40	260	760	61

*rated data


Fan ordering information

Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure Q (guard grille pressure side))
Type	FN050-4EW.4I.A7P1	FN050-4EQ.4I.A7P1	FN050-4EK.4I.V7P1	FN050-4EF.4I.V7P1	FN050-4EF.4I.V7P1
Article no.	167953	167952	167956	167957	167958
Weight kg	13.80	20.10	13.30	16.80	17.50
	18.30				


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design F - flange ring with two flanges, without guard grille

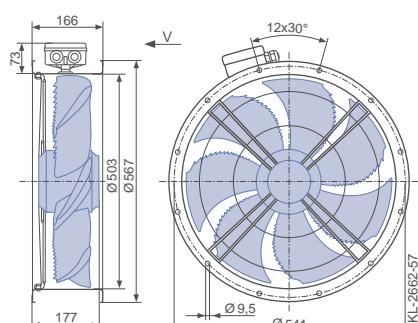

Design F - flange ring with two flanges, guard grille pressure side

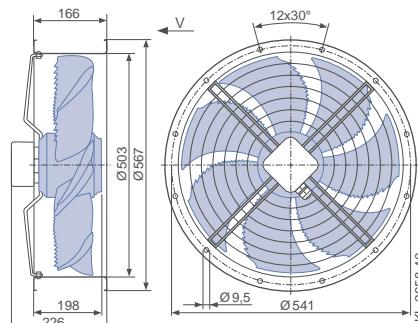


Design Q - square full bell mouth, guard grille pressure side

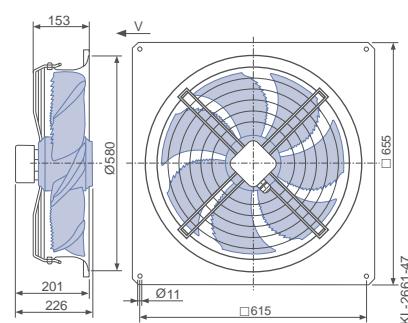

FE2owlet

for single phase alternating current, 6 pole

FN050-6E

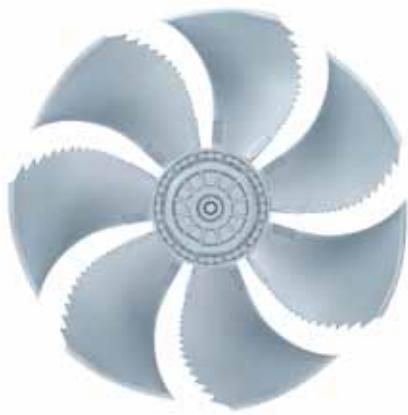



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 270 W*
Rated current I_N : 1.25 A*
Rated speed n_N : 900 min $^{-1}$ *
Starting current I_A : 2.60 A
Current increase ΔI : 15 %
Service capacitor C_{400V} : 5.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 30.4 %
Efficiency: $N_{actual} = 40.6 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

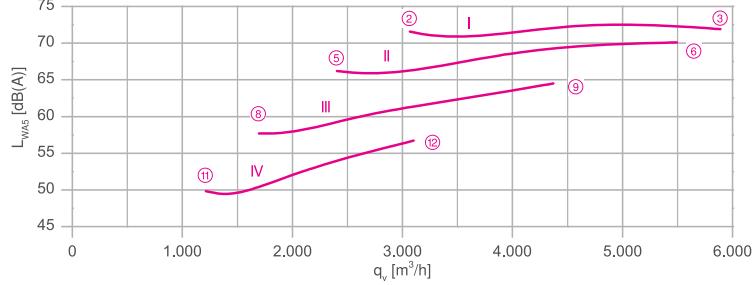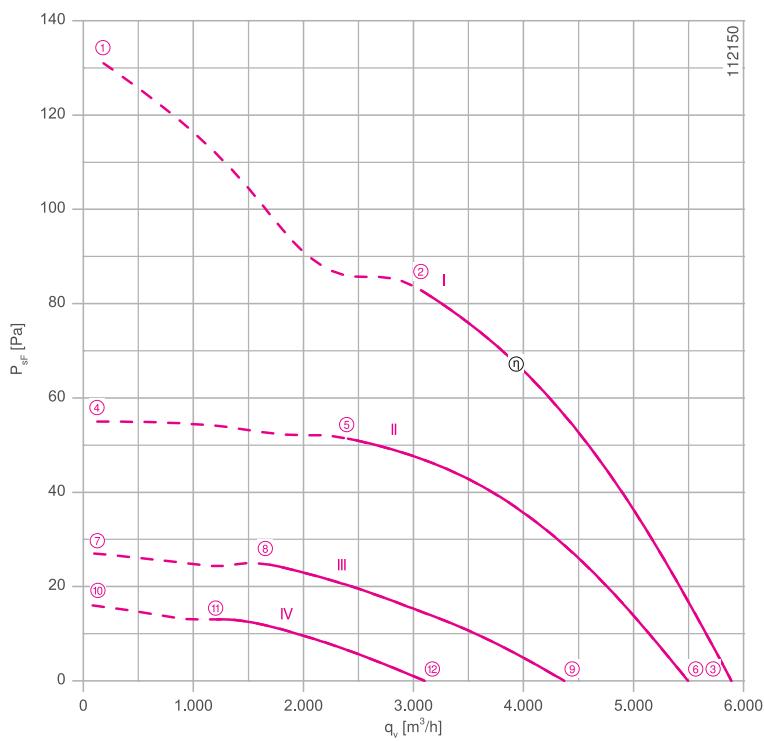


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A


Design W - axial bolted, mounting for short bell mouth, guard grille suction side

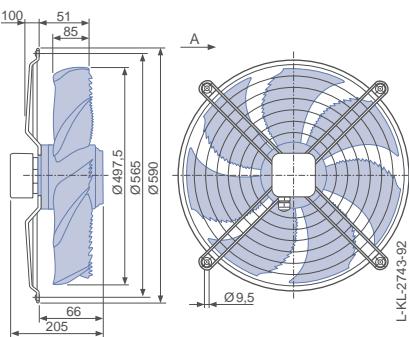

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

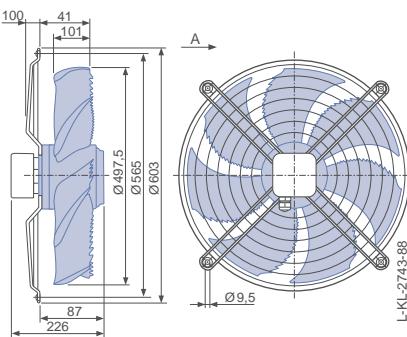

Design Q - square full bell mouth, guard grille suction side

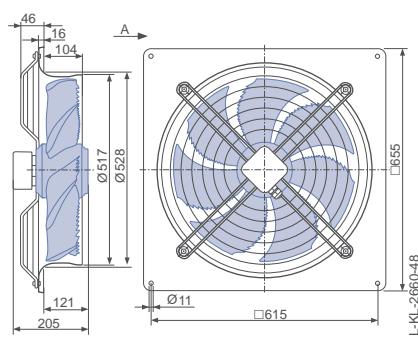

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN050-6E_.4F._7P3	I	230	①	1.60	340	830	
		230*	②	1.25*	270*	900*	72
		230	③	0.94	200	940	72
	II	170	④	1.60	240	550	
		170	⑤	1.40	210	710	66
		170	⑥	0.98	160	880	70
	III	135	⑦	1.35	150	380	
		135	⑧	1.30	150	490	58
		135	⑨	1.15	140	710	65
	IV	110	⑩	1.10	100	290	
		110	⑪	1.10	100	360	50
		110	⑫	1.05	100	500	57

*rated data


Fan ordering information

Airflow direction A		Airflow direction V			
Design		W (guard grille suction side)	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)
Type Article no.	FN050-6EW.4F.A7P3 167961	FN050-4EW.4I.A7P1 167953	FN050-6EQ.4F.A7P3 167960	FN050-6EK.4F.V7P3 167964	F (without guard grille) FN050-6EF.4F.V7P3 167965
Weight kg	11.10	13.80	18.60	10.60	14.10
					14.80


Control technology

Frequency inverters Econtrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492


Airflow direction V
Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

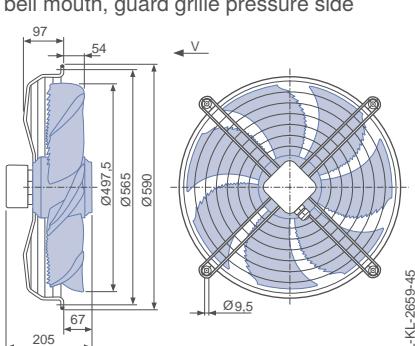

Design F - flange ring with two flanges, without guard grille

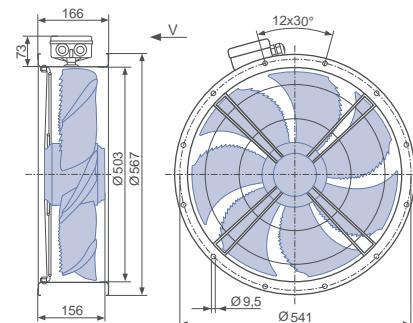


Design F - flange ring with two flanges, guard grille pressure side

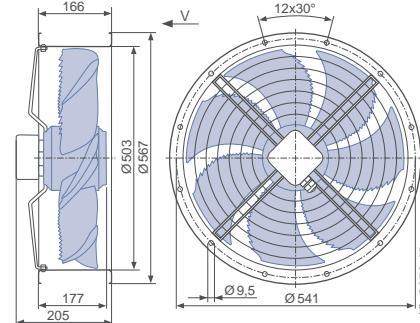

FE2owlet

for single phase alternating current, 8 pole

FNO50-8E

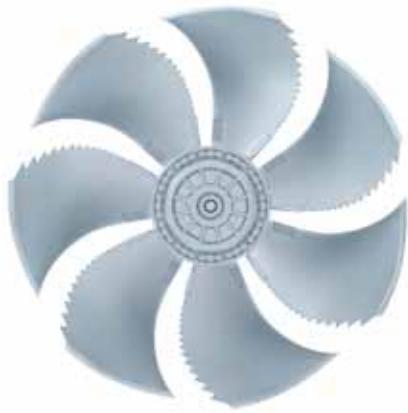



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 130 W*
Rated current I_N : 0.62 A*
Rated speed n_N : 640 min $^{-1}$ *
Starting current I_A : 1.00 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 2.5 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: CE

ErP-data

Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

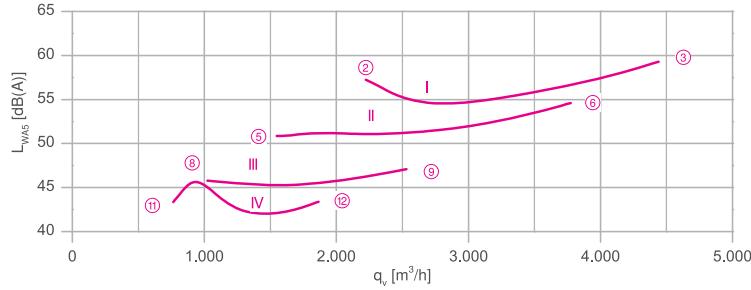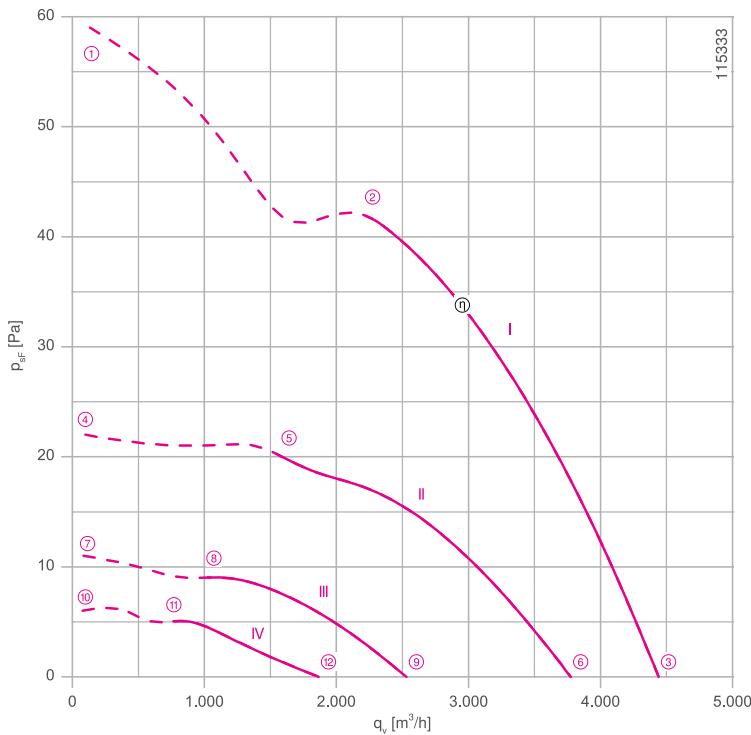

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, guard grille suction side

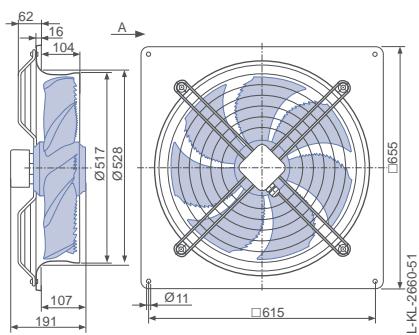


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

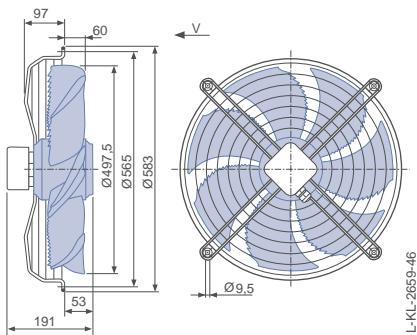

Design F - flange ring with two flanges, without guard grille

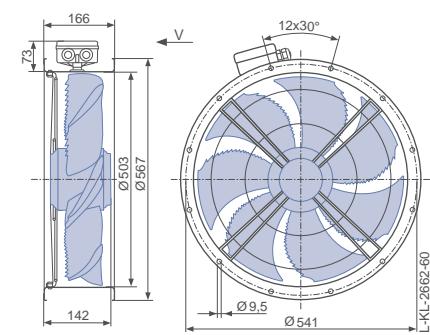

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WA5} dB(A)
FN050-8E_.4C._7P1	I	230	①	0.74	150	580	57
		230*	②	0.62*	130*	630*	59
		230	③	0.52	110	680	59
	II	170	④	0.66	100	360	51
		170	⑤	0.64	95	440	51
		170	⑥	0.54	85	580	55
	III	135	⑦	0.54	65	250	46
		135	⑧	0.54	65	300	46
		135	⑨	0.52	60	390	47
	IV	110	⑩	0.46	42	190	43
		110	⑪	0.44	42	220	43
		110	⑫	0.44	42	290	43

*rated data


Fan ordering information

Airflow direction A		Airflow direction V		
Design	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure Q (guard grille pressure side))
Type Article no.	FN050-8EQ.4C.A7P1 171237	FN050-8EK.4C.V7P1 171233	FN050-8EF.4C.V7P1 171235	FN050-8EF.4C.V7P1 171232
Weight kg	16.90	10.10	13.60	14.30
				14.60


Control technology

Frequency inverters Econtrol 1~		Motor protection units 1~		Electronic voltage controllers 1~	
	Page 474		Page 518		Page 492

Design F - flange ring with two flanges,
guard grille pressure side

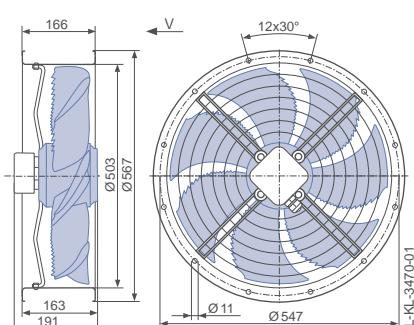


Design Q - square full bell mouth, guard grille pressure side

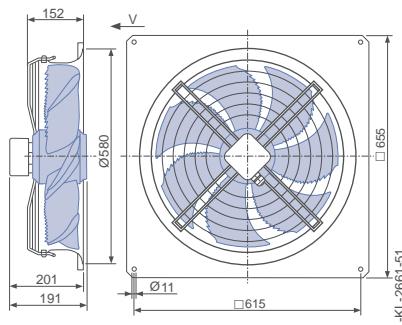

FE2owlet

for three phase alternating current, 4-4 pole

FNO50-VD

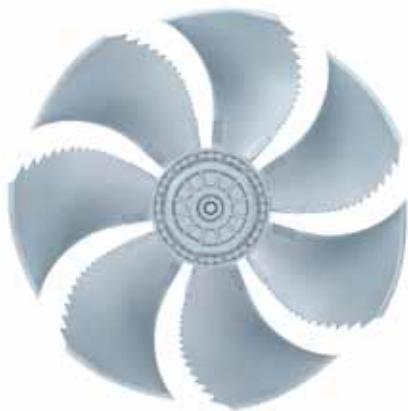

Description

Motor technology: AC

Rated voltage U_{N_r} : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_{N_r} : 50 Hz*

Input power P_i : 0.84/0.54 kW*

Rated current I_{N_r} : 1.45/0.96 A*

Rated speed n_{N_r} : 1340/ 940 min⁻¹*

Starting current I_A : 5.00 / 1.60 A

Current increase ΔI : 15 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 34.2 %

Efficiency: $N_{actual} = 41.3 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

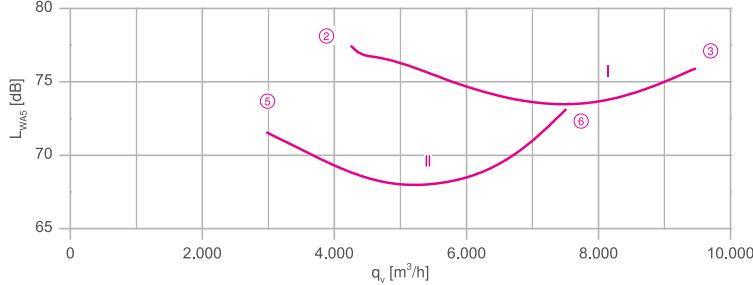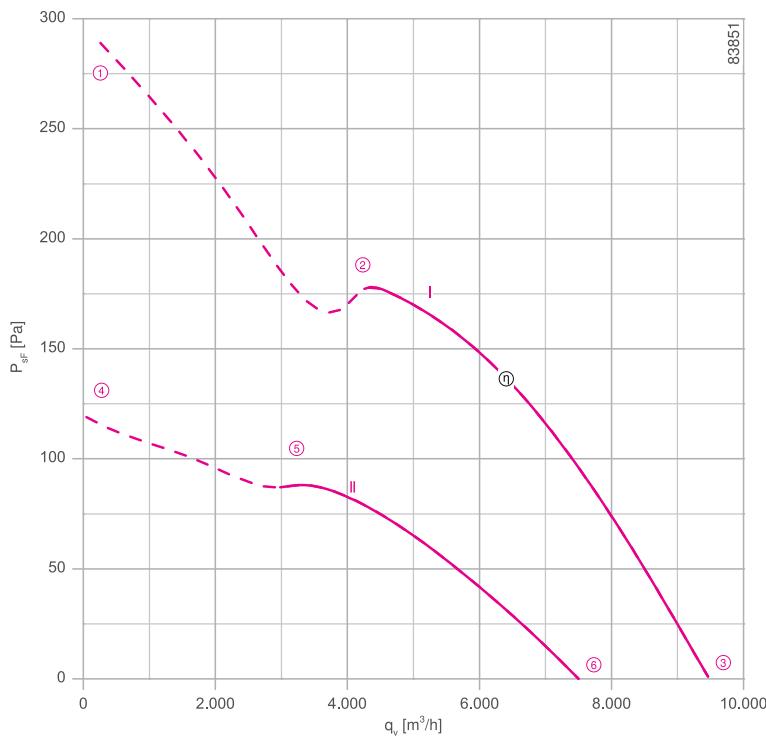

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

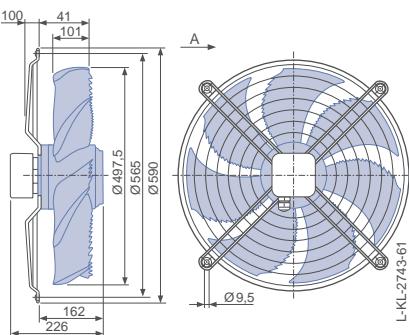


Design Q - square full bell mouth, guard grille suction side

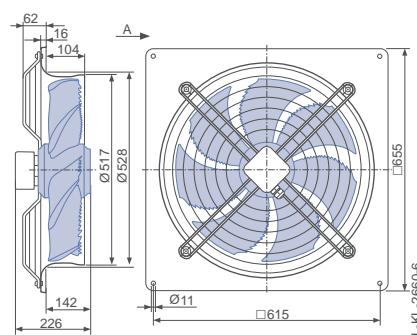

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

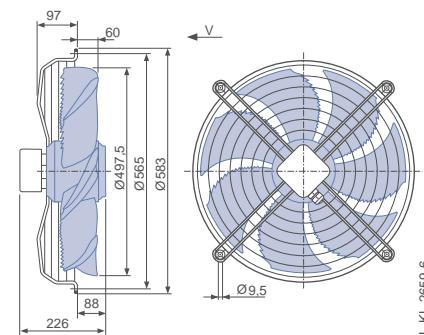

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN050-VD_4I_7P1	Δ	I	400	①	1.75	1050	1280	
			400*	②	1.45*	840*	1340*	78
			400	③	1.15	620	1390	76
	Y	II	400	④	1.05	580	800	
			400*	⑤	0.96*	540*	940*	72
			400	⑥	0.82	480	1110	73

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)
Type	FN050-VDW.4I.A7P1	FN050-VDQ.4I.A7P1	FN050-VDK.4I.V7P1	FN050-VDF.4I.V7P1
Article no.	156556	140083	140056	140067
Weight kg	13.80	20.10	13.30	16.80
				FN050-VDF.4I.V7P1
				140073
				140322
Weight kg	13.80	20.10	13.30	16.80
				17.50
				18.30


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design F - flange ring with two flanges, without guard grille

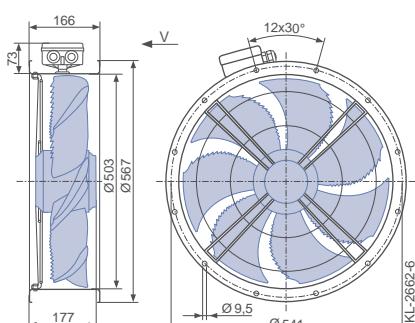

Design F - flange ring with two flanges, guard grille pressure side

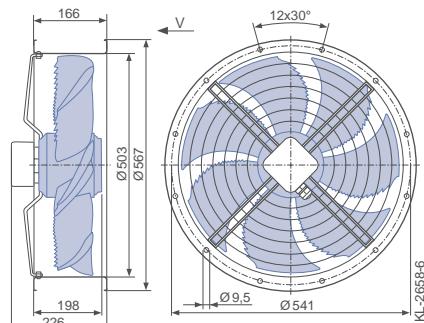


Design Q - square full bell mouth, guard grille pressure side

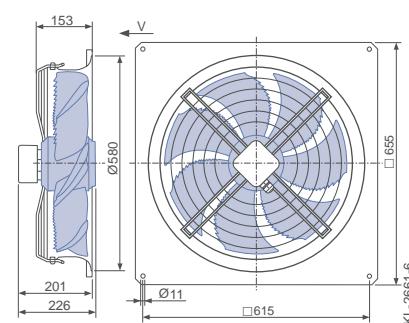

FE2owlet

for three phase alternating current, 6-6 pole

FNO50-SD

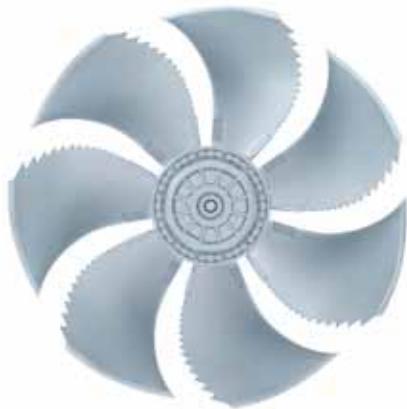



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 290/150 W*
Rated current I_N : 0.74/0.36 A*
Rated speed n_N : 880/ 590 min⁻¹*
Starting current I_A : 1.50 / 0.40 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 30.1 %
Efficiency: $N_{actual} = 40.2 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

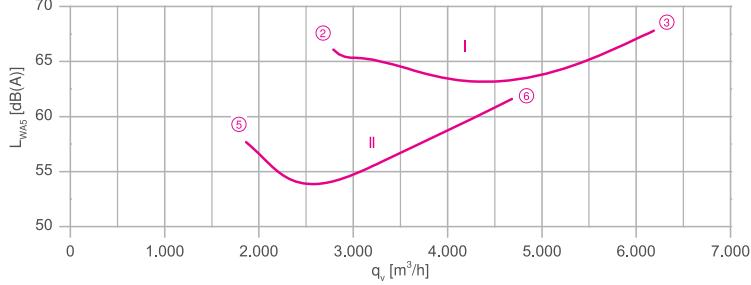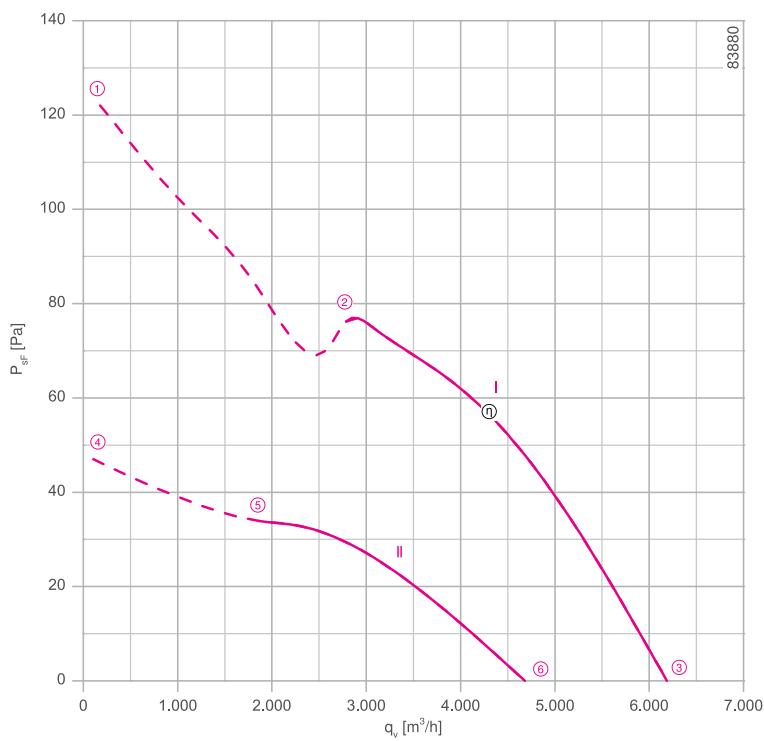


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

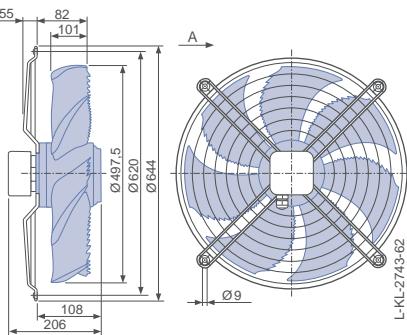


Design Q - square full bell mouth, guard grille suction side

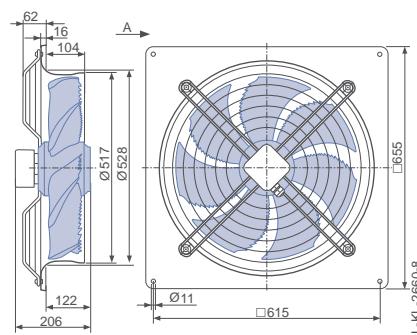

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

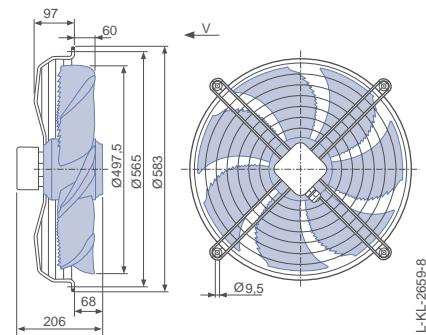

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN050-SD_.4F._7P1	Δ	I	400	①	0.82	350	830	
			400*	②	0.74*	290*	880*	66
			400	③	0.66	230	920	68
	Y	II	400	④	0.38	160	510	
			400*	⑤	0.36*	150*	590*	58
			400	⑥	0.33	140	700	62

*rated data

Fan ordering information

	Airflow direction A		Airflow direction V		
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	
Type	FN050-SDW.4F.A7P1	FN050-SDQ.4F.A7P1	FN050-SDK.4F.V7P1	FN050-SDF.4F.V7P1	FN050-SDF.4F.V7P1
Article no.	155656	140085	140058	140069	140075
Weight kg	11.70	18.60	11.80	15.30	16.00
					140063

Control technology


Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	

Page 480


Page 518

Page 506


Design F - flange ring with two flanges, without guard grille

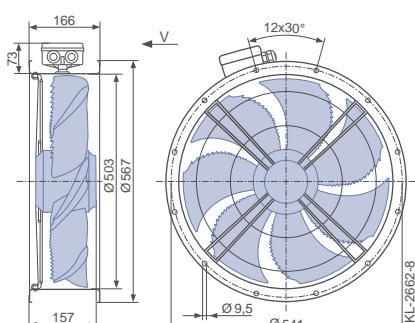

Design F - flange ring with two flanges, guard grille pressure side

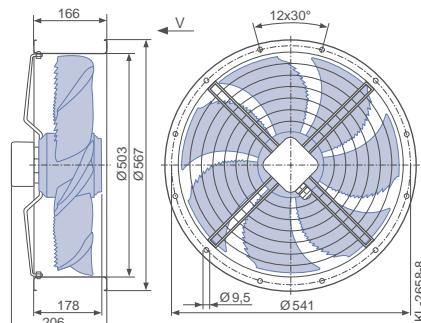


Design Q - square full bell mouth, guard grille pressure side

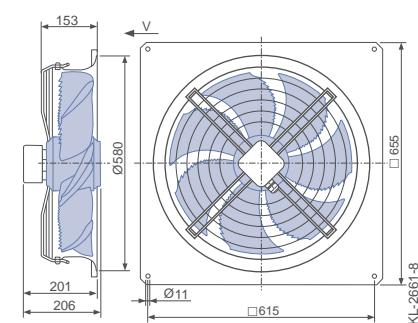

FE2owlet

for three phase alternating current, 8-8 pole



FNO50-AD

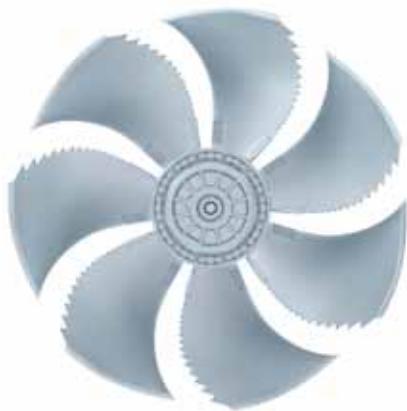

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 130/80 W*
Rated current I_N : 0.30/0.15 A*
Rated speed n_N : 660/510 min⁻¹*
Starting current I_A : 0.70 / 0.22 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

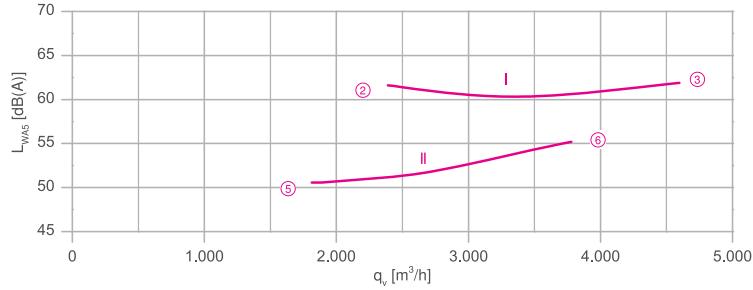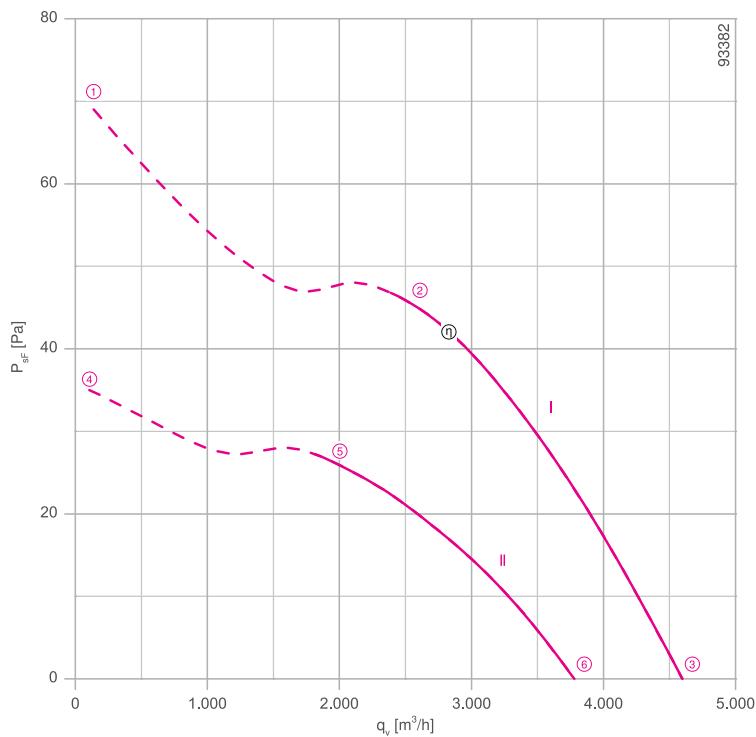

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, guard grille suction side

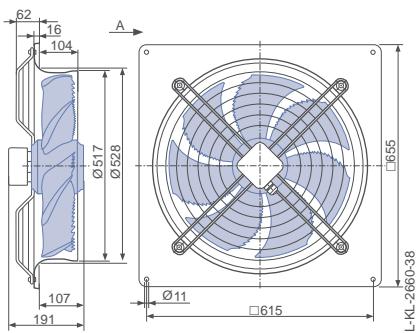


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

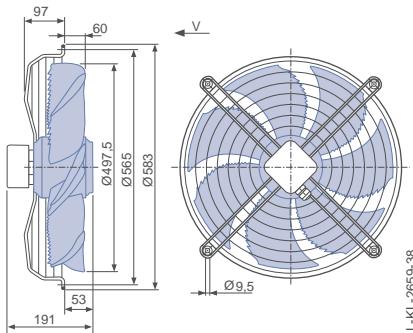

Design F - flange ring with two flanges, without guard grille

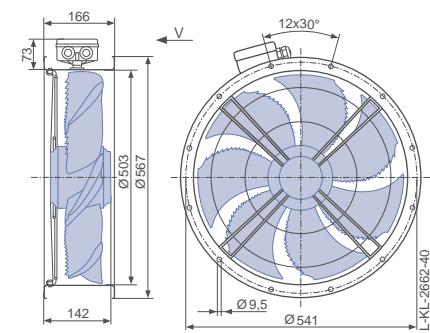

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN050-AD_.4C._7P1	Δ	I	400	①	0.32	150	640	
			400*	②	0.30*	130*	660*	62
			400	③	0.28	100	690	62
	Y	II	400	④	0.16	90	450	
			400*	⑤	0.15*	80*	510*	51
			400	⑥	0.13	70	570	55

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V				
Design	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure side)	Q (guard grille pressure side)	
Type	FN050-ADQ.4C.A7P1	FN050-ADK.4C.V7P1	FN050-ADF.4C.V7P1	FN050-ADF.4C.V7P1	FN050-ADQ.4C.V7P1	
Article no.	160053	160055	160057	160058	160056	
Weight kg	16.90	10.10	13.60	16.10	14.60	


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design F - flange ring with two flanges, guard grille pressure side

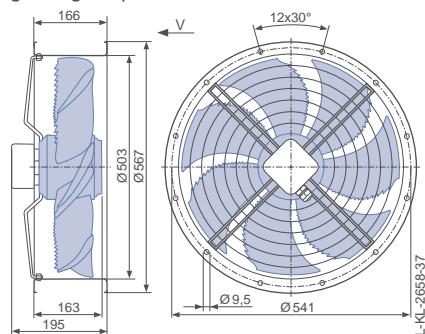

Design Q - square full bell mouth, guard grille pressure side

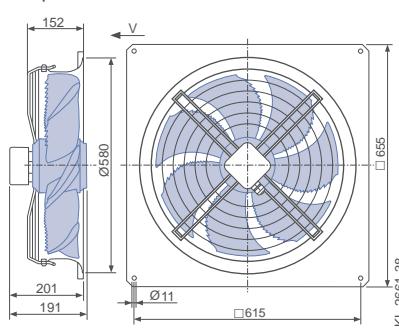

FE2owlet

for single phase alternating current, 6 pole

FN056-6E





Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.39 kW*
Rated current I_N : 1.80 A*
Rated speed n_N : 910 min⁻¹*
Starting current I_A : 4.20 A
Current increase ΔI : 15 %
Service capacitor C_{400V} : 8.0 μF
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.0 %
Efficiency: $N_{actual} = 42.0 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

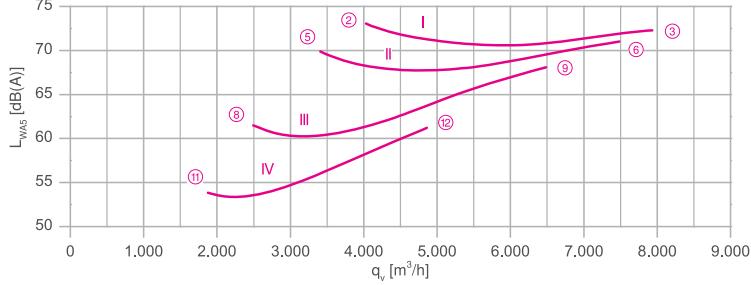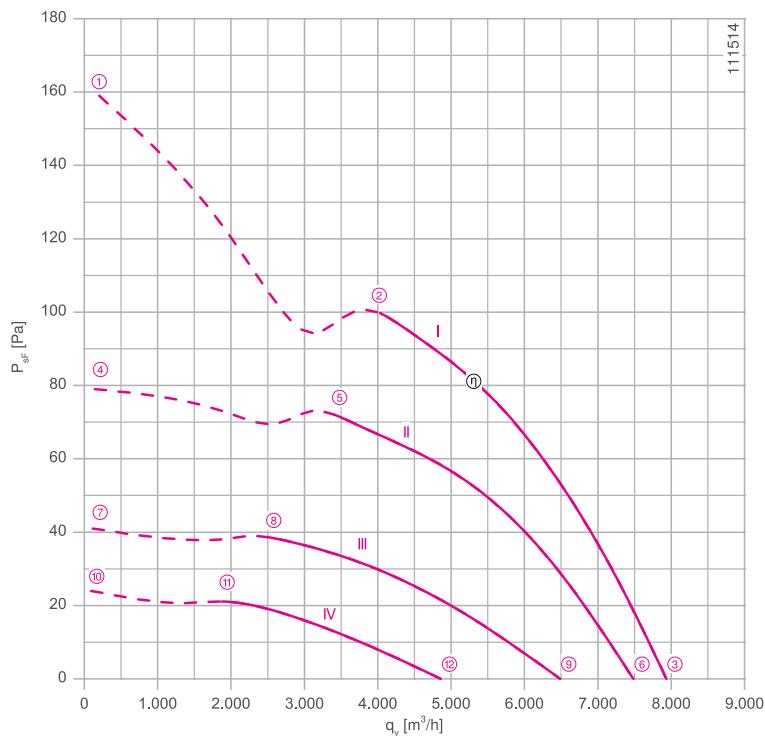


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

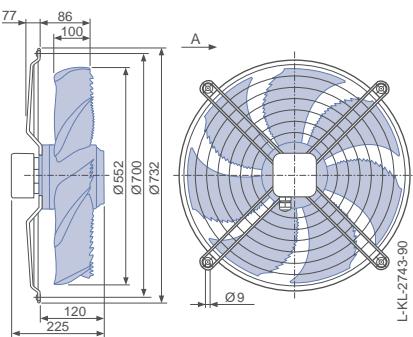


Design Q - square full bell mouth, guard grille suction side

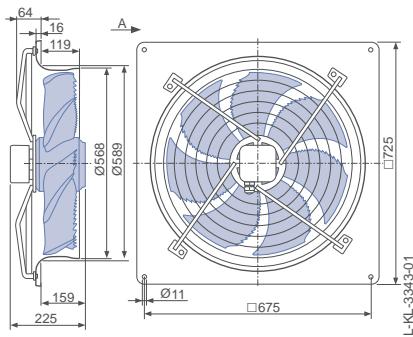

Airflow direction V

Design F - flange ring with two flanges, guard grille suction side


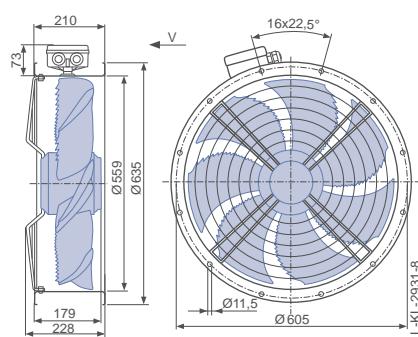


Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN056-6E_4I_7P2	I	230	①	2.40	500	850	
		230*	②	1.80*	390*	910*	73
		230	③	1.40	290	950	72
	II	170	④	2.50	370	590	
		170	⑤	2.00	320	770	70
		170	⑥	1.40	230	900	71
	III	135	⑦	2.10	250	430	
		135	⑧	2.00	240	570	62
		135	⑨	1.60	200	780	68
	IV	110	⑩	1.75	160	320	
		110	⑪	1.70	160	420	54
		110	⑫	1.60	160	580	61

*rated data


Fan ordering information

Airflow direction A		Airflow direction V				
Design	W (guard grille suction side)	Q (guard grille suction side)	F (guard grille suction side)	K (guard grille pressure side)	Q (guard grille pressure side)	
						
Type	FN056-6EW.4I.A7P2	FN056-6EQ.4I.A7P2	FN056-6EF.4I.V7P2	FN056-6EK.4I.V7P2	FN056-6EQ.4I.V7P2	
Article no.	167570	167571	167576	167573	167574	
Weight kg	14.10	22.20	19.30	13.30	21.00	


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

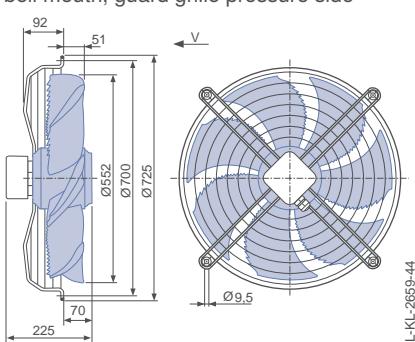

Design Q - square full bell mouth, guard grille pressure side

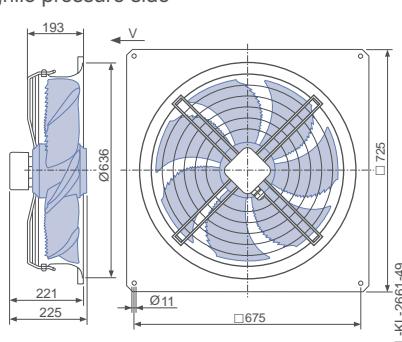

FE2owlet

for three phase alternating current, 4-4 pole

FNO56-VD



Description

Motor technology: AC

Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 1.05/0.58 kW*

Rated current I_N : 2.20/1.10 A*

Rated speed n_N : 1280/910 min $^{-1}$ *

Starting current I_A : 6.50 / 1.90 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 33.7 %

Efficiency: $N_{actual} = 40.1 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

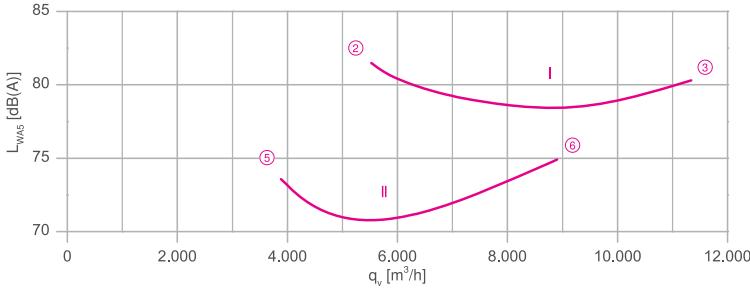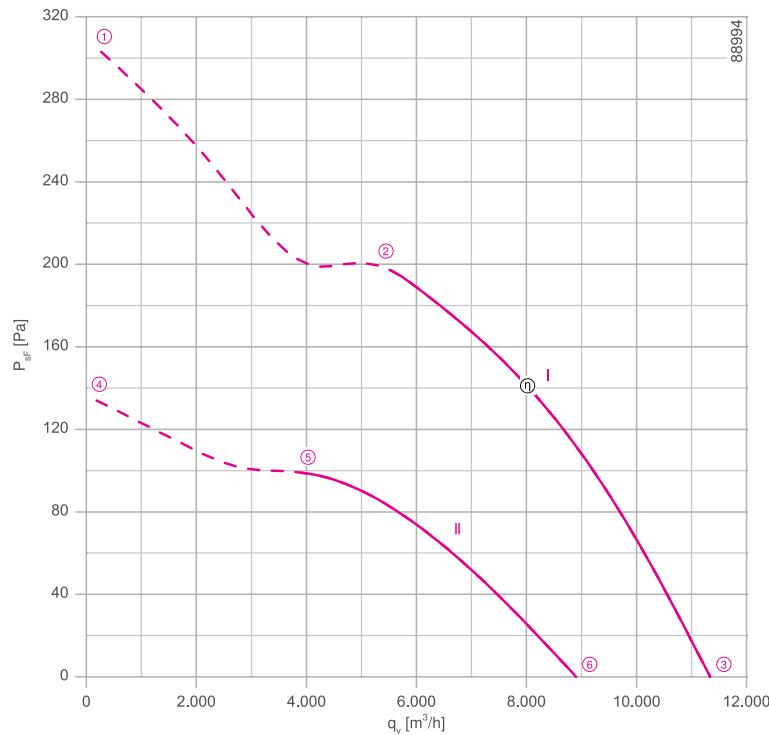

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

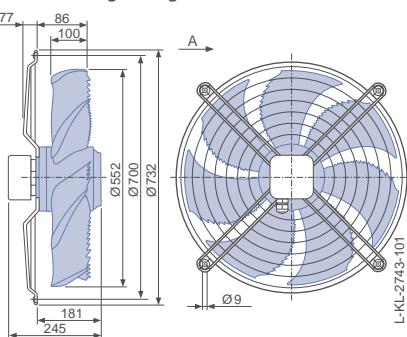


Design Q - square full bell mouth, guard grille suction side

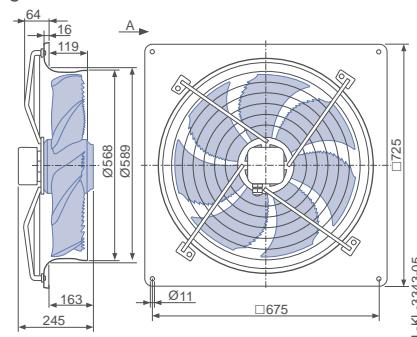

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

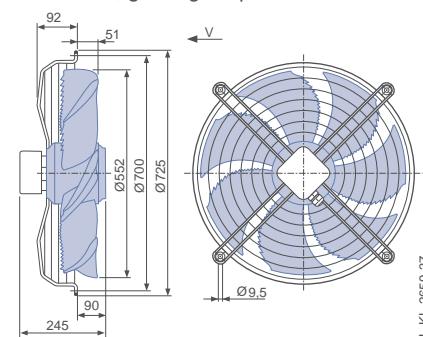

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN056-VD_4M_7P2	Δ	I	400	①	2.60	1300	1190	
			400*	②	2.20*	1050*	1280*	82
			400	③	1.75	740	1370	80
	Y	II	400	④	1.20	640	790	
			400*	⑤	1.10*	580*	910*	73
			400	⑥	0.94	480	1080	75

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)
Type	FN056-VDW.4M.A7P2	FN056-VDQ.4M.A7P2	FN056-VDK.4M.V7P2	FN056-VDF.4M.V7P2
Article no.	159439	159441	159443	159447
Weight kg	16.10	24.20	15.40	20.40
				F (guard grille pressure Q (guard grille pressure side))


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
		Page 480	Page 518	Page 506	


Design F - flange ring with two flanges, without guard grille

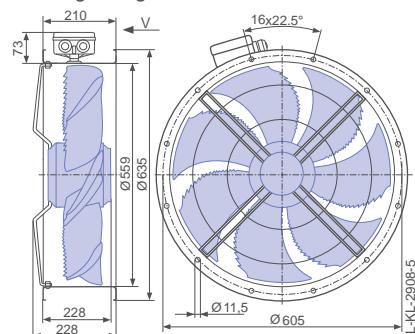

Design F - flange ring with two flanges, guard grille pressure side

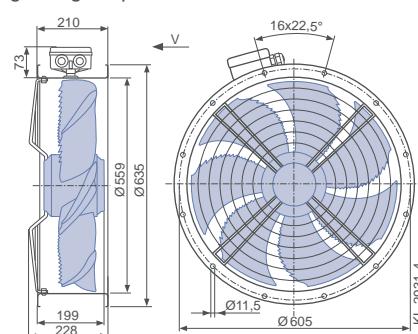


Design Q - square full bell mouth, guard grille pressure side

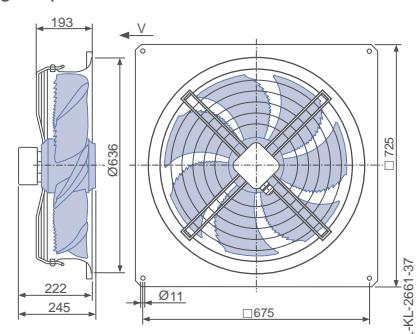

FE2owlet

for three phase alternating current, 6-6 pole

FNO56-SD

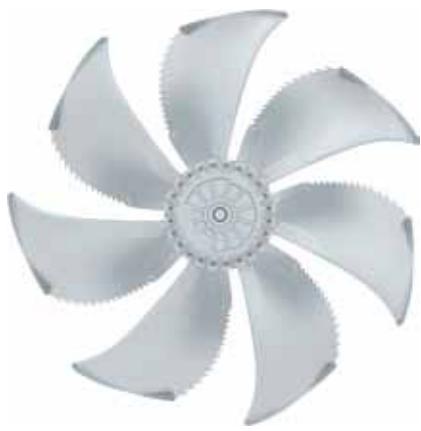



Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.34/0.21 kW*
Rated current I_N : 0.70/0.38 A*
Rated speed n_N : 870/ 630 min⁻¹*
Starting current I_A : 2.20 / 0.70 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 31.9 %
Efficiency: $N_{actual} = 41.3 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

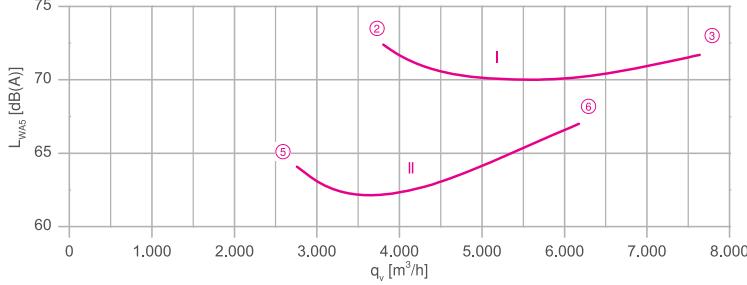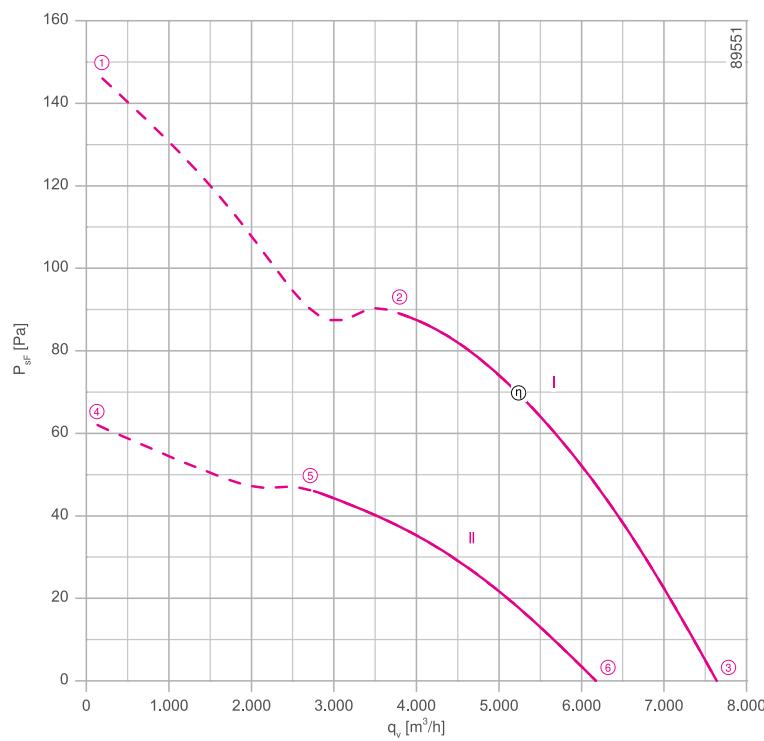


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

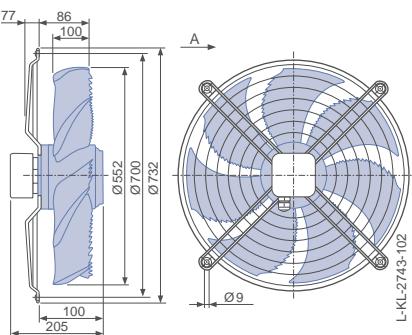


Design Q - square full bell mouth, guard grille suction side

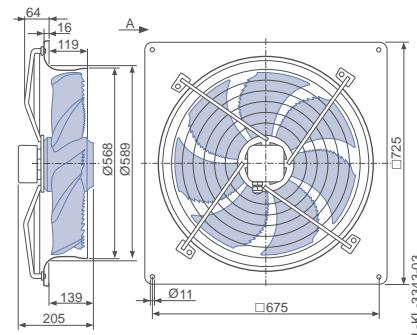

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

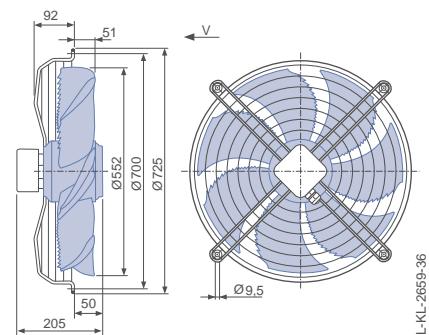

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN056-SD_4F_7P2	Δ	I	400	①	0.84	440	810	
			400*	②	0.70*	340*	870*	72
			400	③	0.58	250	920	72
	Y	II	400	④	0.42	230	530	
			400*	⑤	0.38*	210*	630*	64
			400	⑥	0.31	170	750	67

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V		
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	
Type	FN056-SDW.4F.A7P2	FN056-SDQ.4F.A7P2	FN056-SDK.4F.V7P2	FN056-SDF.4F.V7P2	FN056-SDF.4F.V7P2
Article no.	159449	159451	159453	159457	159456
Weight kg	12.70	22.20	11.90	17.00	17.90
					159455


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design F - flange ring with two flanges, without guard grille

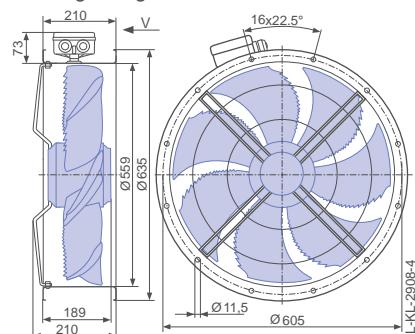

Design F - flange ring with two flanges, guard grille pressure side

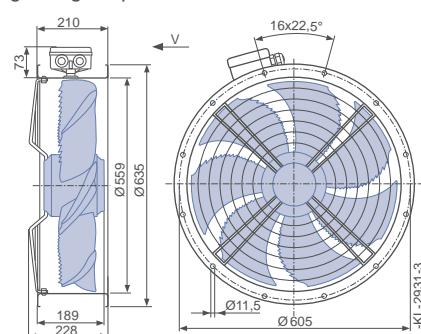


Design Q - square full bell mouth, guard grille pressure side

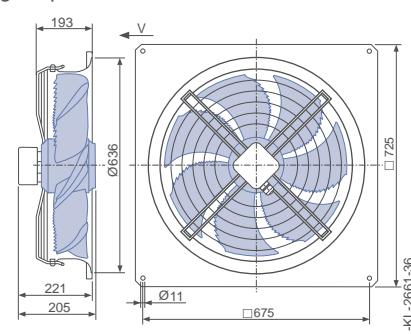

FE2owlet

for single phase alternating current, 4 pole

FNO63-4E

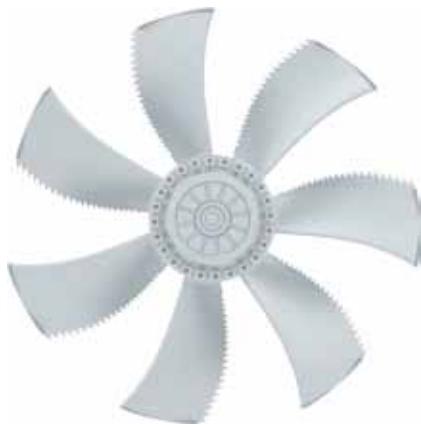



Description

Motor technology: AC
Rated voltage U_N : $1 \sim 230 \text{ V} \pm 10\%$
Rated frequency f_N : 50 Hz * (60Hz data available)
Input power P_i : 1.85 kW *
Rated current I_N : 7.70 A *
Rated speed n_N : 1360 min^{-1} *
Current increase ΔI : 20 %
Service capacitor C_{400V} : $35.0 \mu\text{F}$
Thermal class: **THCL155***
Min. permitted ambient temperature $t_{R(\min)}$: -25°C
Max. permitted ambient temperature $t_{R(\max)}$: 55°C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 36.5 %
Efficiency: $N_{\text{actual}} = 41.3 / N_{\text{target}} = 40$ **
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

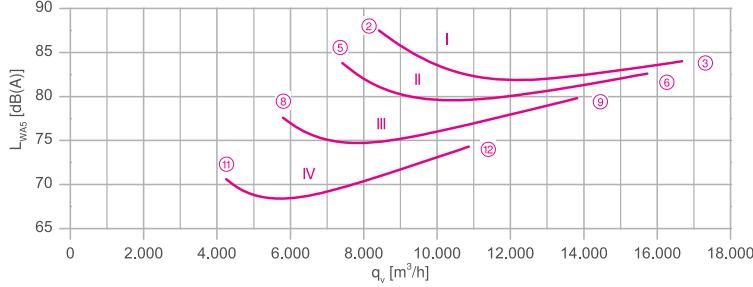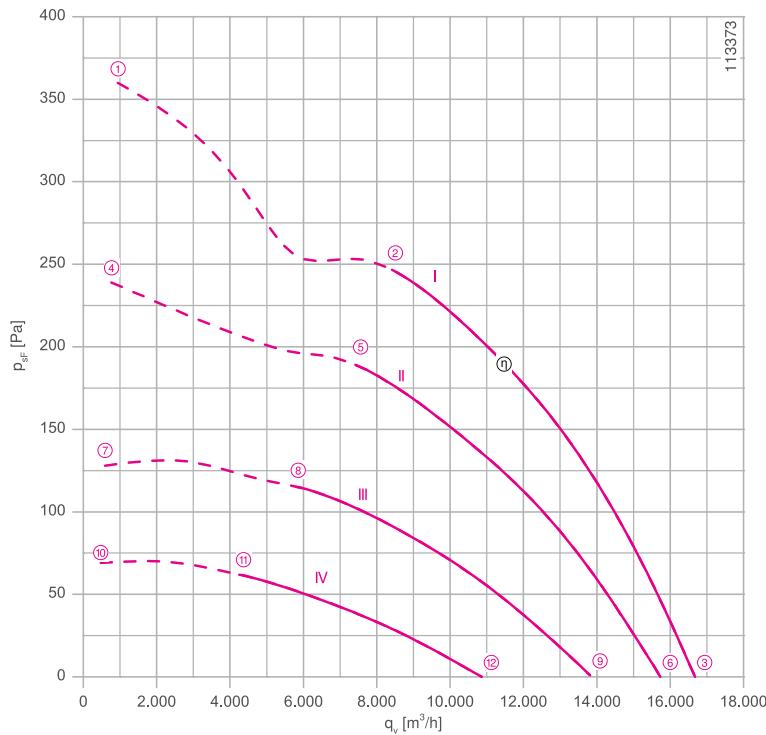


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

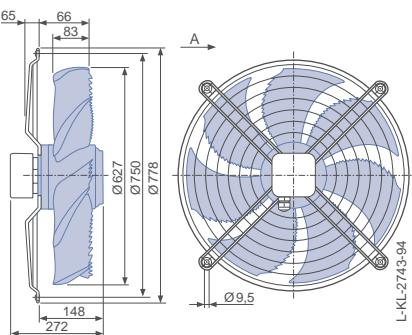


Design Q - square full bell mouth, guard grille suction side

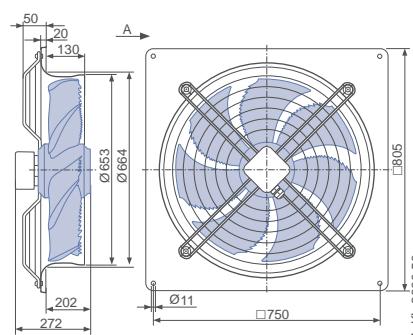

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

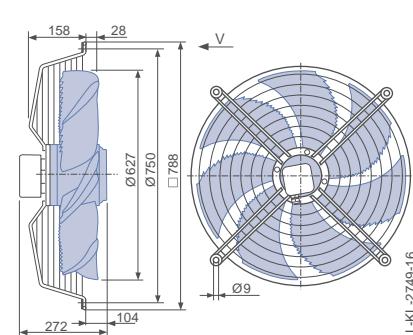

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN063-4E_.6N_.7P6	I	230	①	9.40	2100	1340	
		230*	②	8.00*	1800*	1380*	88
		230	③	5.80	1300	1420	84
	II	170	④	11.50	1800	1080	
		170	⑤	9.60	1550	1210	84
		170	⑥	7.00	1150	1330	83
	III	135	⑦	11.00	1350	790	
		135	⑧	10.50	1300	950	78
		135	⑨	8.20	1050	1180	80
	IV	110	⑩	9.60	940	580	
		110	⑪	9.40	920	690	71
		110	⑫	8.40	860	920	74

*rated data


Fan ordering information

Airflow direction A		Airflow direction V				
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (guard grille pressure side)	Q (guard grille pressure side)	
Type	FN063-4EW.6N.A7P6	FN063-4EQ.6N.A7P6	FN063-4EK.6N.V7P6	FN063-4EF.6N.V7P6	FN063-4EQ.6N.V7P6	
Article no.	169020	169021	169017	169016	169018	
Weight kg	25.90	36.20	28.10	32.80	38.00	


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492

Design F - flange ring with two flanges,
guard grille pressure side

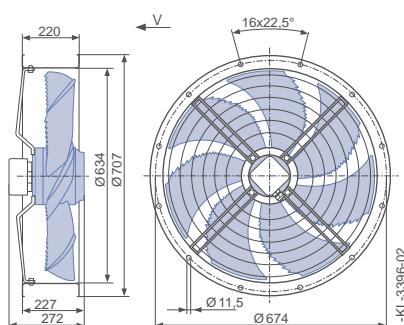

Design Q - square full bell mouth, guard
grille pressure side

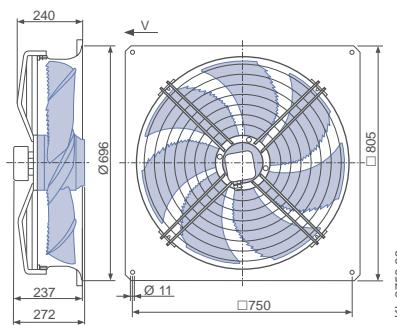

FE2owlet

for single phase alternating current, 6 pole

FN 063-6 E





Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.66 kW*
Rated current I_N : 3.00 A*
Rated speed n_N : 860 min $^{-1}$ *
Starting current I_A : 5.50 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 12.0 μF
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 32.2 %
Efficiency: $N_{actual} = 40.0 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Connection diagram
for airflow direction A Page 531
1360-104XB
for airflow direction V 1360-104XA

System components Page 430

Characteristic curve

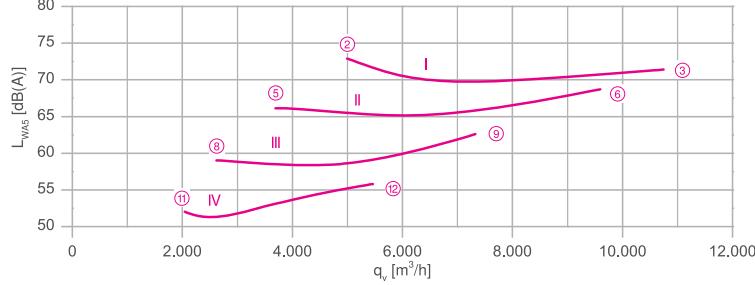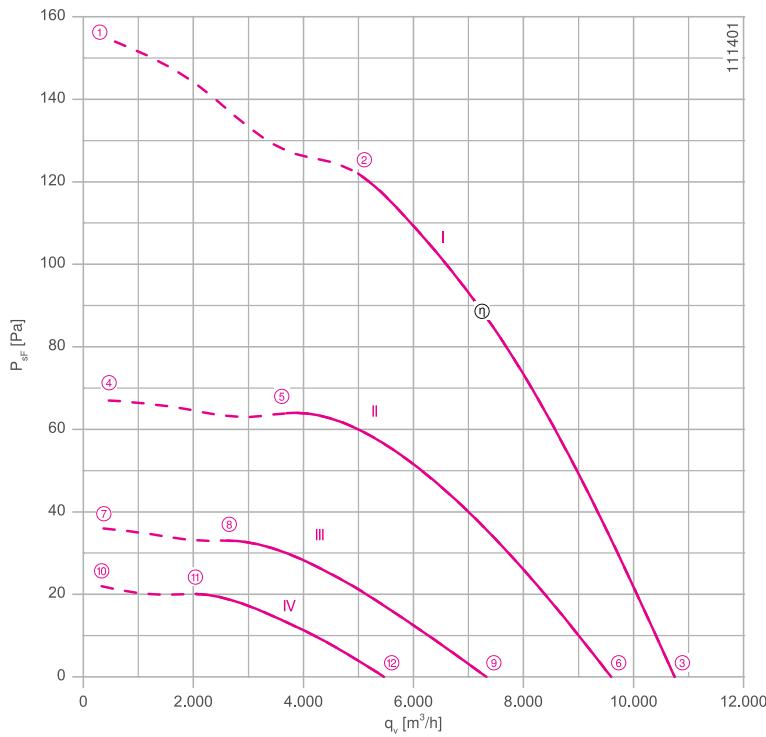


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

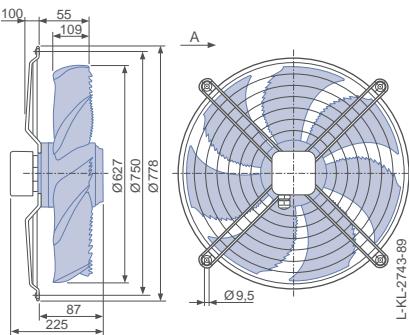


Design Q - square full bell mouth, guard grille suction side

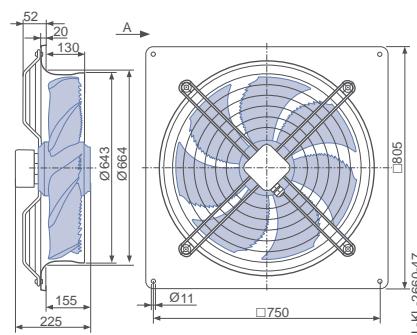

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

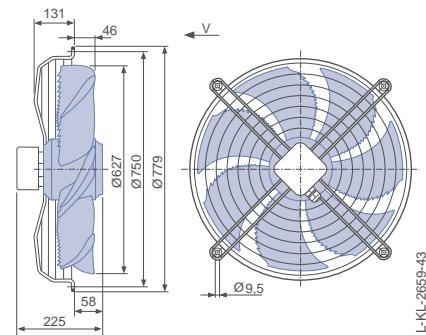

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
FN063-6E_4I_7P1	I	230	①	3.70	780	770	73
		230*	②	2.90*	640*	870*	71
		230	③	2.20	480	930	66
	II	170	④	3.20	480	510	69
		170	⑤	3.00	460	630	59
		170	⑥	2.30	370	840	63
	III	135	⑦	2.60	300	370	
		135	⑧	2.50	300	460	
		135	⑨	2.30	280	640	
	IV	110	⑩	2.10	200	290	
		110	⑪	2.10	200	350	52
		110	⑫	2.00	190	480	56

*rated data


Fan ordering information

Airflow direction A		Airflow direction V			
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure Q (guard grille pressure side))
Type	FN063-6EW.4I.A7P1	FN063-6EQ.4I.A7P1	FN063-6EK.4I.V7P1	FN063-6EF.4I.V7P1	FN063-6EF.4I.V7P1
Article no.	167969	167968	167972	167973	167974
Weight kg	14.30	24.50	15.40	19.90	20.80
					23.90


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design F - flange ring with two flanges, without guard grille

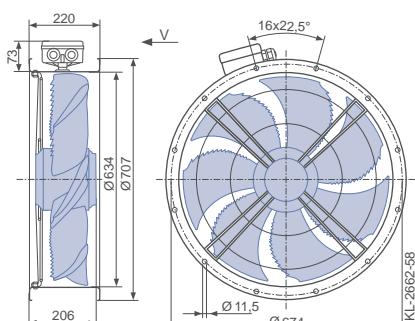

Design F - flange ring with two flanges, guard grille pressure side

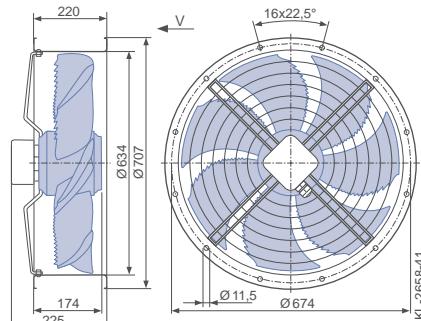


Design Q - square full bell mouth, guard grille pressure side

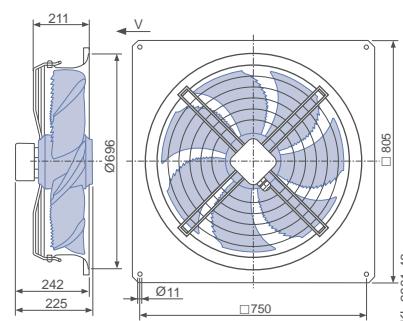

FE2owlet

for three phase alternating current, 4-4 pole

FNO63-VD

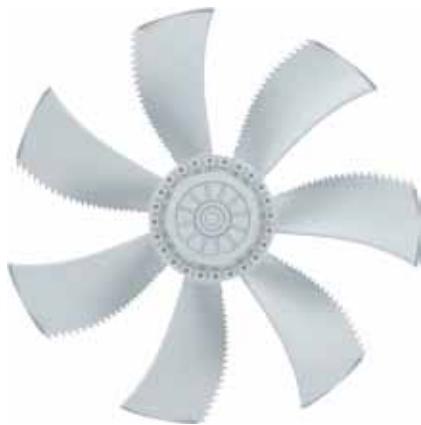



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.75/1.35 kW*
Rated current I_N : 3.70/2.20 A*
Rated speed n_N : 1400/1210 min⁻¹*
Starting current I_A : 20.00 / 6.50 A
Current increase ΔI : 5 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 37.5 %
Efficiency: $N_{actual} = 42.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

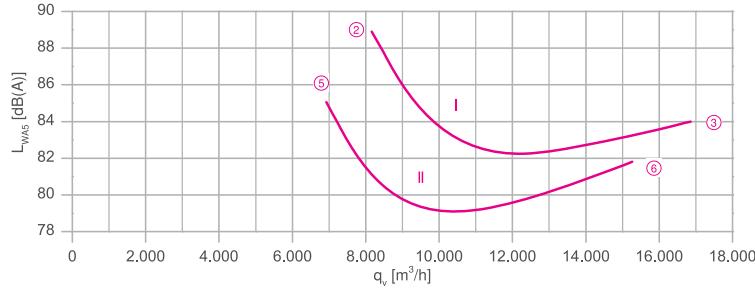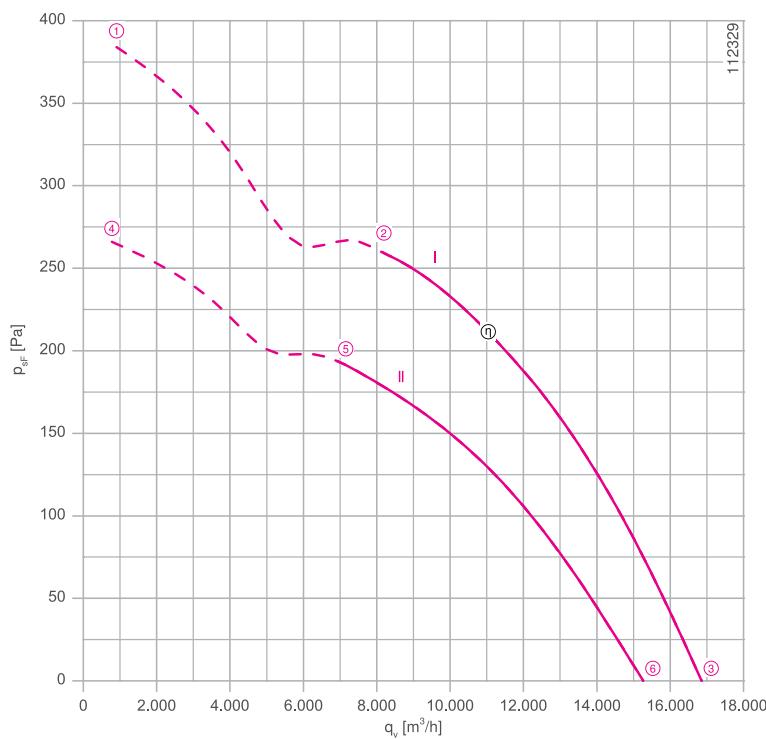


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design W - axial bolted, mounting for short bell mouth, guard grille suction side

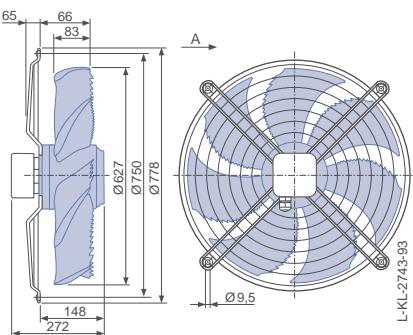


Design Q - square full bell mouth, guard grille suction side

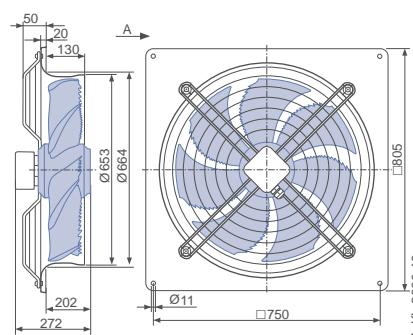

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

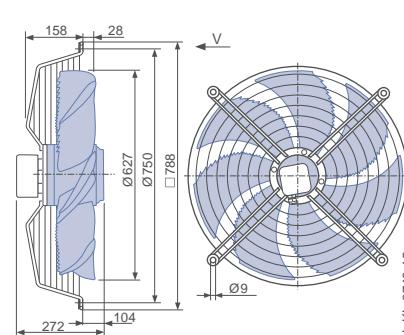

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN063-VD_.6N_.7P6	Δ	I	400	①	4.20	2100	1380	
			400*	②	3.70*	1750*	1400*	89
			400	③	3.10	1250	1430	84
	Y	II	400	④	2.60	1550	1140	
			400*	⑤	2.20*	1350*	1210*	85
			400	⑥	1.75	1000	1300	82

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	W (guard grille suction side)	Q (guard grille suction side)	K (guard grille pressure side)	F (guard grille pressure side)
Type	FN063-VDW.6N.A7P6	FN063-VDQ.6N.A7P6	FN063-VDK.6N.V7P6	FN063-VDF.6N.V7P6
Article no.	169014	169015	169011	169010
Weight kg	25.90	36.20	28.10	32.80
				169012
				38.00


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Design F - flange ring with two flanges, guard grille pressure side

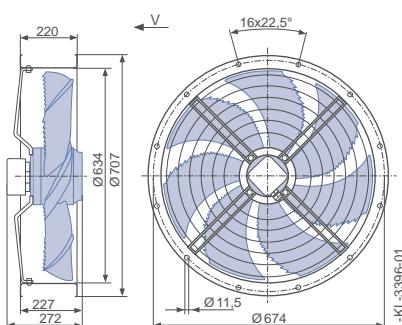


Design Q - square full bell mouth, guard grille pressure side

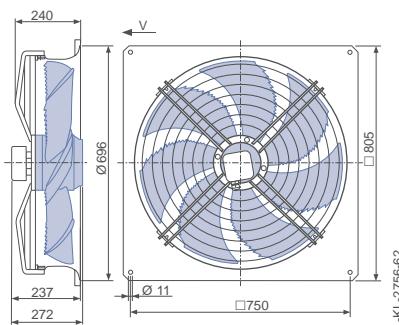

FE2owlet

for three phase alternating current, 4-4 pole

FNO63-VD

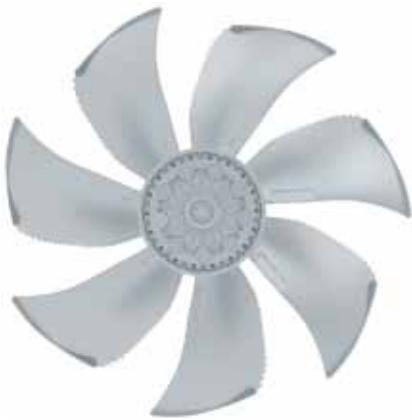

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_N : 2.60/1.75 kW*
Rated current I_N : 5.00/3.00 A*
Rated speed n_N : 1330/1050 min⁻¹*
Starting current I_A : 19.00 / 6.00 A
Current increase ΔI : 5 %
Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C
Max. permitted ambient temperature $t_{R(\max)}$: 60 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 36.4 %

Efficiency: $N_{\text{actual}} = 40.2 / N_{\text{target}} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

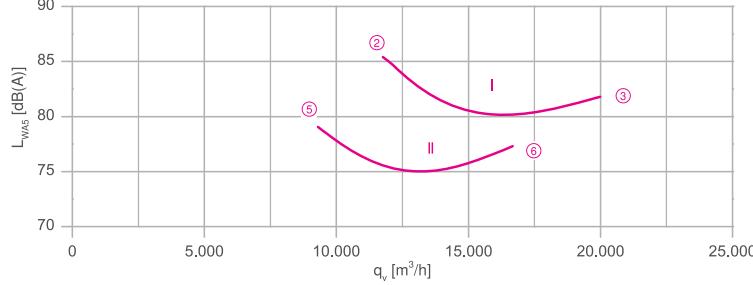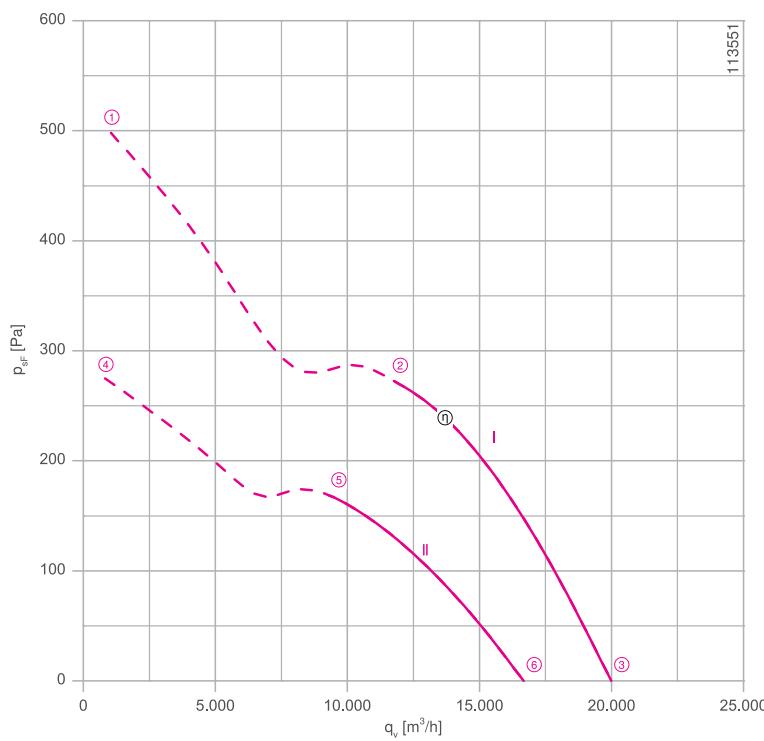

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

← Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

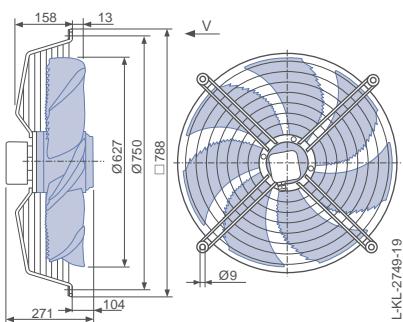

Design F - flange ring with two flanges, without guard grille

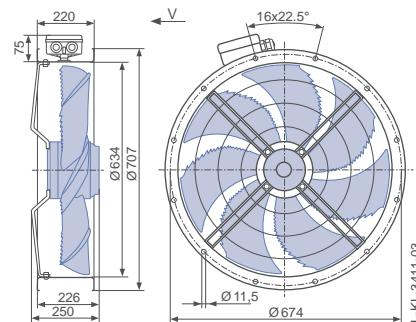

Design F - flange ring with two flanges, guard grille pressure side

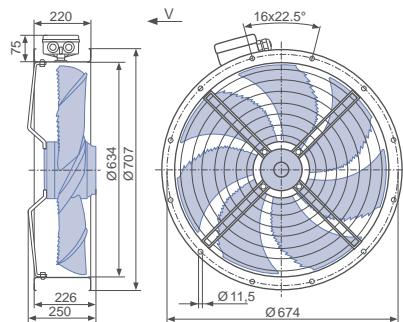

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN063-VD_.6N._7P7	Δ	I	400	①	5.80	3300	1280	
			400*	②	5.00*	2600*	1330*	86
			400	③	4.20	2100	1380	82
	Y	II	400	④	3.30	2000	940	
			400*	⑤	3.00*	1750*	1050*	79
			400	⑥	2.50	1500	1140	77

*rated data


Fan ordering information

Airflow direction V				
Design	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure side)	Q (guard grille pressure side)
Type Article no.	FN063-VDK.6N.V7P7 169699	FN063-VDF.6N.V7P7 169701	FN063-VDF.6N.V7P7 169702	FN063-VDQ.6N.V7P7 169700
Weight kg	31.10	35.10	35.90	41.20

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - square full bell mouth, guard grille pressure side

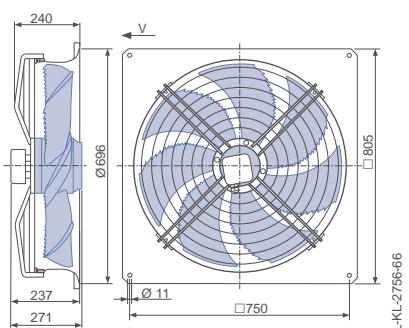

FE2owlet

for three phase alternating current, 6-6 pole

FNO63-SD

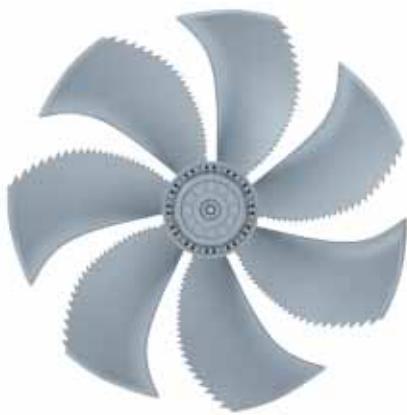



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.62/0.44 kW*
Rated current I_N : 1.25/0.72 A*
Rated speed n_N : 900/ 720 min⁻¹*
Starting current I_A : 4.40 / 1.40 A
Current increase ΔI : 15 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.8 %
Efficiency: $N_{actual} = 41.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

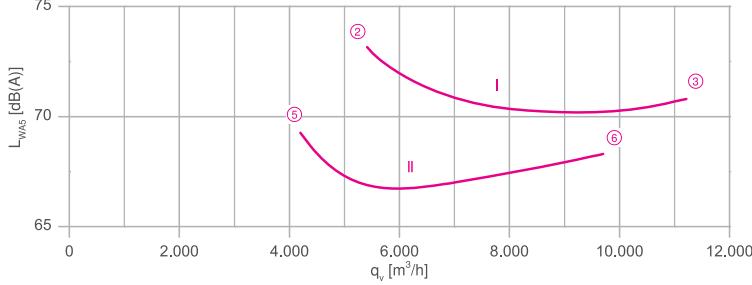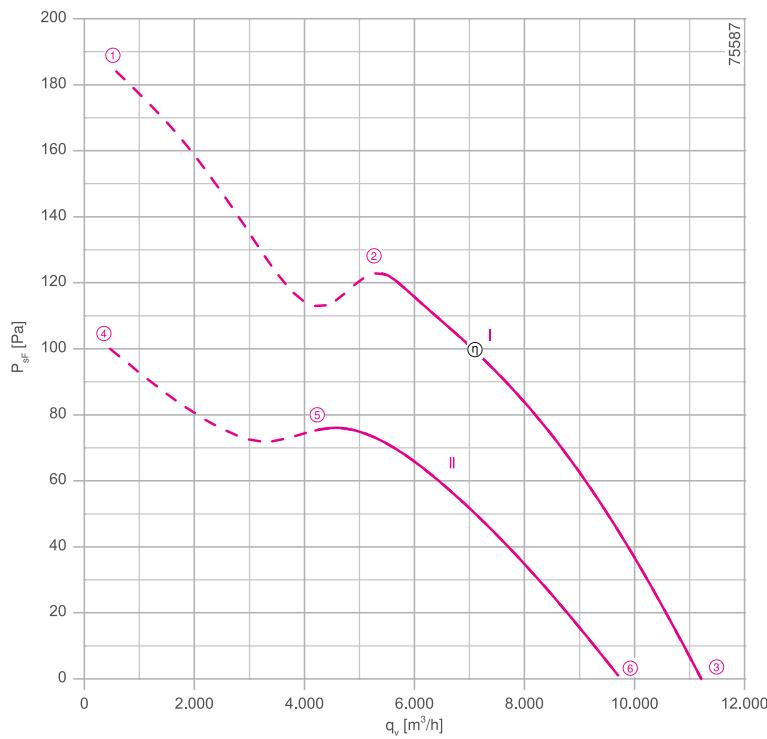


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, guard grille suction side

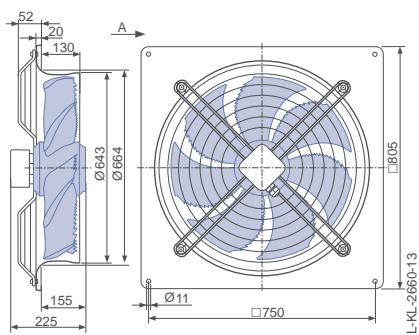


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

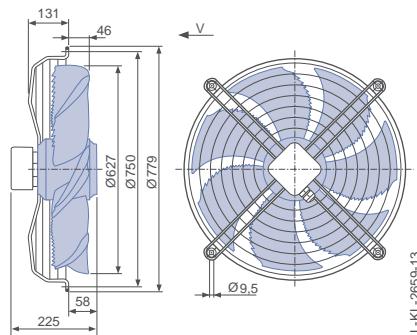

Design F - flange ring with two flanges, without guard grille

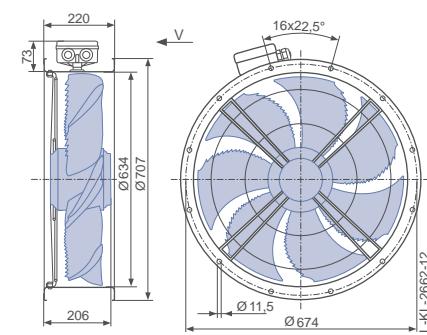

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN063-SD_4I_7P1	Δ	I	400	①	1.45	800	870	
			400*	②	1.25*	620*	900*	73
			400	③	1.05	440	940	71
	Y	II	400	④	0.86	520	640	
			400*	⑤	0.72*	440*	720*	69
			400	⑥	0.56	330	820	68

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V				
Design	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure side)	Q (guard grille pressure side)	
Type Article no.	FN063-SDQ.4I.A7P1 141382	FN063-SDK.4I.V7P1 141384	FN063-SDF.4I.V7P1 141386	FN063-SDF.4I.V7P1 141387	FN063-SDQ.4I.V7P1 141385	
Weight kg	24.50	15.40	19.90	20.80	23.90	


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design F - flange ring with two flanges, guard grille pressure side

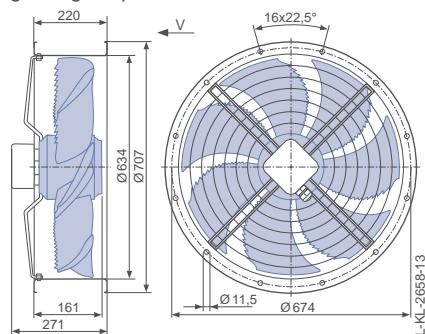


Design Q - square full bell mouth, guard grille pressure side

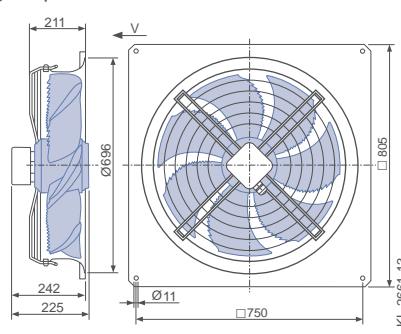

FE2owlet

for three phase alternating current, 12-12 pole



FNO63-N D

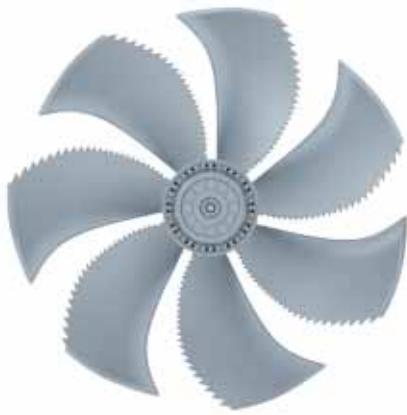

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 130/70 W*
Rated current I_N : 0.32/0.14 A*
Rated speed n_N : 430/ 320 min⁻¹*
Starting current I_A : 2.40 / 1.05 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)
* Rated data

Characteristic curve

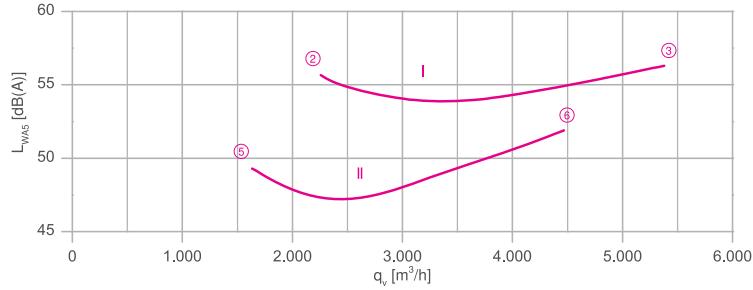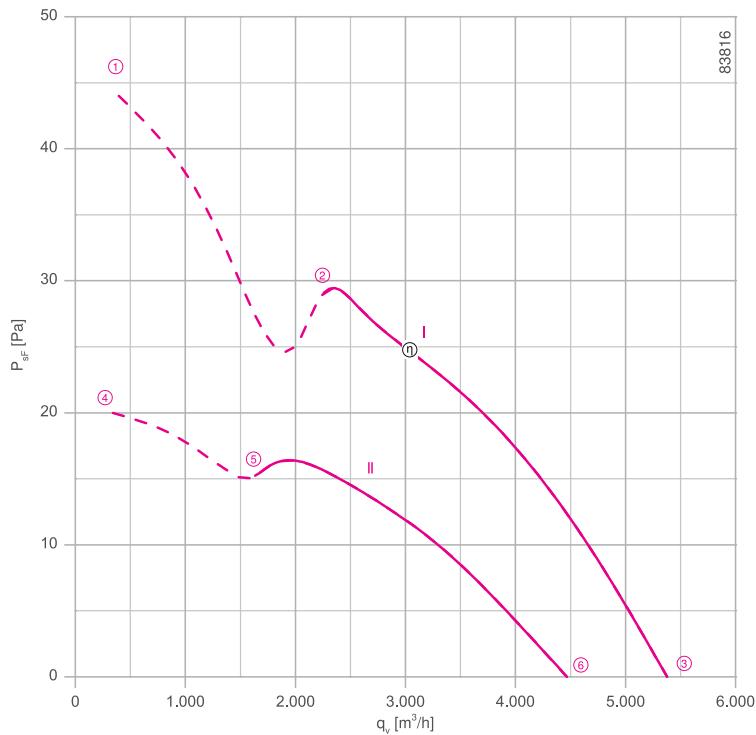

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, guard grille suction side

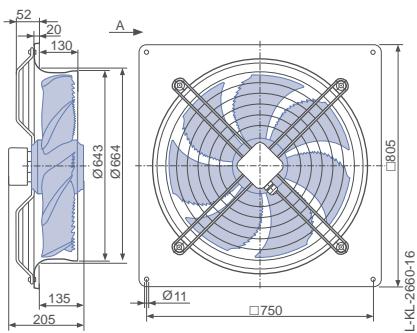


Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

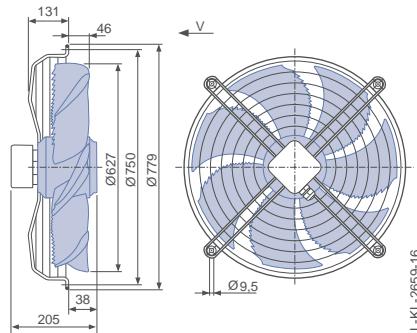

Design F - flange ring with two flanges, without guard grille

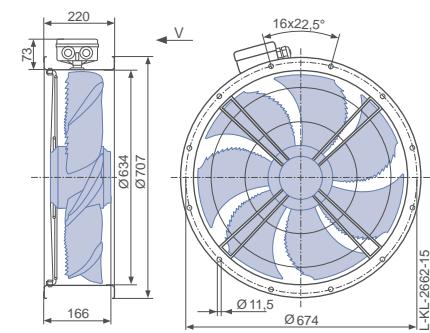

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN063-ND..4F..7P1	Δ	I	400	①	0.34	150	410	
			400*	②	0.32*	130*	430*	56
			400	③	0.31	110	460	56
	Y	II	400	④	0.14	75	290	
			400*	⑤	0.14*	70*	320*	49
			400	⑥	0.12	55	380	52

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V				
Design	Q (guard grille suction side)	K (guard grille pressure side)	F (without guard grille)	F (guard grille pressure side)	Q (guard grille pressure side)	
Type Article no.	FN063-NDQ.4F.A7P1 141585	FN063-NDK.4F.V7P1 141587	FN063-NDF.4F.V7P1 141589	FN063-NDF.4F.V7P1 141590	FN063-NDQ.4F.V7P1 141588	
Weight kg	22.90	13.60	18.30	19.20	22.30	


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design F - flange ring with two flanges, guard grille pressure side

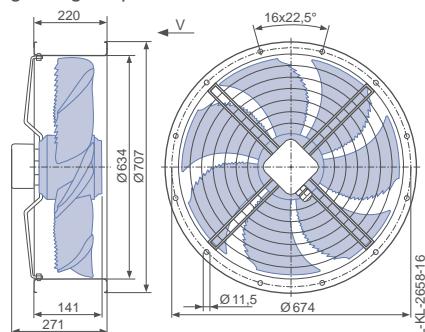


Design Q - square full bell mouth, guard grille pressure side

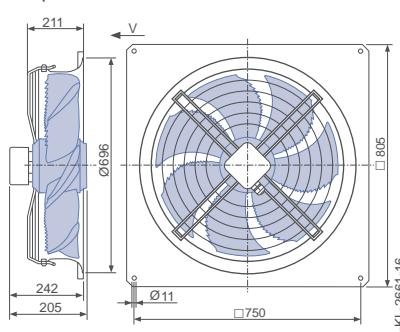

FE2owlet

for three phase alternating current, 4-4 pole

FNO71-VD

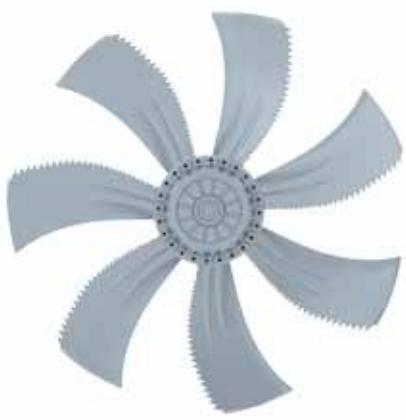

Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 2.60/1.70 kW*

Rated current I_N : 4.80/2.90 A*

Rated speed n_N : 1330/1050 min⁻¹*

Starting current I_A : 20.00 / 6.50 A

Current increase ΔI : 5 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 60 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 37.9 %

Efficiency: $N_{actual} = 41.7 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

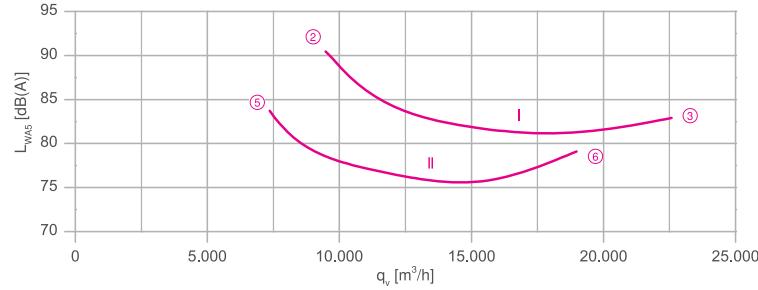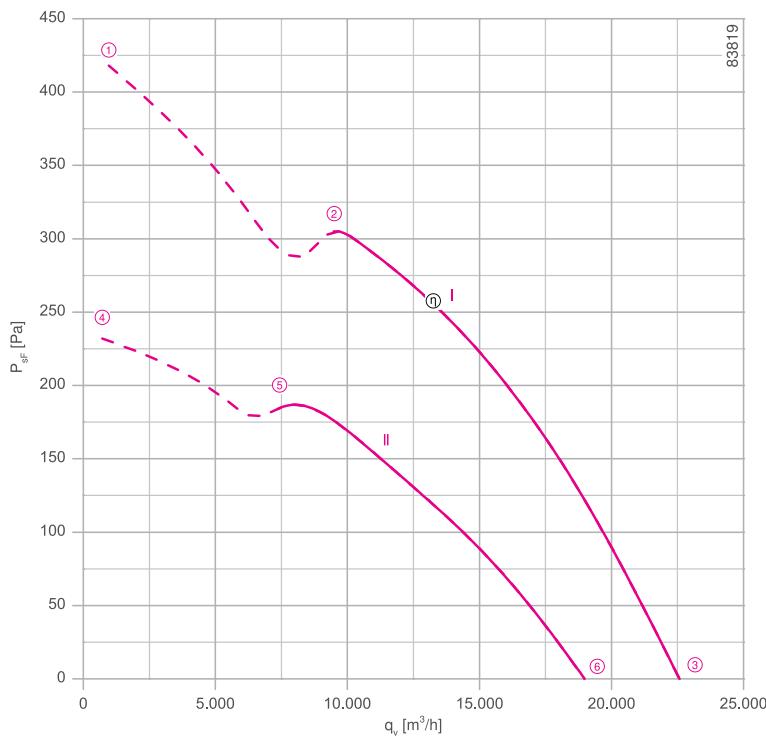

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

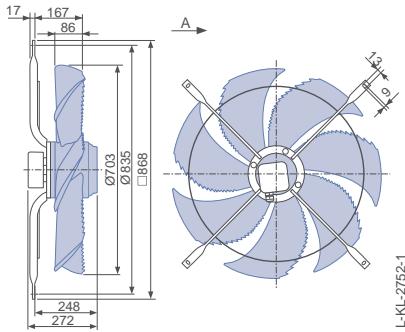


Design Q - square full bell mouth, without guard grille

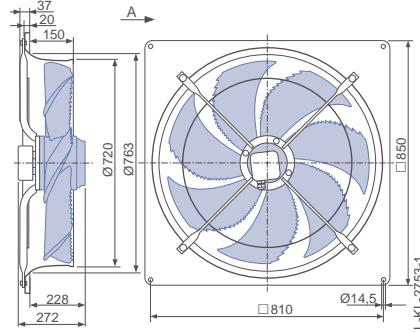

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

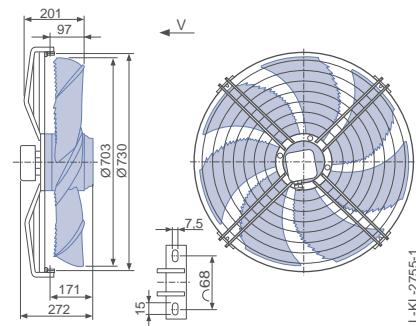

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN071-VD_6N_7P2	Δ	I	400	①	5.60	3100	1290	
			400*	②	4.80*	2600*	1330*	91
			400	③	3.90	1900	1390	83
	Y	II	400	④	3.20	1900	960	
			400*	⑤	2.90*	1700*	1050*	84
			400	⑥	2.30	1400	1170	79

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN071-VDD.6N.A7P2	FN071-VDQ.6N.A7P2	FN071-VDS.6N.V7P2	FN071-VDI.6N.V7P2
Article no.	141760	141761	141782	155556
Weight kg	25.90	36.90	28.90	29.10
				39.60


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
	Page 480		Page 518		Page 506

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

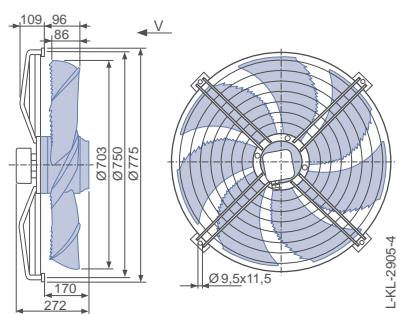

Design Q - square full bell mouth, guard grille pressure side

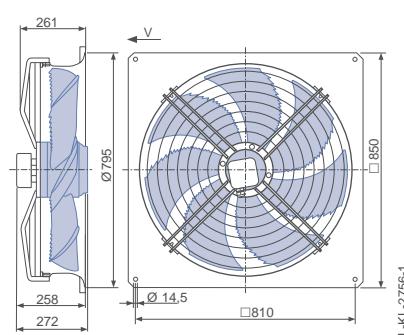

FE2owlet

for three phase alternating current, 6-6 pole

F N O 7 1 - S D



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 0.94/0.62 kW*

Rated current I_N : 1.70/1.05 A*

Rated speed n_N : 900/ 690 min⁻¹*

Starting current I_A : 6.00 / 1.80 A

Current increase ΔI : 10 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 38.1 %

Efficiency: $N_{actual} = 44.9 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

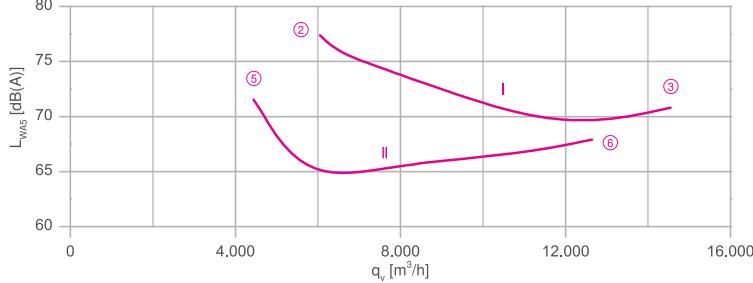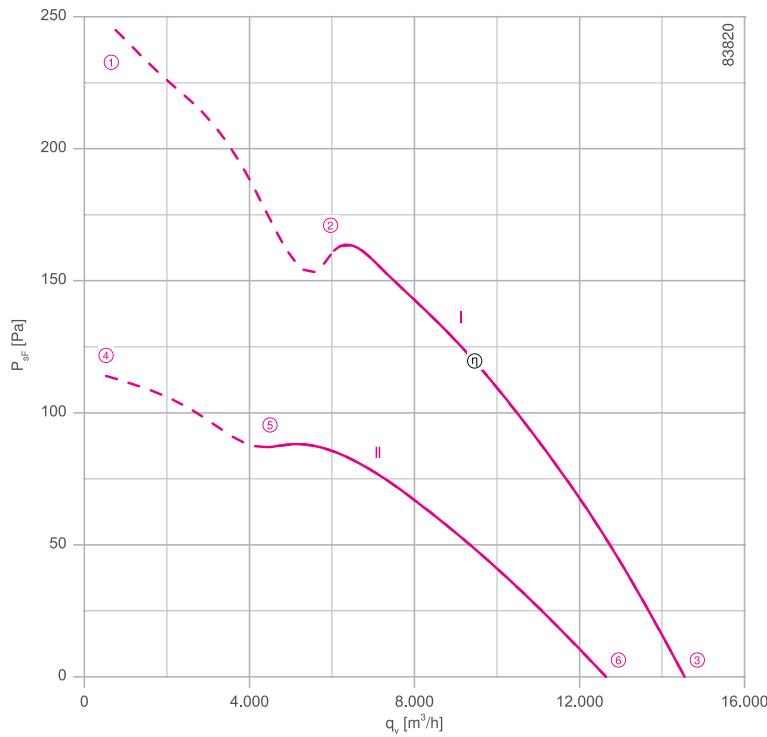

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
1360-108XB
for airflow direction V 1360-108XA

System components Page 430


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

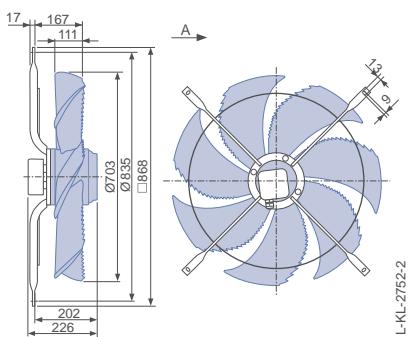


Design Q - square full bell mouth, without guard grille

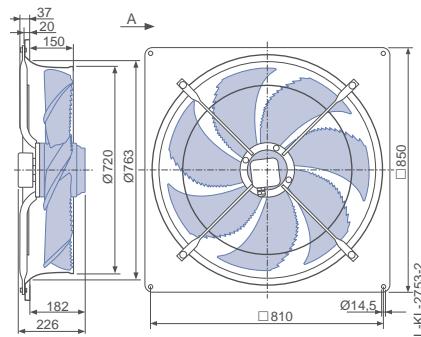

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

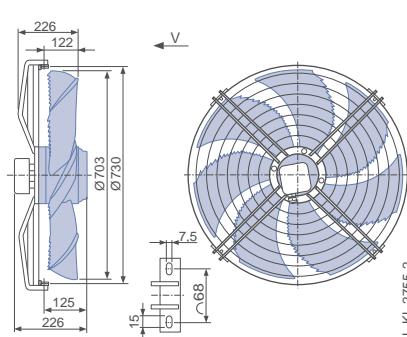

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN071-SD_.6F._7P1	Δ	I	400	①	2.10	1200	850	
			400*	②	1.70*	940*	900*	78
			400	③	1.25	560	940	71
	Y	II	400	④	1.25	700	580	
			400*	⑤	1.05*	620*	690*	69
			400	⑥	0.77	450	820	68

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN071-SDD.6F.A7P1	FN071-SDQ.6F.A7P1	FN071-SDS.6F.V7P1	FN071-SDI.6F.V7P1
Article no.	141748	141749	141783	153791
Weight kg	20.50	31.50	23.40	23.40
				34.30


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

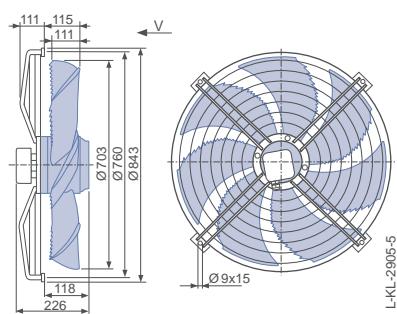

Design Q - square full bell mouth, guard grille pressure side

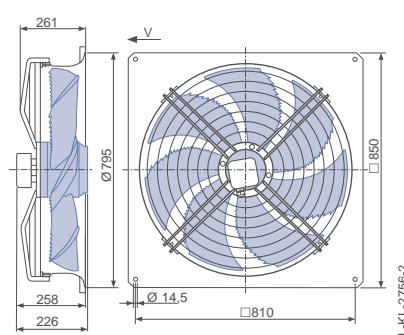

FE2owlet

for three phase alternating current, 6-6 pole

F N O 7 1 - S D





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.00/0.72 kW*
Rated current I_N : 2.50/1.25 A*
Rated speed n_N : 920/ 780 min⁻¹*
Starting current I_A : 9.50 / 3.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 37.4 %
Efficiency: $N_{actual} = 44.0 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

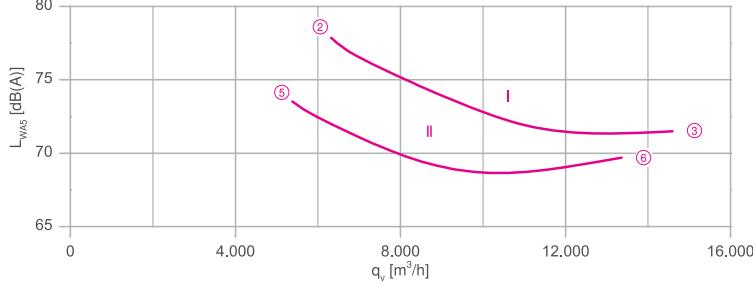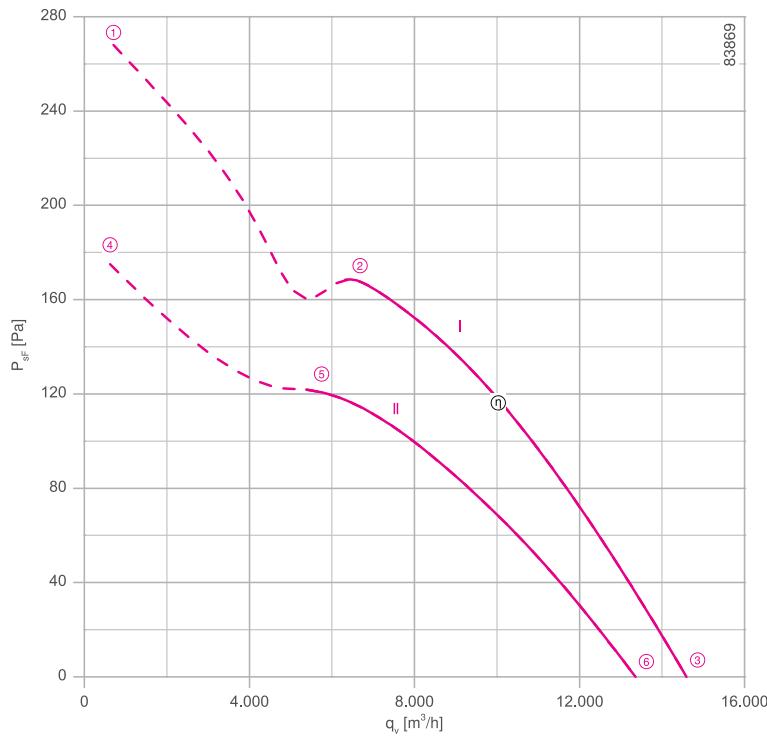


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

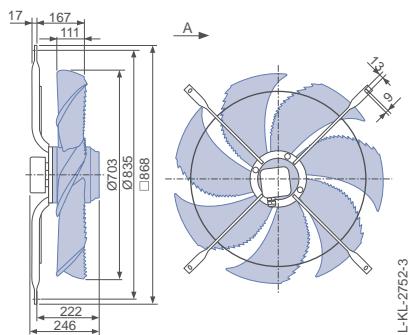


Design Q - square full bell mouth, without guard grille

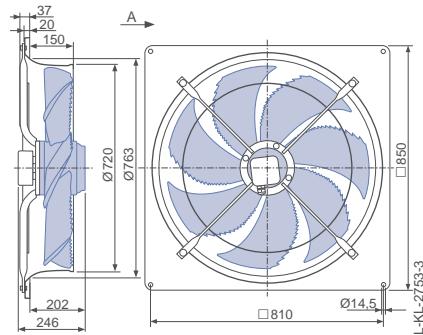

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

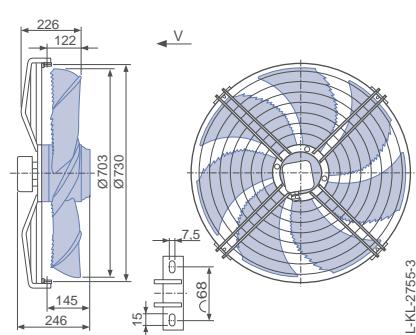

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN071-SD_.6K._7P1	Δ	I	400	①	2.70	1300	880	
			400*	②	2.50*	1000*	920*	78
			400	③	2.20	640	950	72
	Y	II	400	④	1.45	860	710	
			400*	⑤	1.25*	700*	780*	74
			400	⑥	0.92	460	870	70

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN071-SDD.6K.A7P1	FN071-SDQ.6K.A7P1	FN071-SDS.6K.V7P1	FN071-SDI.6K.V7P1
Article no.	141751	141752	141784	156935
Weight kg	24.10	35.10	27.00	27.20
				37.90


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

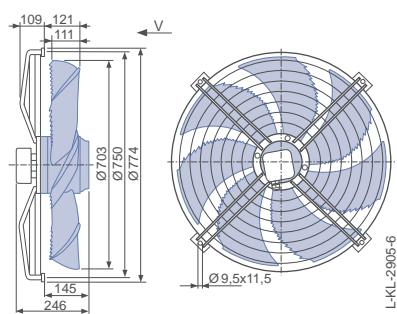

Design Q - square full bell mouth, guard grille pressure side

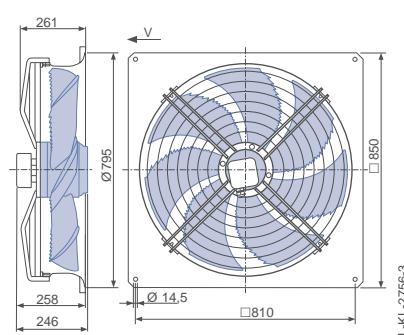

FE2owlet

for three phase alternating current, 8-8 pole

F N O 7 1 - A D





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.46/0.31 kW*
Rated current I_N : 1.10/0.60 A*
Rated speed n_N : 680/540 min⁻¹*
Starting current I_A : 3.20 / 0.95 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.4 %
Efficiency: $N_{actual} = 42.1 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

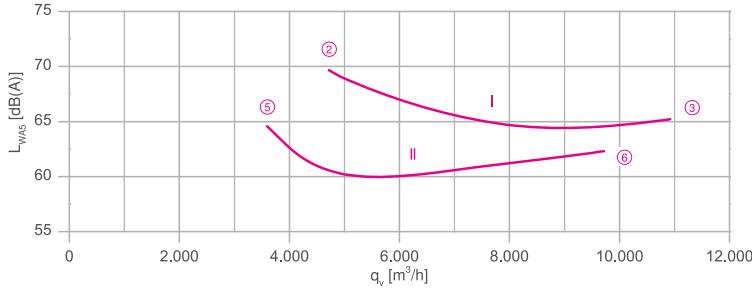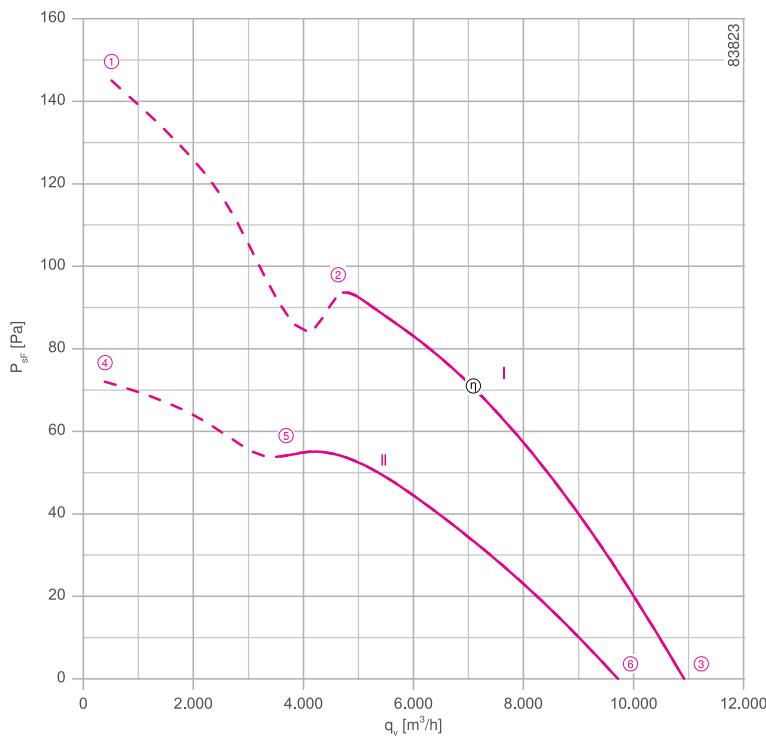


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

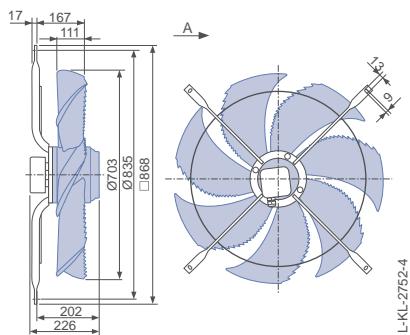


Design Q - square full bell mouth, without guard grille

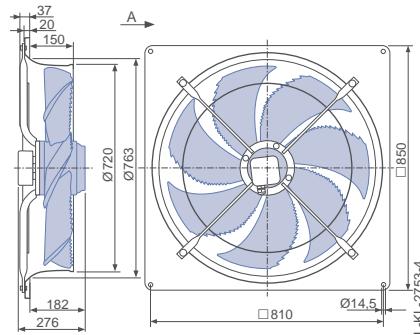

Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

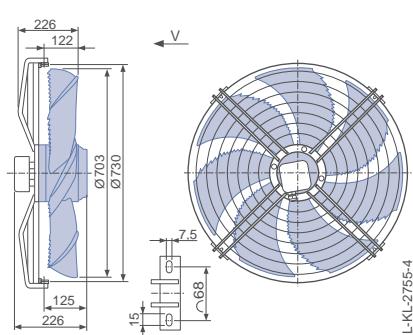

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN071-AD_.6F._7P1	Δ	I	400	①	1.25	580	650	
			400*	②	1.10*	460*	680*	70
			400	③	0.96	300	710	65
	Y	II	400	④	0.70	350	460	
			400*	⑤	0.60*	310*	540*	65
			400	⑥	0.44	210	640	62

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN071-ADD.6F.A7P1	FN071-ADQ.6F.A7P1	FN071-ADS.6F.V7P1	FN071-ADI.6F.V7P1
Article no.	141754	141755	141785	141800
Weight kg	20.50	31.50	23.40	23.10
				34.30


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
	Page 480		Page 518		Page 506

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

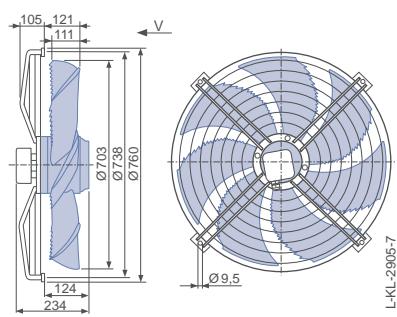


Design Q - square full bell mouth, guard grille pressure side

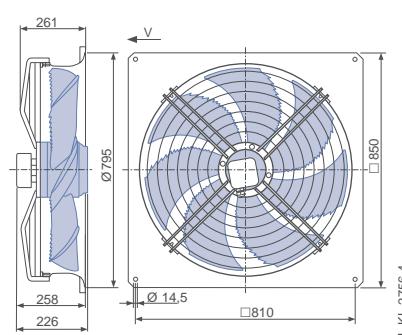

FE2owlet

for three phase alternating current, 12-12 pole

FNO71-N D

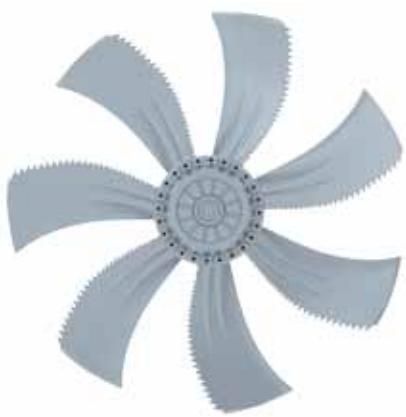

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_i : 140/85 W*
Rated current I_N : 0.37/0.175 A*
Rated speed n_N : 440/ 350 min⁻¹*
Current increase ΔI : 0 %
Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C
Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{stABA} : 28.4 %
Efficiency: $N_{\text{actual}} = 40.3 / N_{\text{target}} = 40\%$
Frequency inverter required



* Rated data

**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

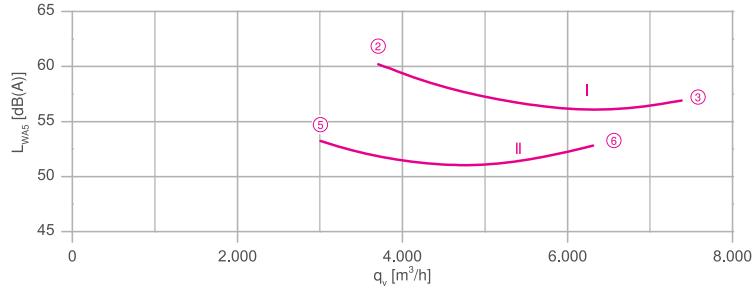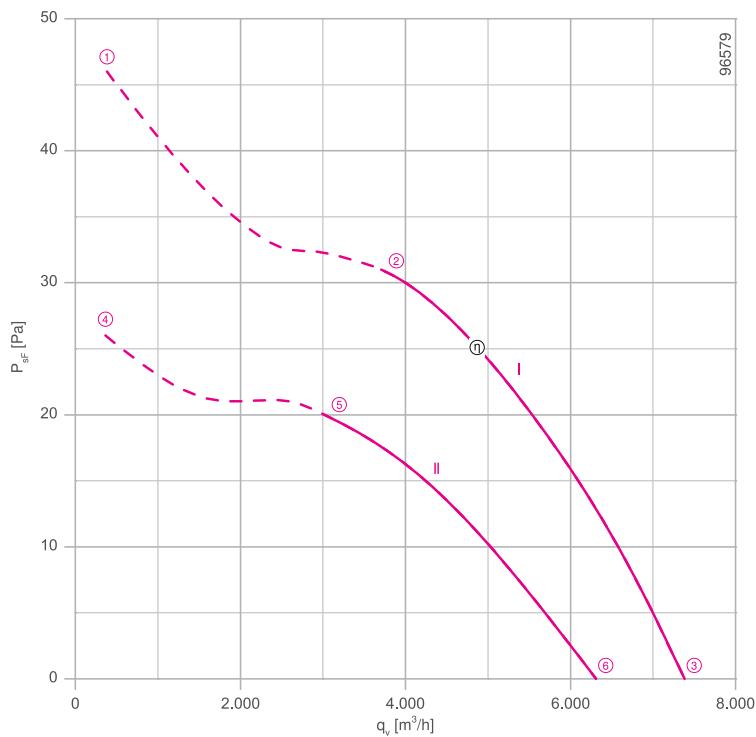


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design D - axial bolted, suspension for full bell mouth, guard grille suction side

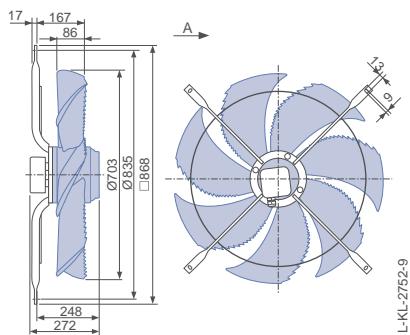


Design Q - square full bell mouth, without guard grille

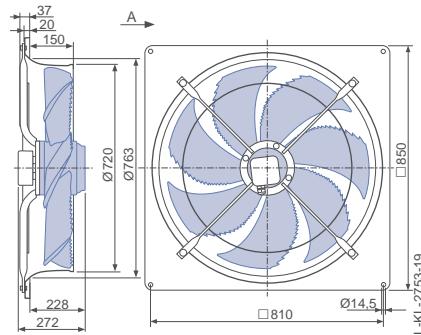

Airflow direction V

Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

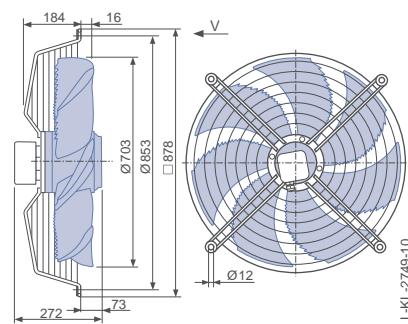

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN071-ND..6N..7P2	Δ	I	400	①	0.40	160	430	
			400*	②	0.37*	140*	440*	60
			400	③	0.35	110	460	57
	Y	II	400	④	0.19	95	320	
			400*	⑤	0.17*	85*	350*	53
			400	⑥	0.15	70	390	53

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	D (guard grille suction side)	Q (without guard grille)	K (guard grille pressure side)	S (guard grille pressure side)
Type	FN071-NDD.6N.A7P2	FN071-NDQ.6N.A7P2	FN071-NDK.6N.V7P2	FN071-NDS.6N.V7P2
Article no.	160060	160061	160063	160065
Weight kg	25.90	36.90	29.60	28.90
				23.00
				39.60


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

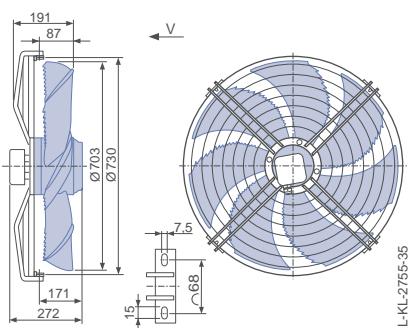

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

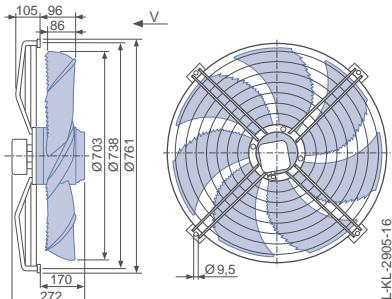

Design Q - square full bell mouth, guard grille pressure side

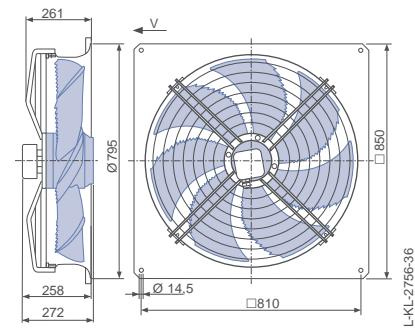

FE2owlet

for three phase alternating current, 4-4 pole

FNO80-VD



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 3.90/2.60 kW*

Rated current I_N : 6.80/4.20 A*

Rated speed n_N : 1310/1050 min⁻¹*

Starting current I_A : 32.00 / 10.00 A

Current increase ΔI : 5 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 5

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 40.4 %

Efficiency: $N_{actual} = 43.2 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

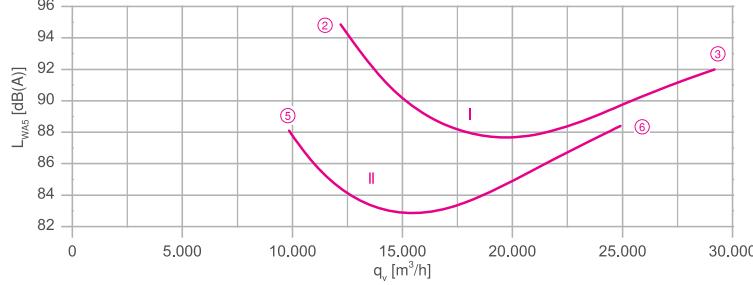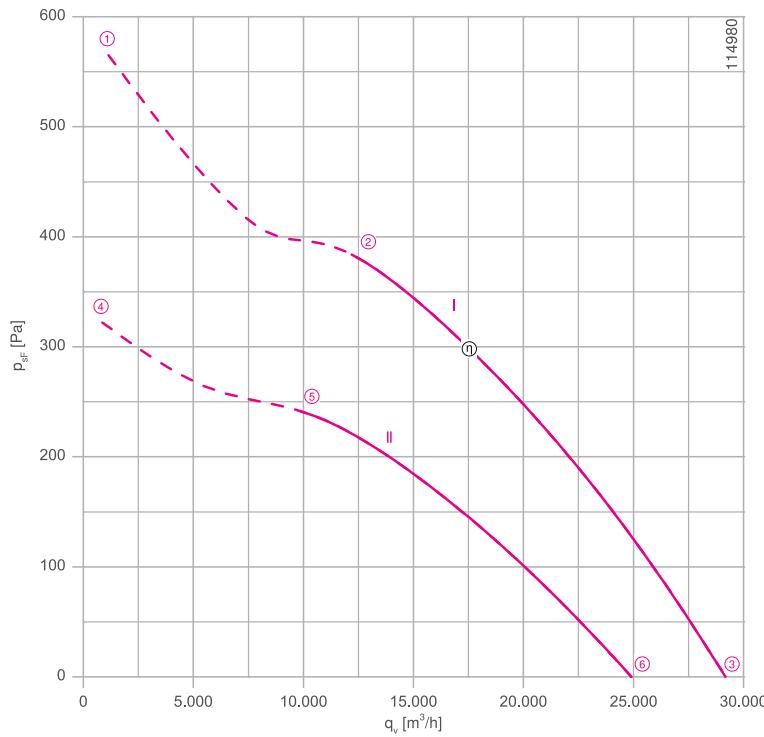

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, guard grille suction side

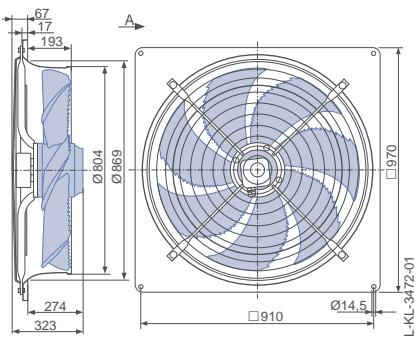


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

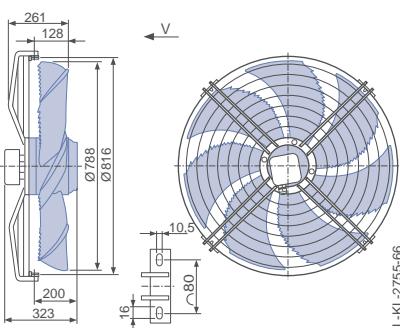

Design Q - square full bell mouth, guard grille pressure side


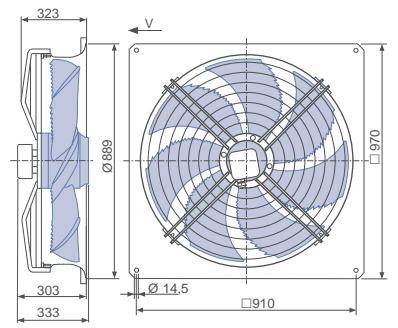


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-VD_.7Q_.5P7	Δ	I	400	①	8.40	5000	1240	
			400*	②	6.80*	3900*	1310*	95
			400	③	5.20	2700	1380	92
	Y	II	400	④	5.00	3000	930	
			400*	⑤	4.20*	2600*	1050*	88
			400	⑥	3.20	2000	1180	88

*rated data

Fan ordering information

Airflow direction A		Airflow direction V	
Design	Q (guard grille suction side)	S (guard grille pressure side)	Q (guard grille pressure side)
			
Type	FN080-VDQ.7Q.A5P7	FN080-VDS.7Q.V5P7	FN080-VDQ.7Q.V5P7
Article no.	171318	171315	171314
Weight kg	65.60	50.90	65.20

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components

Control
technology

Appendix

FE2owlet

for three phase alternating current, 6-6 pole

FNO80-SD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz*
Motor input power P_i : 1.80/1.15 kW*
Rated current I_N : 3.90/2.20 A*
Rated speed n_N : 900/ 700 min⁻¹*
Starting current I_A : 13.00 A / 3.80 A
Current increase ΔI : 5 %
Thermal class: THCL155*

Min. permitted conveyor temperature $t_{R(min)}$: -40 °C
Max. permitted conveyor temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: Thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP Data



Efficiency η_{statA} : 36.8 %

Efficiency: $N_{actual} = 41.5 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

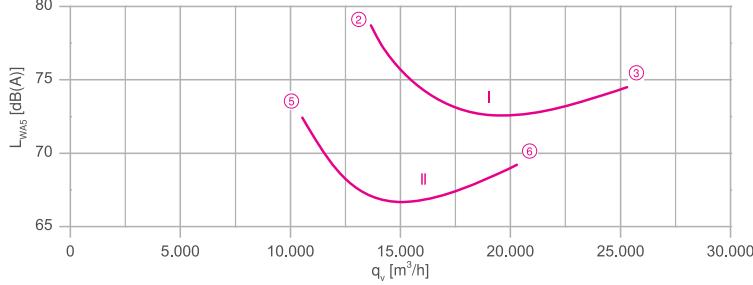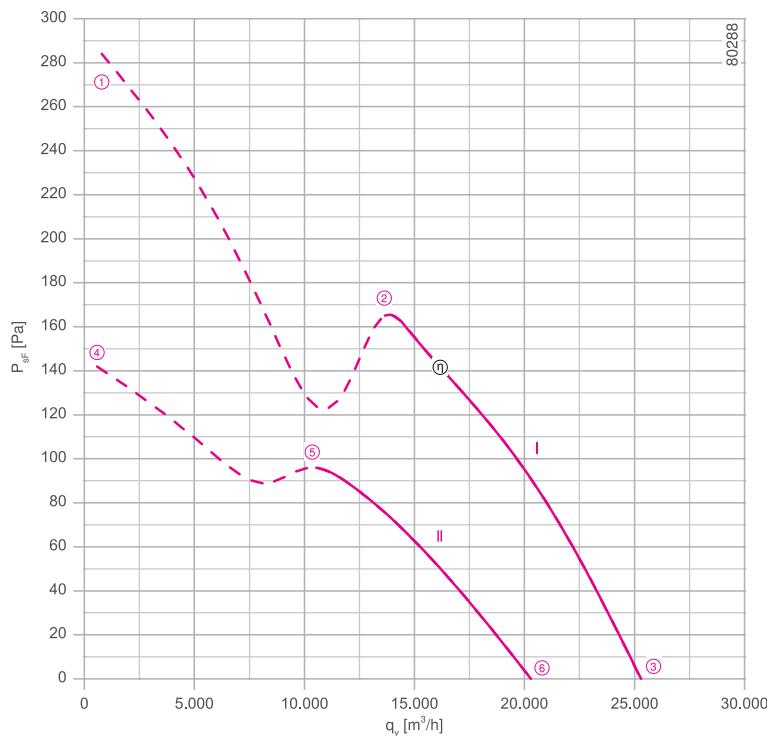

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

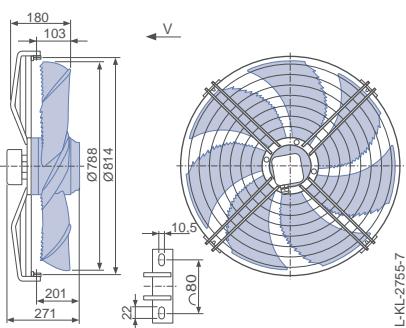

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

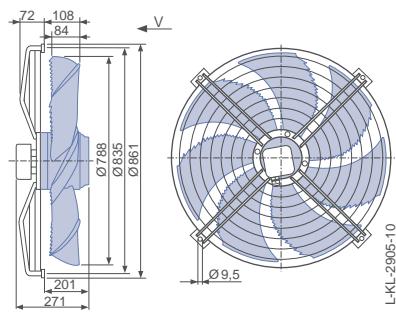

Design Q - square full bell mouth, guard grille pressure side

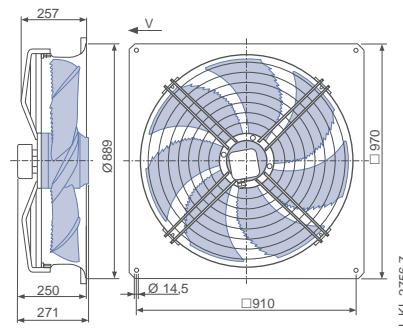

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-SD_.6N._7	Δ	I	400	①	4.80	2400	860	
			400*	②	3.90*	1800*	900*	79
			400	③	3.60	1550	920	75
	Y	II	400	④	2.50	1300	600	
			400*	⑤	2.20*	1150*	700*	73
			400	⑥	2.00	1050	740	69

*rated data

Fan ordering information

Airflow direction V			
Design	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type Article no.	FN080-SDS.6N.V7 138757	FN080-SDI.6N.V7 153512	FN080-SDQ.6N.V7 138758
Weight kg	36.50	36.10	50.90

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components

Control
technology

Appendix

FE2owlet

for three phase alternating current, 6-6 pole

FNO80-SD



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 1.90/1.10 kW*

Rated current I_N : 3.90/2.00 A*

Rated speed n_N : 870/ 630 min⁻¹*

Starting current I_A : 11.00 / 3.40 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 60 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 36.3 %

Efficiency: $N_{actual} = 41.0 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

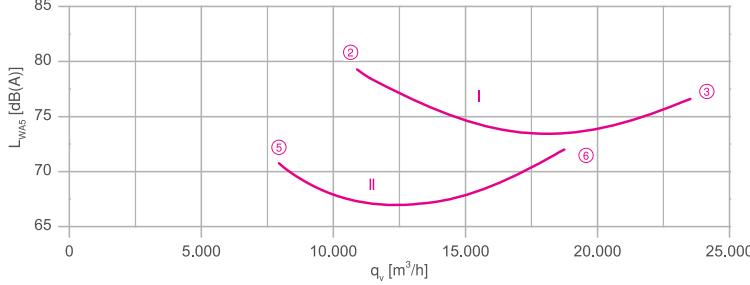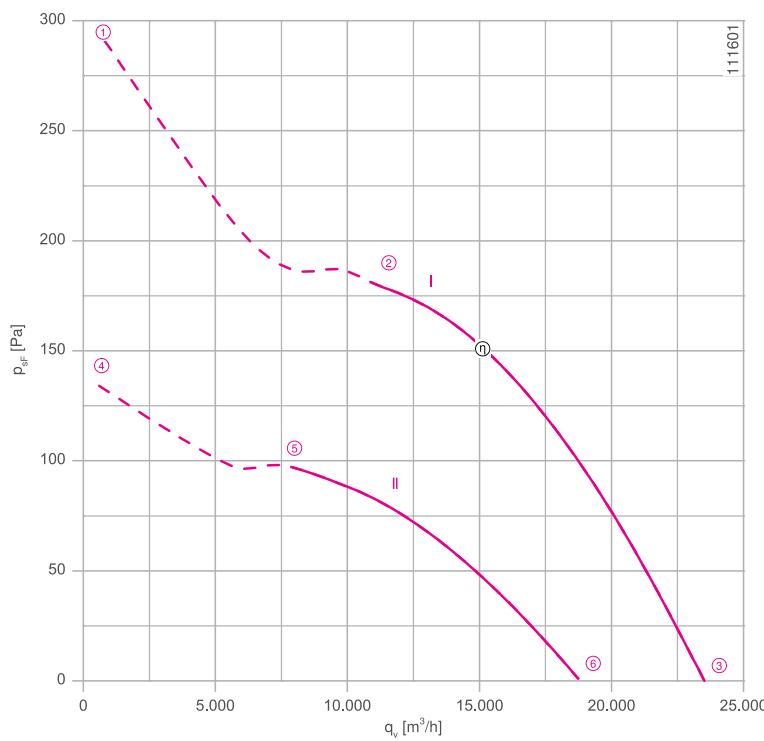

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

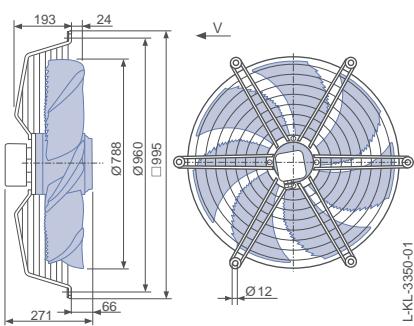

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

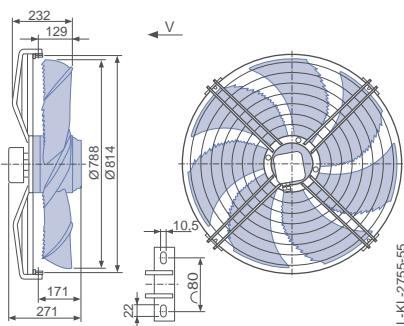

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

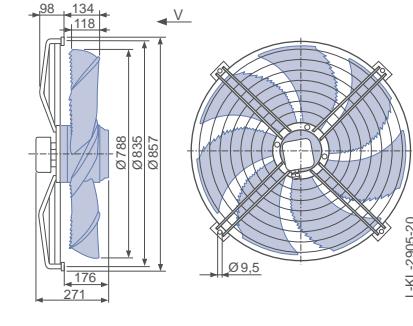

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-SD_.6N.V7P5	Δ	I	400	①	4.60	2400	810	
			400*	②	3.90*	1900*	870*	80
			400	③	3.10	1350	920	77
	Y	II	400	④	2.20	1200	550	
			400*	⑤	2.00*	1100*	630*	71
			400	⑥	1.70	900	740	72

*rated data


Fan ordering information

Design	K (guard grille pressure side)	S (guard grille pressure side)	I (guard grille pressure side)	F (without guard grille)	Q (guard grille pressure side)
Type Article no.	FN080-SDK.6N.V7P5 168788	FN080-SDS.6N.V7P5 168787	FN080-SDI.6N.V7P5 168785	FN080-SDF.6N.V7P5 168789	FN080-SDQ.6N.V7P5 168786
Weight kg	37.90	33.70	33.60	45.80	42.60


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design F - flange ring with two flanges, without guard grille

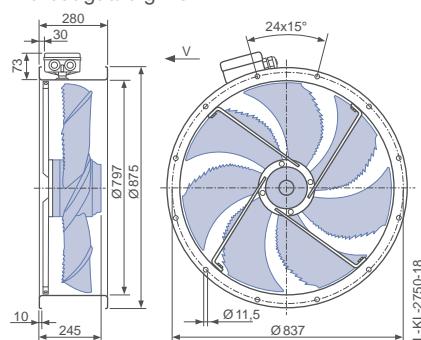

Design Q - square full bell mouth, guard grille pressure side

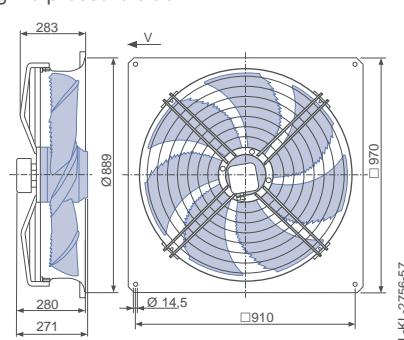

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-SD_.6N.V7P5	Δ	I	400	①	4.00	1950	730	
			400*	②	3.50*	1650*	790*	76
			400	③	3.00	1250	860	76
	Y	II	400	④	1.70	880	490	
			400*	⑤	1.55*	820*	560*	67
			400	⑥	1.40	720	650	70

*rated data


Fan ordering information

Design	K (guard grille pressure side)	S (guard grille pressure side)	I (guard grille pressure side)	F (without guard grille)	Q (guard grille pressure side)
Type Article no.	FN080-SDK.6N.V7P5 168893	FN080-SDS.6N.V7P5 168892	FN080-SDI.6N.V7P5 168890	FN080-SDF.6N.V7P5 168894	FN080-SDQ.6N.V7P5 168891
Weight kg	37.90	33.00	33.60	45.80	42.60


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design F - flange ring with two flanges, without guard grille

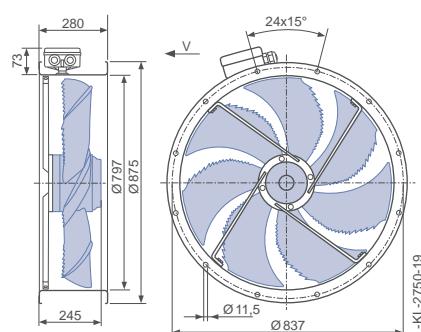

Design Q - square full bell mouth, guard grille pressure side

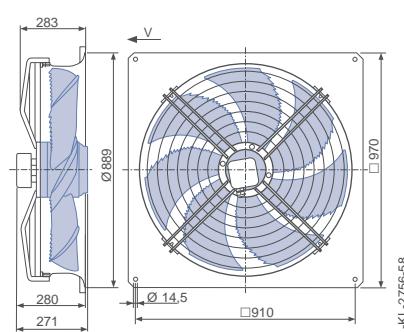

FE2owlet

for three phase alternating current, 8-8 pole



FNO80-A



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.82/0.48 kW*
Rated current I_N : 2.10/1.00 A*
Rated speed n_N : 670/550 min⁻¹*
Starting current I_A : 5.50 / 1.60 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 8
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.4 %
Efficiency: $N_{actual} = 40.3 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

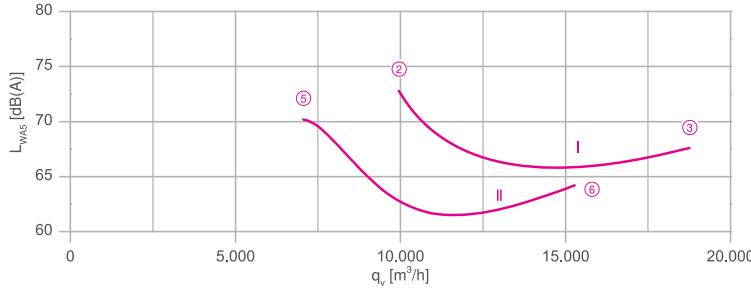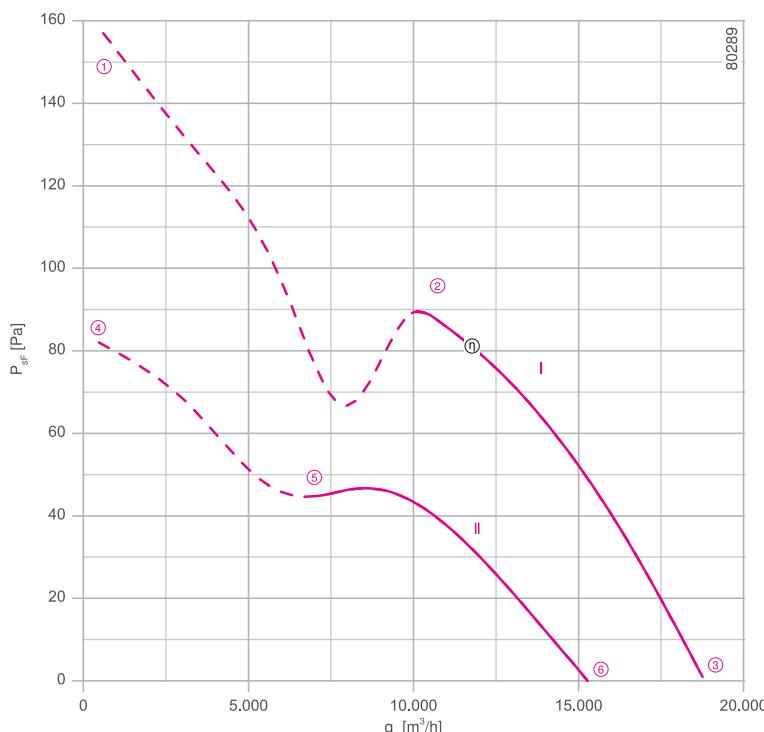

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

← Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

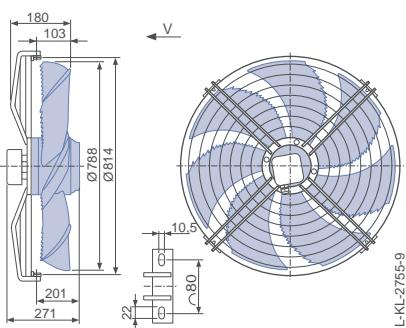

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

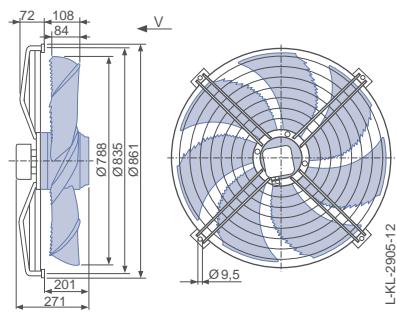

Design Q - square full bell mouth, guard grille pressure side

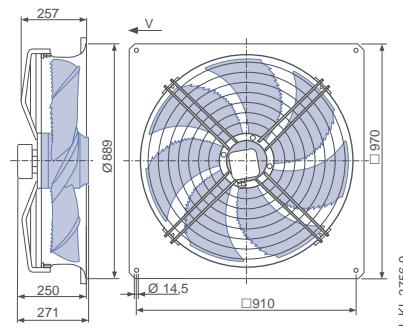

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-AD_.6N._7	Δ	I	400	① 2.40	1050	640		
			400*	② 2.10*	820*	670*	73	
			400	③ 2.00	700	690	68	
	Y	II	400	④ 1.20	580	460		
			400*	⑤ 1.00*	480*	550*	70	
			400	⑥ 0.98	460	560	64	

*rated data

Fan ordering information

Airflow direction V			
Design	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type Article no.	FN080-ADS.6N.V7 138763	FN080-ADI.6N.V7 153397	FN080-ADQ.6N.V7 138764
Weight kg	36.50	36.10	50.90

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System components

Control technology

Appendix

FE2owlet

for three phase alternating current, 8-8 pole



FNO80-AD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.84/0.46 kW*
Rated current I_N : 2.20/1.00 A*
Rated speed n_N : 650/ 480 min⁻¹*
Starting current I_A : 5.50 / 1.60 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.1 %
Efficiency: $N_{actual} = 40.1 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

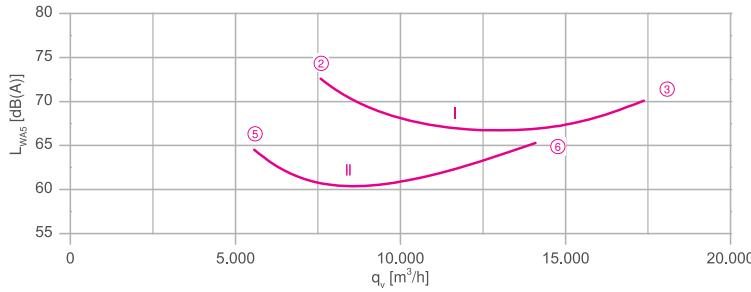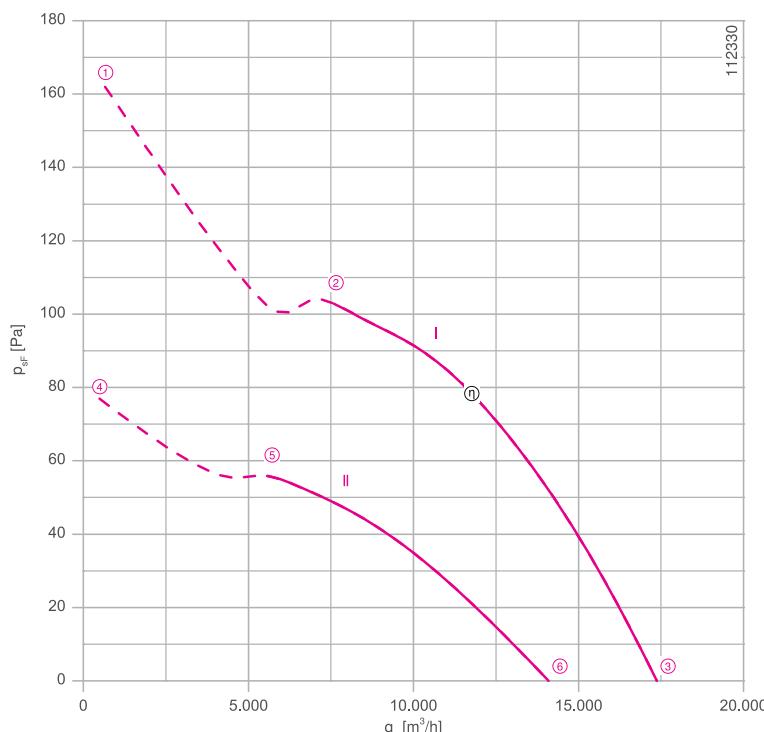

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

← Airflow direction V


Design K - axial bolted, mounted for short bell mouth, guard grille pressure side

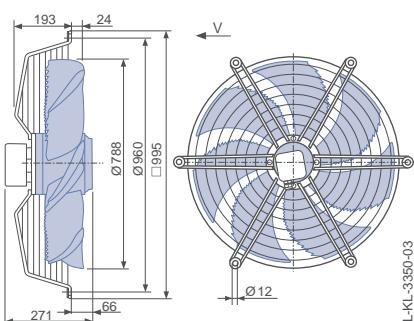

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

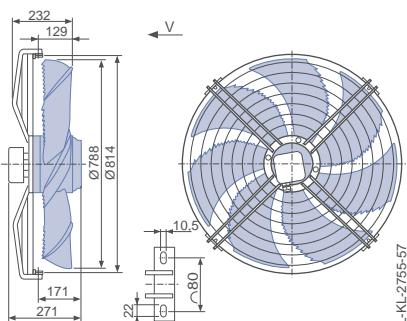

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

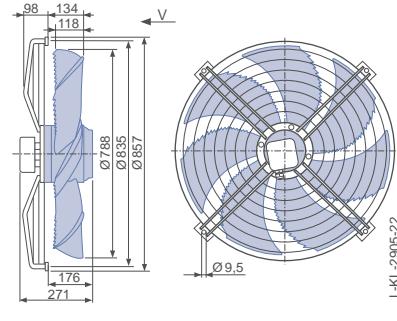

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN080-AD_.6N.V7P5	Δ	I	400	① 2.50	1050	610		
			400*	② 2.20*	840*	650*	73	
			400	③ 1.90	620	690	70	
	Y	II	400	④ 1.10	520	420		
			400*	⑤ 1.00*	460*	480*	65	
			400	⑥ 0.88	400	550	65	

*rated data


Fan ordering information

Design	K (guard grille pressure side)	S (guard grille pressure side)	I (guard grille pressure side)	F (without guard grille)	Q (guard grille pressure side)
Type Article no.	FN080-ADK.6N.V7P5 168901	FN080-ADS.6N.V7P5 168900	FN080-ADI.6N.V7P5 168898	FN080-ADF.6N.V7P5 168902	FN080-ADQ.6N.V7P5 168899
Weight kg	37.90	33.00	33.60	45.80	42.60


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Design F - flange ring with two flanges, without guard grille

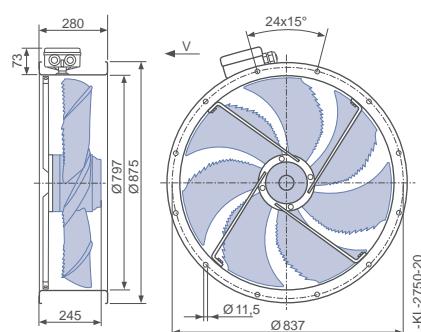

Design Q - square full bell mouth, guard grille pressure side

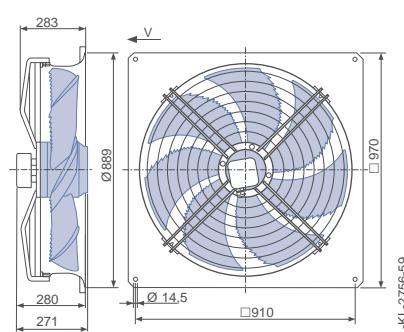

FE2owlet

for three phase alternating current, 4-4 pole

FNO91-VD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 5 Hz*
Input power P_N : 5.20/3.10 kW*
Rated current I_N : 8.80/5.00 A*
Rated speed n_N : 1210/900 min $^{-1}$ *
Starting current I_A : 32.00 / 10.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 40 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 38.5 %
Efficiency: $N_{actual} = 40.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

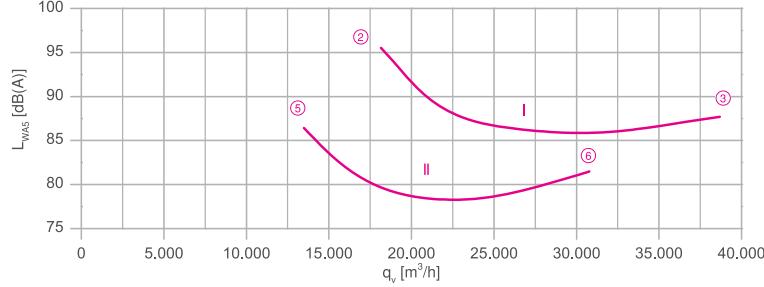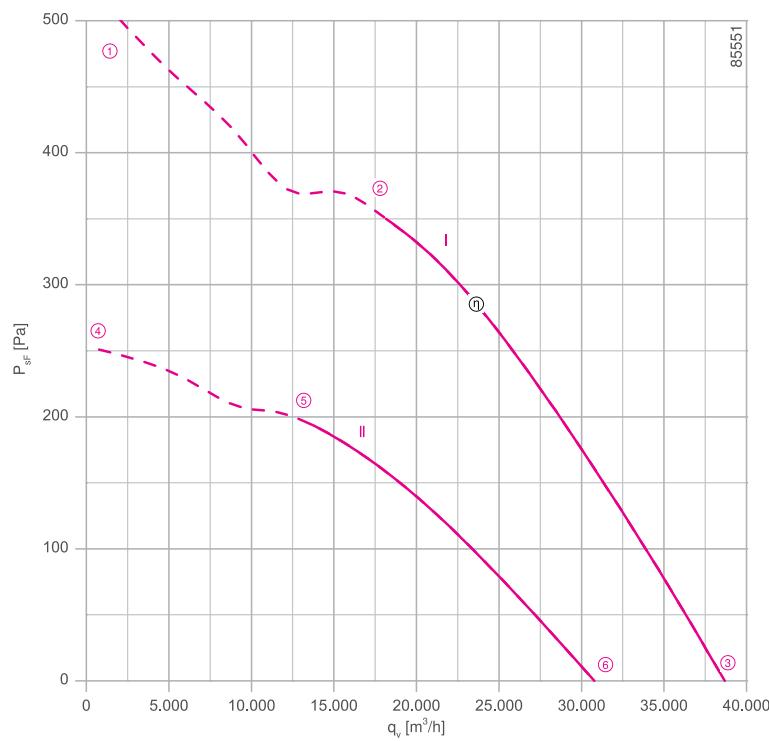


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

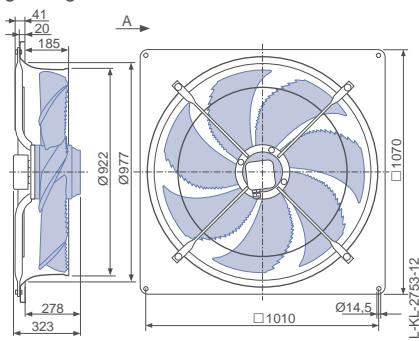


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

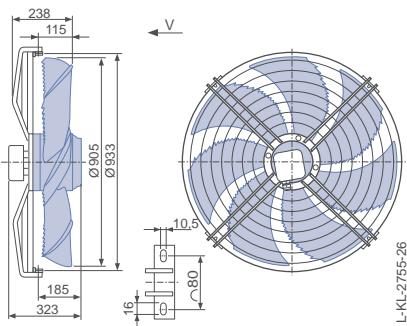

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

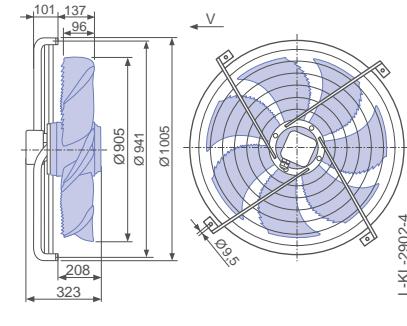

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN091-VD_.7Q_.5P1	Δ	I	400	①	11.00	6800	1110	
			400*	②	8.80*	5200*	1210*	96
			400	③	6.80	3800	1300	88
	Y	II	400	④	5.80	3600	750	
			400*	⑤	5.00*	3100*	900*	87
			400	⑥	4.20	2500	1040	82

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type Article no.	FN091-VDQ.7Q.A5P1 155924	FN091-VDS.7Q.V5P1 155926	FN091-VDI.7Q.V5P1 155928
Weight kg	64.70	52.70	52.00
			69.30

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - square full bell mouth, guard grille pressure side

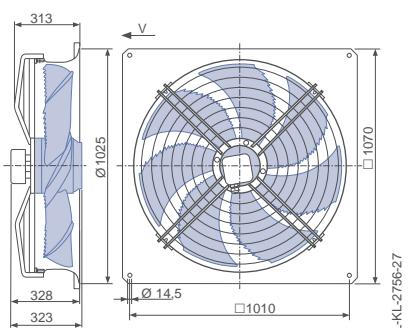

FE2owlet

for three phase alternating current, 6-6 pole



FNO91-SD

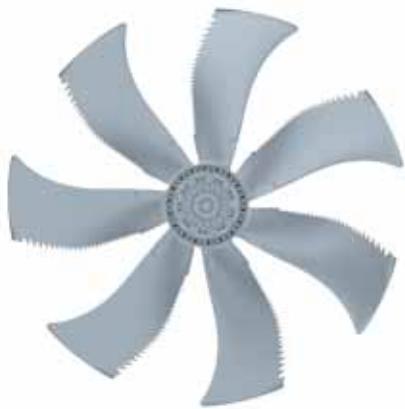

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.85/1.05 kW*
Rated current I_N : 3.80/1.90 A*
Rated speed n_N : 840/ 630 min⁻¹*
Starting current I_A : 11.00 / 3.40 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 39.2 %
Efficiency: $N_{actual} = 44.0 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

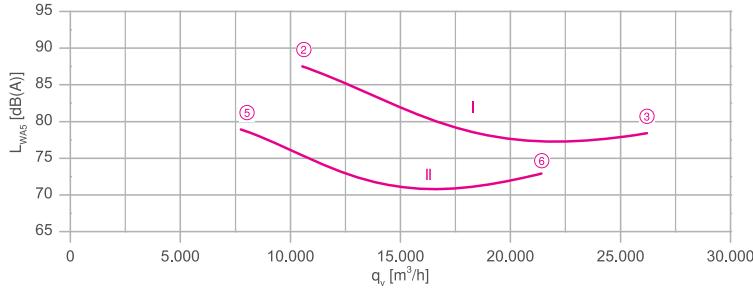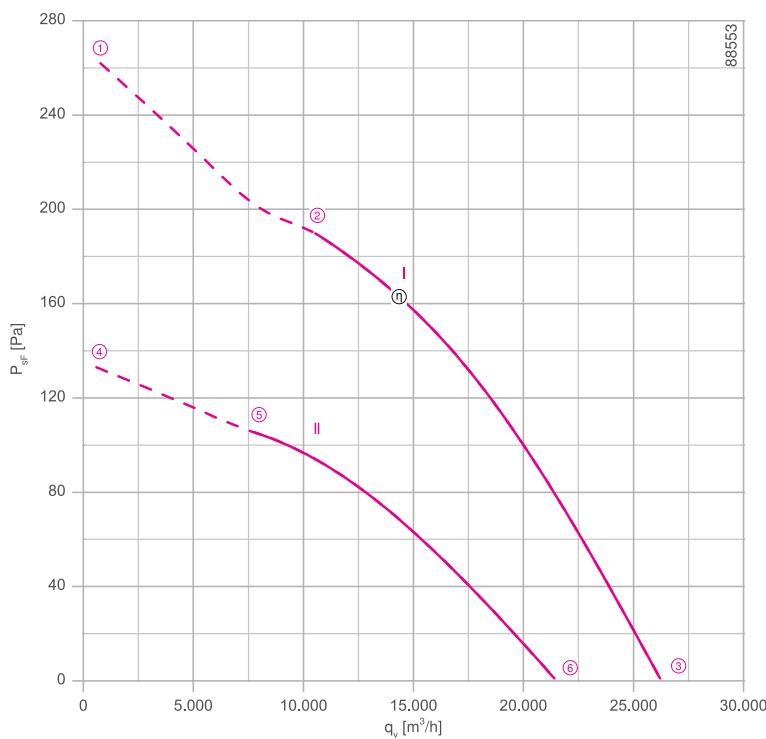

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

← Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

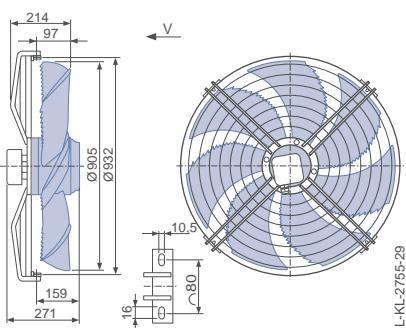

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

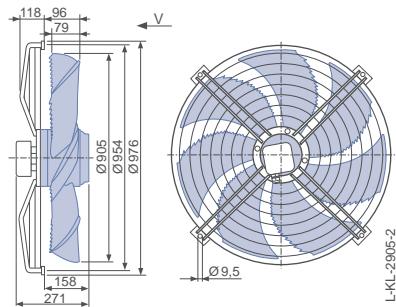

Design Q - square full bell mouth, guard grille pressure side

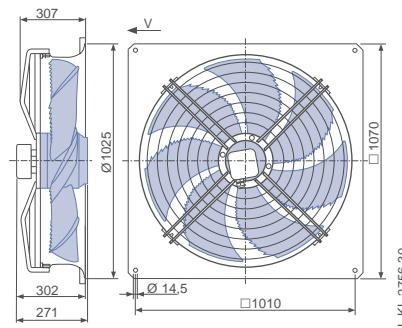

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN091-SD_.6N._7P2	Δ	I	400	①	4.40	2200	790	
			400*	②	3.80*	1850*	840*	88
			400	③	3.10	1250	900	78
	Y	II	400	④	2.10	1200	560	
			400*	⑤	1.90*	1050*	630*	79
			400	⑥	1.55	840	730	73

*rated data

Fan ordering information

Airflow direction V			
Design	S (guard grille pressure side)	I (guard grille pressure side)	
Type Article no.	FN091-SDS.6N.V7P2 156205	FN091-SDI.6N.V7P2 156203	FN091-SDQ.6N.V7P2 156204
Weight kg	34.10	34.20	50.70

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System components
Control technology

Appendix

FE2owlet

for three phase alternating current, 6-6 pole

FNO91-SD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.95/1.30 kW*
Rated current I_N : 4.40/2.30 A*
Rated speed n_N : 880/ 720 min⁻¹*
Starting current I_A : 17.00 / 5.50 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 40.8 %
Efficiency: $N_{actual} = 45.4 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

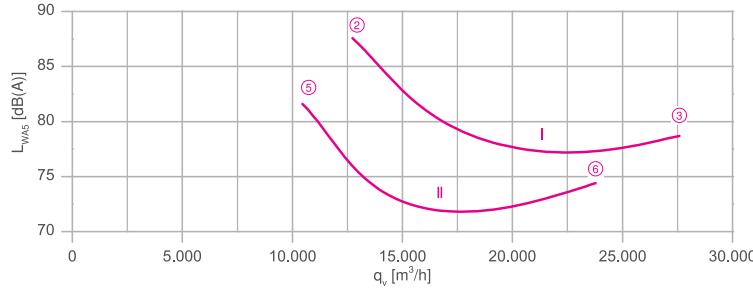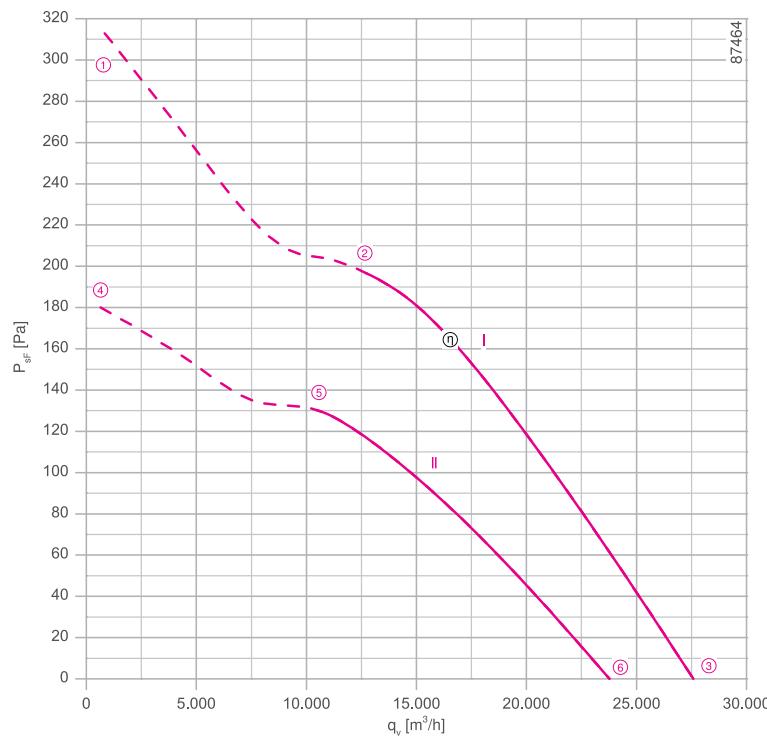


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

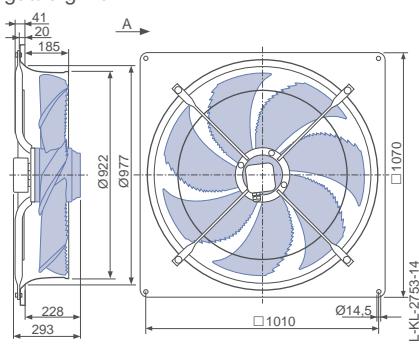


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

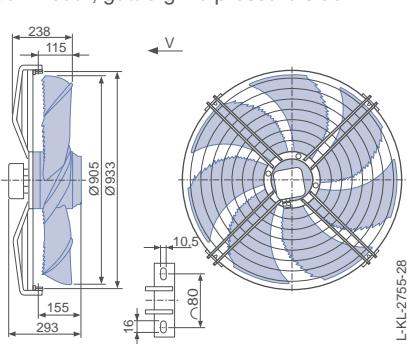

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

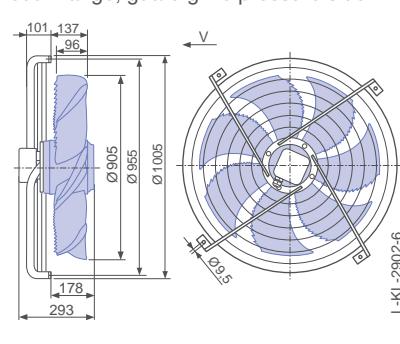

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN091-SD_.7M._5P1	Δ	I	400	①	5.40	2700	830	
			400*	②	4.40*	1950*	880*	88
			400	③	3.90	1400	920	79
	Y	II	400	④	2.80	1600	620	
			400*	⑤	2.30*	1300*	720*	82
			400	⑥	1.80	1000	800	74

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN091-SDQ.7M.A5P1	FN091-SDS.7M.V5P1	FN091-SDI.7M.V5P1
Article no.	156181	156183	156185
Weight kg	58.20	46.40	45.90
			63.00

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - square full bell mouth, guard grille pressure side

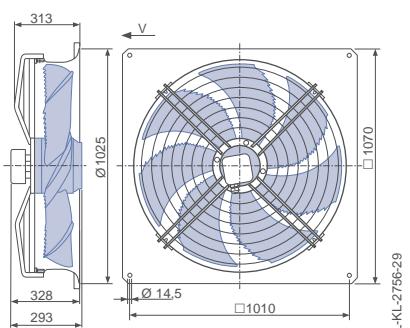

FE2owlet

for three phase alternating current, 8-8 pole

FNO91-AD

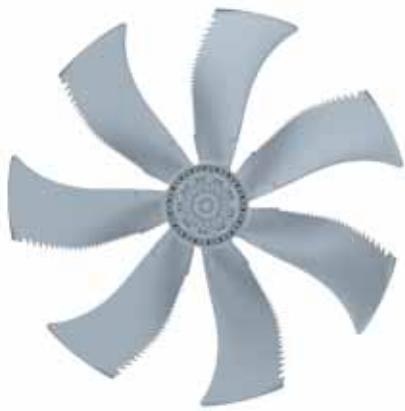

Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 0.90/0.54 kW*

Rated current I_N : 2.20/1.10 A*

Rated speed n_N : 660/ 500 min⁻¹*

Starting current I_A : 5.50 / 1.60 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 36.5 %

Efficiency: $N_{actual} = 43.2 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

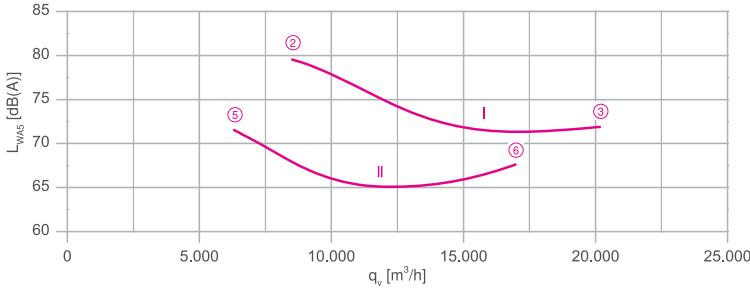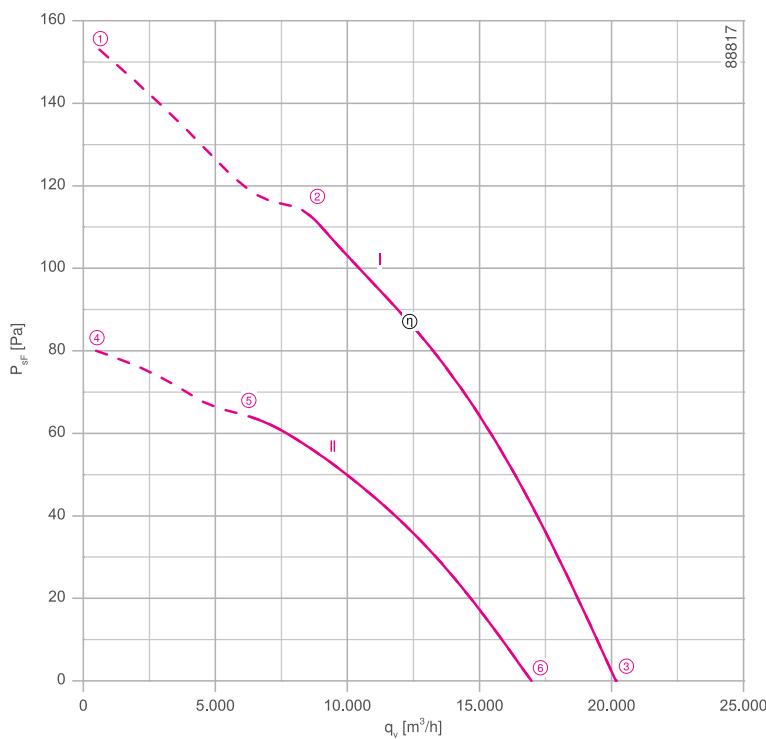

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

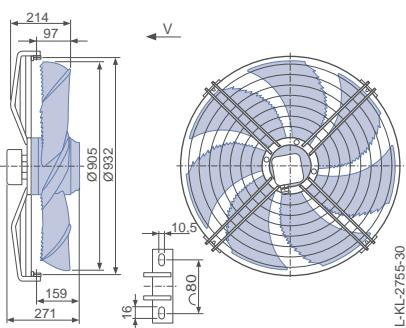

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

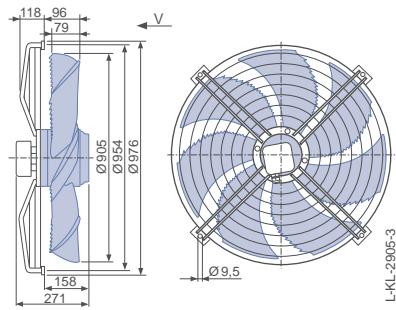

Design Q - square full bell mouth, guard grille pressure side

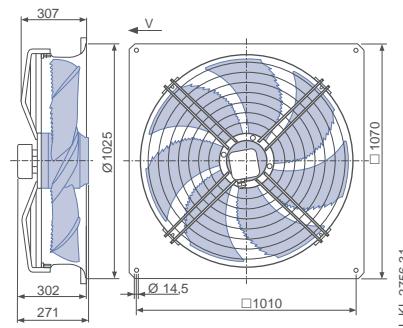

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN091-AD_.6N._7P2	Δ	I	400	①	2.40	1100	620	
			400*	②	2.20*	900*	660*	80
			400	③	1.85	620	690	72
	Y	II	400	④	1.20	600	440	
			400*	⑤	1.10*	540*	500*	72
			400	⑥	0.90	440	590	68

*rated data

Fan ordering information

Airflow direction V			
Design	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type	FN091-ADS.6N.V7P2	FN091-ADI.6N.V7P2	FN091-ADQ.6N.V7P2
Article no.	156215	156213	156214
Weight kg	34.10	34.20	50.70

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System
components


Control
technology

Appendix

FE2owlet

for three phase alternating current, 12-12 pole



FNO91-ND

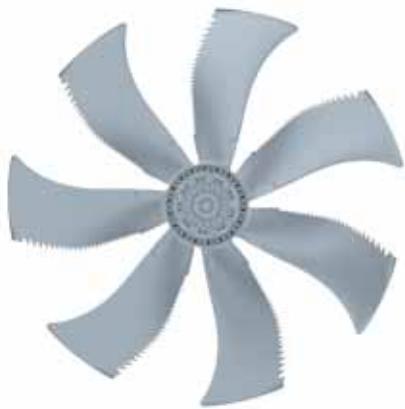

Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 310/190 W*
Rated current I_N : 0.83/0.39 A*
Rated speed n_N : 440/ 340 min⁻¹*
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{startA} : 30.4 %
Efficiency: $N_{actual} = 40.0 / N_{target} = 40\%$ **
* Rated data
**ErP 2015

Characteristic curve

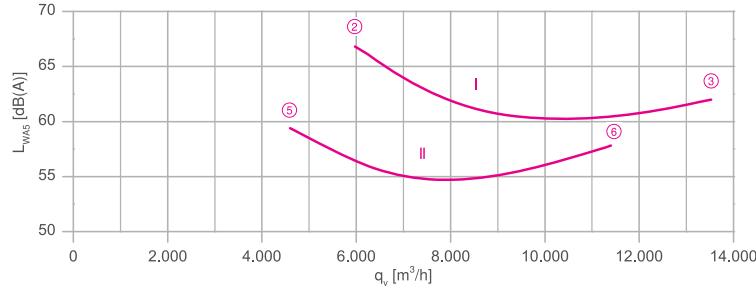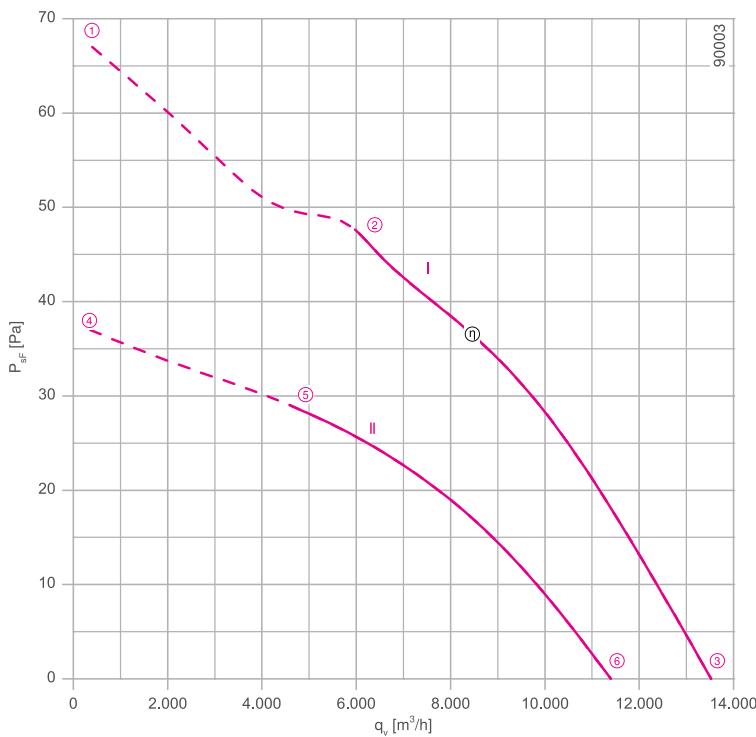

Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430


Dimensions mm

← Airflow direction V


Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

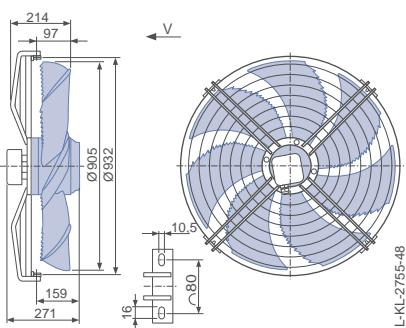

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

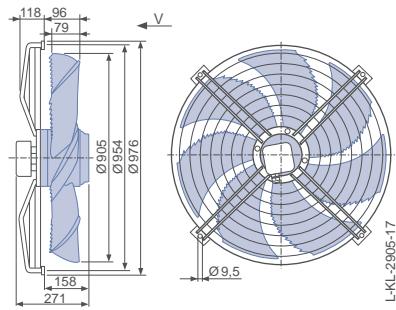

Design Q - square full bell mouth, guard grille pressure side

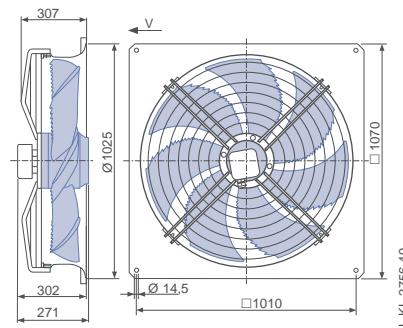

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
FN091-ND..6N..7P2	Δ	I	400	①	0.90	380	420	
			400*	②	0.83*	310*	440*	67
			400	③	0.76	240	460	62
	Y	II	400	④	0.42	210	310	
			400*	⑤	0.39*	190*	340*	59
			400	⑥	0.33	150	390	58

*rated data

Fan ordering information

Airflow direction V			
Design	S (guard grille pressure side)	I (guard grille pressure side)	Q (guard grille pressure side)
Type	FN091-NDS.6N.V7P2	FN091-NDI.6N.V7P2	FN091-NDQ.6N.V7P2
Article no.	156219	156217	156218
Weight kg	34.10	34.20	50.70

Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506

Information

FE2owlet
ECblue

FE2owlet

FE2owlet-ECblue
with ZApplus

FE2owlet
with ZApplus

System components

Control technology

Appendix

FE2owlet

for three phase alternating current, 6-6 pole

FN 1 OO-SD



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 3.10/1.95 kW*

Rated current I_N : 5.60/3.40 A*

Rated speed n_N : 870/ 660 min⁻¹*

Starting current I_A : 22.00 / 6.50 A

Current increase ΔI : 5 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 5

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 38.7 %

Efficiency: $N_{actual} = 42.1 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

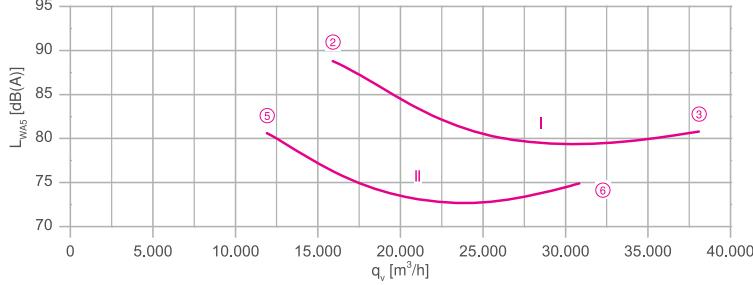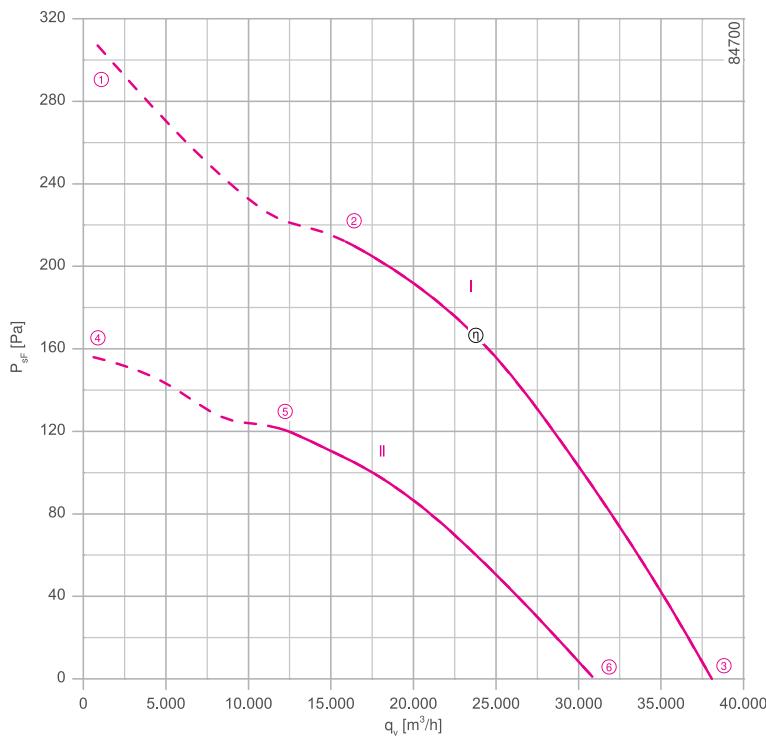

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

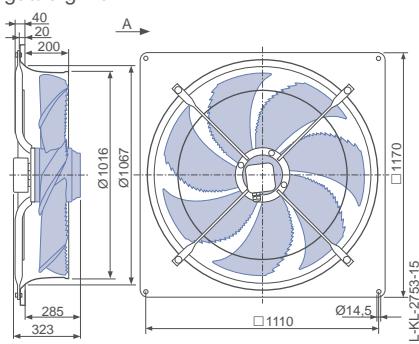


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

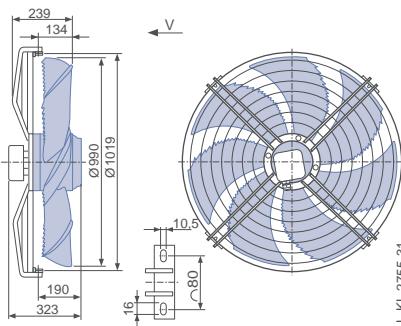

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

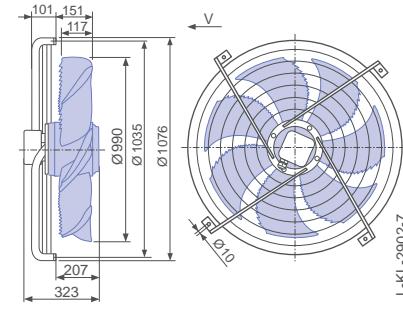

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-SD_.7Q._5P1	Δ	I	400	①	6.60	3800	830	
			400*	②	5.60*	3100*	870*	89
			400	③	4.40	2300	910	81
	Y	II	400	④	3.80	2100	590	
			400*	⑤	3.40*	1950*	660*	81
			400	⑥	2.80	1650	740	75

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type Article no.	FN100-SDQ.7Q.A5P1 155854	FN100-SDS.7Q.V5P1 155858	FN100-SDI.7Q.V5P1 155856
Weight kg	69.50	55.10	54.30
			73.80

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

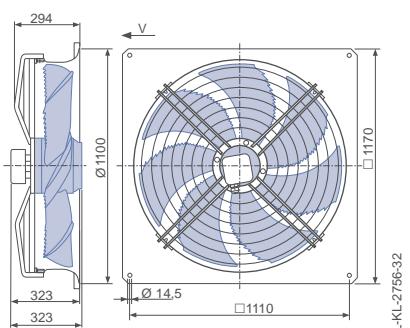

FE2owlet

for three phase alternating current, 6-6 pole

FN 1 OO-SD





Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 2.70/1.60 kW*
Rated current I_N : 5.40/2.80 A*
Rated speed n_N : 820/620 min⁻¹*
Starting current I_A : 18.00 / 6.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 36.8 %
Efficiency: $N_{actual} = 40.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

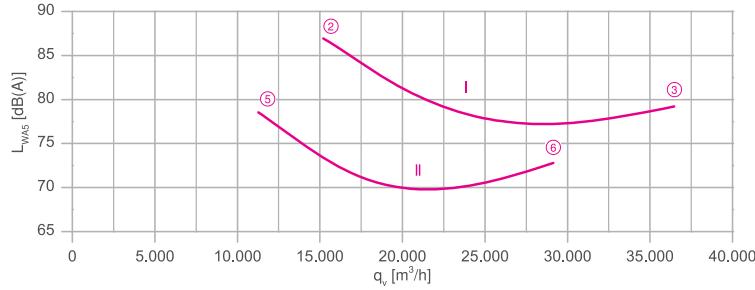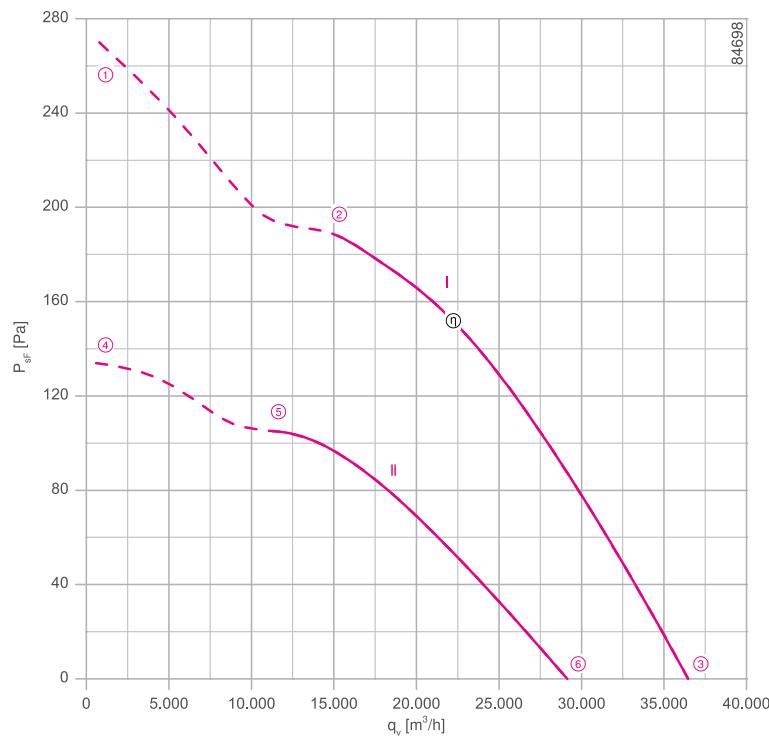


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

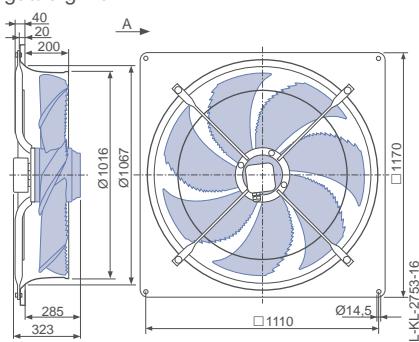


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

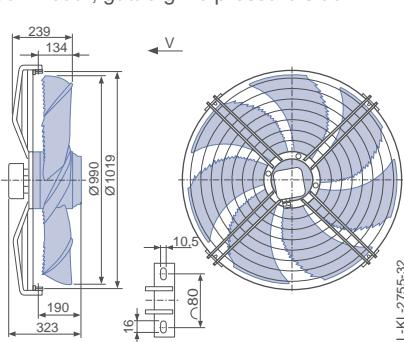

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

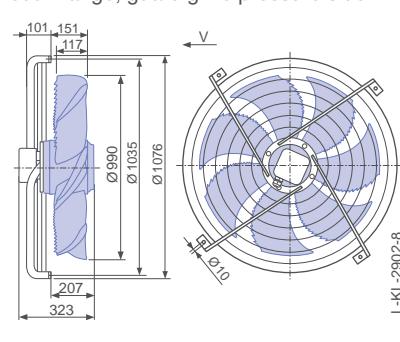

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-SD_.7Q._5P1	Δ	I	400	①	6.00	3200	780	
			400*	②	5.40*	2700*	820*	87
			400	③	4.60	2100	870	79
	Y	II	400	④	3.10	1800	560	
			400*	⑤	2.80*	1600*	620*	79
			400	⑥	2.40	1350	700	73

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Design	Q (guard grille pressure side)		
Type Article no.	FN100-SDQ.7Q.A5P1 155860	FN100-SDS.7Q.V5P1 155864	FN100-SDI.7Q.V5P1 155862
Weight kg	69.50	55.10	54.30
			73.80

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

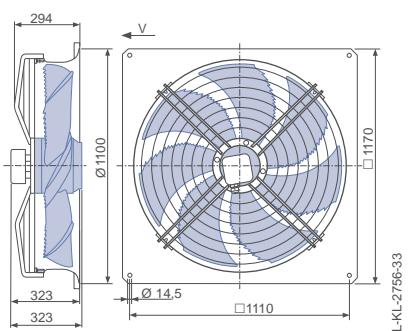

FE2owlet

for three phase alternating current, 8-8 pole

FN 1 OO-AD



Description

Motor technology: AC

Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

Input power P_i : 1.55/1.15 kW*

Rated current I_N : 3.40/2.00 A*

Rated speed n_N : 690/ 570 min⁻¹*

Starting current I_A : 14.00 / 4.40 A

Current increase ΔI : 5 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 5

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 38.0 %

Efficiency: $N_{actual} = 43.2 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

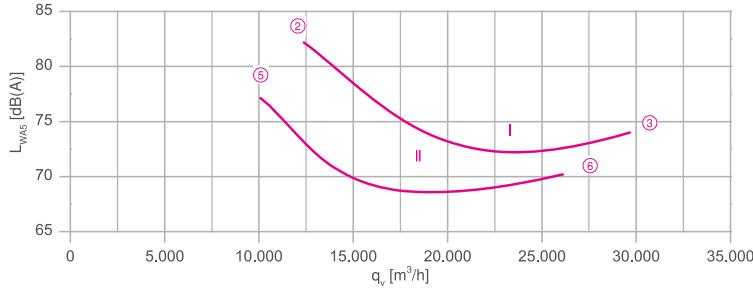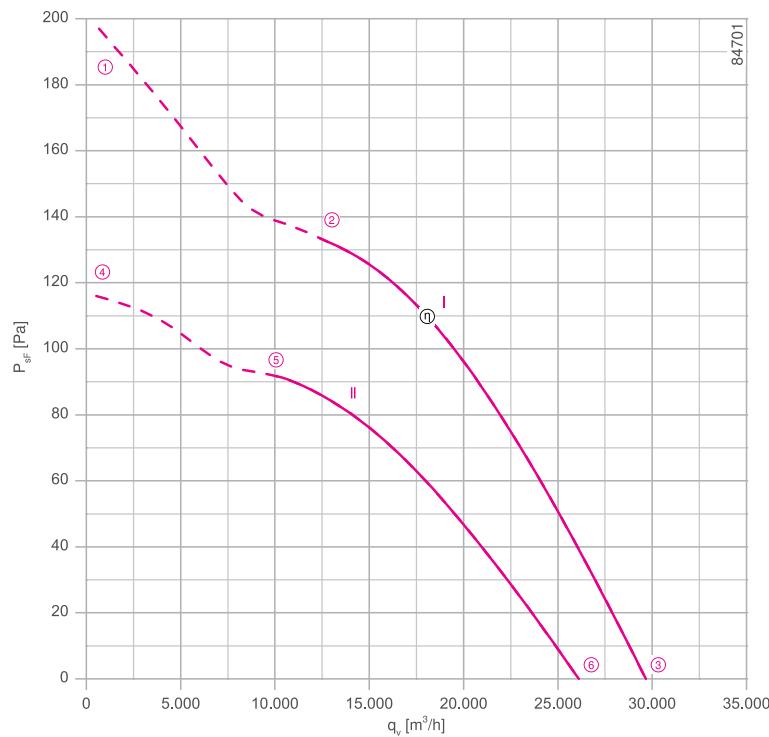

Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

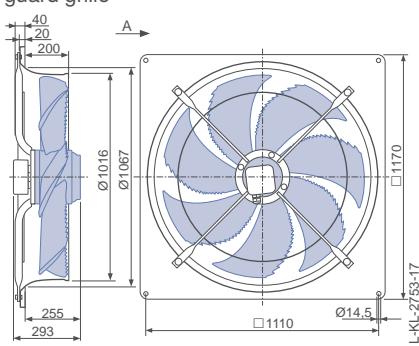


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

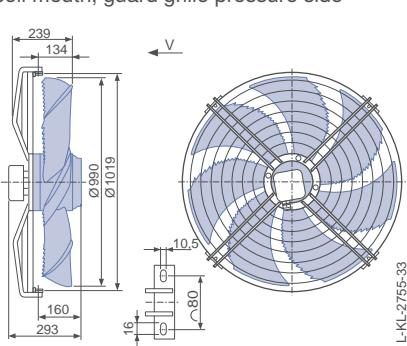

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

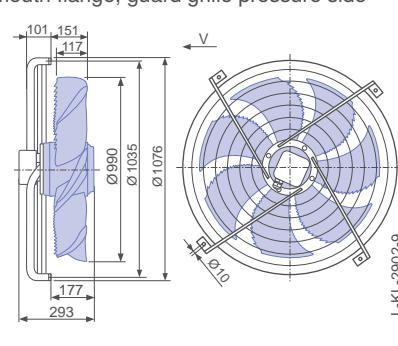

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-AD_.7M_.5P1	Δ	I	400	①	3.90	2000	670	
			400*	②	3.40*	1550*	690*	82
			400	③	2.90	1150	710	74
	Y	II	400	④	2.40	1350	510	
			400*	⑤	2.00*	1150*	570*	77
			400	⑥	1.60	900	630	70

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Design	Q (guard grille pressure side)		
Type	FN100-ADQ.7M.A5P1	FN100-ADS.7M.V5P1	FN100-ADI.7M.V5P1
Article no.	155848	155852	155850
Weight kg	63.00	48.60	47.80
			67.90

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

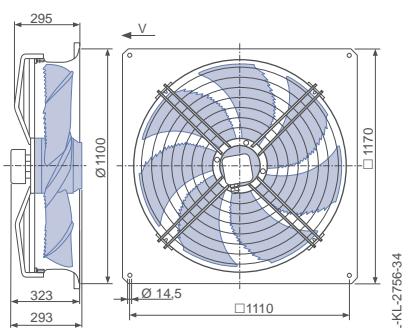

FE2owlet

for three phase alternating current, 8-8 pole

FN 1 OO-AD





Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.25/0.74 kW*
Rated current I_N : 2.90/1.40 A*
Rated speed n_N : 620/ 480 min⁻¹*
Starting current I_A : 14.00 / 4.40 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 34.3 %
Efficiency: $N_{actual} = 40.2 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

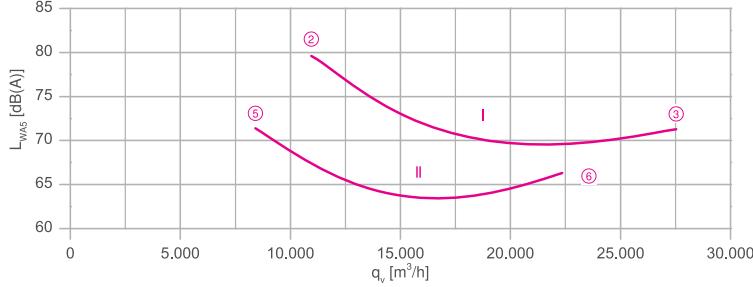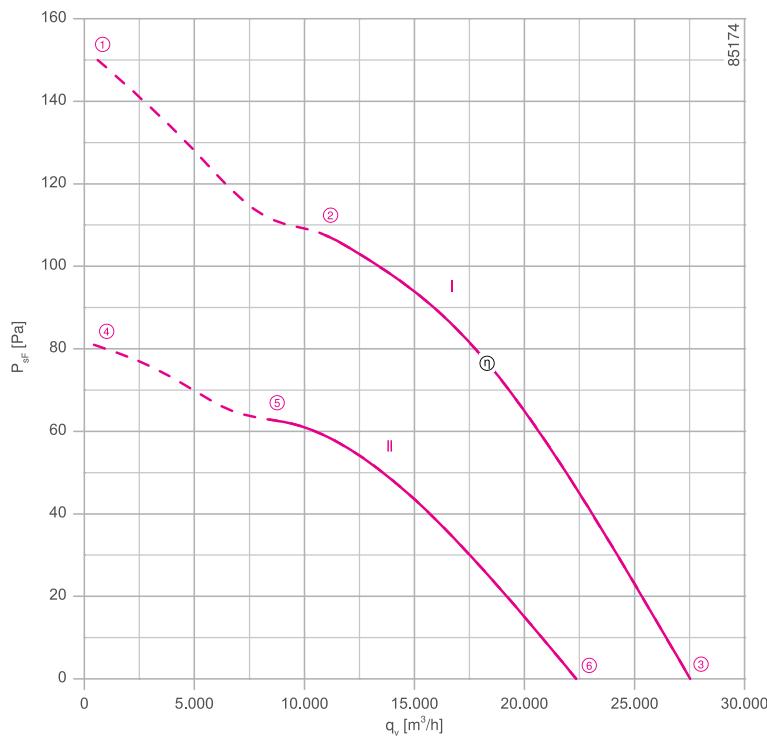


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

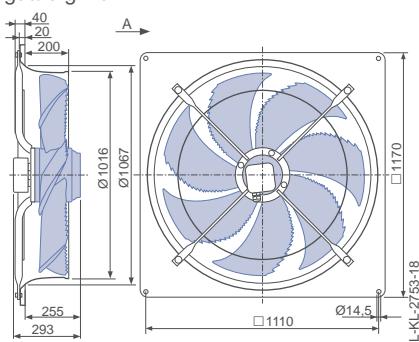


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

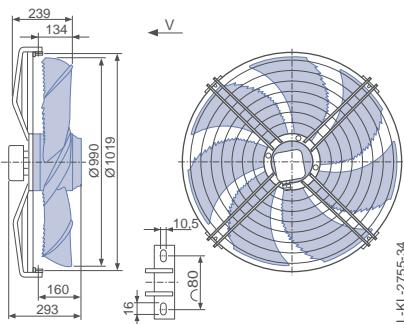

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

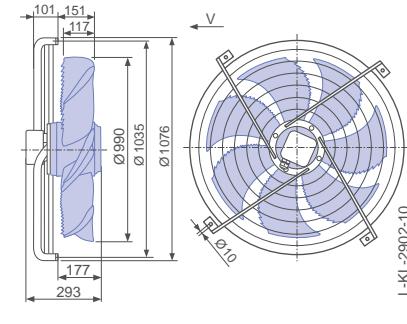

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-AD_.7M_.5P1	Δ	I	400	①	3.20	1500	590	
			400*	②	2.90*	1250*	620*	80
			400	③	2.70	980	660	71
	Y	II	400	④	1.55	840	430	
			400*	⑤	1.40*	740*	480*	72
			400	⑥	1.20	620	540	66

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN100-ADQ.7M.A5P1	FN100-ADS.7M.V5P1	FN100-ADI.7M.V5P1
Article no.	155866	155870	155868
Weight kg	63.00	48.60	47.80
			67.90

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

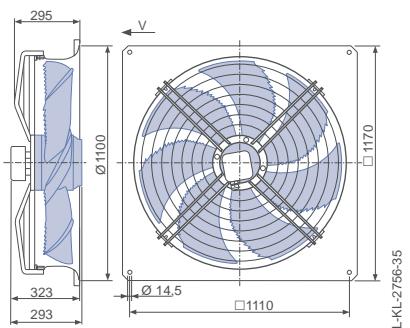

FE2owlet

for three phase alternating current, 10-10 pole

FN 100-MD



Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.88/0.62 kW*
Rated current I_N : 2.50/1.25 A*
Rated speed n_N : 550/ 460 min⁻¹*
Starting current I_A : 8.00 / 2.20 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box

Number of blades: 5

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 33.4 %

Efficiency: $N_{actual} = 40.1 / N_{target} = 40^{**}$



* Rated data

**ErP 2015

Connection diagram
for airflow direction A Page 531
for airflow direction V 1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

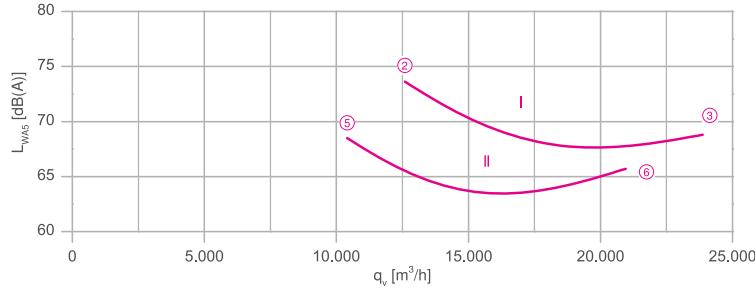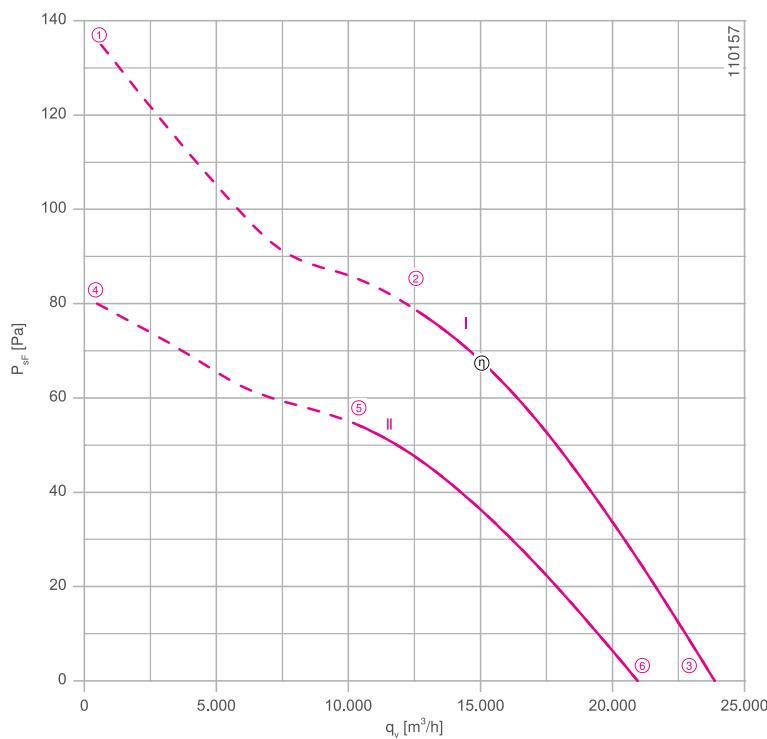


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

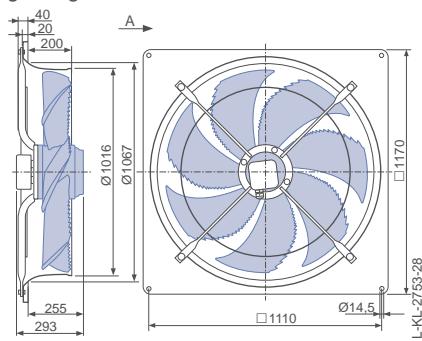


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

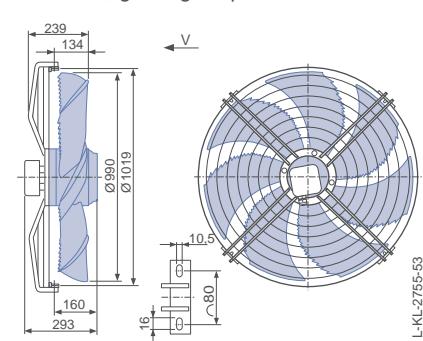

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

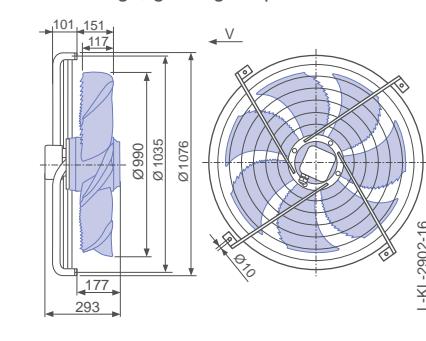

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-MD_.7M._5P1	Δ	I	400	①	2.80	1100	540	
			400*	②	2.50*	880*	550*	74
			400	③	2.40	680	570	68
	Y	II	400	④	1.45	700	420	
			400*	⑤	1.25*	600*	460*	69
			400	⑥	1.05	480	500	66

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN100-MDQ.7M.A5P1	FN100-MDS.7M.V5P1	FN100-MDI.7M.V5P1
Article no.	167942	167937	167936
Weight kg	63.00	48.60	47.80
			67.90

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

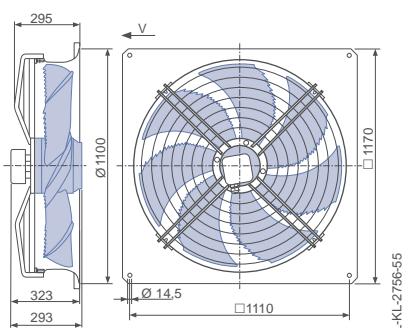

FE2owlet

for three phase alternating current, 12-12 pole

FN 1 OO-N D





Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.50/0.33 kW*
Rated current I_N : 1.40/0.70 A*
Rated speed n_N : 450/370 min⁻¹*
Starting current I_A : 3.80 / 1.20 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 32.1 %
Efficiency: $N_{actual} = 40.4 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

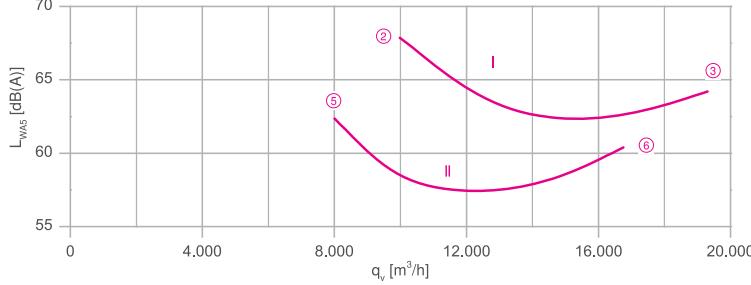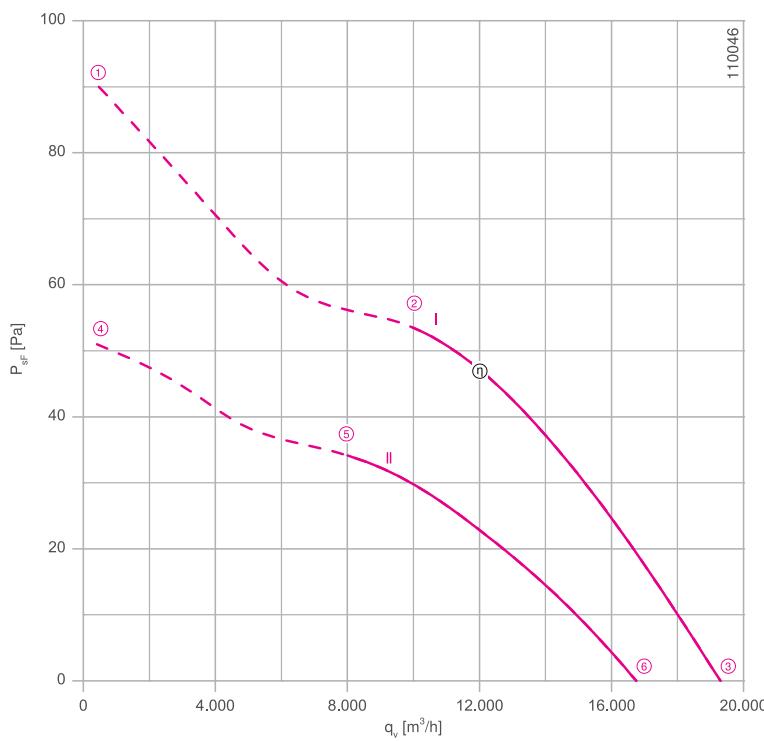


Measured in full bell mouth without guard grille in installation type A according to ISO 5801

Dimensions mm


Airflow direction A

Design Q - square full bell mouth, without guard grille

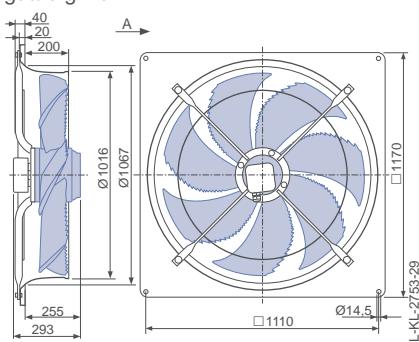


Airflow direction V

Design S - radially bolted, mounted for short bell mouth, guard grille pressure side

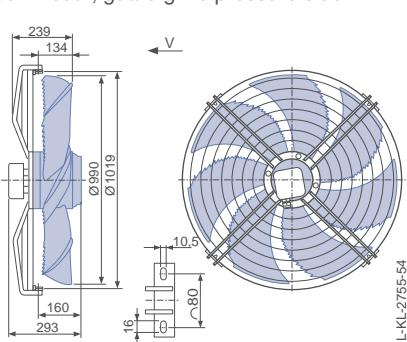

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

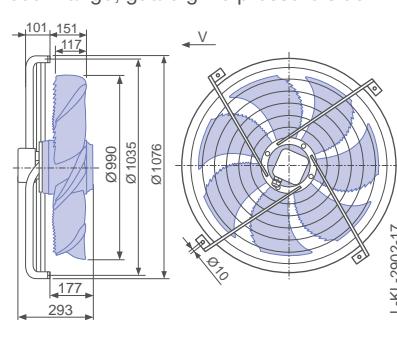

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
FN100-ND..7M..5P1	Δ	I	400	①	1.55	600	440	
			400*	②	1.40*	500*	450*	68
			400	③	1.35	380	470	64
	Y	II	400	④	0.78	370	340	
			400*	⑤	0.70*	330*	370*	63
			400	⑥	0.60	270	410	60

*rated data


Fan ordering information

	Airflow direction A	Airflow direction V	
Design	Q (without guard grille)	S (guard grille pressure side)	I (guard grille pressure side)
Type	FN100-NDQ.7M.A5P1	FN100-NDS.7M.V5P1	FN100-NDI.7M.V5P1
Article no.	167940	160994	167932
Weight kg	63.00	48.60	47.80
			FN100-NDQ.7M.V5P1
			167934
			67.90

Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - square full bell mouth, guard grille pressure side

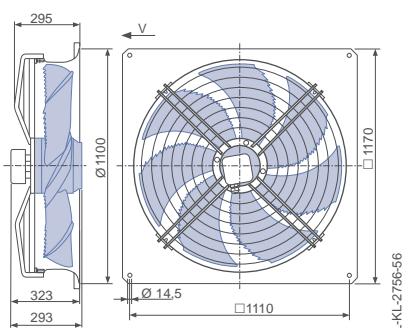

FE2owlet

for three phase alternating current, 10-10 pole

FN 125-MD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) ±10 %
Rated frequency f_N : 50 Hz*
Input power P_i : 1.95/1.20 kW*
Rated current I_N : 4.60/2.40 A*
Rated speed n_N : 530/ 400 min⁻¹*
Starting current I_A : 14.00 / 4.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 65 °C
Electrical connection: Terminal box
Number of blades: 3
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 35.9 %
Efficiency: $N_{actual} = 40.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Connection diagram
for airflow direction A Page 531
1360-108XB
for airflow direction V 1360-108XA

System components Page 430

Characteristic curve

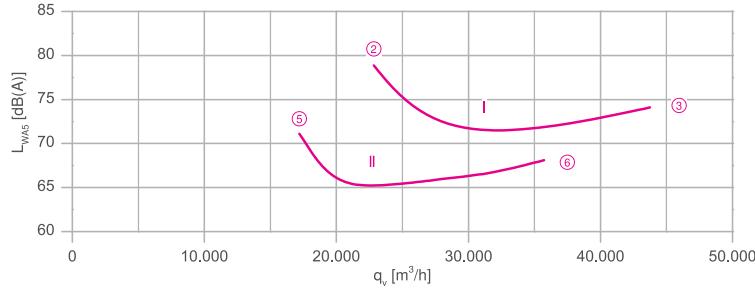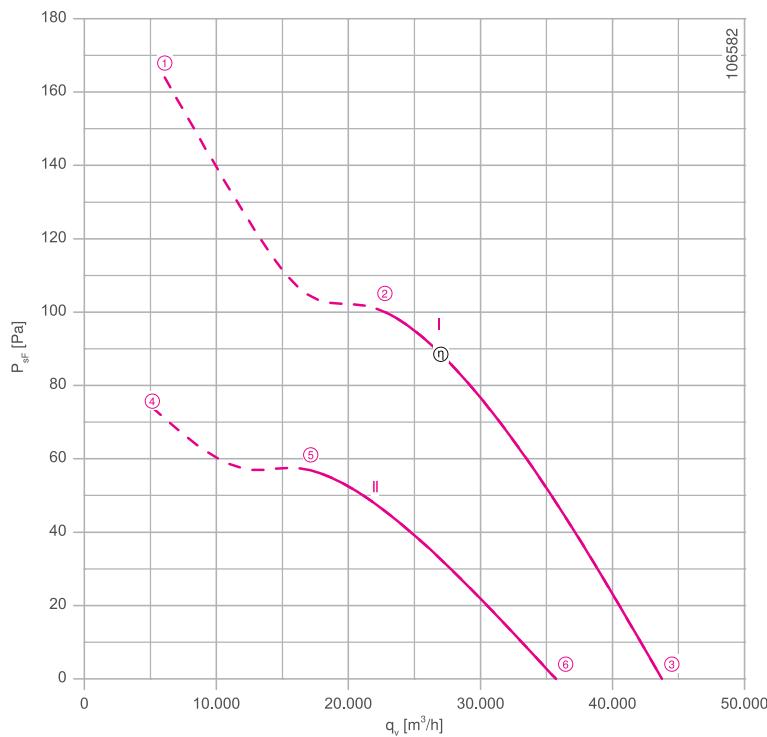


Measured in full bell mouth without guard grille in installation type A according to ISO 5801


Dimensions mm

Airflow direction A

Design F - flange ring with two flanges, without guard grille




Design L - round full bell mouth, without guard grille

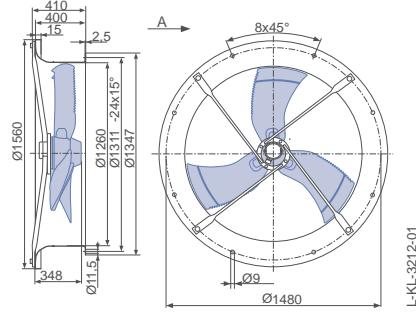

Airflow direction V

Design I - axial bolted, mounting for bell mouth flange, guard grille pressure side

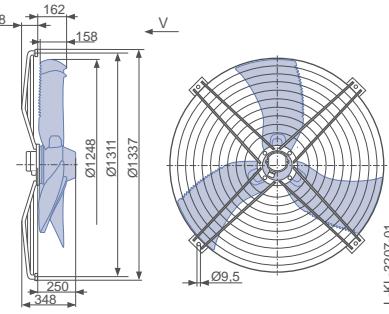

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN125-MD..7Q..3P1	Δ	I	400	①	5.40	2500	500	
			400*	②	4.60*	1950*	530*	79
			400	③	4.20	1550	550	74
	Y	II	400	④	2.70	1300	340	
			400*	⑤	2.40*	1200*	400*	71
			400	⑥	2.10	1000	450	68

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	F (without guard grille)	L (without guard grille)	I (guard grille pressure side)	L (guard grille pressure side)
Type	FN125-MDF.7Q.A3P1	FN125-MDL.7Q.A3P1	FN125-MDI.7Q.V3P1	FN125-MDL.7Q.V3P1
Article no.	167460	167461	167459	167452
Weight kg	86.90	101.00	61.40	106.10
				167453
				113.70


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design L - round full bell mouth, guard grille pressure side

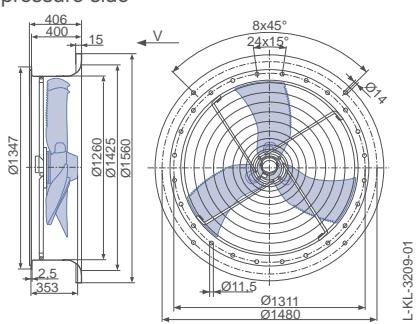

Design L - round full bell mouth, guard grille two-sided

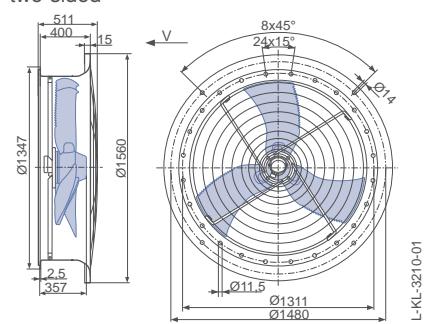

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
FN125-ND_7Q_3P1	Δ	I	400	①	3.70	1600	400	
			400*	②	3.10*	1150*	440*	74
			400	③	2.90	920	450	68
	Y	II	400	④	1.75	800	270	
			400*	⑤	1.50*	700*	330*	67
			400	⑥	1.35	600	370	63

*rated data


Fan ordering information

	Airflow direction A		Airflow direction V	
Design	F (without guard grille)	L (without guard grille)	I (guard grille pressure side)	L (guard grille pressure side)
Type	FN125-NDF.7Q.A3P1	FN125-NDL.7Q.A3P1	FN125-NDI.7Q.V3P1	FN125-NDL.7Q.V3P1
Article no.	167472	167473	167471	167464
Weight kg	86.90	101.00	61.40	106.10
				167465
				113.70


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design L - round full bell mouth, guard grille pressure side

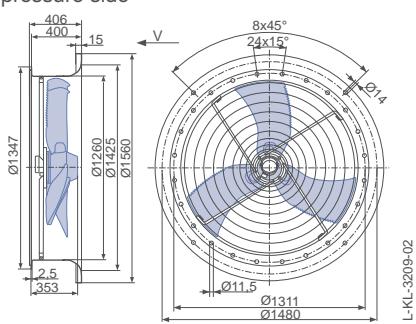

Design L - round full bell mouth, guard grille two-sided

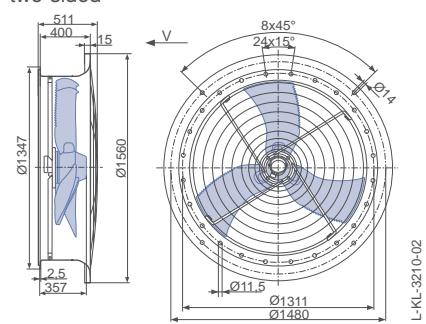





Axial fans FE2owlet ECblue with ZAplus EC-Technology

Product overview

Quick selection	Page 280
Size 450	Page 282
Size 500	Page 286
Size 630	Page 294
Size 710	Page 310
Size 800	Page 326
Size 910	Page 340

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus


System
components

Control
technology

Appendix

Size	Voltage	Type	Airflow direction	ErP	Page
450	1~200-277 V	ZN045-6I_.BD.V7P2		2015	282
		ZN045-6I_.BD.V7P3		2015	284
500	1~200-277 V	ZN050-6I_.BD.V7P2		2015	286
	3~200-240 V	ZN050-ZI_.DC.V7P2		2015	288
	3~380-480 V	ZN050-ZI_.DC.V7P2		2015	290
630	1~200-277 V	ZN063-6I_.BD.V7P2		2015	294
	3~200-240 V	ZN063-ZI_.DG.V7P2		2015	296
		ZN063-ZI_.DG.V7P2		2015	298
		ZN063-ZI_.GG.V7P3		2015	300
	3~380-480 V	ZN063-ZI_.GL.V7P3		2015	302
		ZN063-ZI_.DG.V7P2		2015	304
		ZN063-ZI_.GG.V7P3		2015	306
		ZN063-ZI_.GL.V7P3		2015	308
710	1~200-277 V	ZN071-6I_.BD.V7P3		2015	310
	3~200-240 V	ZN071-ZI_.DG.V7P3		2015	312
		ZN071-ZI_.DG.V7P3		2015	314
		ZN071-ZI_.GG.V7P4		2015	316
	3~300-240 V	ZN071-ZI_.GL.V7P4		2015	318
		ZN071-ZI_.DG.V7P3		2015	320
		ZN071-ZI_.GG.V7P4		2015	322
		ZN071-ZI_.GL.V7P4		2015	324
800	1~200-277 V	ZN080-ZI_.DG.V5P4		2015	326
	3~200-240 V	ZN080-ZI_.DG.V5P4		2015	328
		ZN080-ZI_.GG.V7P3		2015	330
		ZN080-ZI_.GL.V7P3		2015	332
	3~380-480 V	ZN080-ZI_.DG.V5P4		2015	334
		ZN080-ZI_.GG.V7P3		2015	336
		ZN080-ZI_.GL.V7P3		2015	338
910	1~200-277 V	ZN091-ZI_.DG.V4P3		2015	340
	3~200-240 V	ZN091-ZI_.DG.V4P3		2015	342
		ZN091-ZI_.GG.V5P1		2015	344
		ZN091-ZI_.GL.V5P1		2015	346
	3~380-480 V	ZN091-ZI_.DG.V4P3		2015	348
		ZN091-ZI_.GG.V5P1		2015	350
		ZN091-ZI_.GL.V5P1		2015	352



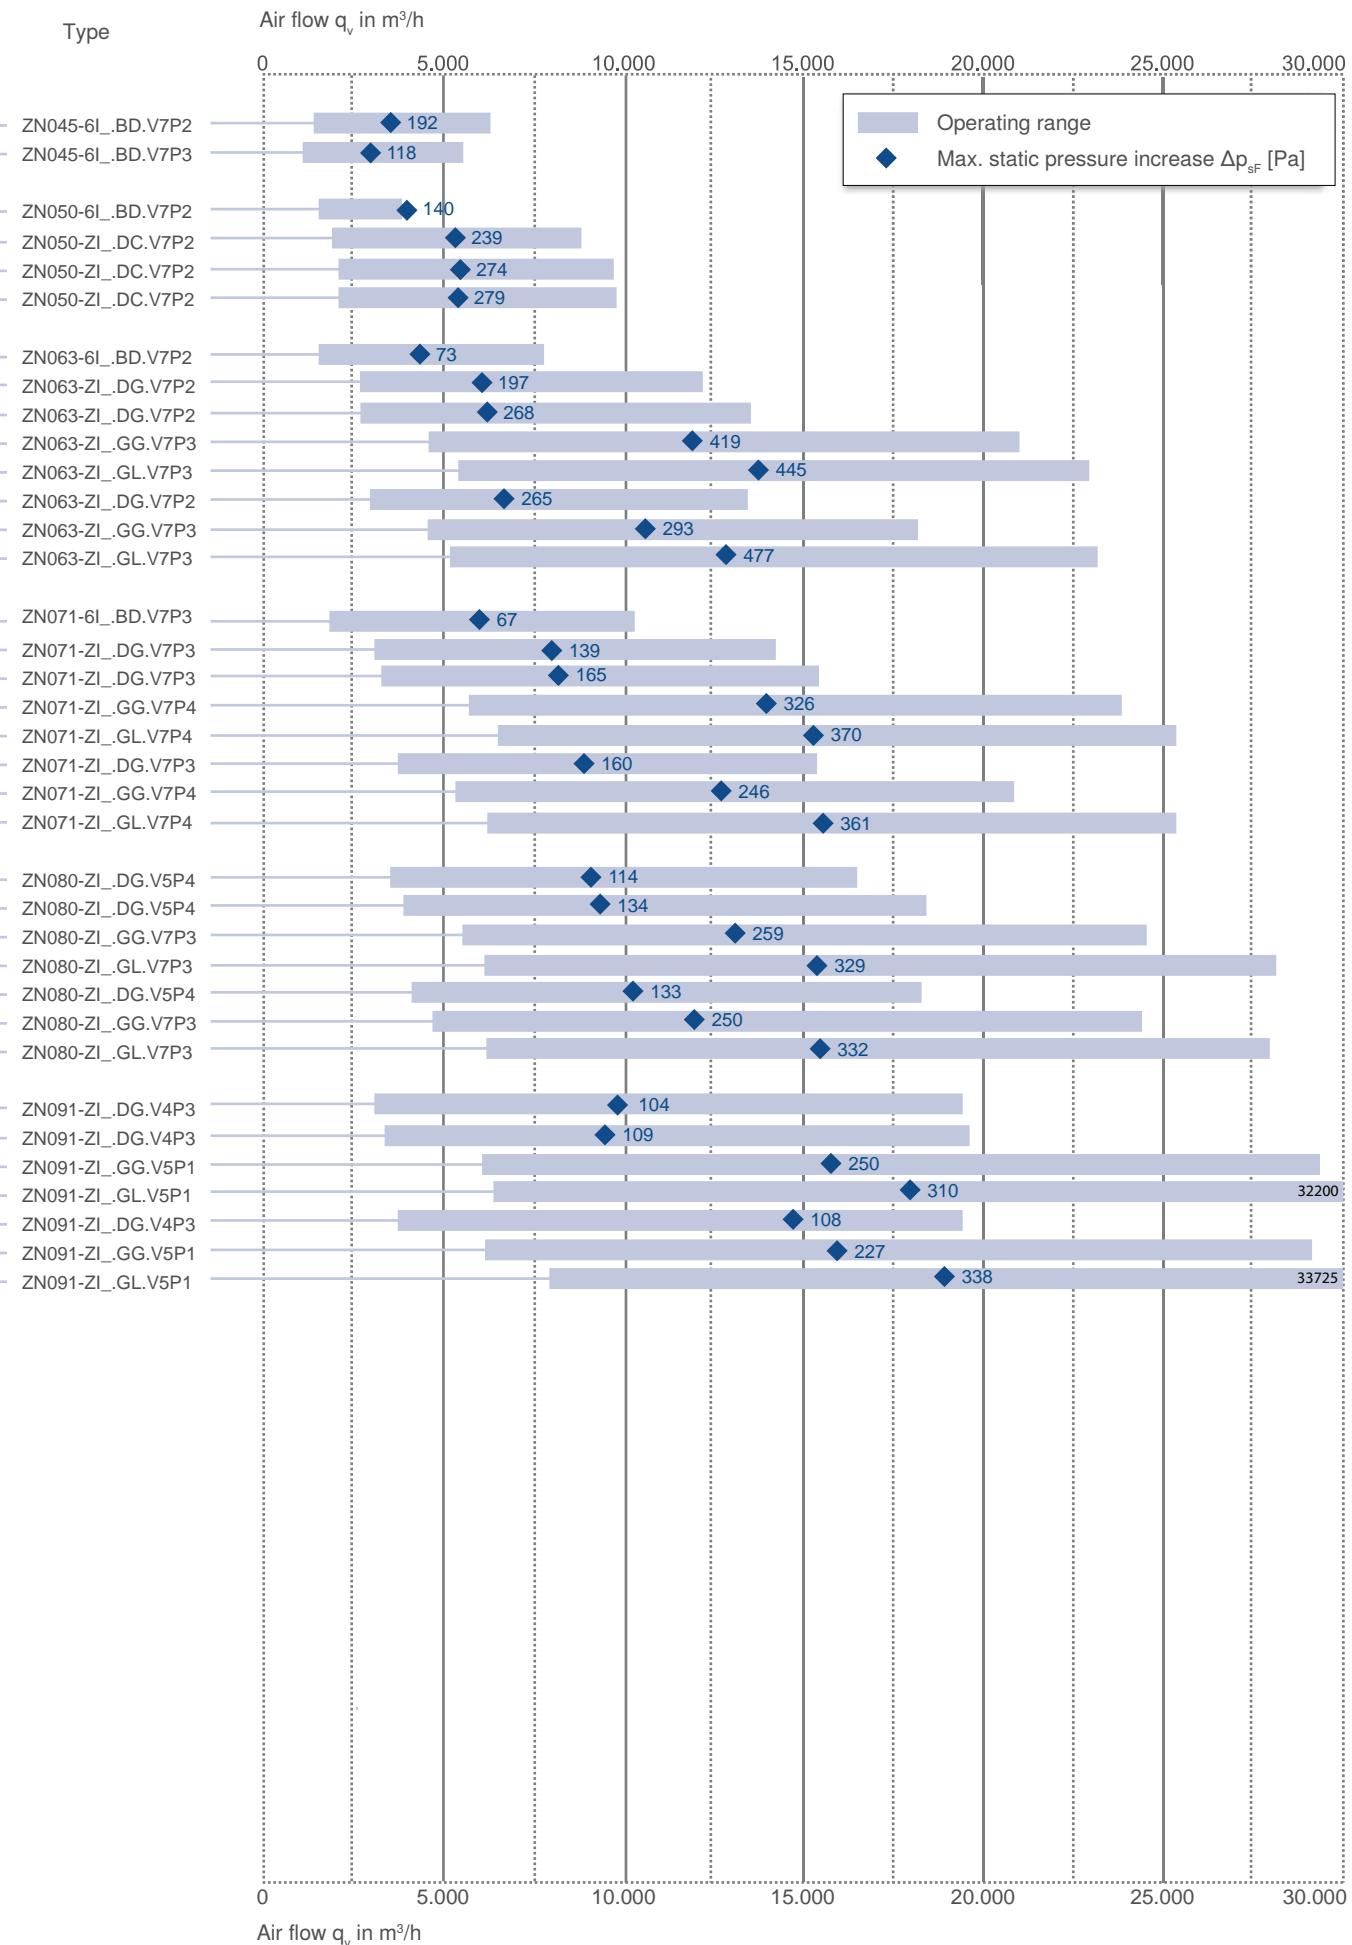

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V


Z N O 4 5



Description

Motor technology: EC
Rated voltage U_N : 1~ 200-277 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 420 W*
Rated current I_N : 2.10- 1.50 A*
Rated speed n_N : 1470 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statis} : 57.1 %
Efficiency: $N_{actual} = 65.9 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

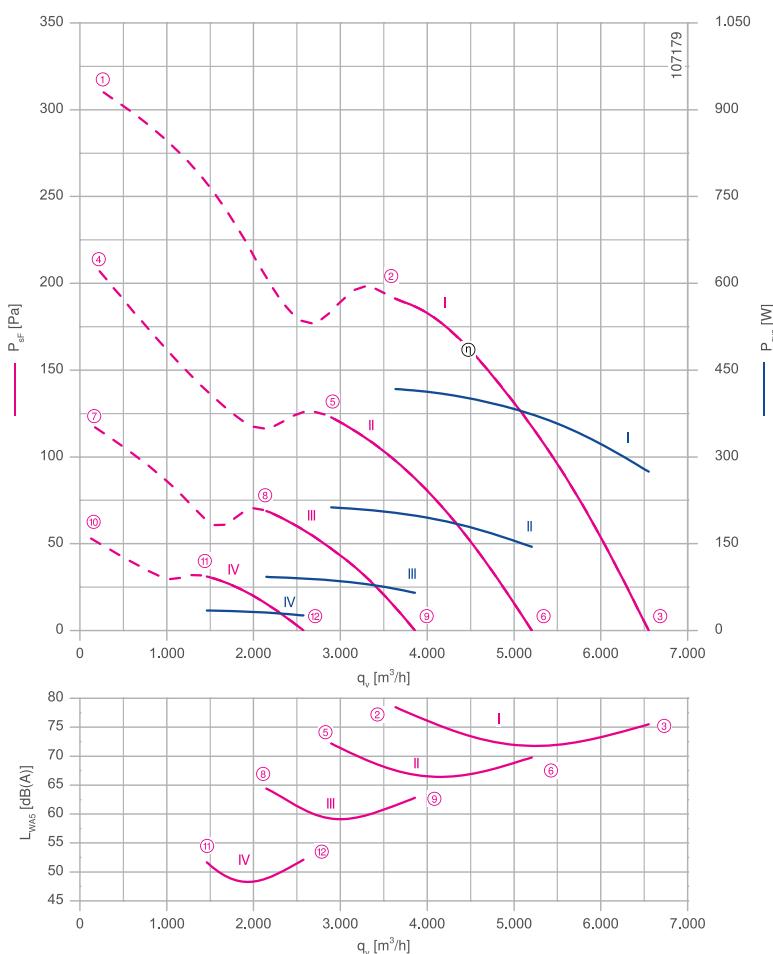

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

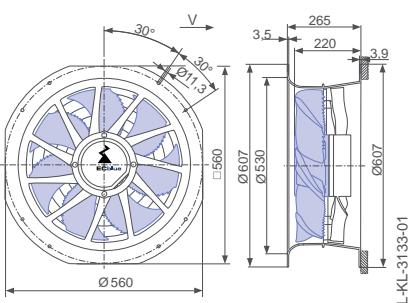


← Airflow direction

Design L - ZAplus Ontop without guard grille

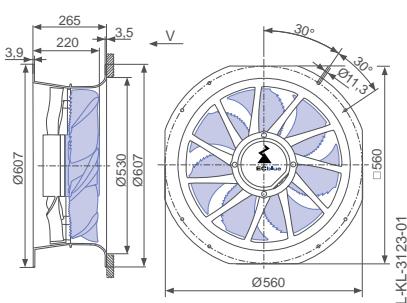

Design L - ZAplus Ontop, guard grille pressure side





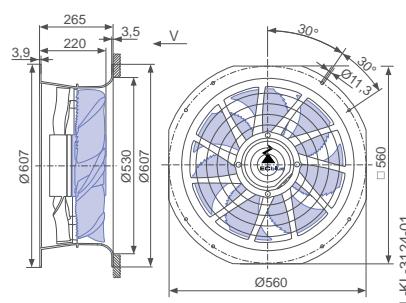


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN045-6I..BD..7P2	I	1470	①	2.50	580	
			②	1.80	420	79
			③	1.20	270	76
	II	1180	④	1.35	310	
			⑤	0.94	210	72
			⑥	0.64	140	70
	III	880	⑦	0.58	130	
			⑧	0.44	95	64
			⑨	0.32	65	63
	IV	590	⑩	0.24	46	
			⑪	0.20	34	52
			⑫	0.17	26	52

Current values determined at 230V

Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN045-6IL.BD.V7P2 166918	ZN045-6IL.BD.V7P2 166794	ZN045-6IL.BD.V7P2 166795	ZN045-6IQ.BD.V7P2 166797	ZN045-6IQ.BD.V7P2 166798
Weight kg	10.50	8.20	8.90	9.00	9.60
ZAplus attachable on both sides.					


Control technology

Control modules




Page 452


Design Q - ZAplus with adapter plate, without guard grille

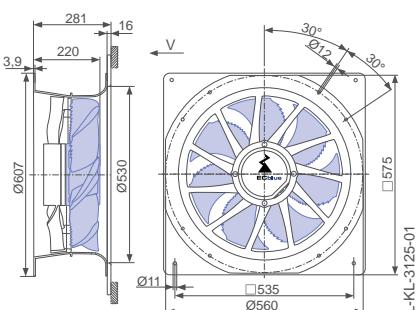

Design Q - ZAplus with adapter plate, guard grille pressure side

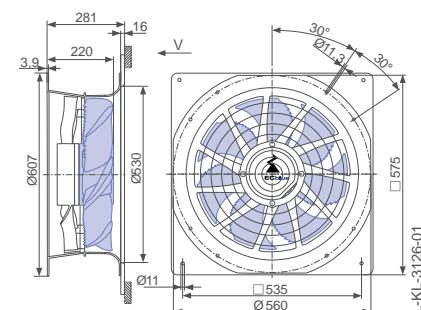

Design H - ZAplus Flattop, guard grille pressure side

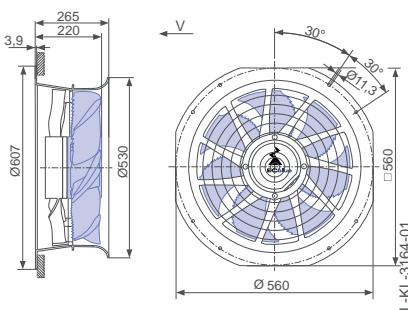

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 4 5



Description

Motor technology: EC
Rated voltage U_N : 1~ 200-277 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 210 W*
Rated current I_N : 1.05-0.78 A*
Rated speed n_N : 1100 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE


ErP-data

Efficiency η_{start} : 56.6 %
Efficiency: $N_{actual} = 67.2 / N_{target} = 40**$
EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

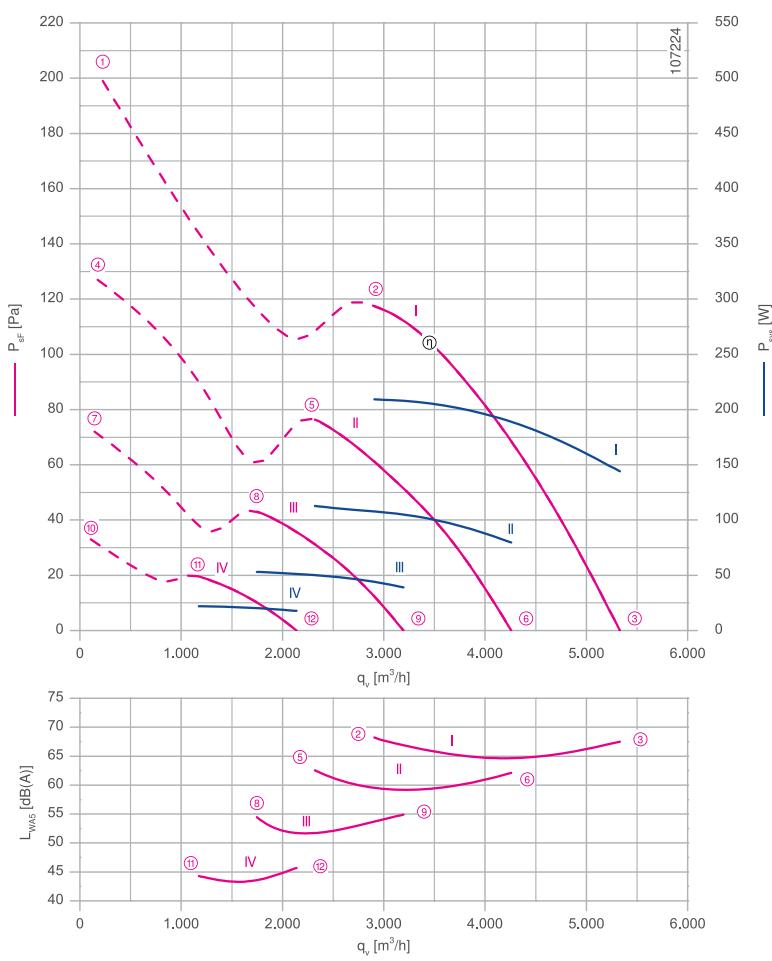

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

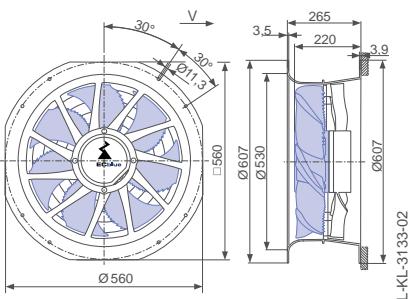


← Airflow direction

Design L - ZAplus Ontop without guard grille

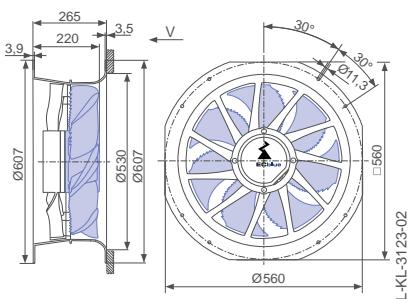

Design L - ZAplus Ontop, guard grille pressure side





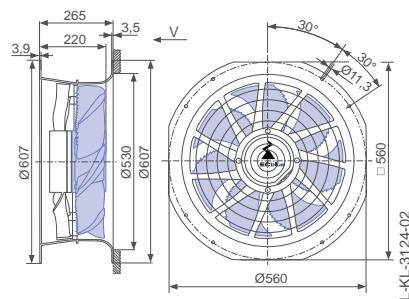


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN045-6I..BD..7P3	I	1100	①	1.35	300	
			②	0.92	210	69
			③	0.64	140	68
	II	880	④	0.70	160	
			⑤	0.50	110	63
			⑥	0.38	80	62
	III	660	⑦	0.34	70	
			⑧	0.27	55	55
			⑨	0.22	40	55
	IV	440	⑩	0.18	28	
			⑪	0.16	22	44
			⑫	0.16	18	46

Current values determined at 230V

Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN045-6IL.BD.V7P3 166919	ZN045-6IL.BD.V7P3 166812	ZN045-6IL.BD.V7P3 166813	ZN045-6IQ.BD.V7P3 166815	ZN045-6IQ.BD.V7P3 166816
Weight kg	10.50	8.30	8.90	9.00	9.70
ZAplus attachable on both sides.					


Control technology

Control modules




Page 452


Design Q - ZAplus with adapter plate, without guard grille

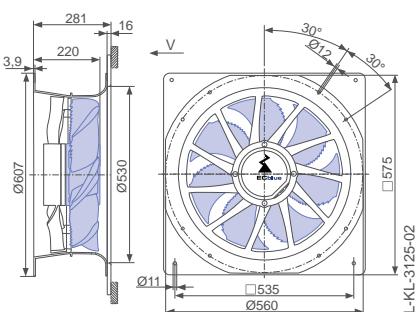

Design Q - ZAplus with adapter plate, guard grille pressure side

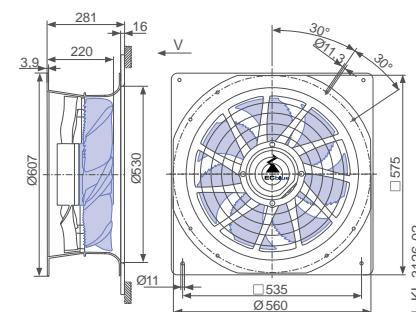

Design H - ZAplus Flattop, guard grille pressure side

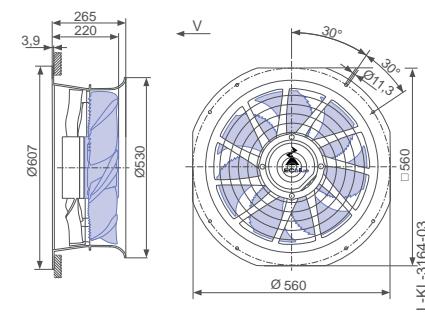

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V


ZN050



Description

Motor technology: EC
Rated voltage U_N : 1~ 200-277 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 360 W*
Rated current I_N : 1.85- 1.30 A*
Rated speed n_N : 1120 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{start} : 52.0 %
Efficiency: $N_{actual} = 61.2 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

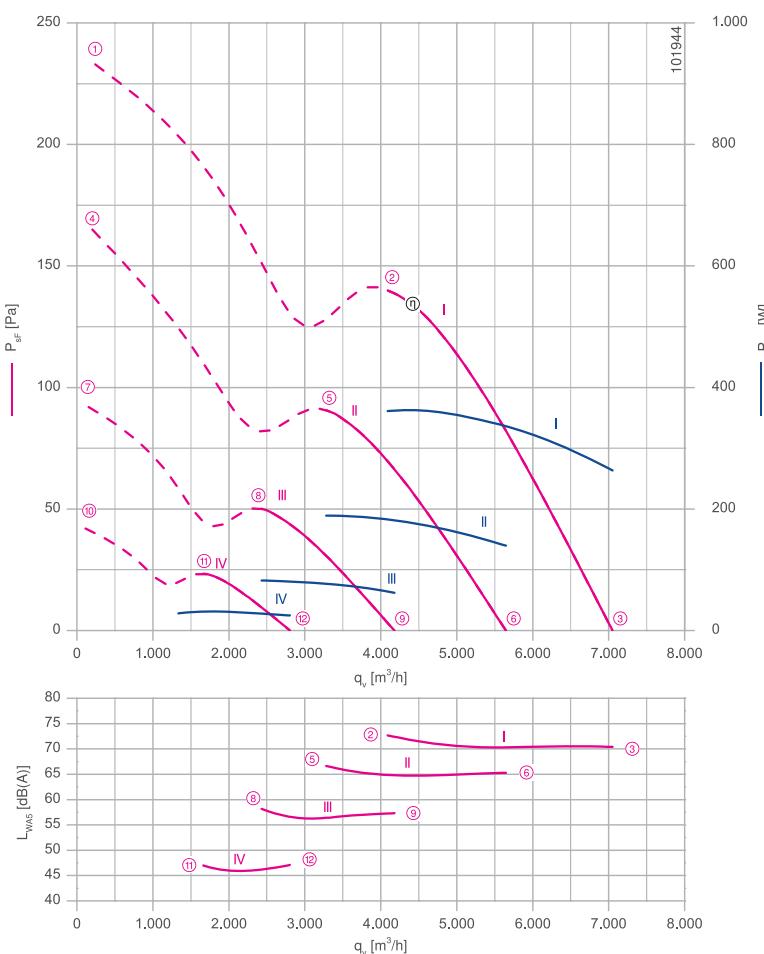

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

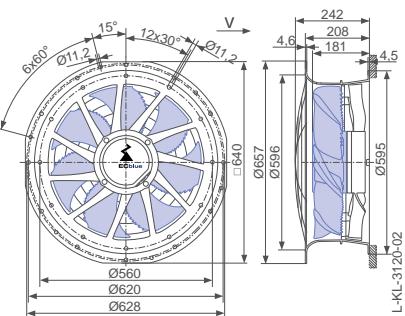


← Airflow direction

Design L - ZAplus Ontop without guard grille

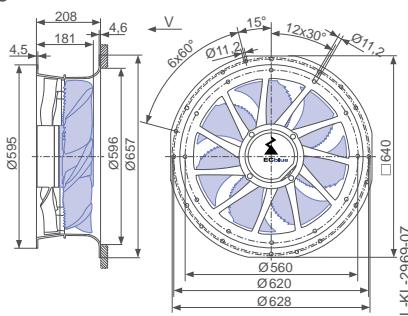

Design L - ZAplus Ontop, guard grille pressure side

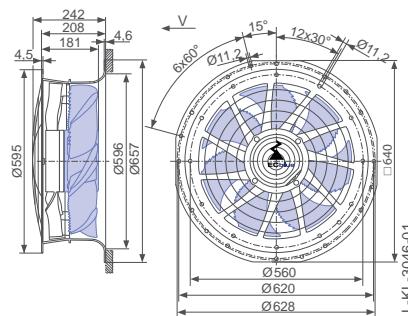

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
ZN050-6I_.BD.V7P2	I	1120	①	2.10	480	
			②	1.55	360	73
			③	1.15	260	70
	II	900	④	1.20	270	
			⑤	0.84	190	67
			⑥	0.62	140	65
	III	670	⑦	0.52	110	
			⑧	0.38	80	58
			⑨	0.30	60	57
	IV	450	⑩	0.23	40	
			⑪	0.19	30	47
			⑫	0.17	24	47

Current values determined at 230V

Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (guard grille pressure side)	H (guard grille pressure side) Flat top
Type Article no.	ZN050-6IL.BD.V7P2 165325	ZN050-6IL.BD.V7P2 162262	ZN050-6IL.BD.V7P2 162263	ZN050-6IQ.BD.V7P2 162265	ZN050-6IH.BD.V7P2 162267
Weight kg	12.40	11.00	12.30	13.50	11.50
ZAplus attachable on both sides.					


Control technology

Control modules




Page 452

Design Q - ZAplus with adapter plate, guard grille pressure side

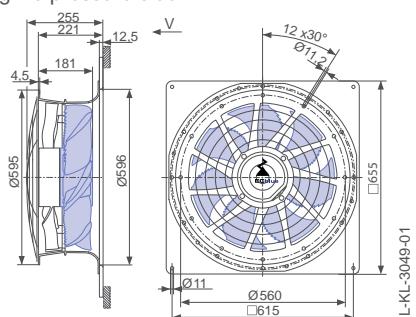

Design H - ZAplus Flat top, guard grille pressure side





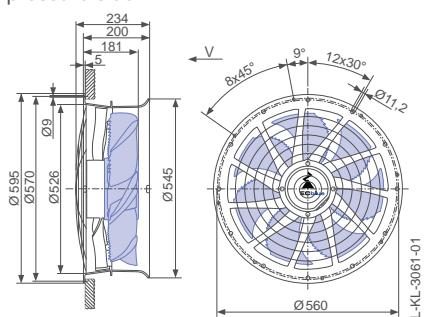


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN050-ZI_.DC.V7P2	I	1440	①	4.20	880	
			②	3.50	740	80
			③	2.70	560	77
	II	1150	④	2.60	520	
			⑤	1.85	380	73
			⑥	1.40	290	71
	III	860	⑦	1.05	230	
			⑧	0.76	160	66
			⑨	0.64	130	64
	IV	580	⑩	0.42	80	
			⑪	0.37	60	58
			⑫	0.33	50	58

Current values determined at 230V


Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN050-ZIL.DC.V7P2 169872	ZN050-ZIL.DC.V7P2 161736	ZN050-ZIL.DC.V7P2 161738	ZN050-ZIQ.DC.V7P2 161742	ZN050-ZIQ.DC.V7P2 161744
Weight kg	13.80	12.50	13.50	13.70	14.70
ZAplus attachable on both sides.					13.20


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
 Page 452	 Page 454	 Page 463


Design Q - ZAplus with adapter plate, without guard grille

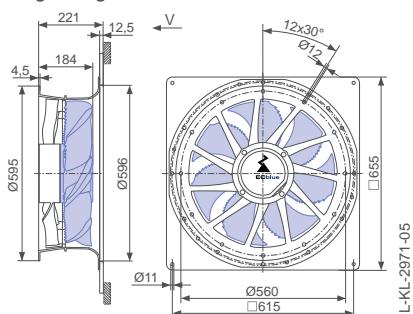

Design Q - ZAplus with adapter plate, guard grille pressure side

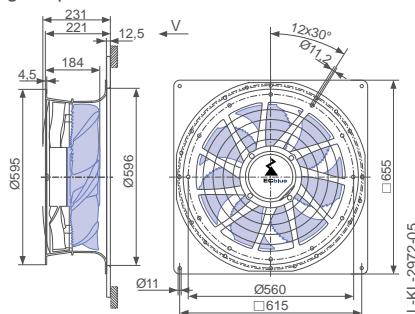

Design H - ZAplus Flattop, guard grille pressure side

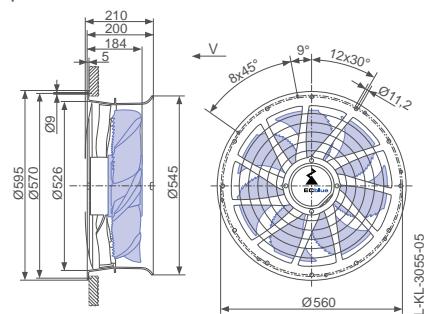

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

ZN050



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.90 kW*

Rated current I_N : 2.80- 2.30 A*

Rated speed n_N : 1550 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 55.4 %


Efficiency: $N_{actual} = 62.0 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

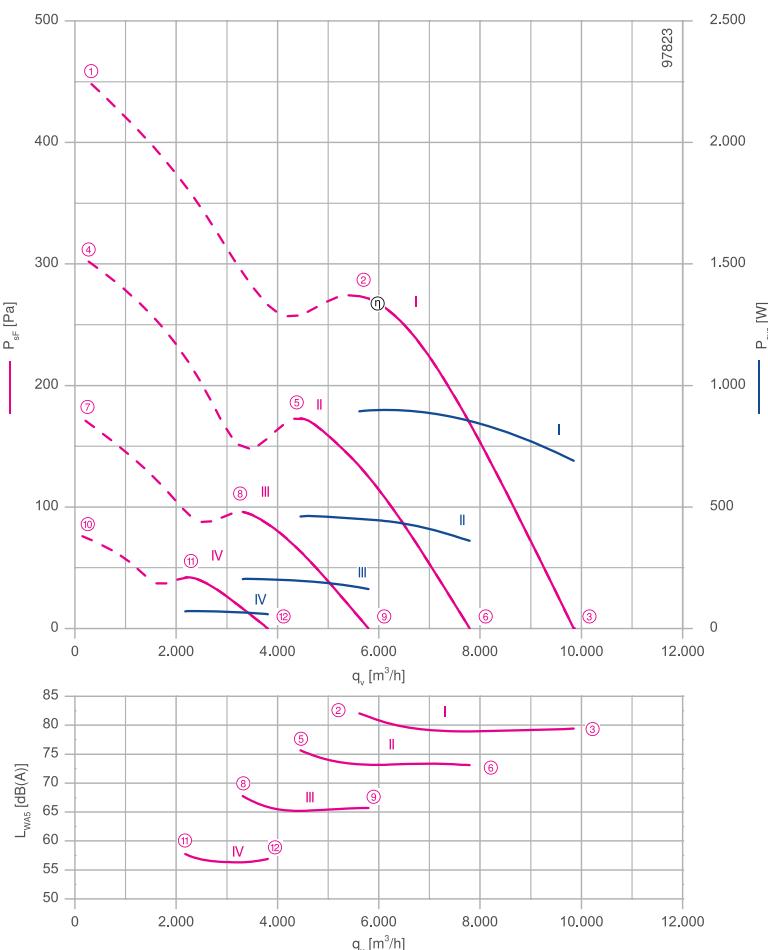

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram



Page 530

1360-403


System components

Page 430

Dimensions mm

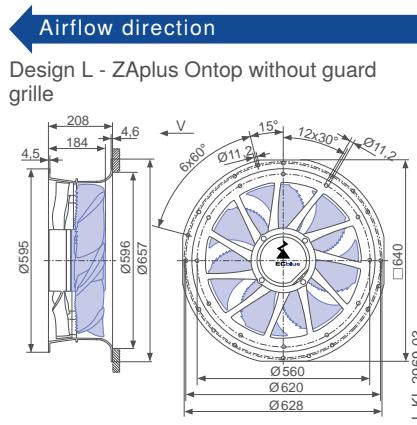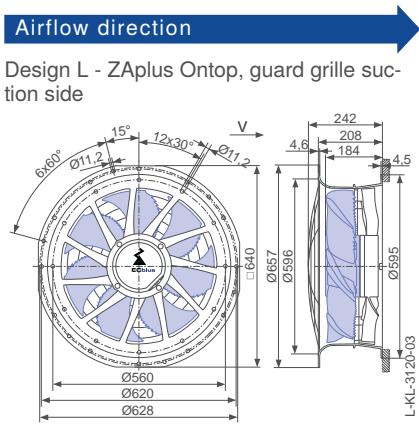

Design L - ZAplus Ontop, guard grille pressure side





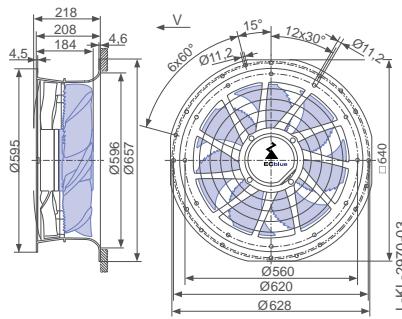


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN050-ZI_.DC.V7P2	I	1550	①	3.10	1150	
			②	2.40	900	81
			③	1.85	700	79
	II	1240	④	1.75	640	
			⑤	1.25	460	76
			⑥	1.00	360	73
	III	930	⑦	0.82	280	
			⑧	0.64	200	68
			⑨	0.54	160	66
	IV	620	⑩	0.39	95	
			⑪	0.33	70	58
			⑫	0.29	60	57

Current values determined at 230V


Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN050-ZIL.DC.V7P2 169871	ZN050-ZIL.DC.V7P2 161722	ZN050-ZIL.DC.V7P2 161724	ZN050-ZIQ.DC.V7P2 161728	ZN050-ZIQ.DC.V7P2 161730
Weight kg	13.80	12.50	13.50	13.70	14.70
ZAplus attachable on both sides.					13.20


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
 Page 452	 Page 454	 Page 463


Design Q - ZAplus with adapter plate, without guard grille

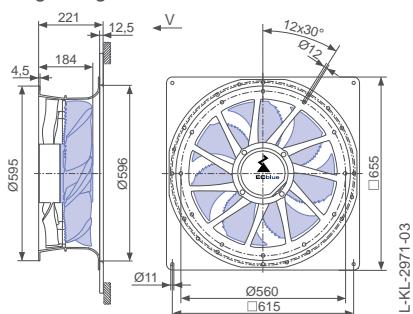

Design Q - ZAplus with adapter plate, guard grille pressure side

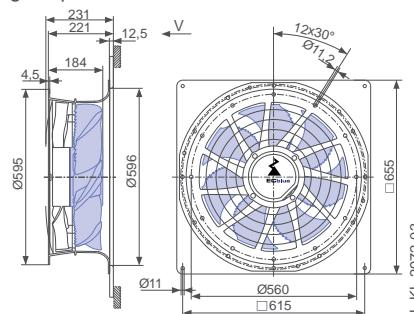

Design H - ZAplus Flattop, guard grille pressure side

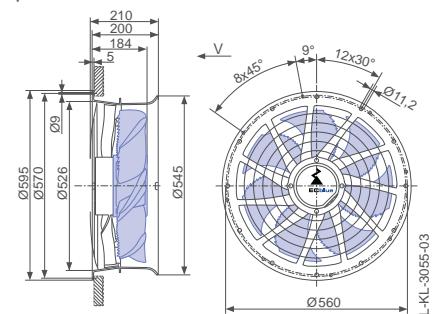

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

ZN050



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.90 kW*

Rated current I_N : 1.55 - 1.25 A*

Rated speed n_N : 1550 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 56.3 %


Efficiency: $N_{actual} = 62.9 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

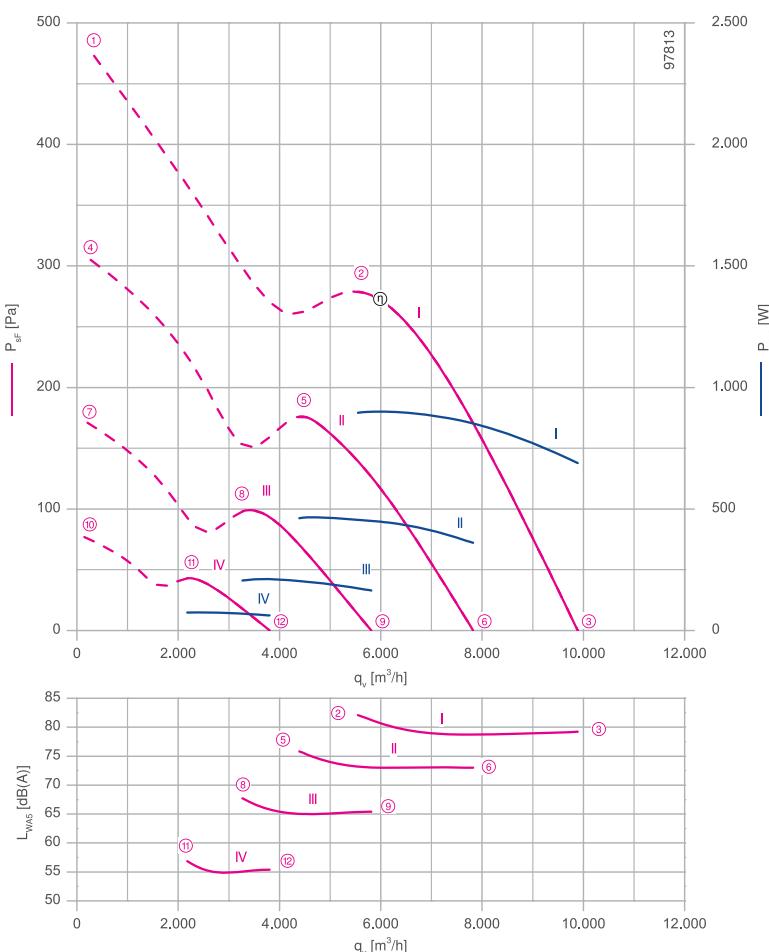

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

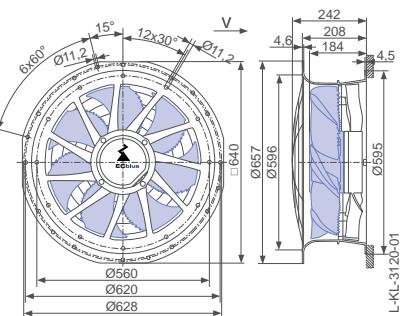


← Airflow direction

Design L - ZAplus OnTop without guard grille

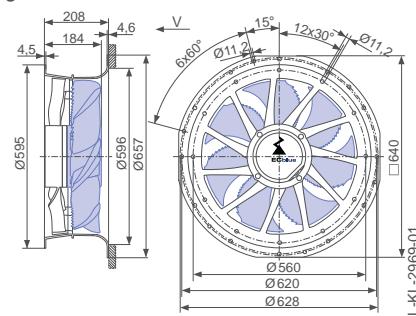

Design L - ZAplus OnTop, guard grille pressure side

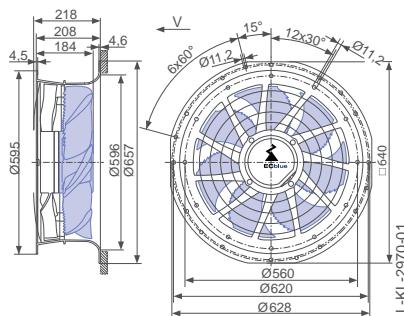

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN050-ZI_.DC.V7P2	I	1550	①	1.95	1250	
			②	1.45	900	82
			③	1.20	680	79
	II	1240	④	1.15	640	
			⑤	0.90	460	76
			⑥	0.76	360	73
	III	930	⑦	0.64	280	
			⑧	0.54	210	68
			⑨	0.46	160	65
	IV	620	⑩	0.34	95	
			⑪	0.29	75	57
			⑫	0.26	60	55

Current values determined at 400V


Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
Type Article no.	ZN050-ZIL.DC.V7P2 165326	ZN050-ZIL.DC.V7P2 161708	ZN050-ZIL.DC.V7P2 161710	ZN050-ZIQ.DC.V7P2 161714	ZN050-ZIQ.DC.V7P2 161716
Weight kg	13.80	12.50	13.50	13.70	14.70
ZAplus attachable on both sides.					


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
 Page 452	 Page 454	 Page 463


Design Q - ZAplus with adapter plate, without guard grille

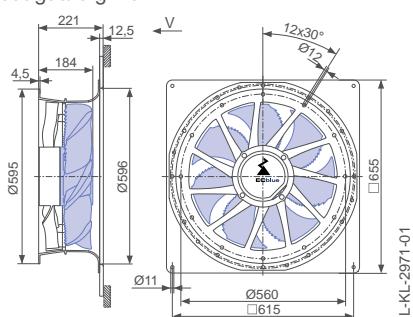

Design Q - ZAplus with adapter plate, guard grille pressure side

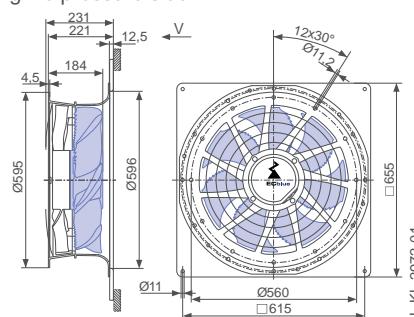

Design H - ZAplus Flattop, guard grille pressure side

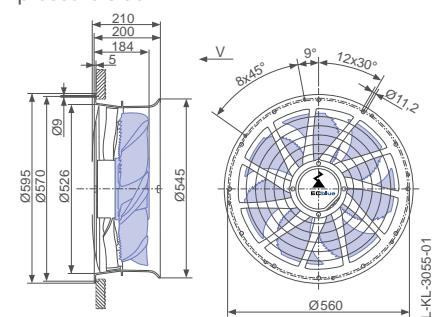

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 210 W*

Rated current I_N : 1.05-0.78 A*

Rated speed n_N : 660 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{startA} : 51.4 %


Efficiency: $N_{actual} = 62.4 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

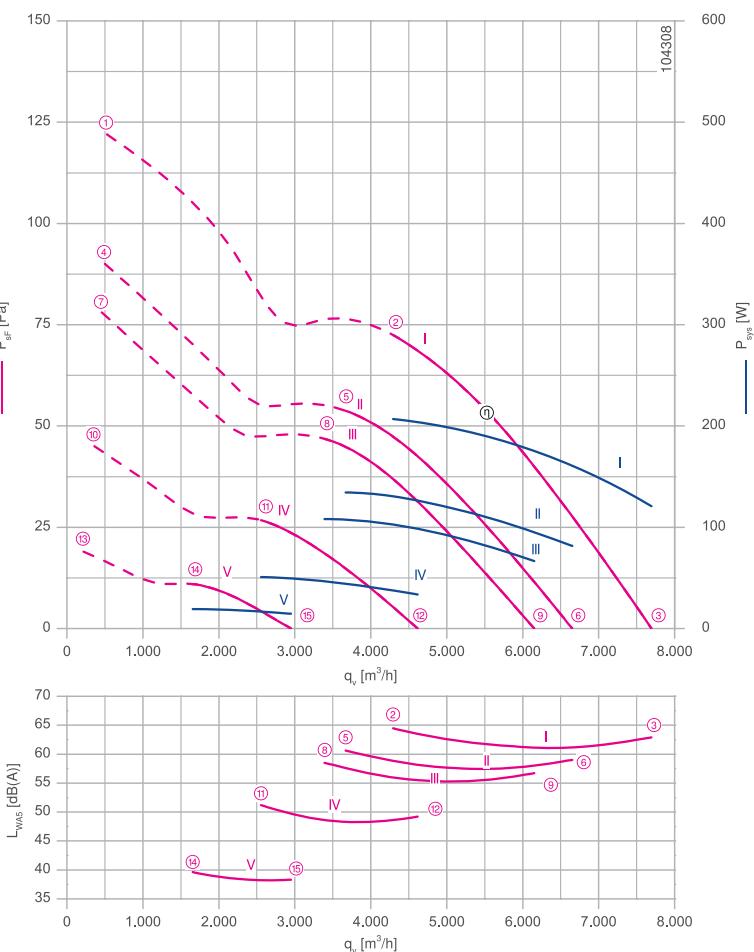

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

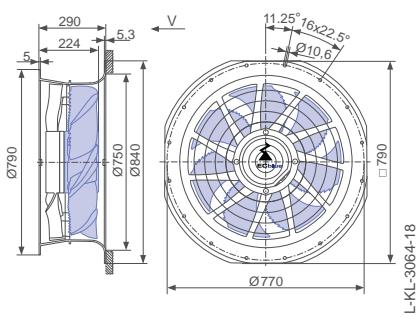


← Airflow direction

Design L - ZAplus OnTop without guard grille

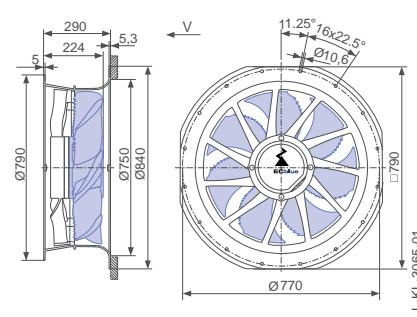

Design L - ZAplus OnTop, guard grille pressure side

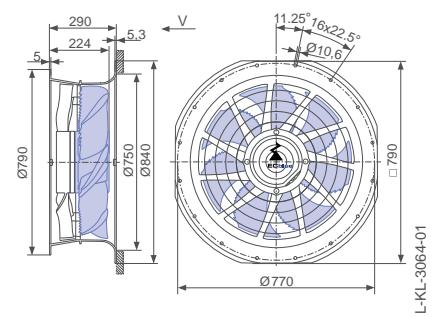

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
ZN063-6I..BD.V7P2	I	660	①	1.25	290	55	
			②	0.92	210	65	
			③	0.54	120	63	
	II	570	④	0.80	180		60
			⑤	0.60	130	61	
			⑥	0.38	80	59	
	III	530	⑦	0.66	150		
			⑧	0.48	110	59	
			⑨	0.32	65	57	
	IV	400	⑩	0.33	70		
			⑪	0.26	50	51	
			⑫	0.20	34	49	
	V	260	⑬	0.17	24		
			⑭	0.15	19	40	
			⑮	0.14	15	38	

Current values determined at 230V

Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure side) Ontop
	Q (guard grille pressure H (guard grille pressure side) Flattop)
Type Article no.	ZN063-6IL.BD.V7P2 166779
	ZN063-6IL.BD.V7P2 163303
	ZN063-6IL.BD.V7P2 163304
	ZN063-6IQ.BD.V7P2 163307
	ZN063-6IH.BD.V7P2 163311
Weight kg	17.30
ZAplus attachable on both sides.	15.50
	16.50
	18.60
	16.90


Control technology

Control modules




Page 452

Design Q - ZAplus with adapter plate, guard grille pressure side

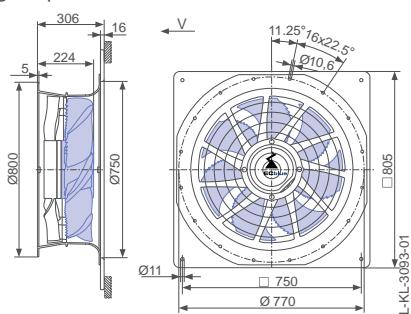

Design H - ZAplus Flattop, guard grille pressure side

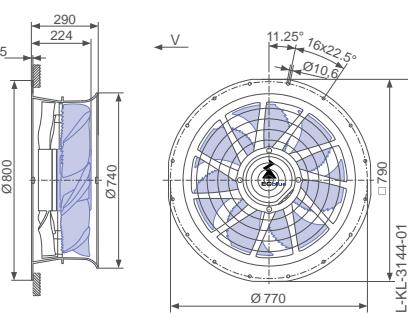

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.78 kW*

Rated current I_N : 4.00- 2.90 A*

Rated speed n_N : 1060 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 57.2 %


Efficiency: $N_{actual} = 64.4 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

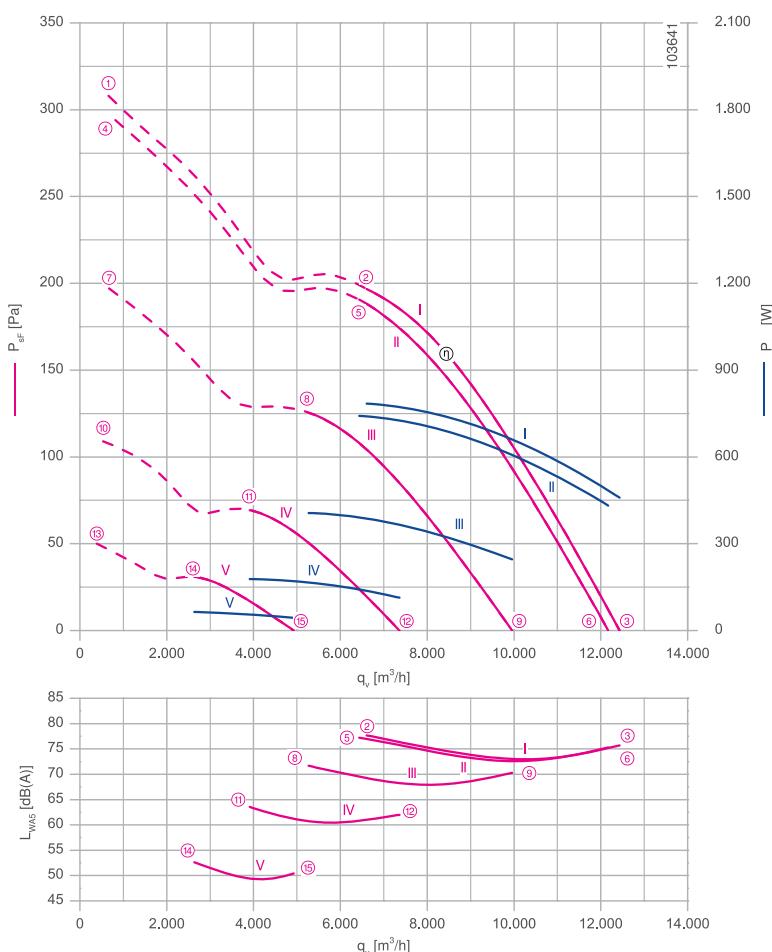

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

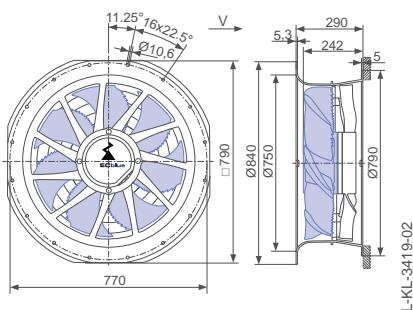


← Airflow direction

Design L - ZAplus Ontop without guard grille

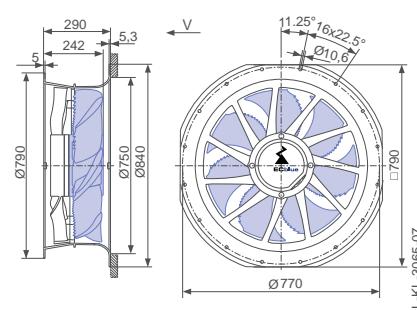

Design L - ZAplus Ontop, guard grille pressure side






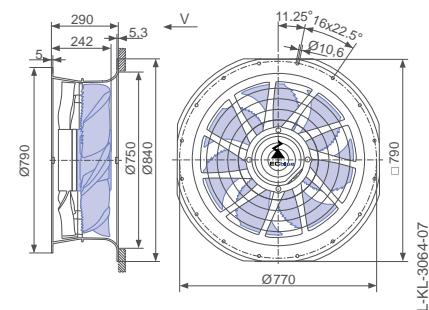


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN063-ZI_.DG.V7P2	I	1060	①	4.60	1000	78	55
			②	3.50	780	76	
			③	2.10	460	75	
	II	1040	④	4.20	960		60
			⑤	3.30	740	77	
			⑥	1.95	440	75	
	III	850	⑦	2.40	540		
			⑧	1.85	400	72	
			⑨	1.15	250	70	
	IV	630	⑩	1.05	230		
			⑪	0.82	180	64	
			⑫	0.54	110	62	
	V	420	⑬	0.42	80		
			⑭	0.54	65	53	
			⑮	0.46	44	50	

Current values determined at 230V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN063-ZIL.DG.V7P2 169880	ZN063-ZIL.DG.V7P2 163357	ZN063-ZIL.DG.V7P2 163358	ZN063-ZIQ.DG.V7P2 163360	ZN063-ZIQ.DG.V7P2 163361	ZN063-ZIH.DG.V7P2 163365
Weight kg	20.60	18.80	19.80	20.80	21.80	19.80
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

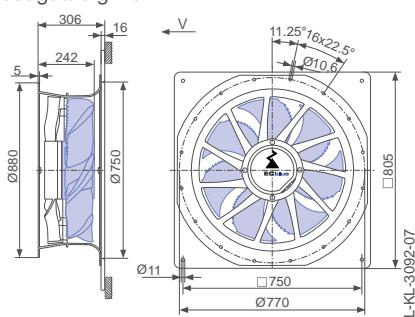

Design Q - ZAplus with adapter plate, guard grille pressure side

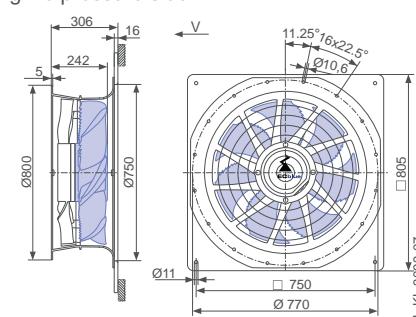

Design H - ZAplus Flattop, guard grille pressure side

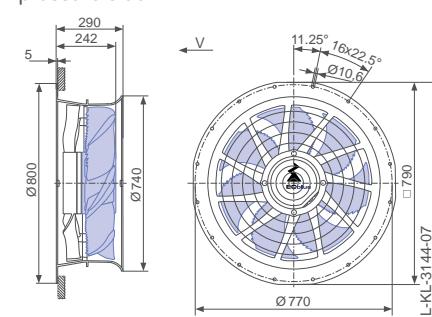

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.00 kW*

Rated current I_N : 3.60- 3.00 A*

Rated speed n_N : 1200 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 58.2 %


Efficiency: $N_{actual} = 64.3 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

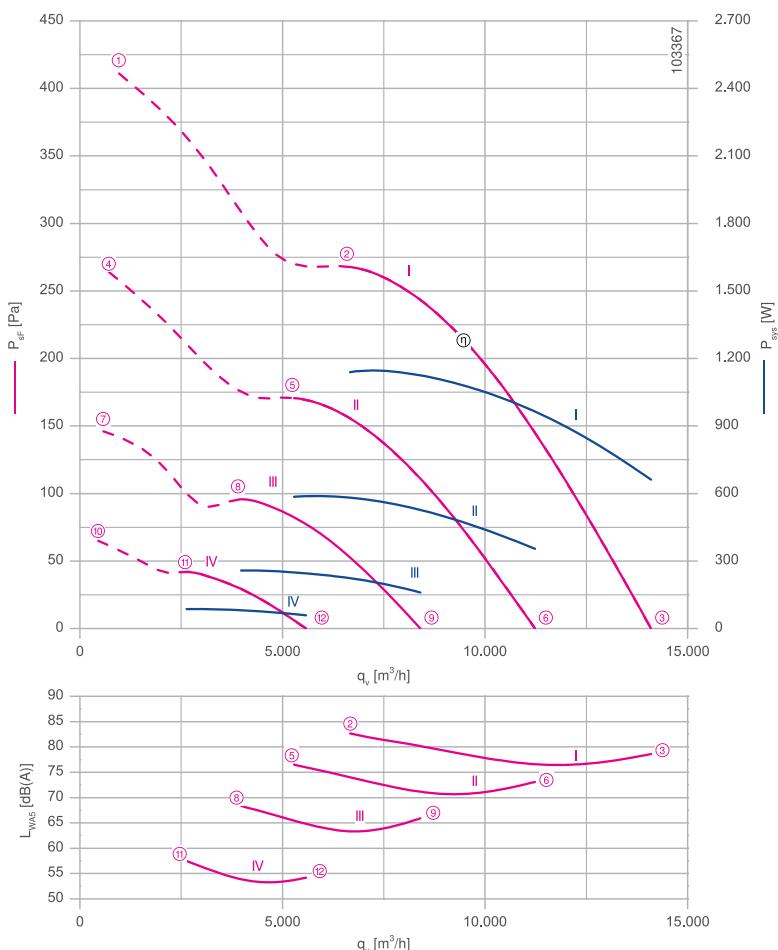

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

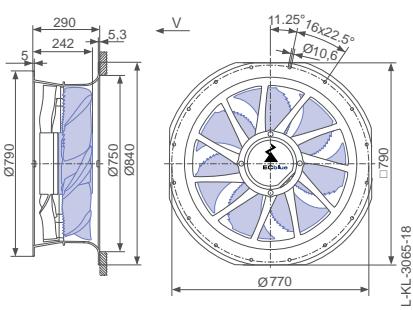


← Airflow direction

Design L - ZAplus Ontop without guard grille

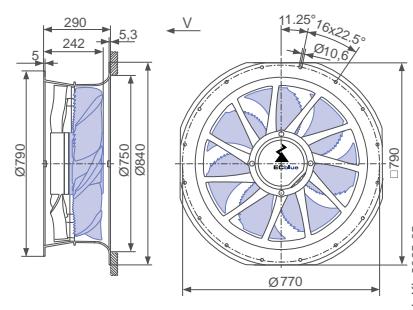

Design L - ZAplus Ontop, guard grille pressure side




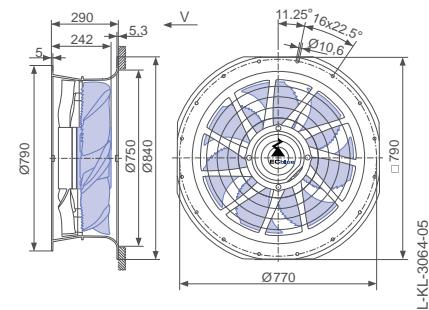


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN063-ZI_.DG.V7P2	I	1200	①	4.00	1500	
			②	3.10	1150	83
			③	1.85	660	79
	II	960	④	2.40	780	
			⑤	1.90	580	77
			⑥	1.20	350	73
	III	720	⑦	1.15	330	
			⑧	0.88	250	69
			⑨	0.60	160	66
	IV	480	⑩	0.46	110	
			⑪	0.39	85	58
			⑫	0.30	60	54

Current values determined at 230V


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN063-ZIL.DG.V7P2 169879	ZN063-ZIL.DG.V7P2 163339	ZN063-ZIL.DG.V7P2 163340	ZN063-ZIQ.DG.V7P2 163342	ZN063-ZIQ.DG.V7P2 163343
Weight kg	20.60	18.80	19.80	20.80	21.80
ZAplus attachable on both sides.					19.80


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		
Page 452	Page 454	Page 463


Design Q - ZAplus with adapter plate, without guard grille

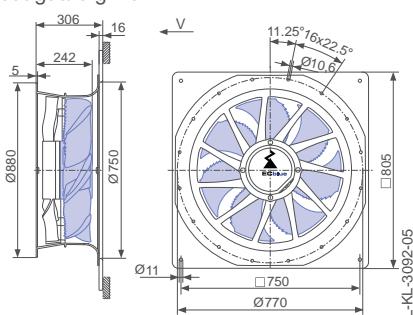

Design Q - ZAplus with adapter plate, guard grille pressure side

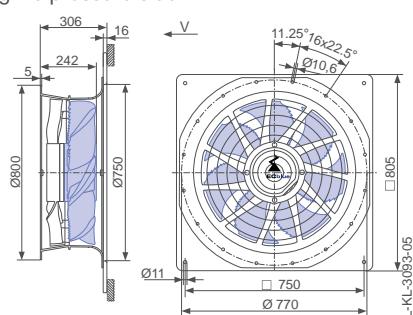

Design H - ZAplus Flattop, guard grille pressure side

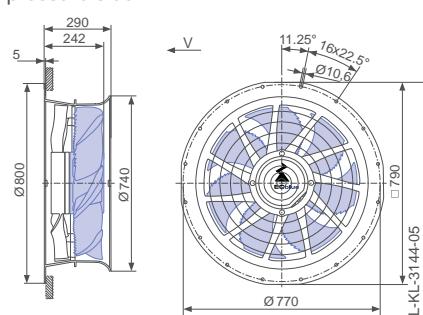

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.10 kW*

Rated current I_N : 9.40- 8.00 A*

Rated speed n_N : 1500 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 45 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 51.2 %


Efficiency: $N_{actual} = 54.4 / N_{target} = 40$ **

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

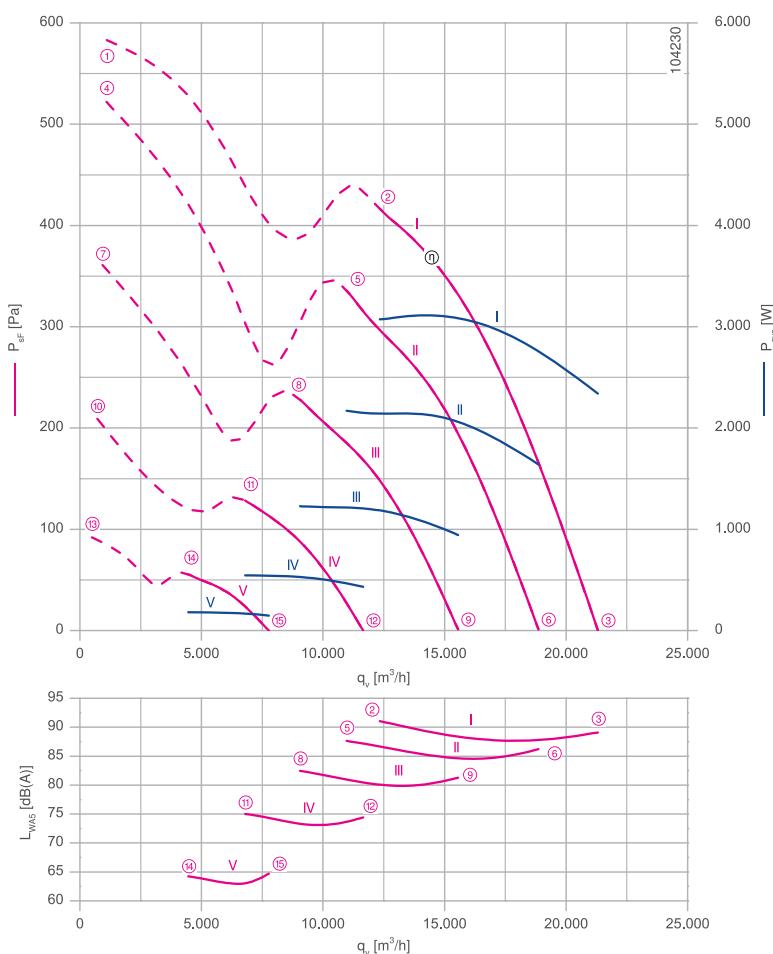

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram




Page 530

1360-403

System components

Page 430

Dimensions mm



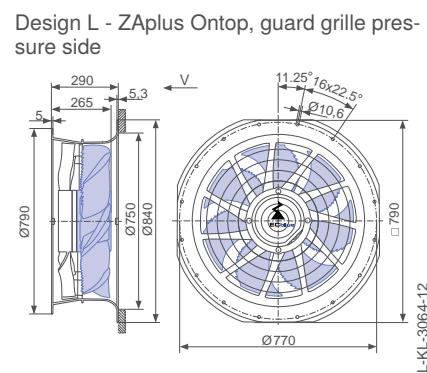
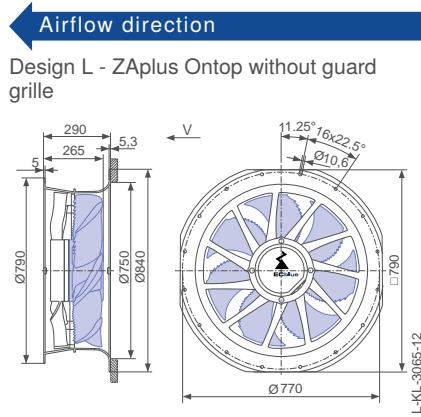
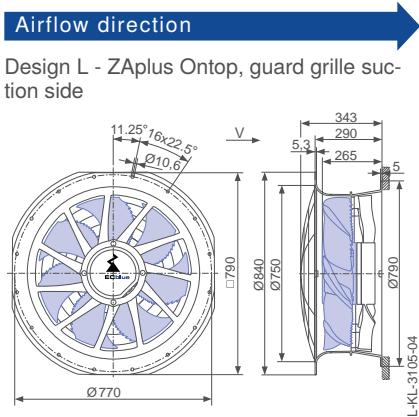


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN063-ZIL.GG.V7P3	I	1500	①	8.40	3200	91	45
			②	8.20	3100	89	
			③	6.20	2300	86	
	II	1340	④	7.00	2700	88	60
			⑤	5.60	2100	86	
			⑥	4.40	1650	83	
	III	1110	⑦	4.00	1500	81	
			⑧	3.30	1200	75	
			⑨	2.60	940	74	
	IV	830	⑩	1.90	680		
			⑪	1.55	540		
			⑫	1.25	440		
	V	550	⑬	0.74	220		
			⑭	0.62	180		
			⑮	0.54	150	64	

Current values determined at 230V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN063-ZIL.GG.V7P3 169881	ZN063-ZIL.GG.V7P3 164302	ZN063-ZIL.GG.V7P3 164303	ZN063-ZIQ.GG.V7P3 164305	ZN063-ZIQ.GG.V7P3 164306	ZN063-ZIH.GG.V7P3 164310
Weight kg	33.40	31.40	32.50	32.80	33.80	32.50
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

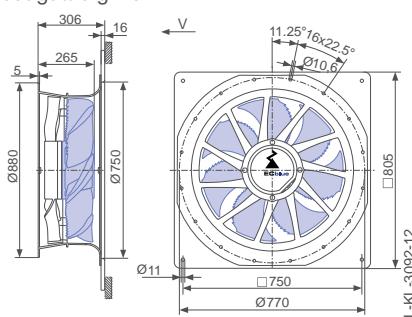

Design Q - ZAplus with adapter plate, guard grille pressure side

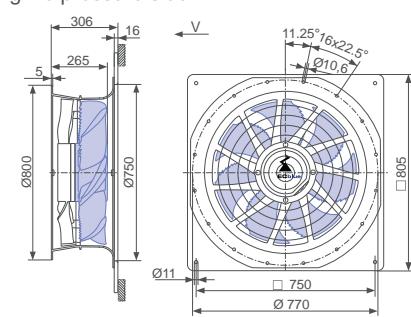

Design H - ZAplus Flattop, guard grille pressure side

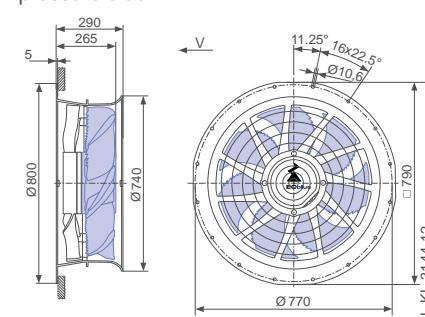

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.60 kW*

Rated current I_N : 11.00- 9.20 A*

Rated speed n_N : 1600 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 52.4 %


Efficiency: $N_{actual} = 55.2 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

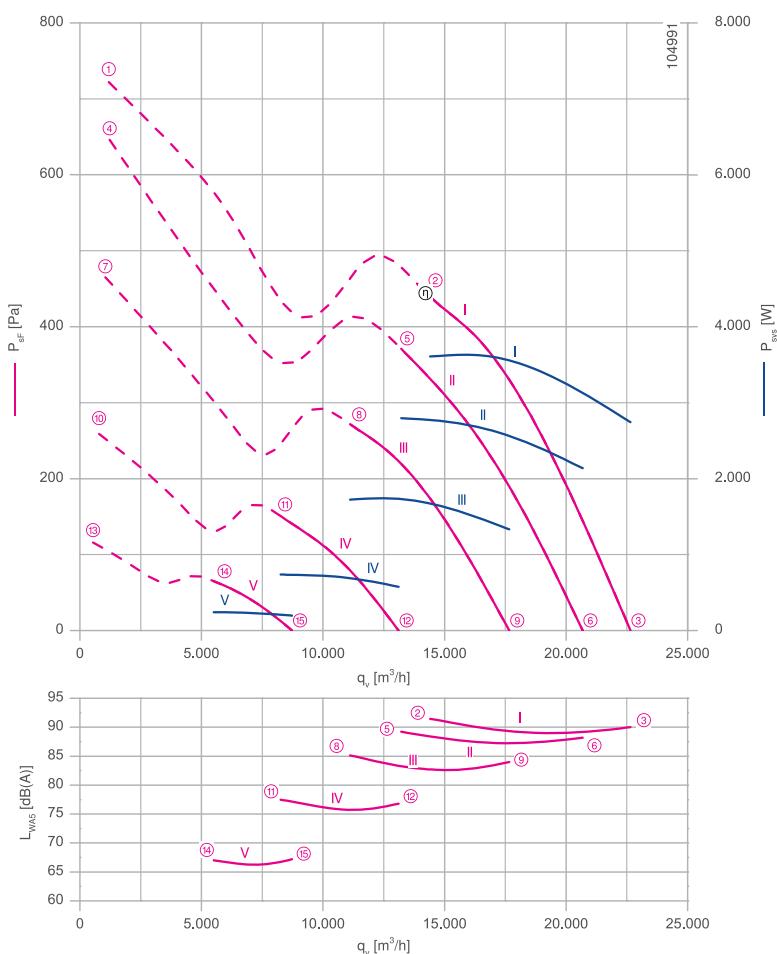

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

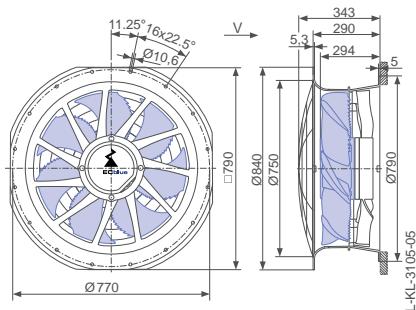


← Airflow direction

Design L - ZAplus Ontop without guard grille

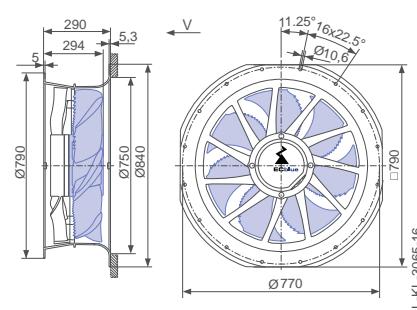

Design L - ZAplus Ontop, guard grille pressure side




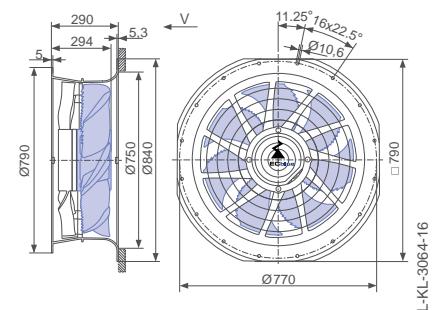


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN063-ZI_GL.V7P3	I	1600	①	11.00	4200	92	50
			②	9.60	3600	90	
			③	7.20	2700	88	
	II	1470	④	9.40	3500	89	60
			⑤	7.40	2800	88	
			⑥	5.60	2100	85	
	III	1250	⑦	5.60	2100	84	
			⑧	4.60	1750	84	
			⑨	3.50	1350	84	
	IV	930	⑩	2.40	920	78	
			⑪	1.95	740	78	
			⑫	1.55	580	77	
	V	620	⑬	0.86	300	67	
			⑭	0.72	240	67	
			⑮	0.62	200	67	

Current values determined at 230V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN063-ZIL.GL.V7P3 169882	ZN063-ZIL.GL.V7P3 164337	ZN063-ZIL.GL.V7P3 164338	ZN063-ZIQ.GL.V7P3 164340	ZN063-ZIQ.GL.V7P3 164341	ZN063-ZIH.GL.V7P3 164345
Weight kg	37.60	35.60	36.70	37.20	38.20	36.70
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

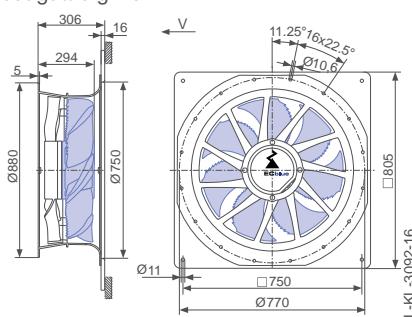

Design Q - ZAplus with adapter plate, guard grille pressure side

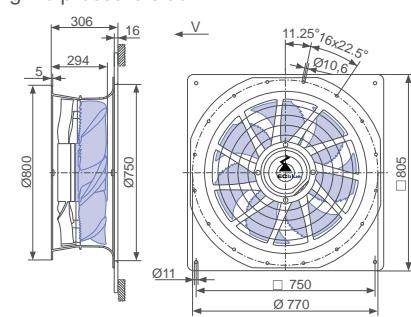

Design H - ZAplus Flattop, guard grille pressure side

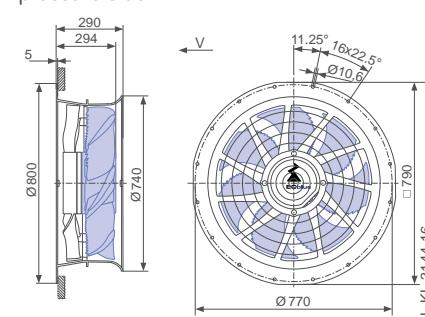

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.00 kW*

Rated current I_N : 2.00- 1.60 A*

Rated speed n_N : 1200 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 60 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 58.7 %


Efficiency: $N_{actual} = 64.8 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

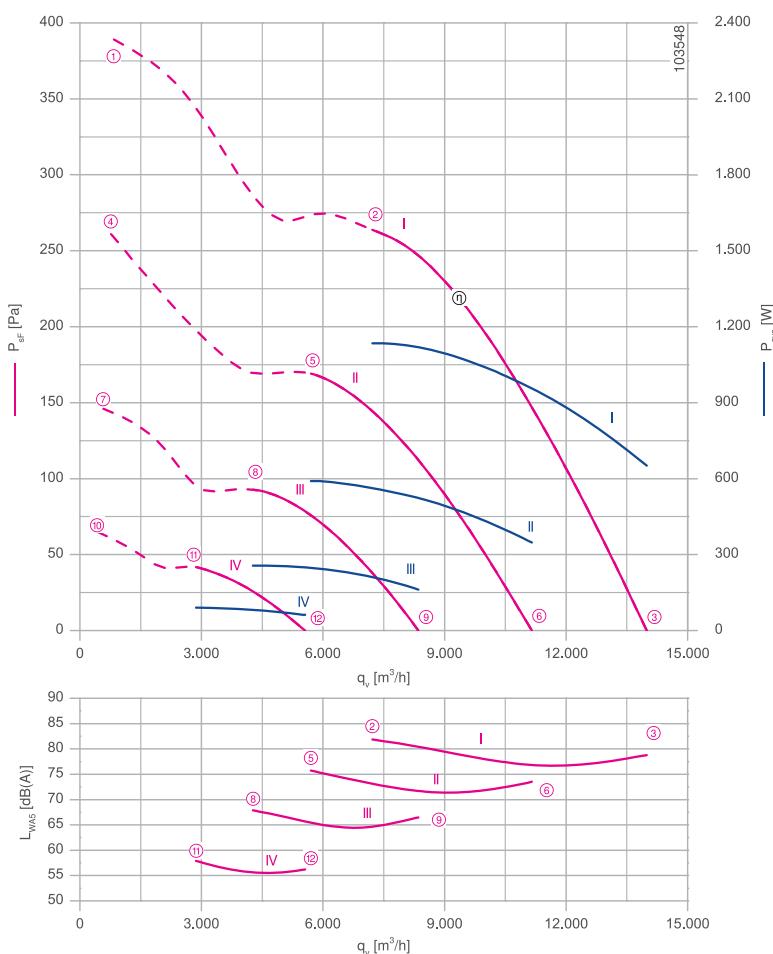

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

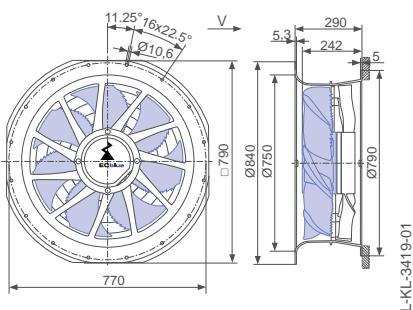


Airflow direction ←

Design L - ZAplus Ontop without guard grille

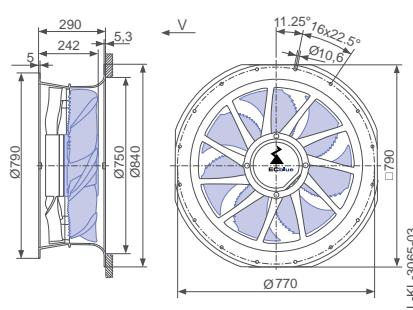

Design L - ZAplus Ontop, guard grille pressure side





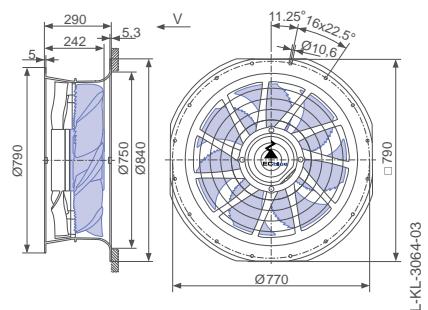


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN063-ZI_.DG.V7P2	I	1200	①	2.30	1400	
			②	1.90	1150	82
			③	1.25	660	79
	II	960	④	1.40	780	
			⑤	1.15	580	76
			⑥	0.84	350	74
	III	720	⑦	0.82	340	
			⑧	0.70	260	68
			⑨	0.54	160	67
	IV	480	⑩	0.42	110	
			⑪	0.37	90	58
			⑫	0.29	60	56

Current values determined at 400V


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type Article no.	ZN063-ZIL.DG.V7P2 166780	ZN063-ZIL.DG.V7P2 163321	ZN063-ZIL.DG.V7P2 163322	ZN063-ZIQ.DG.V7P2 163324	ZN063-ZIQ.DG.V7P2 163325
Weight kg	20.60	18.80	19.80	20.80	21.80
ZAplus attachable on both sides.					19.80


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		
Page 452	Page 454	Page 463


Design Q - ZAplus with adapter plate, without guard grille

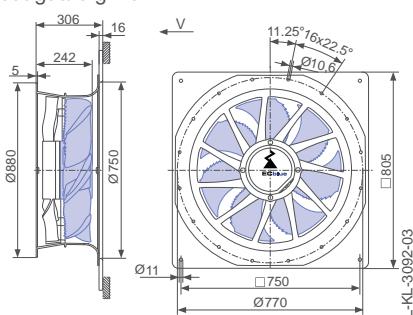

Design Q - ZAplus with adapter plate, guard grille pressure side

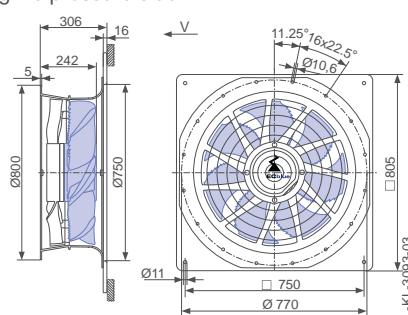

Design H - ZAplus Flattop, guard grille pressure side

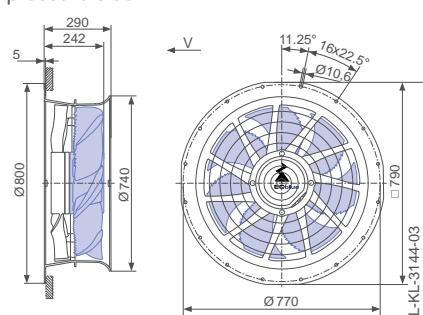

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.85 kW*

Rated current I_N : 3.00- 2.40 A*

Rated speed n_N : 1270 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 52.8 %


Efficiency: $N_{actual} = 57.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

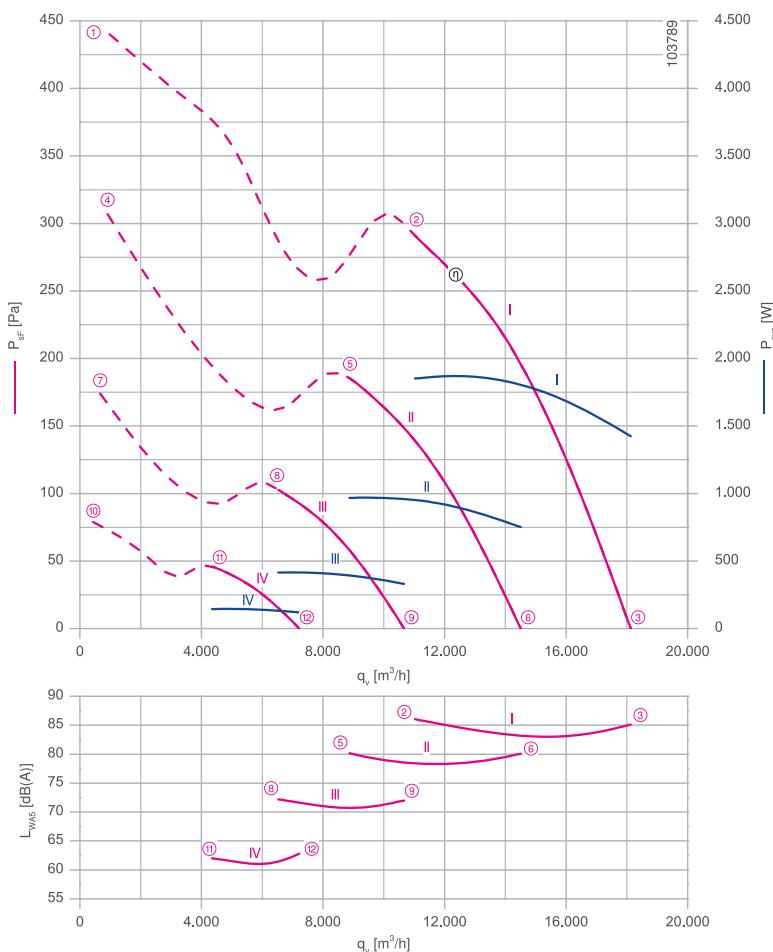

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

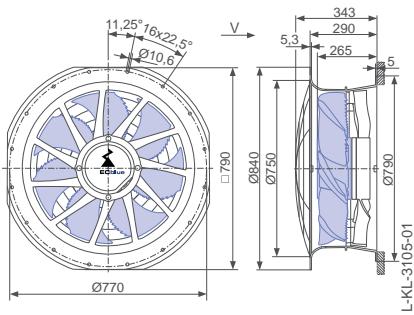


← Airflow direction

Design L - ZAplus Ontop without guard grille

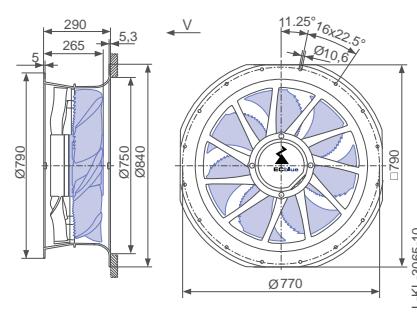

Design L - ZAplus Ontop, guard grille pressure side





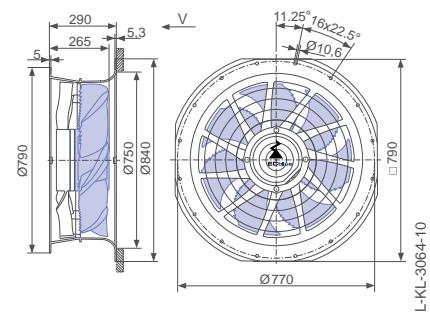


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)
ZN063-ZI_.GG.V7P3	I	1270	①	3.10	2000	
			②	2.90	1850	86
			③	2.20	1400	85
	II	1020	④	1.85	1200	
			⑤	1.55	960	80
			⑥	1.25	760	80
	III	760	⑦	0.94	520	
			⑧	0.80	420	72
			⑨	0.68	330	72
	IV	510	⑩	0.48	180	
			⑪	0.42	140	62
			⑫	0.38	120	63

Current values determined at 400V


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop
					
Type Article no.	ZN063-ZIL.GG.V7P3 166781	ZN063-ZIL.GG.V7P3 164284	ZN063-ZIL.GG.V7P3 164285	ZN063-ZIQ.GG.V7P3 164287	ZN063-ZIQ.GG.V7P3 164288
Weight kg	33.40	31.40	32.50	32.80	33.80
ZAplus attachable on both sides.					32.50


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		
Page 452	Page 454	Page 463


Design Q - ZAplus with adapter plate, without guard grille

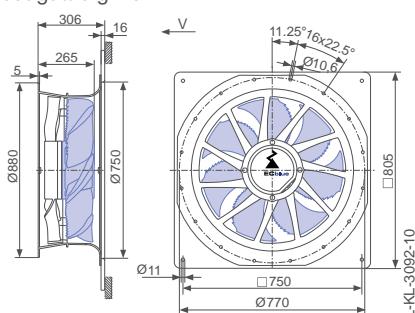

Design Q - ZAplus with adapter plate, guard grille pressure side

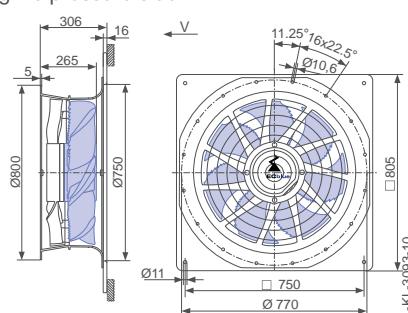

Design H - ZAplus Flattop, guard grille pressure side

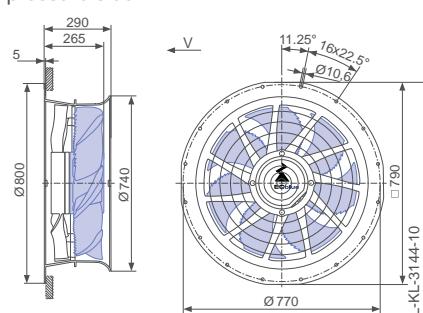

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 6 3



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.70 kW*

Rated current I_N : 6.00- 4.70 A*

Rated speed n_N : 1600 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 52.9 %


Efficiency: $N_{actual} = 55.7 / N_{target} = 40$ **

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

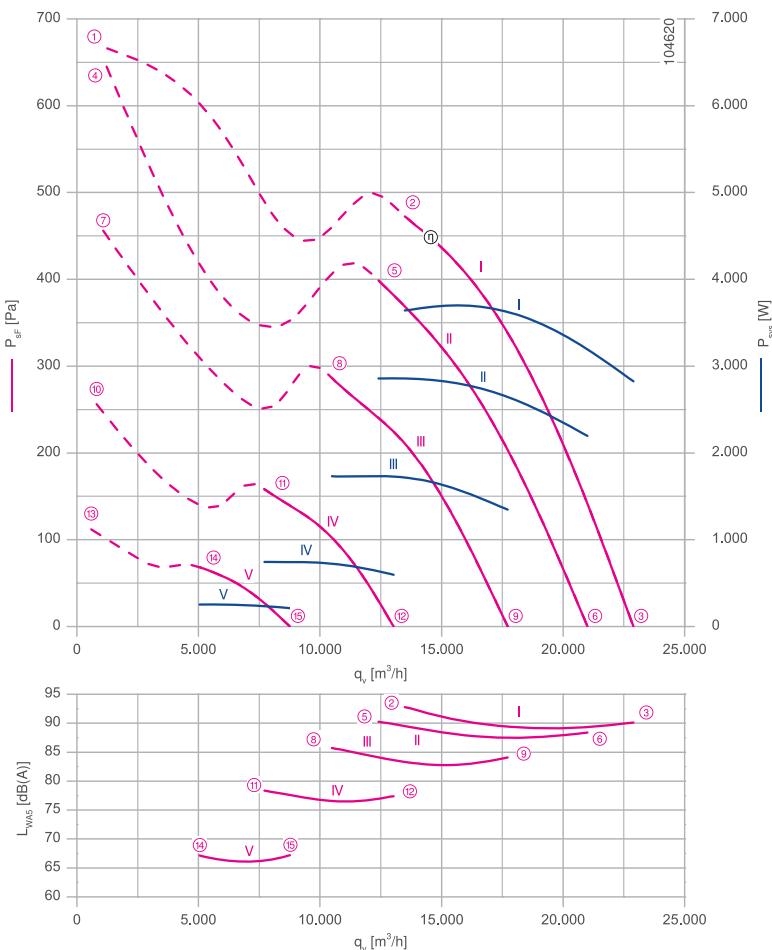

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

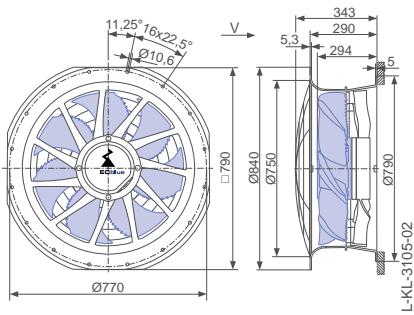


← Airflow direction

Design L - ZAplus OnTop without guard grille

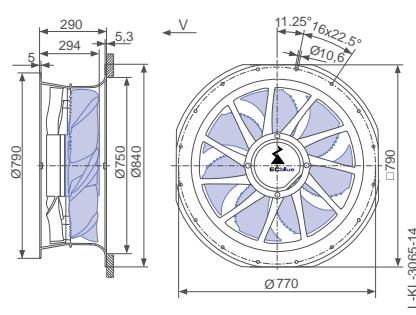

Design L - ZAplus OnTop, guard grille pressure side




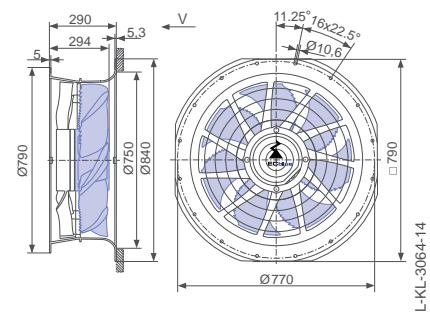


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN063-ZI_GL.V7P3	I	1600	①	5.60	3700	93	55
			②	5.60	3600	90	
			③	4.40	2800	88	
	II	1480	④	5.40	3500	90	60
			⑤	4.40	2900	88	
			⑥	3.40	2200	86	
	III	1250	⑦	3.20	2100	86	
			⑧	2.70	1700	84	
			⑨	2.10	1350	84	
	IV	930	⑩	1.50	920	78	
			⑪	1.25	740	78	
			⑫	1.05	600	77	
	V	620	⑬	0.66	300	67	
			⑭	0.58	250	67	
			⑮	0.52	210	67	

Current values determined at 400V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN063-ZIL.GL.V7P3 166782	ZN063-ZIL.GL.V7P3 164319	ZN063-ZIL.GL.V7P3 164320	ZN063-ZIQ.GL.V7P3 164322	ZN063-ZIQ.GL.V7P3 164323	ZN063-ZIH.GL.V7P3 164327
Weight kg	37.60	35.70	36.70	37.20	38.20	36.70
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

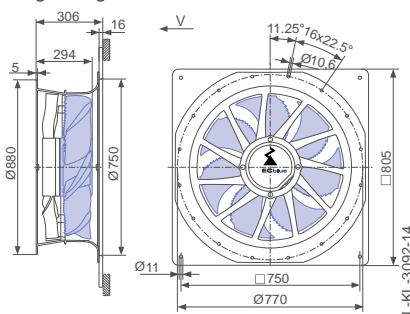

Design Q - ZAplus with adapter plate, guard grille pressure side

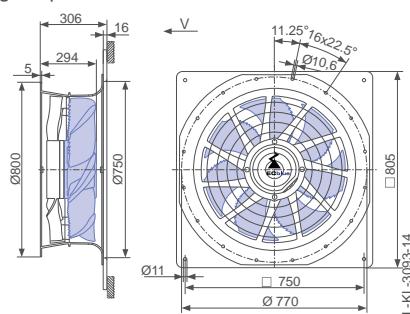

Design H - ZAplus Flattop, guard grille pressure side

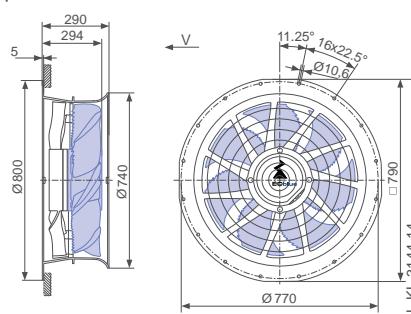

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 71



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 290 W*

Rated current I_N : 1.45-1.05 A*

Rated speed n_N : 620 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 45 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE

ErP-data

Efficiency η_{start} : 46.0 %


Efficiency: $N_{actual} = 55.9 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

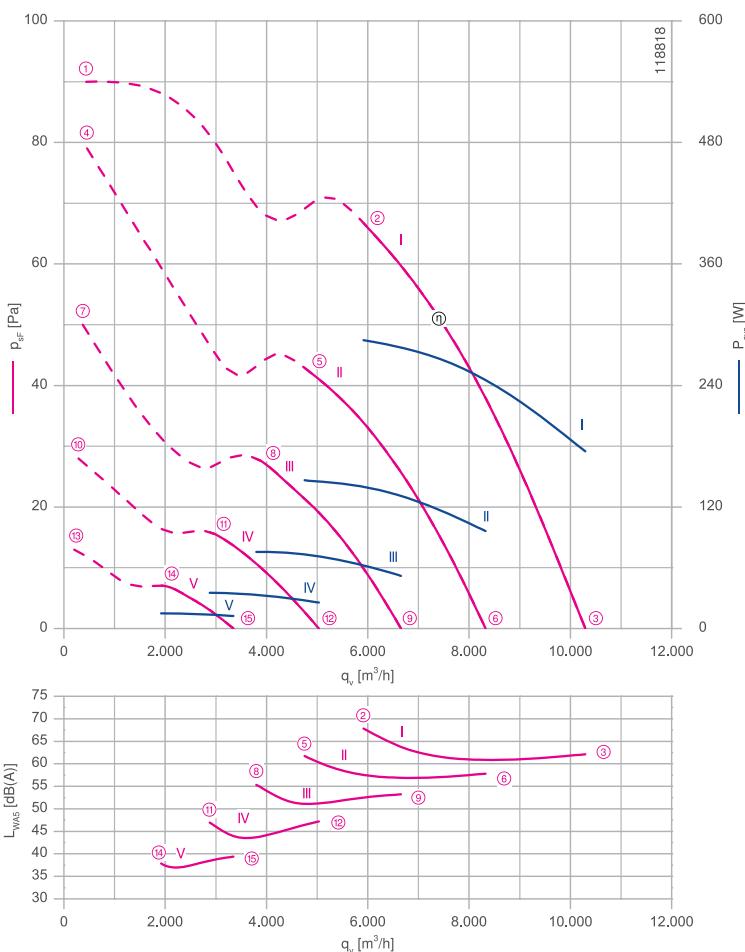

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 529

1360-384


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

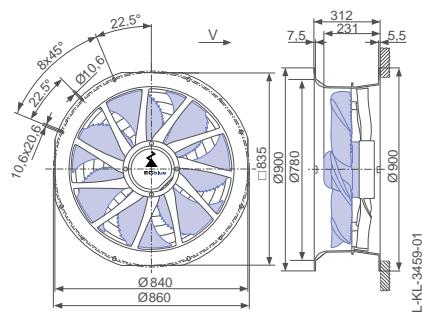


← Airflow direction

Design L - ZAplus OnTop without guard grille

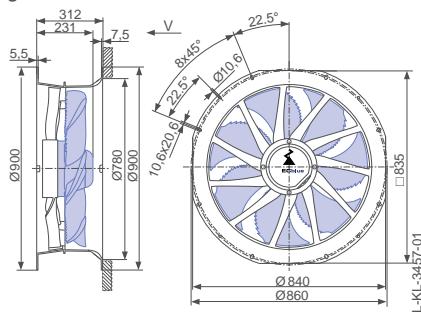

Design L - ZAplus OnTop, guard grille pressure side

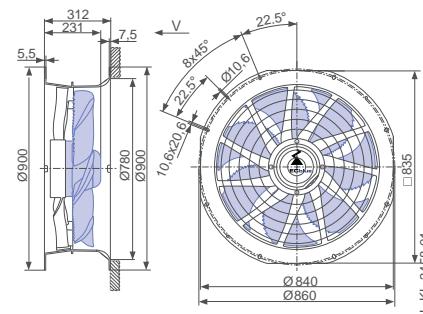

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
ZN071-6I..BD.V7P3	I	620	①	1.25	290	68	45
			②	1.25	280	62	
			③	0.78	170	58	
	II	500	④	1.00	230		60
			⑤	0.64	150	62	
			⑥	0.44	95	55	
	III	400	⑦	0.52	120		
			⑧	0.36	75	53	
			⑨	0.27	50		
	IV	300	⑩	0.26	50		
			⑪	0.20	36	47	
			⑫	0.17	26	47	
	V	200	⑬	0.15	20		
			⑭	0.14	15	38	
			⑮	0.13	12	39	

Current values determined at 230V

Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure H (without guard grille) Ontop
	Flattop
	H (guard grille pressure side) Flattop
Type Article no.	ZN071-6IL.BD.V7P3 170380
	ZN071-6IL.BD.V7P3 170376
	ZN071-6IL.BD.V7P3 170377
	ZN071-6IH.BD.V7P3 170378
	ZN071-6IH.BD.V7P3 170379
Weight kg	19.40
ZAplus attachable on both sides.	16.20
	17.50
	15.20
	16.50


Control technology

Control modules




Page 452

Design H - ZAplus Flattop, without guard grille

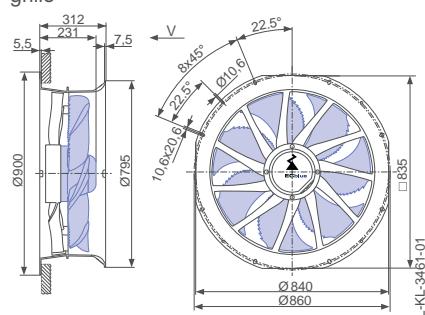

Design H - ZAplus Flattop, guard grille pressure side

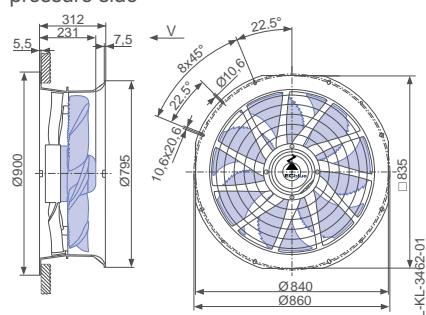

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 71



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.68 kW*

Rated current I_N : 3.50- 2.50 A*

Rated speed n_N : 890 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{start} : 53.6 %


Efficiency: $N_{actual} = 61.0 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

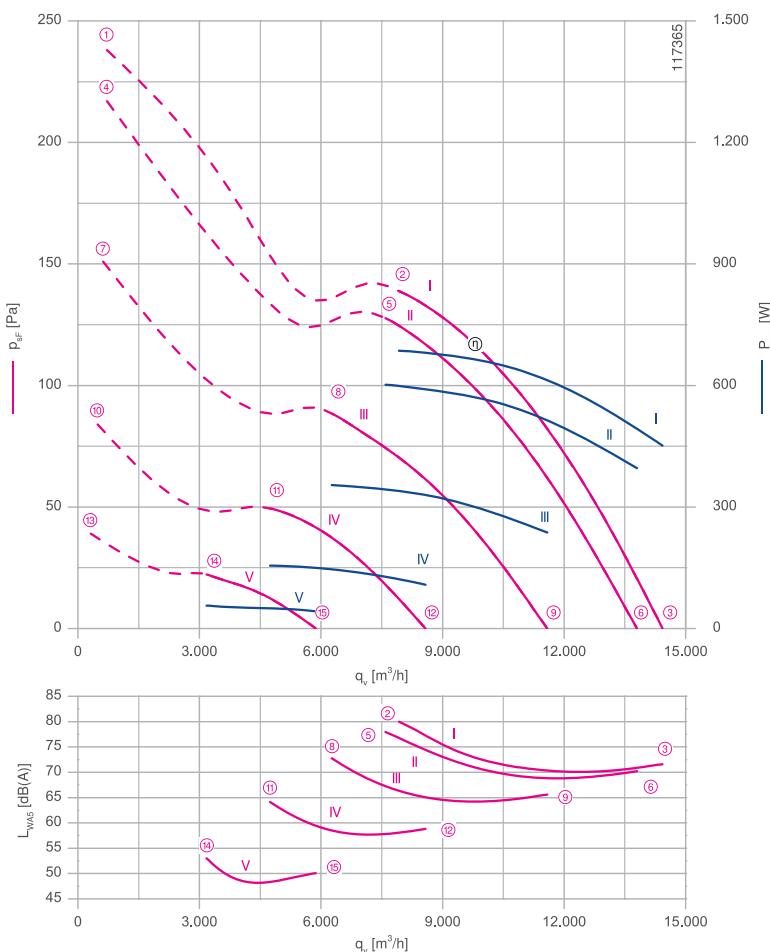

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

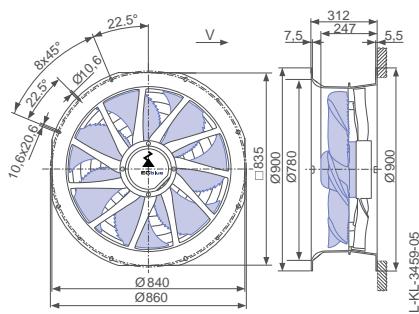


← Airflow direction

Design L - ZAplus OnTop without guard grille

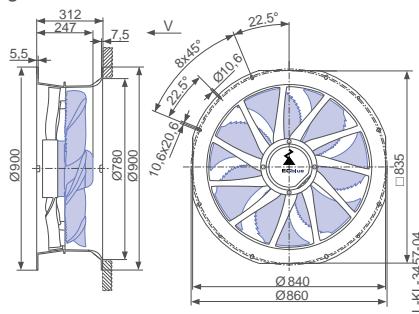

Design L - ZAplus OnTop, guard grille pressure side

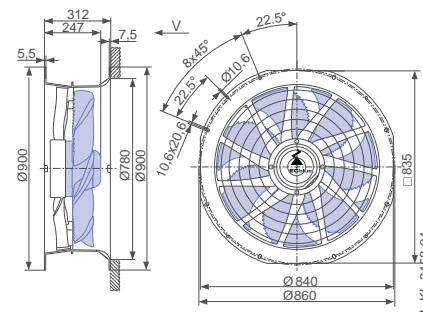

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN071-ZI..DG..7P3	I	890	①	4.40	1000	55	
			②	3.00	680	80	
			③	2.00	460	72	
	II	850	④	3.80	860	60	
			⑤	2.60	600	78	
	III	710	⑥	1.75	400	70	
			⑦	2.20	500		
			⑧	1.55	350	73	
	IV	530	⑨	1.10	240	66	
			⑩	0.98	220		
	V	360	⑪	0.72	150	64	
			⑫	0.52	110	59	
			⑬	0.42	80		
			⑭	0.50	55	53	
			⑮	0.44	42	50	

Current values determined at 230V


Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure H (without guard grille) Ontop
	Flattop
	H (guard grille pressure side) Flattop
Type Article no.	ZN071-ZIL.DG.V7P3 170404
	ZN071-ZIL.DG.V7P3 170341
	ZN071-ZIL.DG.V7P3 170342
	ZN071-ZIH.DG.V7P3 170402
	ZN071-ZIH.DG.V7P3 170403
Weight kg	22.40
ZAplus attachable on both sides.	19.30
	20.60
	18.30
	19.50


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			
Page 452		Page 454	
			Page 463
			
			Page 472

Design H - ZAplus Flattop, without guard grille

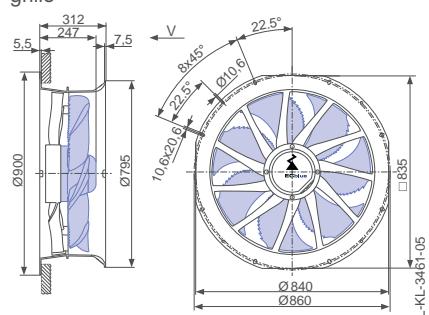

Design H - ZAplus Flattop, guard grille pressure side

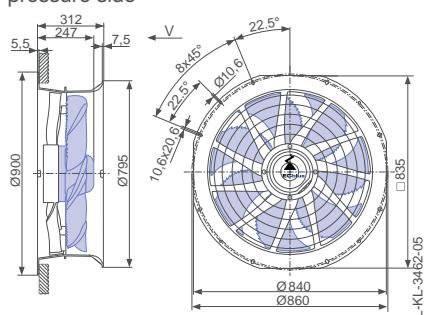

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V


Z N O 71



Description

Motor technology: EC
Rated voltage U_N : 3~ 200-240 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 0.86 kW*
Rated current I_N : 2.70- 2.20 A*
Rated speed n_N : 960 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL
ErP-data
Efficiency η_{startA} : 54.1 %
Efficiency: $N_{actual} = 60.9 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

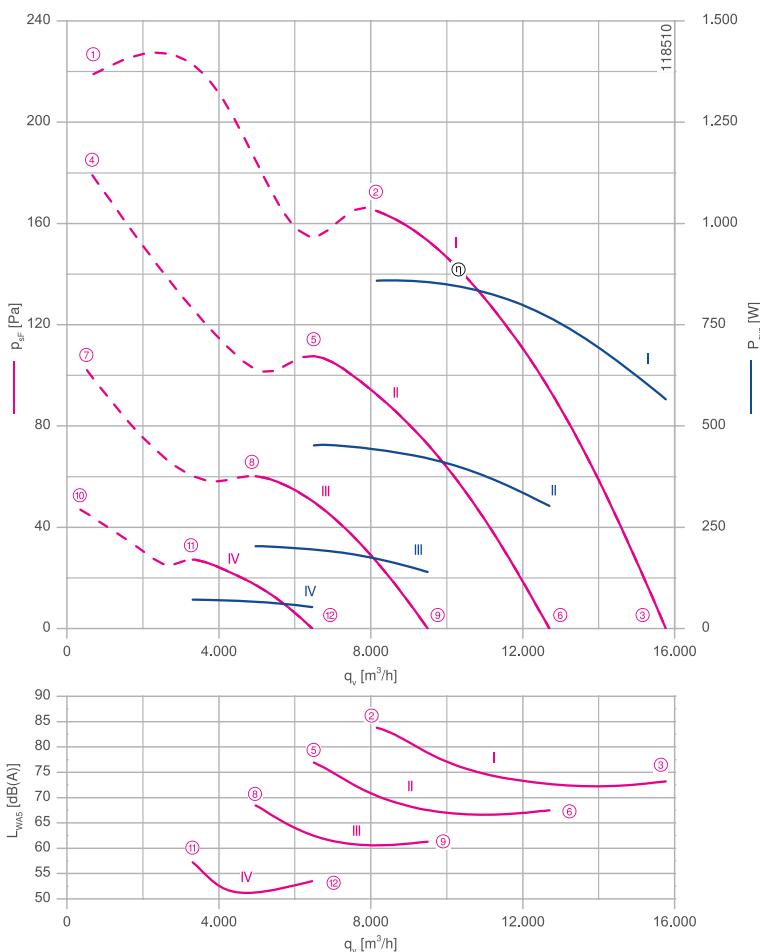

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram




Page 530

1360-403

System components

Page 430

Dimensions mm

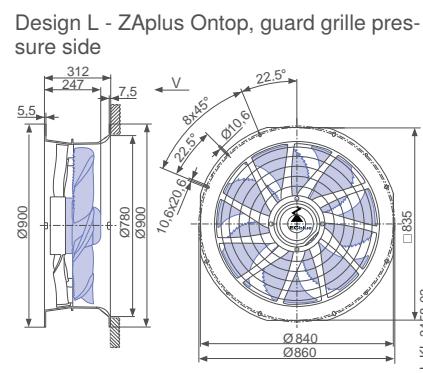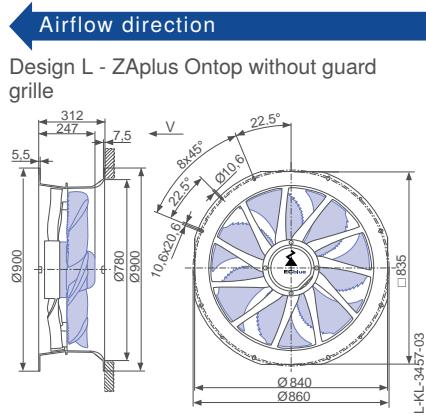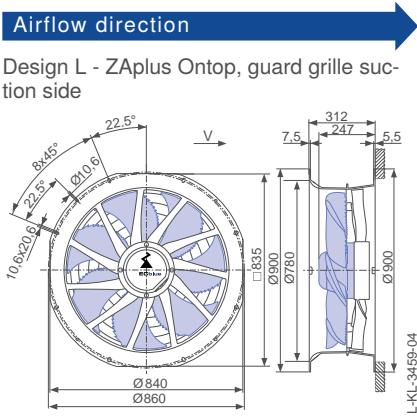

Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
ZN071-ZI_.DG.V7P3	I	960	①	2.40	880	
			②	2.30	860	84
			③	1.55	560	73
	II	770	④	1.80	660	
			⑤	1.25	440	77
			⑥	0.90	300	68
	III	580	⑦	0.88	290	
			⑧	0.68	200	69
			⑨	0.54	140	61
	IV	390	⑩	0.44	100	
			⑪	0.34	70	58
			⑫	0.29	55	54

Current values determined at 230V

Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	H (without guard grille) Flattop	H (guard grille pressure side) Flattop
Type Article no.	ZN071-ZIL.DG.V7P3 170396	ZN071-ZIL.DG.V7P3 170392	ZN071-ZIL.DG.V7P3 170393	ZN071-ZIH.DG.V7P3 170394	ZN071-ZIH.DG.V7P3 170395
Weight kg	22.40	19.30	20.50	18.30	19.50
ZAplus attachable on both sides.					

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472

Design H - ZAplus Flattop, without guard grille

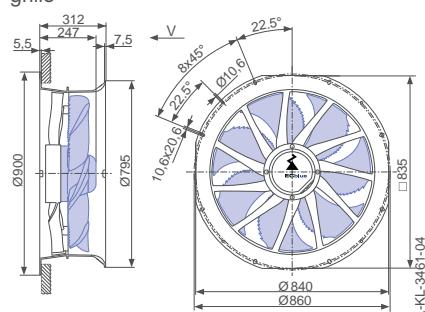

Design H - ZAplus Flattop, guard grille pressure side

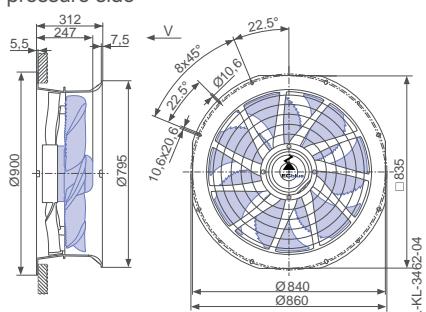

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V


Z N O 71



Description

Motor technology: EC
Rated voltage U_N : 3~ 200-240 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 2.70 kW*
Rated current I_N : 8.20-6.80 A*
Rated speed n_N : 1300 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 50 °C
Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: Aluminium, uncoated
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL
ErP-data
Efficiency η_{startA} : 52.8 %
Efficiency: $N_{actual} = 56.5 / N_{target} = 40^{**}$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

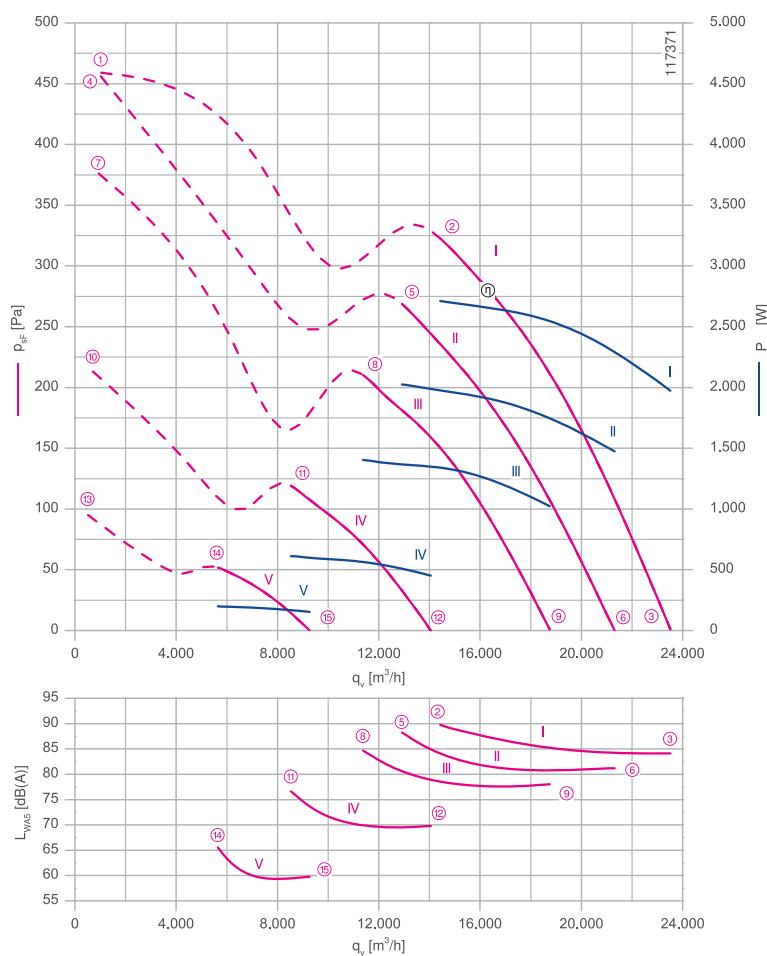

Measured in ZAplus without guard grille in installation type A according to ISO 5801


Connection diagram

Page 530
1360-403

System components


Page 430

Dimensions mm

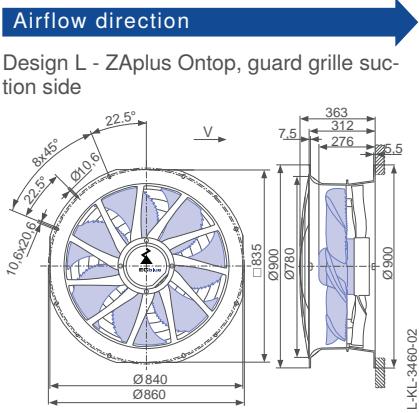


Airflow direction

Design L - ZAplus Ontop, guard grille suction side

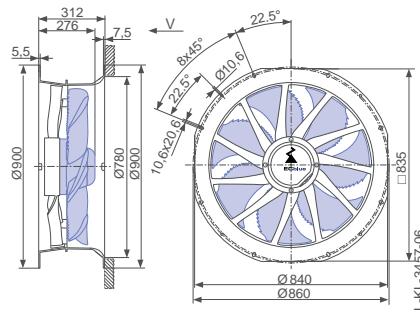

Airflow direction

Design L - ZAplus Ontop, guard grille pressure side

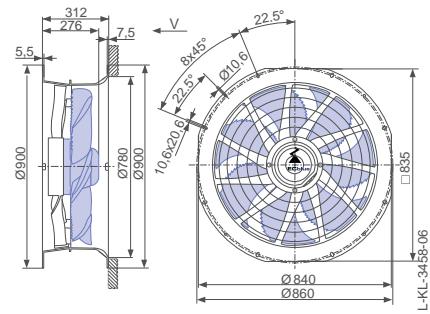

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN071-ZI_GG.V7P4	I	1300	① ② ③	7.40 7.20 5.20	2800 2700 1950	90 84	50
	II	1180	④ ⑤ ⑥	7.40 5.40 3.90	2800 2000 1500	88 81	60
	III	1040	⑦ ⑧ ⑨	5.40 3.70 2.80	2100 1400 1000	85 78	
	IV	780	⑩ ⑪ ⑫	2.40 1.65 1.30	880 600 460	77 70	
	V	520	⑬ ⑭ ⑮	0.86 0.66 0.58	280 200 150	66 60	

Current values determined at 230V


Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure H (without guard grille) Ontop
	Flattop
	H (guard grille pressure side) Flattop
Type Article no.	ZN071-ZIL.GG.V7P4 170418
	ZN071-ZIL.GG.V7P4 170414
	ZN071-ZIL.GG.V7P4 170415
	ZN071-ZIH.GG.V7P4 170416
	ZN071-ZIH.GG.V7P4 170417
Weight kg	33.40
ZAplus attachable on both sides.	30.80
	32.00
	29.90
	31.10


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472

Design H - ZAplus Flattop, without guard grille

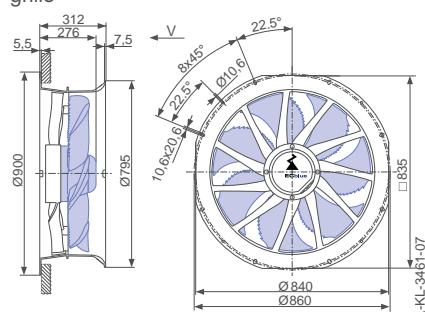

Design H - ZAplus Flattop, guard grille pressure side

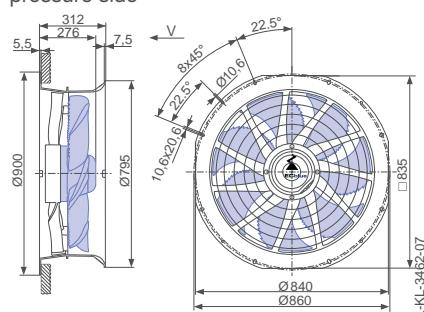

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.30 kW*

Rated current I_N : 10.00- 8.40 A*

Rated speed n_N : 1400 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 53.9 %


Efficiency: $N_{actual} = 57.0 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

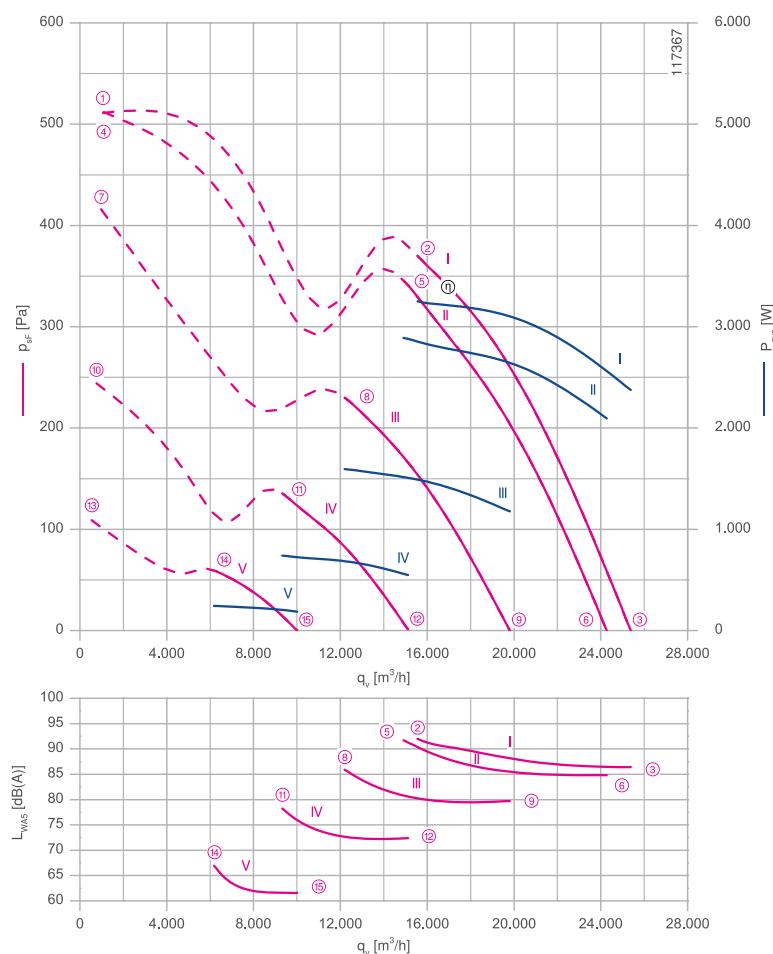

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

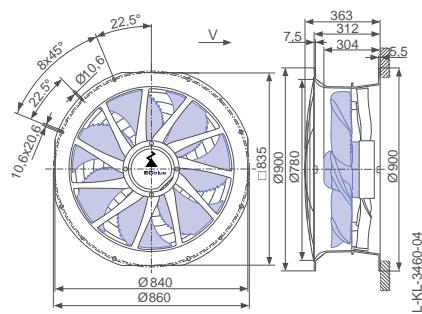


← Airflow direction

Design L - ZAplus OnTop without guard grille

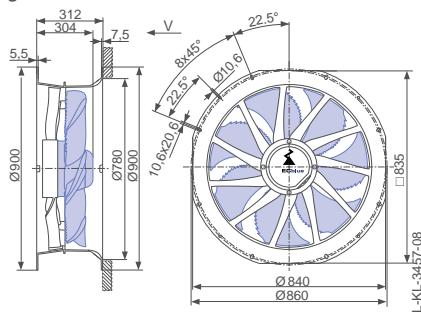

Design L - ZAplus OnTop, guard grille pressure side




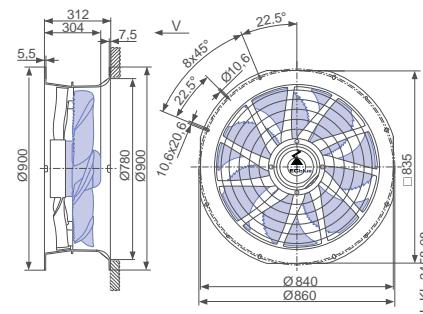


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN071-ZI_GL.V7P4	I	1400	①	8.60	3200	55	
			②	8.60	3300	92	
			③	6.20	2400	86	
	II	1340	④	8.40	3200	60	
			⑤	7.60	2900	92	
			⑥	5.60	2100	85	
	III	1100	⑦	6.20	2300		
			⑧	4.20	1600	86	
			⑨	3.20	1200	80	
	IV	840	⑩	2.90	1050		
			⑪	2.00	720	78	
			⑫	1.55	540	72	
	V	560	⑬	1.00	340		
			⑭	0.76	240	67	
			⑮	0.64	190	62	

Current values determined at 230V


Fan ordering information

	Airflow direction	Airflow direction		
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure H (without guard grille) Ontop	H (guard grille pressure side) Flattop
				
Type Article no.	ZN071-ZIL.GL.V7P4 170434	ZN071-ZIL.GL.V7P4 170430	ZN071-ZIL.GL.V7P4 170431	ZN071-ZIH.GL.V7P4 170432
Weight kg	37.80	35.20	36.40	34.30
ZAplus attachable on both sides.				35.50


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
		 Page 463	 Page 472

Design H - ZAplus Flattop, without guard grille

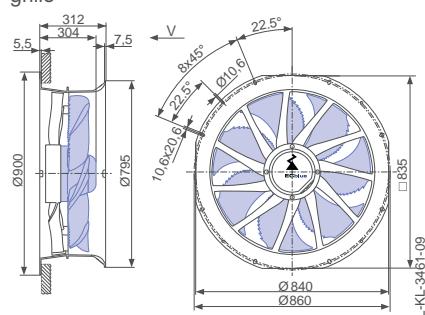

Design H - ZAplus Flattop, guard grille pressure side

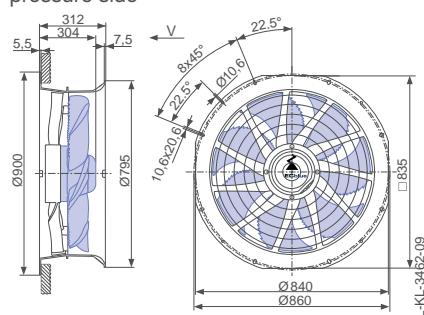

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.84 kW*

Rated current I_N : 1.45-1.15 A*

Rated speed n_N : 960 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 54.5 %


Efficiency: $N_{actual} = 61.4 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

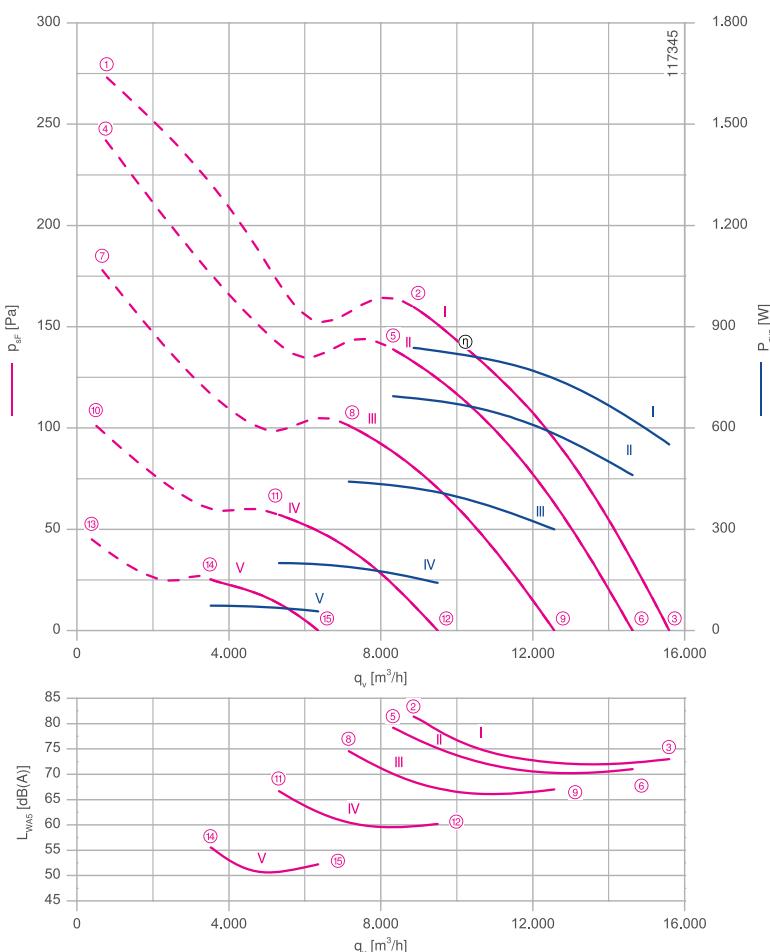

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

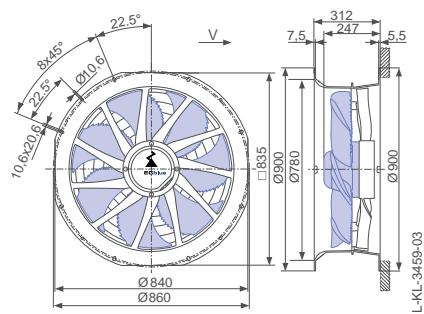


← Airflow direction

Design L - ZAplus OnTop without guard grille

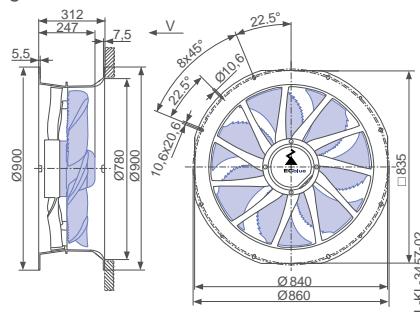

Design L - ZAplus OnTop, guard grille pressure side

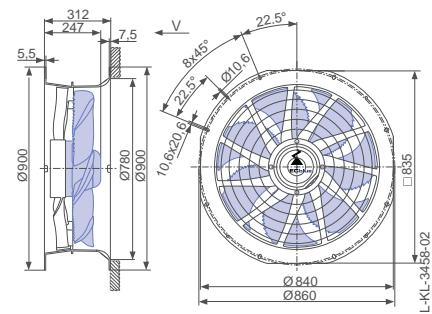

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN071-ZI..DG..7P3	I	960	① ② ③	1.90 1.35 0.98	1250 840 560	82 73	55
	II	900	④ ⑤ ⑥	1.60 1.20 0.88	1000 700 460	79 71	60
	III	770	⑦ ⑧ ⑨	1.10 0.86 0.68	640 440 300	75 71	
	IV	580	⑩ ⑪ ⑫	0.66 0.52 0.42	280 200 140	67 67 60	
	V	390	⑬ ⑭ ⑮	0.33 0.28 0.24	100 75 55	56 56 52	

Current values determined at 400V


Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure H (without guard grille) Ontop
	Flattop
	H (guard grille pressure side) Flattop
Type Article no.	ZN071-ZIL.DG.V7P3 170388
	ZN071-ZIL.DG.V7P3 170337
	ZN071-ZIL.DG.V7P3 170338
	ZN071-ZIH.DG.V7P3 170386
	ZN071-ZIH.DG.V7P3 170387
Weight kg	22.40
ZAplus attachable on both sides.	19.30
	20.50
	18.30
	19.50


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472

Design H - ZAplus Flattop, without guard grille

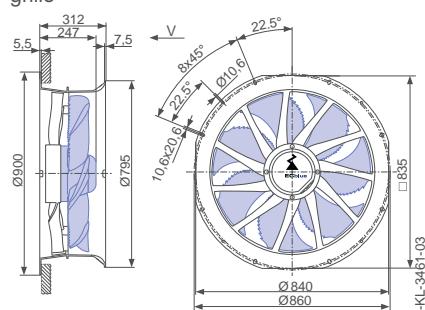

Design H - ZAplus Flattop, guard grille pressure side

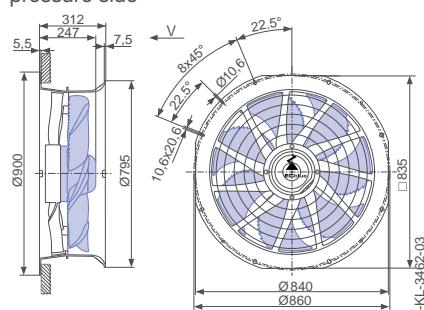

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 71



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 1.85 kW*

Rated current I_N : 3.00- 2.40 A*

Rated speed n_N : 1150 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 54.8 %


Efficiency: $N_{actual} = 59.5 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

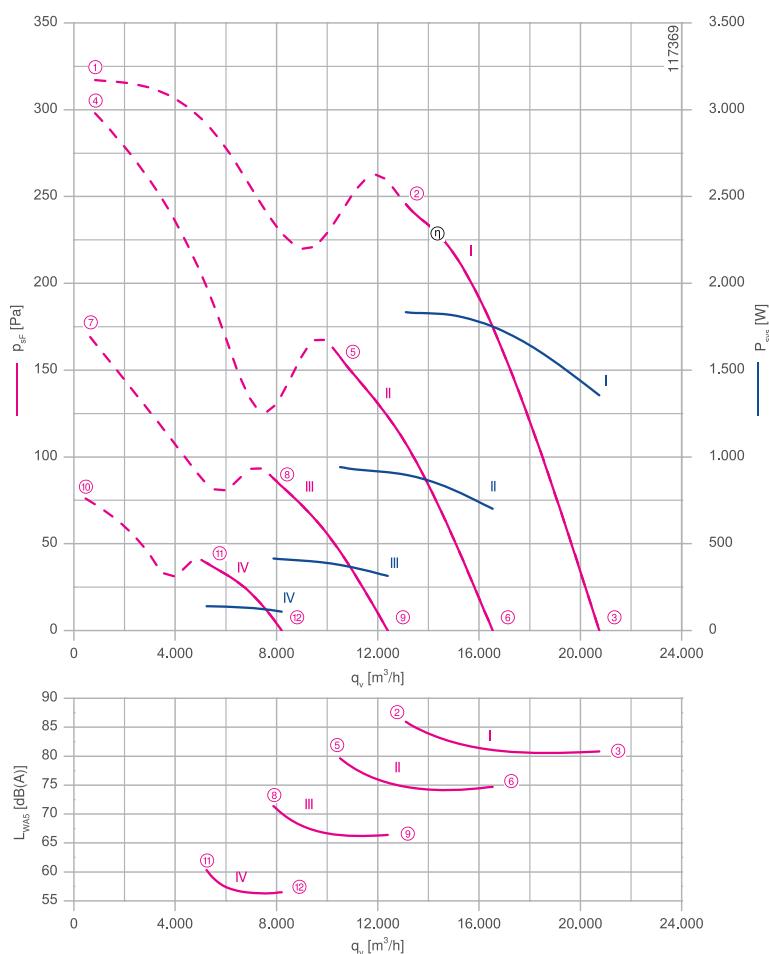

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

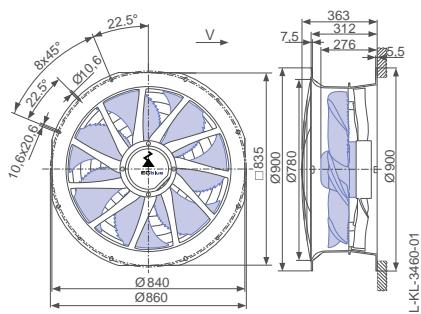


← Airflow direction

Design L - ZAplus OnTop without guard grille

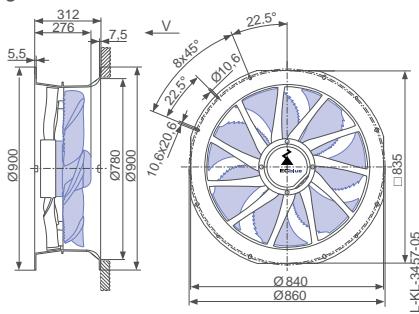

Design L - ZAplus OnTop, guard grille pressure side





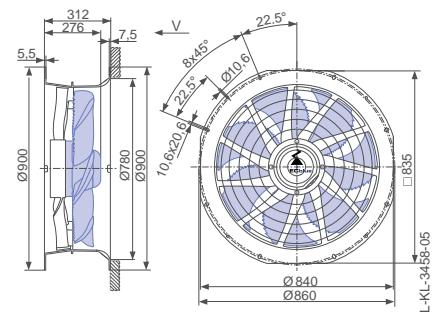


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WAS} dB(A)
ZN071-ZI_.GG.V7P4	I	1150	①	2.40	1550	
			②	2.80	1850	86
			③	2.10	1350	81
	II	920	④	2.20	1400	
			⑤	1.55	940	80
			⑥	1.20	700	75
	III	690	⑦	1.10	600	
			⑧	0.84	420	72
			⑨	0.70	310	66
	IV	460	⑩	0.52	200	
			⑪	0.42	140	61
			⑫	0.37	110	57

Current values determined at 400V


Fan ordering information

Design	Airflow direction		Airflow direction		
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	H (without guard grille) Flattop	H (guard grille pressure side) Flattop
					
Type Article no.	ZN071-ZIL.GG.V7P4 170410	ZN071-ZIL.GG.V7P4 170345	ZN071-ZIL.GG.V7P4 170346	ZN071-ZIH.GG.V7P4 170408	ZN071-ZIH.GG.V7P4 170409
Weight kg	33.40	30.80	32.00	29.90	31.10
ZAplus attachable on both sides.					


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
 Page 452	 Page 454	 Page 463	 Page 472

Design H - ZAplus Flattop, without guard grille

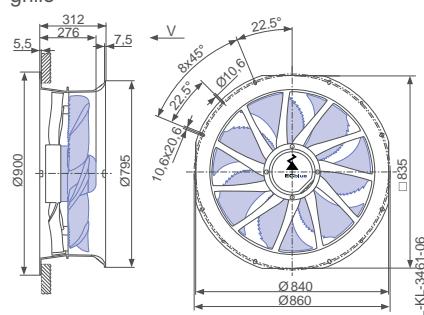

Design H - ZAplus Flattop, guard grille pressure side

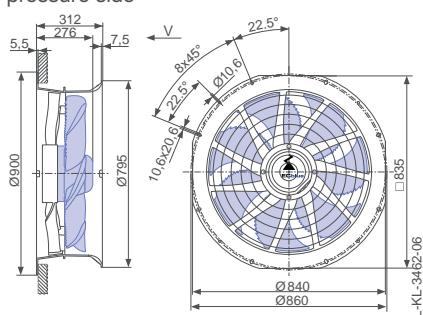

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 71



Description

Motor technology: EC
Rated voltage U_N : 3~ 380-480 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 3.20 kW*
Rated current I_N : 5.20- 4.00 A*
Rated speed n_N : 1400 min⁻¹*
Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller
Number of blades: 7
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: Aluminium, uncoated
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL


ErP-data

Efficiency η_{startA} : 54.4 %
Efficiency: $N_{actual} = 57.6 / N_{target} = 40^{**}$
EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

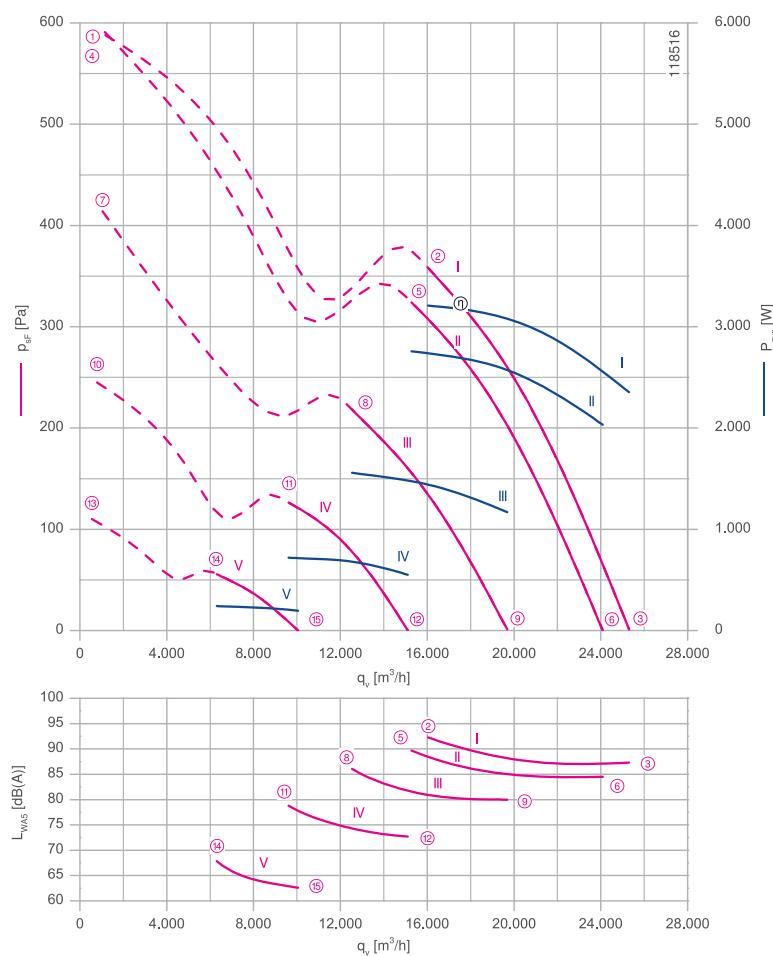

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus On top, guard grille suction side

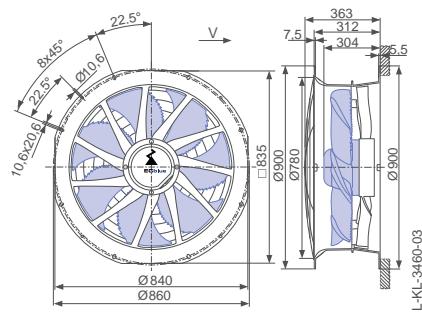


← Airflow direction

Design L - ZAplus On top without guard grille

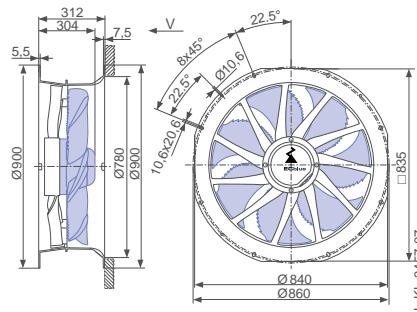

Design L - ZAplus On top, guard grille pressure side

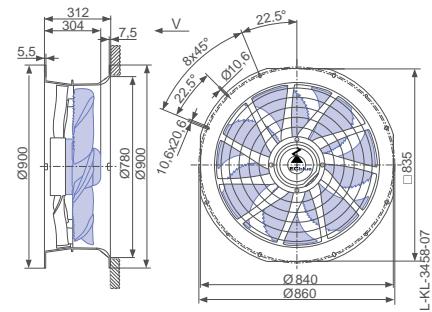

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN071-ZI_GL.V7P4	I	1400	① ② ③	6.00 4.80 3.60	3900 3200 2400	93 87	55
	II	1330	④ ⑤ ⑥	1.25 2.40 1.85	3900 2800 2000	90 85	60
	III	1100	⑦ ⑧ ⑨	0.60 0.54 1.25	2300 1550 1150	86 80	
	IV	840	⑩ ⑪ ⑫	4.20 3.10 0.60	1050 720 560	79 73	
	V	560	⑬ ⑭ ⑮	6.00 4.20 4.20	350 240 200	68 63	

Current values determined at 400V


Fan ordering information

Airflow direction	Airflow direction
Design	L (guard grille suction side) Ontop
	L (without guard grille) Ontop
	L (guard grille pressure H (without guard grille) Ontop
	Flattop
	H (guard grille pressure side) Flattop
Type Article no.	ZN071-ZIL.GL.V7P4 170426
	ZN071-ZIL.GL.V7P4 170349
	ZN071-ZIL.GL.V7P4 170350
	ZN071-ZIH.GL.V7P4 170424
	ZN071-ZIH.GL.V7P4 170425
Weight kg	37.80
ZAplus attachable on both sides.	35.20
	36.40
	34.30
	35.50


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472

Design H - ZAplus Flattop, without guard grille

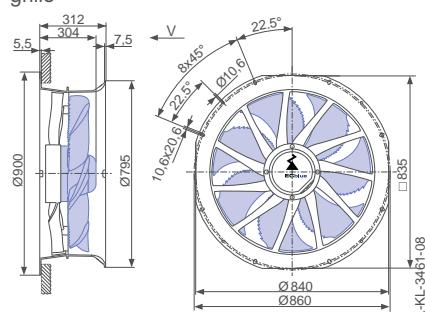

Design H - ZAplus Flattop, guard grille pressure side

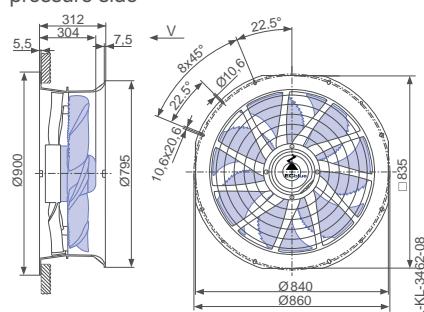

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

ZN080



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.70 kW*

Rated current I_N : 3.60- 2.60 A*

Rated speed n_N : 650 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated, black

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 53.5 %


Efficiency: $N_{actual} = 61.0 / N_{target} = 40**$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

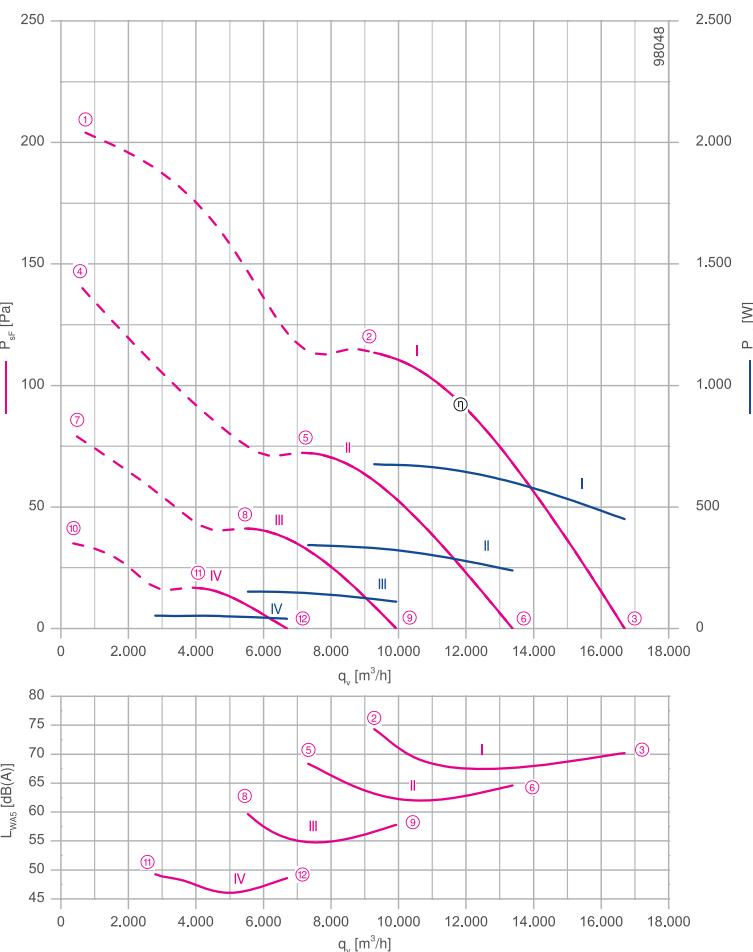

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

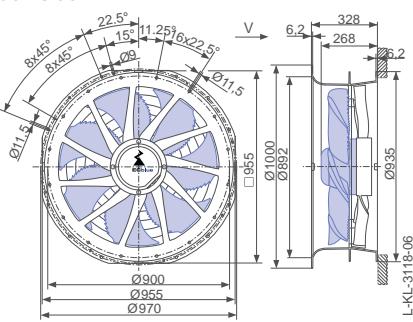


← Airflow direction

Design L - ZAplus Ontop without guard grille

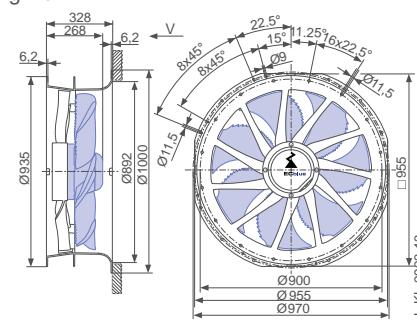

Design L - ZAplus Ontop, guard grille pressure side

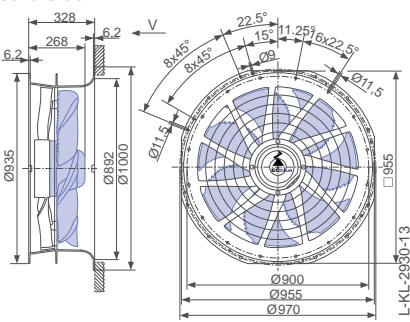

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
ZN080-ZIL.DG.V5P4	I	650	①	4.40	960	55	
			②	3.10	680	75	
			③	2.10	440	70	
	II	520	④	2.50	540		60
			⑤	1.65	340	69	
			⑥	1.15	240	65	
	III	390	⑦	1.10	230		
			⑧	0.72	150	60	
			⑨	0.56	110	58	
	IV	260	⑩	0.42	75		
			⑪	0.33	55	49	
			⑫	0.42	40	49	

Current values determined at 230V

Fan ordering information


Design	L (guard grille suction side) Ontax	L (without guard grille) Ontax	L (guard grille pressure side) Ontax	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN080-ZIL.DG.V5P4 169895	ZN080-ZIL.DG.V5P4 161467	ZN080-ZIL.DG.V5P4 161469	ZN080-ZIQ.DG.V5P4 161397	ZN080-ZIQ.DG.V5P4 161395
Weight kg	26.40	23.60	26.00	26.70	28.20

ZAplus attachable on both sides.


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472


Design Q - ZAplus with adapter plate, without guard grille

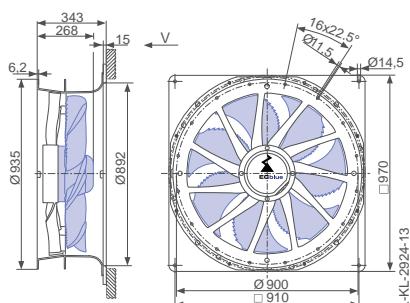

Design Q - ZAplus with adapter plate, guard grille pressure side

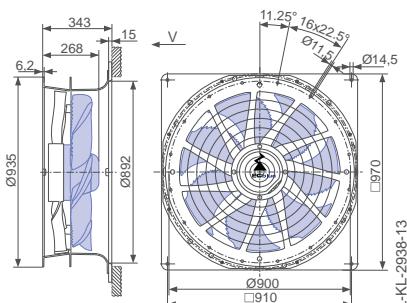

Design H - ZAplus Flattop, guard grille pressure side

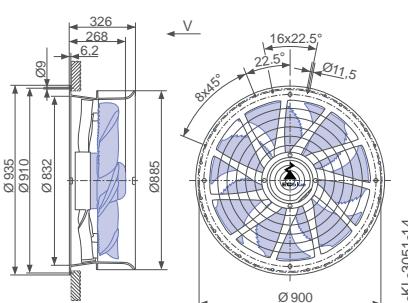

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V


ZN080



Description

Motor technology: EC
Rated voltage U: 3~ 200-240 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 0.86 kW*
Rated current I: 2.80- 2.30 A*
Rated speed n_{max} : 700 Min⁻¹*
Thermal class: THCL155*
Min. permitted conveyor temperature $t_{R(min)}$: -35 °C
Max. permitted conveyor temperature $t_{R(max)}$: 45 °C
Electrical connection: integrated Controller
Number of blades: 5
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: High Performance Composite Material, uncoated, black
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL
ErP-data
Efficiency η_{start} : 54.5 %
Efficiency: $N_{actual} = 61.3 / N_{target} = 40**$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

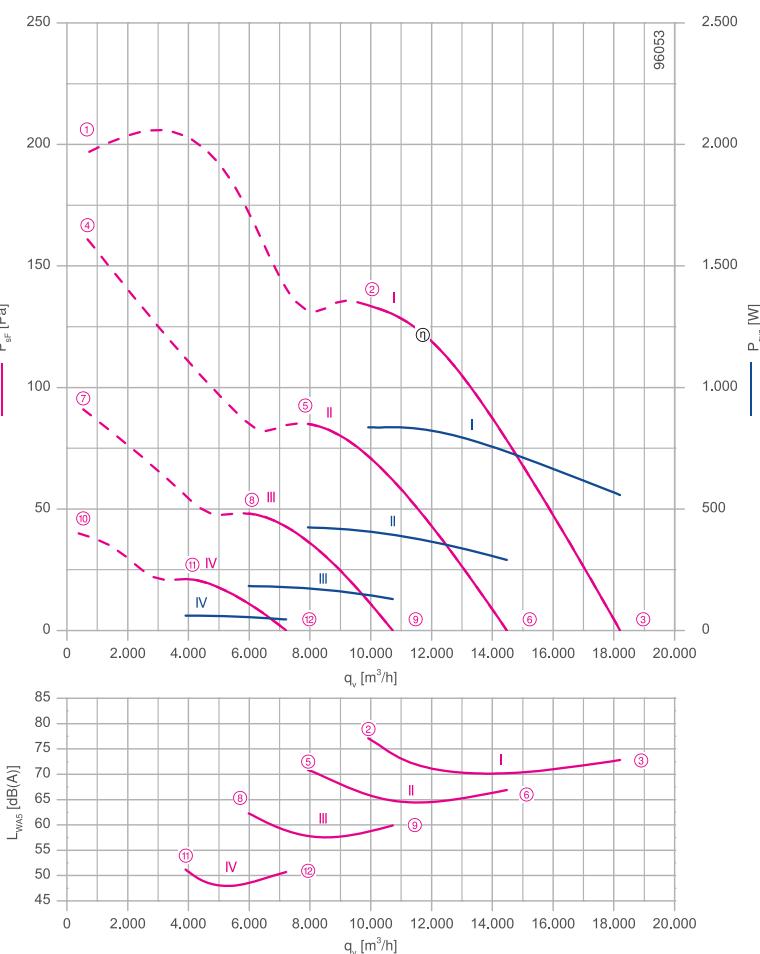

Measured in ZAplus without guard grille in installation type A according to ISO 5801


Connection diagram

Page 530
1360-403

System components


Page 430

Dimensions mm

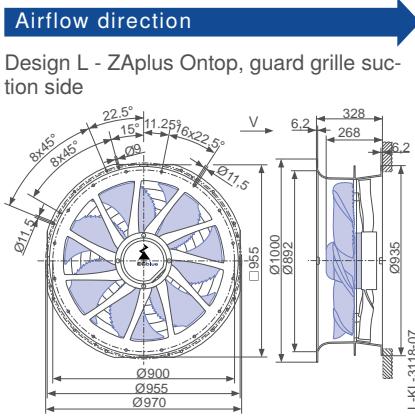

Airflow direction


Design L - ZAplus Ontop, guard grille suction side

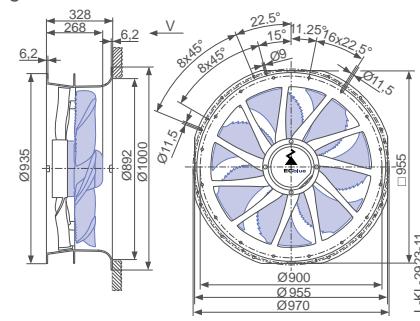

Airflow direction

Design L - ZAplus Ontop without guard grille

Design L - ZAplus Ontop, guard grille pressure side

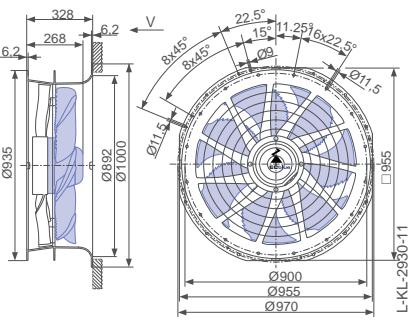

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
ZN080-ZIL.DG.V5P4	I	700	①	2.60	900	77	45
			②	2.40	840	73	
			③	1.60	560		
	II	560	④	1.90	660		60
			⑤	1.25	420	71	
			⑥	0.88	290	67	
	III	420	⑦	0.86	280		
			⑧	0.58	180	63	
			⑨	0.44	130	60	
	IV	280	⑩	0.32	90		
			⑪	0.24	60	51	
			⑫	0.20	46	51	

Current values determined at 230V

Fan ordering information

Design	L (guard grille suction side) Ontax	L (without guard grille) Ontax	L (guard grille pressure side) Ontax	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN080-ZIL.DG.V5P4 169894	ZN080-ZIL.DG.V5P4 161463	ZN080-ZIL.DG.V5P4 161465	ZN080-ZIQ.DG.V5P4 161387	ZN080-ZIQ.DG.V5P4 161385
Weight kg	26.40	23.60	26.00	26.70	28.20


ZAplus attachable on both sides.

Control technology


Control modules	Sensor control modules	Add-on modules	Operating terminal

Page 452 Page 454 Page 463 Page 472


Design Q - ZAplus with adapter plate, without guard grille

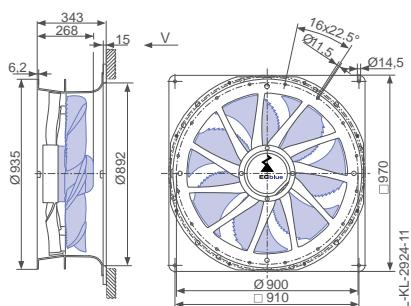

Design Q - ZAplus with adapter plate, guard grille pressure side

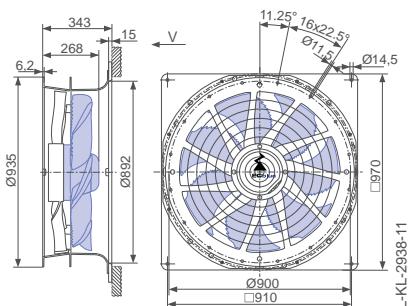

Design H - ZAplus Flattop, guard grille pressure side





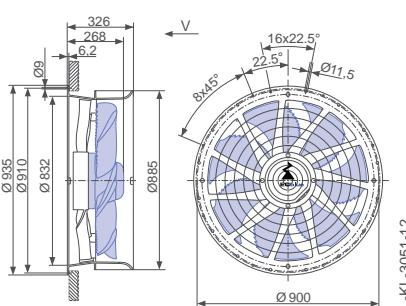


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
ZN080-ZI_.GG.V7P3	I	970	①	6.40	2400	50	
			②	5.40	2000	83	
			③	3.80	1450	78	
	II	940	④	6.40	2400		55
			⑤	4.80	1850	82	
			⑥	3.50	1350	78	
	III	750	⑦	3.50	1350		60
			⑧	2.50	940	76	
			⑨	1.85	680	72	
	IV	560	⑩	1.50	560		
			⑪	1.10	400	67	
			⑫	0.86	290	66	
	V	380	⑬	0.60	190		
			⑭	0.50	140	57	
			⑮	0.44	110	56	

Current values determined at 230V


Fan ordering information

Airflow direction		Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille) Q (guard grille pressure H (guard grille pressure side)) Flattop	
					
Type Article no.	ZN080-ZIL.GG.V7P3 169893	ZN080-ZIL.GG.V7P3 161513	ZN080-ZIL.GG.V7P3 161515	ZN080-ZIQ.GG.V7P3 161521	ZN080-ZIQ.GG.V7P3 161519
Weight kg	39.70	37.00	38.50	40.10	41.60
ZAplus attachable on both sides.					


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
		 Page 463	 Page 472


Design Q - ZAplus with adapter plate, without guard grille

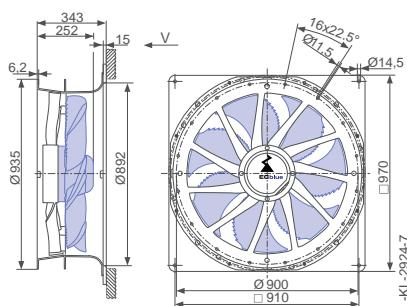

Design Q - ZAplus with adapter plate, guard grille pressure side

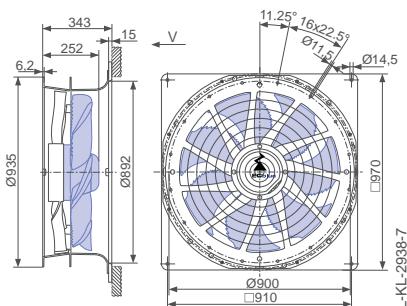

Design H - ZAplus Flattop, guard grille pressure side




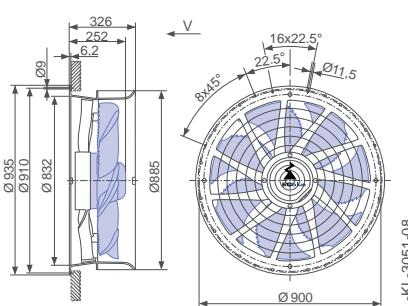


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN080-ZI_GL.V7P3	I	1100	①	9.80	3700	86	40
			②	7.60	2800	81	
			③	5.40	2100		
	II	930	④	6.40	2400		60
			⑤	4.60	1700	82	
			⑥	3.30	1250	77	
	III	800	⑦	4.20	1550		
			⑧	2.90	1100	77	
			⑨	2.20	820	74	
	IV	670	⑩	2.40	920		
			⑪	1.80	660	72	
			⑫	1.35	500	70	
	V	440	⑬	0.84	280		
			⑭	0.66	210	61	
			⑮	0.54	160	60	

Current values determined at 230V


Fan ordering information

Airflow direction	Airflow direction
Design L (guard grille suction side) Ontop	L (without guard grille) Ontop
	
Design L (guard grille pressure side) Ontop	Q (without guard grille) Q (guard grille pressure H (guard grille pressure side) Flattop)
	
Type Article no.	ZN080-ZIL.GL.V7P3 169892
Type Article no.	ZN080-ZIL.GL.V7P3 161475
Type Article no.	ZN080-ZIL.GL.V7P3 161477
Type Article no.	ZN080-ZIQ.GL.V7P3 161417
Type Article no.	ZN080-ZIQ.GL.V7P3 161415
Type Article no.	ZN080-ZIH.GL.V7P3 162227
Weight kg	43.90
ZAplus attachable on both sides.	41.20
	42.70
	44.30
	45.80
	41.00


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			
Page 452	Page 454	Page 463	Page 472


Design Q - ZAplus with adapter plate, without guard grille

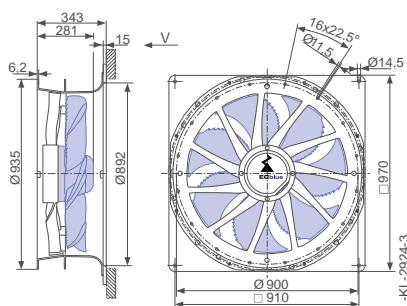

Design Q - ZAplus with adapter plate, guard grille pressure side

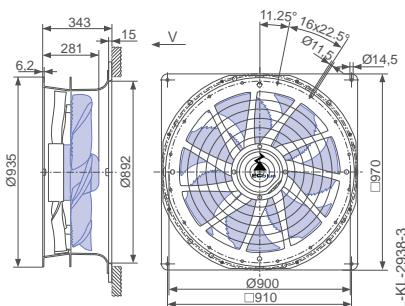

Design H - ZAplus Flattop, guard grille pressure side

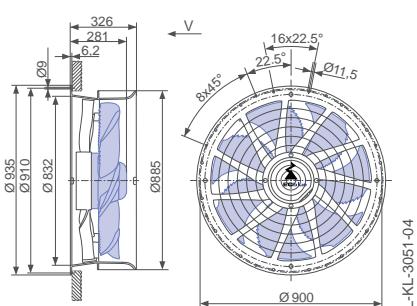

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)	Maximum ambient temperature t_R °C
ZN080-ZIL.DG.5P4	I	700	①	1.70	1100	55	
			②	1.35	820	76	
			③	0.98	540	73	
	II	560	④	1.15	660		60
			⑤	0.84	420	69	
			⑥	0.64	290	67	
	III	420	⑦	0.66	280		
			⑧	0.50	180	61	
			⑨	0.40	130	61	
	IV	280	⑩	0.33	95		
			⑪	0.27	65	51	
			⑫	0.23	50	51	

Current values determined at 400V


Fan ordering information

Design	L (guard grille suction side) Ontax	L (without guard grille) Ontax	L (guard grille pressure side) Ontax	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN080-ZIL.DG.V5P4 165319	ZN080-ZIL.DG.V5P4 161459	ZN080-ZIL.DG.V5P4 161461	ZN080-ZIQ.DG.V5P4 160026	ZN080-ZIQ.DG.V5P4 160024
Weight kg	26.40	23.60	26.00	26.70	28.20
ZAplus attachable on both sides.					24.30


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
Page 452	Page 454	Page 463


Design Q - ZAplus with adapter plate, without guard grille

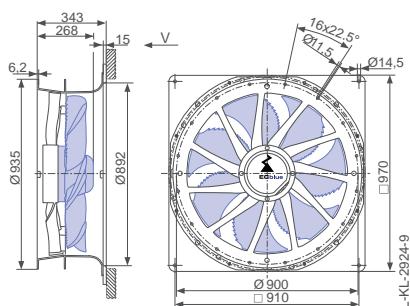

Design Q - ZAplus with adapter plate, guard grille pressure side

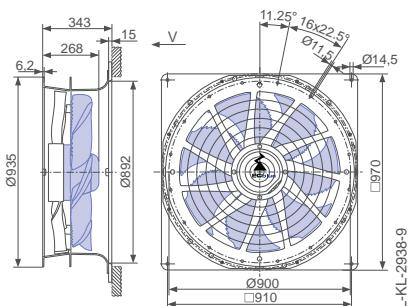

Design H - ZAplus Flattop, guard grille pressure side





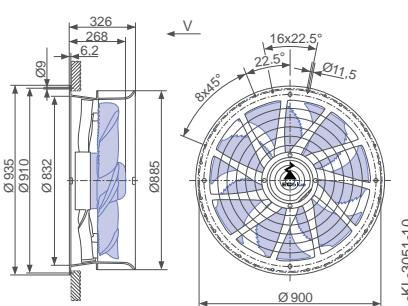


Performance data

Type	Characteristic curve	Speed n min^{-1}	Operating point	Current I A	Input power P_{sys} W	Suction side sound power level L_{WA5} dB(A)
ZN080-ZI_.GG.V7P3	I	950	①	2.90	1900	
			②	2.80	1850	84
			③	2.10	1350	79
	II	760	④	2.10	1350	
			⑤	1.55	960	78
			⑥	1.20	700	73
	III	570	⑦	1.00	560	
			⑧	0.82	420	70
			⑨	0.68	300	67
	IV	380	⑩	0.50	180	
			⑪	0.42	140	59
			⑫	0.35	110	57

Current values determined at 400V


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side) Flattop)
					
Type	ZN080-ZIL.GG.V7P3	ZN080-ZIL.GG.V7P3	ZN080-ZIL.GG.V7P3	ZN080-ZIQ.GG.V7P3	ZN080-ZIQ.GG.V7P3
Article no.	165321	161493	161495	161501	161499
Weight kg	39.70	37.00	38.50	40.10	41.60
ZAplus attachable on both sides.					36.80


Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		
Page 452	Page 454	Page 463


Design Q - ZAplus with adapter plate, without guard grille

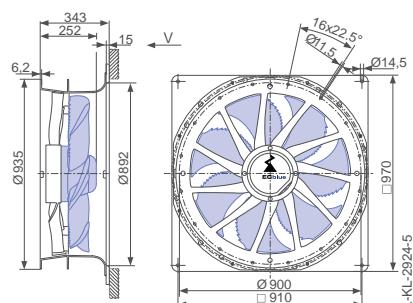

Design Q - ZAplus with adapter plate, guard grille pressure side

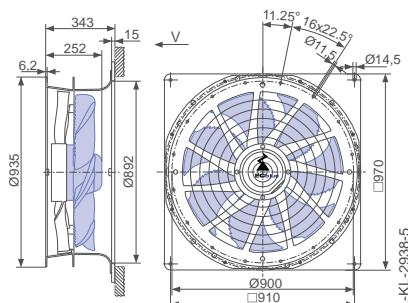

Design H - ZAplus Flattop, guard grille pressure side

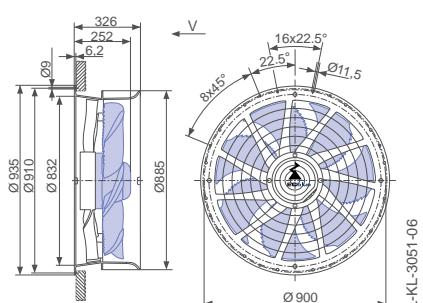

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

ZN080



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.80 kW*

Rated current I_N : 4.40- 3.50 A*

Rated speed n_N : 1100 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 7

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 58.0 %


Efficiency: $N_{actual} = 61.6 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

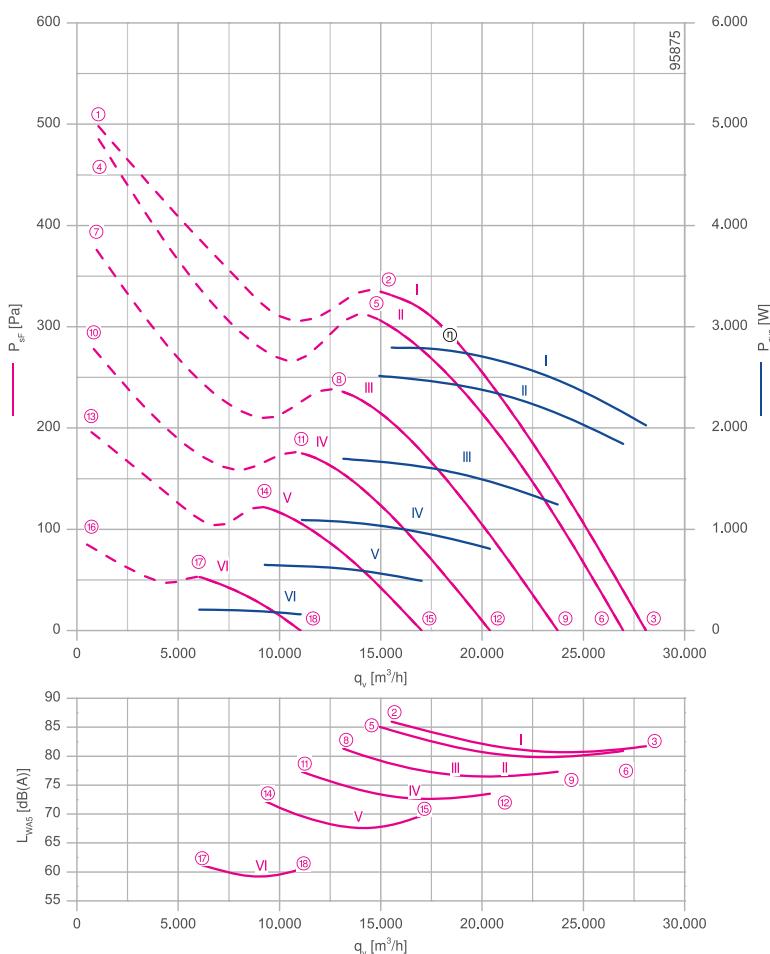

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

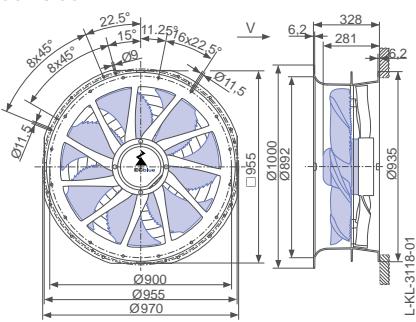


← Airflow direction

Design L - ZAplus OnTop without guard grille

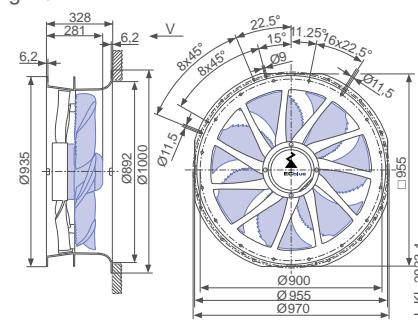

Design L - ZAplus OnTop, guard grille pressure side

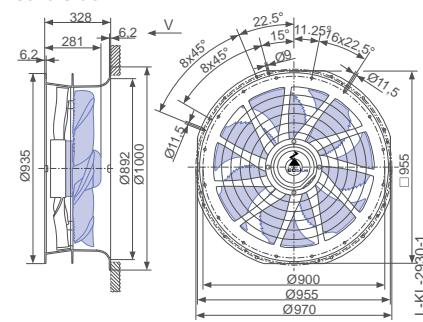

Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
ZN080-ZIL,GL.V7P3	I	1100	① ② ③	5.60 4.20 3.10	3700 2800 2000	86 82	55
	II	1060	④ ⑤ ⑥	5.40 3.80 2.80	3600 2500 1850	85 81	60
	III	930	⑦ ⑧ ⑨	3.70 2.60 1.95	2400 1700 1250	81 77	
	IV	800	⑩ ⑪ ⑫	2.40 1.75 1.35	1550 1100 800	77 74	
	V	670	⑬ ⑭ ⑮	1.50 1.15 0.90	920 640 500	72 70	
	VI	440	⑯ ⑰ ⑱	0.64 0.52 0.44	280 210 160	61 61	

Current values determined at 400V

Fan ordering information


Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	H (guard grille pressure side) Flattop
Type Article no.	ZN080-ZIL,GL.V7P3 165320	ZN080-ZIL,GL.V7P3 161471	ZN080-ZIL,GL.V7P3 161473	ZN080-ZIQ,GL.V7P3 161407	ZN080-ZIQ,GL.V7P3 161405	ZN080-ZIH,GL.V7P3 162223
Weight kg	43.90	41.20	42.70	44.30	45.80	41.00

ZAplus attachable on both sides.


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472


Design Q - ZAplus with adapter plate, without guard grille

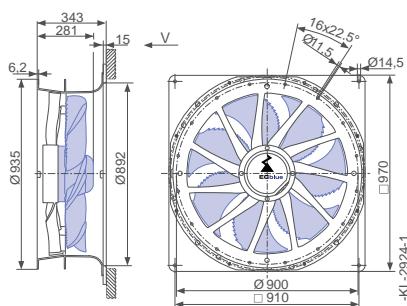

Design Q - ZAplus with adapter plate, guard grille pressure side

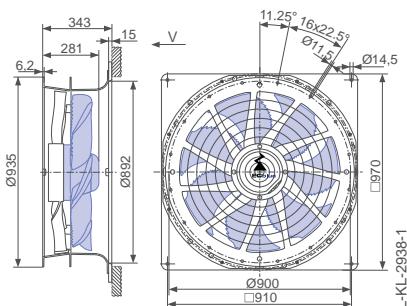

Design H - ZAplus Flattop, guard grille pressure side

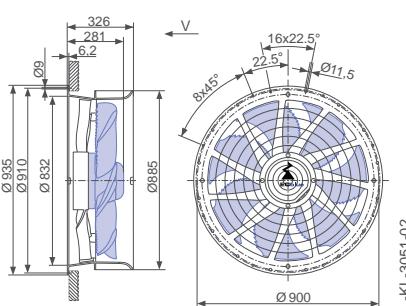

FE2owlet-ECblue with ZAplus

for single phase alternating current, 200-277 V

Z N O 91



Description

Motor technology: EC

Rated voltage U_N : 1~ 200-277 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.68 kW*

Rated current I_N : 3.50- 2.50 A*

Rated speed n_N : 570 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 45 °C

Electrical connection: integrated Controller

Number of blades: 4

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 54.6 %


Efficiency: $N_{actual} = 62.2 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

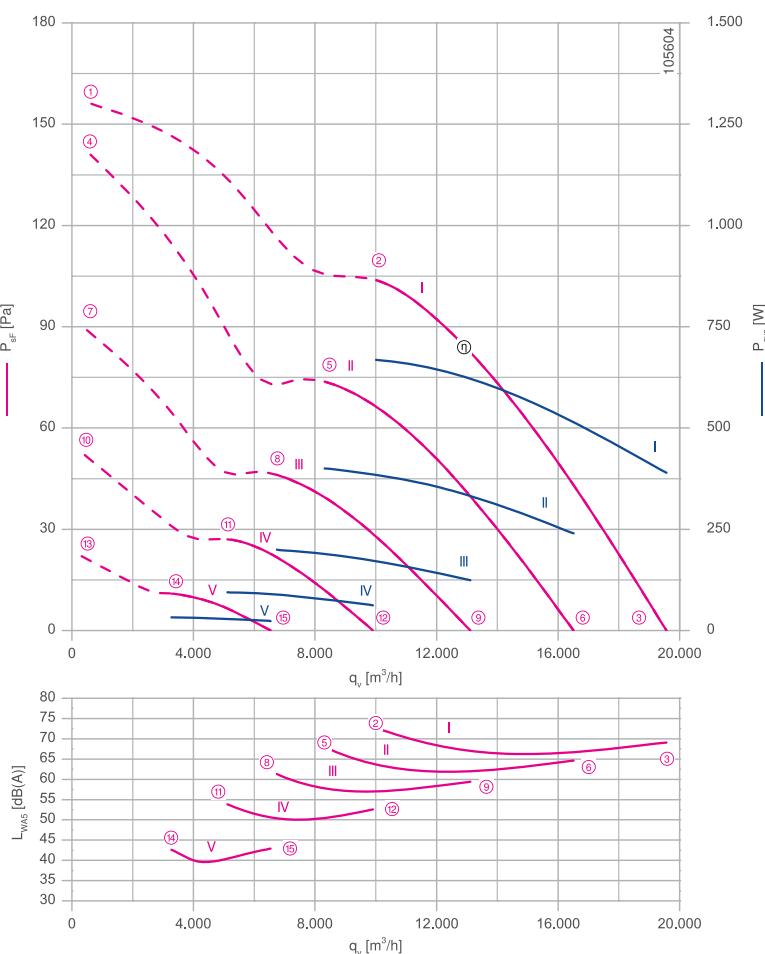

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

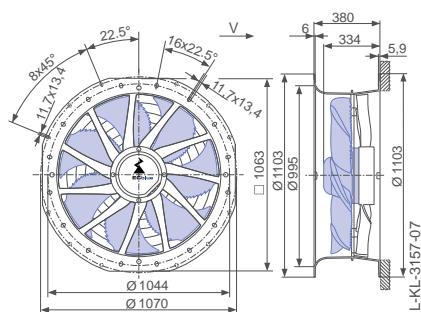


← Airflow direction

Design L - ZAplus Ontop without guard grille

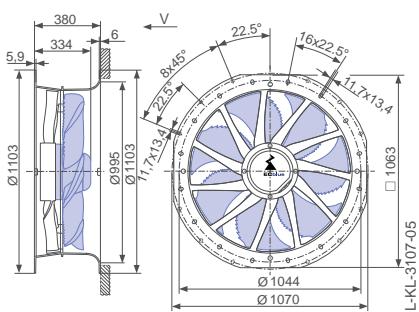

Design L - ZAplus Ontop, guard grille pressure side


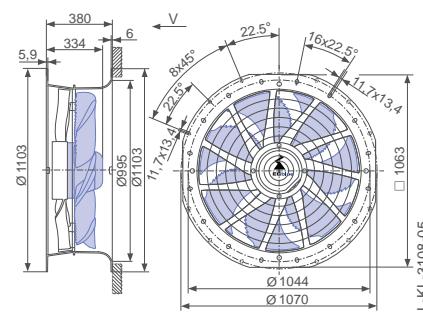


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_.DG.V4P3	I	570	① ② ③	3.70 3.00 1.80	820 660 390	73 69	45
	II	480	④ ⑤ ⑥	3.20 1.85 1.15	700 400 240	67 65	60
	III	380	⑦ ⑧ ⑨	1.55 0.96 0.62	340 200 120	62 59	
	IV	290	⑩ ⑪ ⑫	0.74 0.48 0.37	150 95 60	54 53	
	V	190	⑬ ⑭ ⑮	0.42 0.37 0.34	48 32 24	43 43	

Current values determined at 230V

Fan ordering information

Airflow direction	Airflow direction
Design L (guard grille suction side) Ontop	L (without guard grille) Ontop
	
Q (without guard grille) Q (guard grille pressure H (guard grille pressure side) Flattop	Q (guard grille pressure side) Flattop
	
Design	
Type Article no.	ZN091-ZIL.DG.V4P3 169898
Weight kg	31.40
Type Article no.	ZN091-ZIL.DG.V4P3 164945
Weight kg	27.60
Type Article no.	ZN091-ZIL.DG.V4P3 164947
Weight kg	29.50
Type Article no.	ZN091-ZIQ.DG.V4P3 164951
Weight kg	31.50
Type Article no.	ZN091-ZIQ.DG.V4P3 164953
Weight kg	33.40
Type Article no.	ZN091-ZIH.DG.V4P3 164961
Weight kg	29.50

Control technology

Control modules	Sensor control modules Add-on modules	Operating terminal
		


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

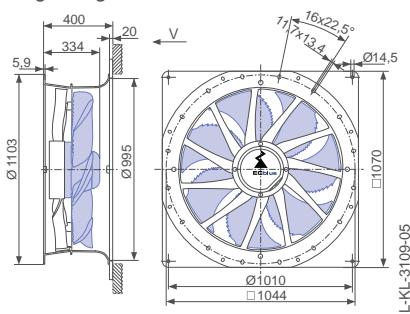

Design Q - ZAplus with adapter plate, guard grille pressure side

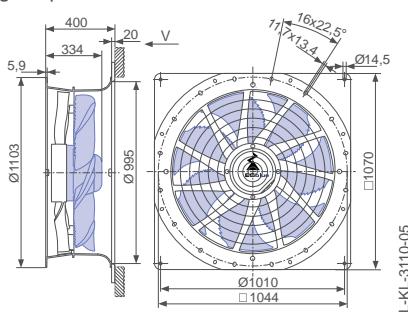

Design H - ZAplus Flattop, guard grille pressure side

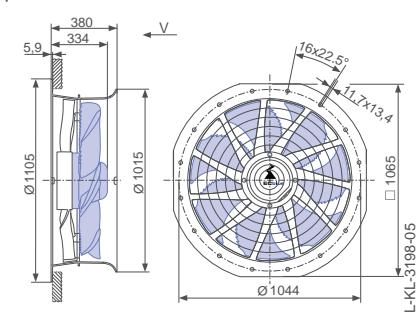

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 0.68 kW*

Rated current I_N : 2.10- 1.80 A*

Rated speed n_N : 570 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 4

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: High Performance Composite Material, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 56.0 %


Efficiency: $N_{actual} = 63.7 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

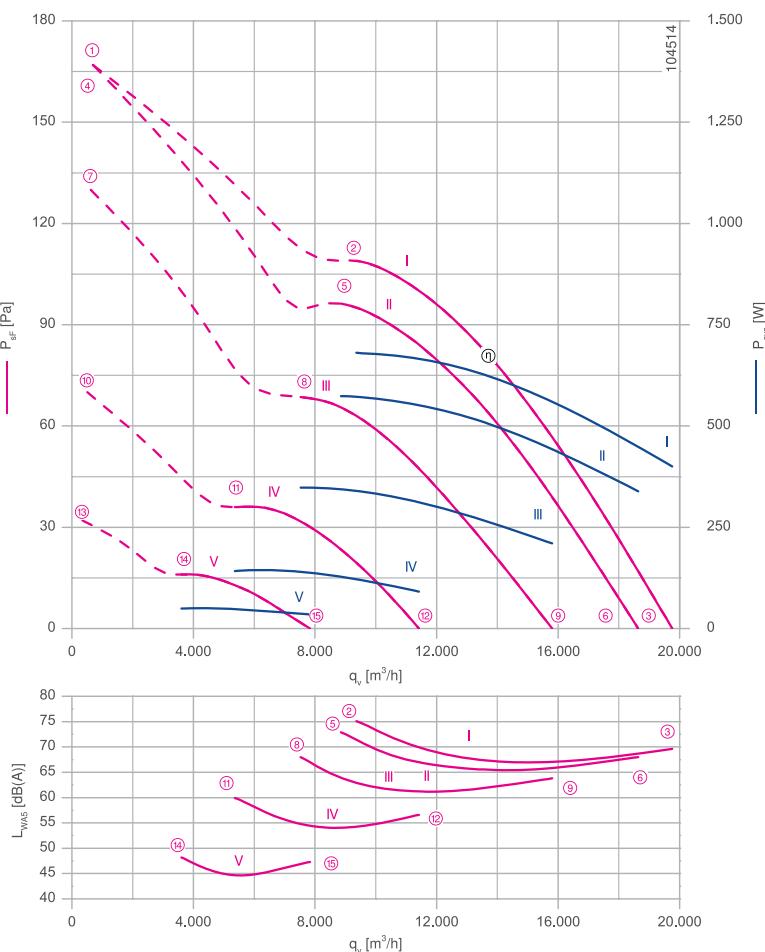

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

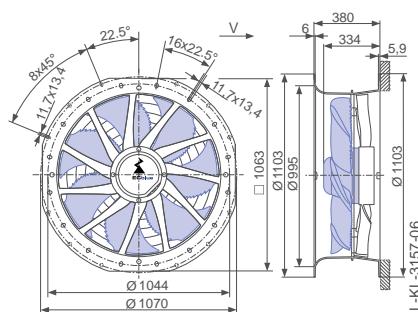


← Airflow direction

Design L - ZAplus Ontop without guard grille

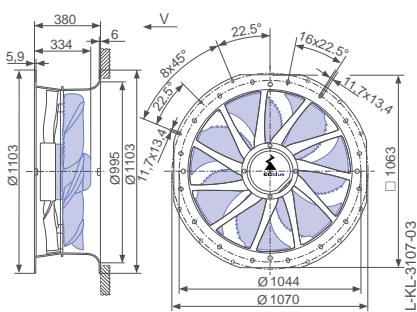

Design L - ZAplus Ontop, guard grille pressure side



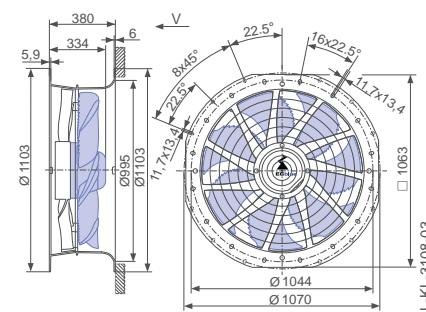


Performance data

Type	Characteristic curve	Speed n min ⁻¹	Operating point	Current I A	Input power P _{sys} W	Suction side sound power level L _{WA5} dB(A)	Maximum ambient temperature t _R °C
ZN091-ZI_.DG.V4P3	I	570	①	2.40	900	75	55
			②	1.85	680	70	
			③	1.15	400		
	II	540	④	2.40	900		60
			⑤	1.60	580	73	
			⑥	1.00	340	68	
	III	460	⑦	1.65	600		
			⑧	1.00	350	68	
			⑨	0.68	210		
	IV	340	⑩	0.76	240		
			⑪	0.52	140	60	
			⑫	0.37	90	57	
	V	230	⑬	0.34	80		
			⑭	0.26	50	48	
			⑮	0.21	34	47	

Current values determined at 230V

Fan ordering information

Airflow direction		Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille) Q (guard grille pressure H (guard grille pressure side)) Flattop	
					
Type Article no.	ZN091-ZIL.DG.V4P3 169897	ZN091-ZIL.DG.V4P3 164927	ZN091-ZIL.DG.V4P3 164929	ZN091-ZIQ.DG.V4P3 164933	ZN091-ZIQ.DG.V4P3 164935
Weight kg	31.40	27.60	29.50	31.50	33.40
ZAplus attachable on both sides.					

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

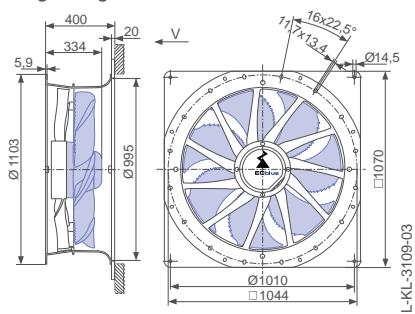

Design Q - ZAplus with adapter plate, guard grille pressure side

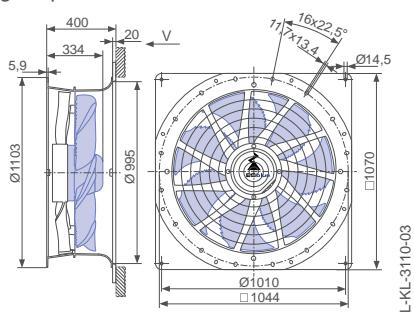

Design H - ZAplus Flattop, guard grille pressure side

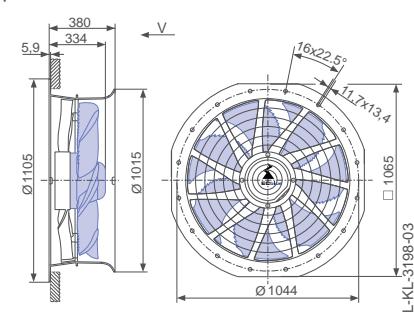

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 200-240 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 2.10 kW*

Rated current I_N : 6.40- 5.40 A*

Rated speed n_N : 950 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 55 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 60.8 %


Efficiency: $N_{actual} = 65.2 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

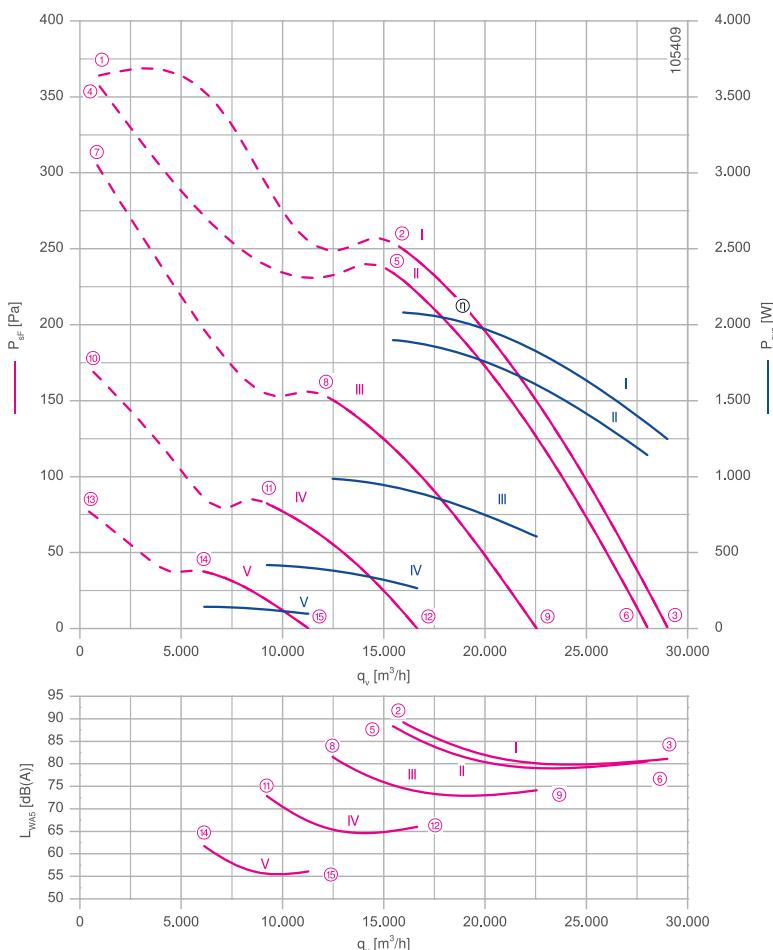

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

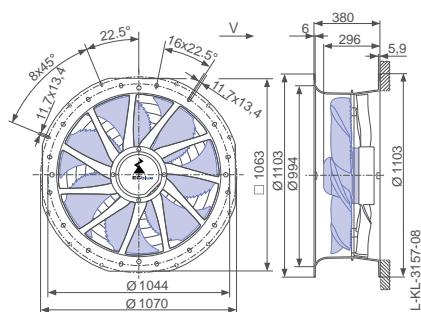


← Airflow direction

Design L - ZAplus Ontop without guard grille

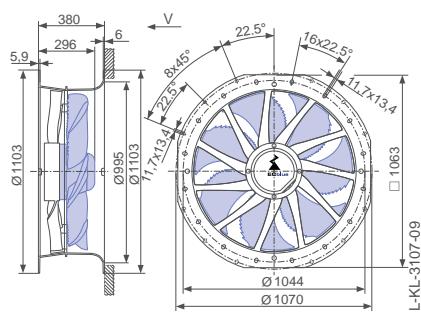

Design L - ZAplus Ontop, guard grille pressure side






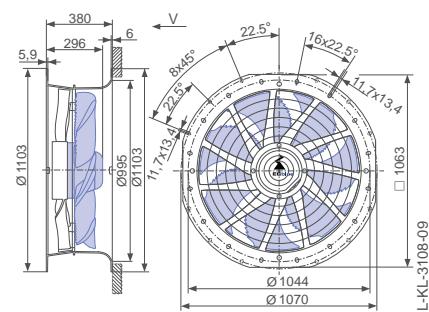


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_GG.V5P1	I	950	①	6.40	2400	89	55
			②	5.60	2100	81	
			③	3.30	1250		
	II	920	④	6.40	2400		60
			⑤	5.00	1900	88	
			⑥	3.10	1150	81	
	III	740	⑦	4.80	1850		
			⑧	2.60	980	82	
			⑨	1.65	600	74	
	IV	550	⑩	2.00	740		
			⑪	1.20	420	73	
			⑫	0.82	260		
	V	370	⑬	0.76	240		
			⑭	0.54	140	62	
			⑮	0.42	95	56	

Current values determined at 230V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN091-ZIL.GG.V5P1 169899	ZN091-ZIL.GG.V5P1 164990	ZN091-ZIL.GG.V5P1 164992	ZN091-ZIQ.GG.V5P1 164996	ZN091-ZIQ.GG.V5P1 164998	ZN091-ZIH.GG.V5P1 165006
Weight kg	43.00	39.30	41.20	42.30	44.20	41.20
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

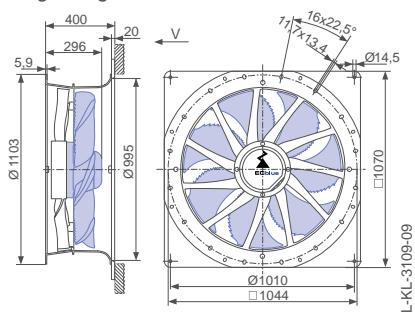

Design Q - ZAplus with adapter plate, guard grille pressure side

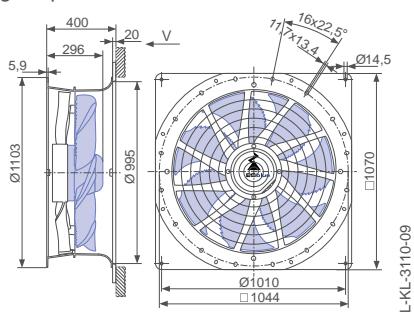

Design H - ZAplus Flattop, guard grille pressure side

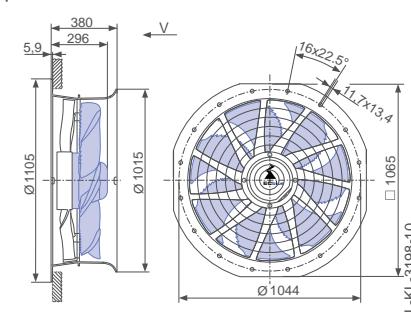

FE2owlet-ECblue with ZAplus

for three phase alternating current, 200-240 V

Z N O 91



Description

Motor technology: EC
Rated voltage U_N : 3~ 200-240 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 2.80 kW*
Rated current I_N : 8.60-7.20 A*
Rated speed n_N : 1060 min⁻¹*
Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 50 °C

Electrical connection: integrated Controller
Number of blades: 5
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: Aluminium, uncoated
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL


ErP-data

Efficiency η_{data} : 61.9 %
Efficiency: $N_{actual} = 65.5 / N_{target} = 40^{**}$
EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

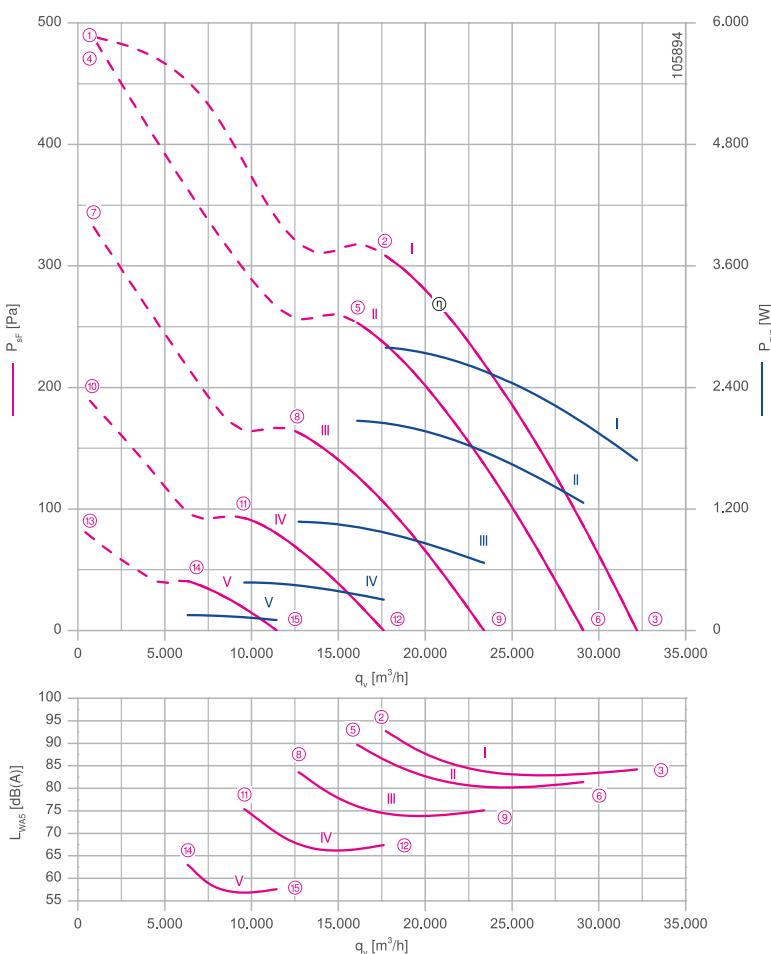

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530
1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

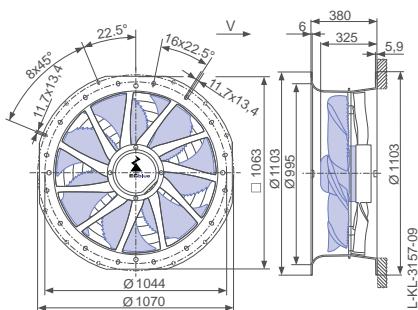


← Airflow direction

Design L - ZAplus Ontop without guard grille

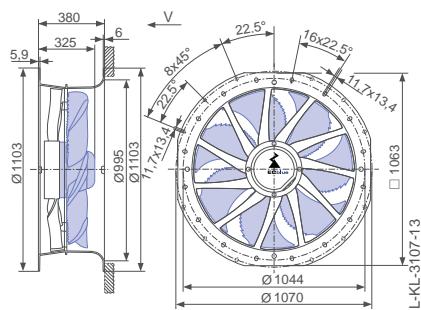

Design L - ZAplus Ontop, guard grille pressure side




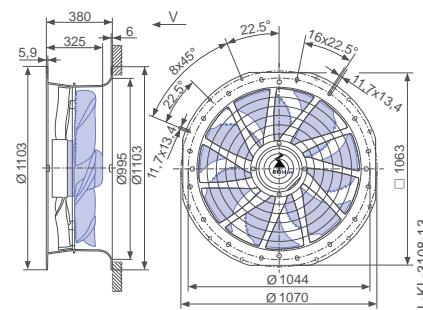


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_GL.V5P1	I	1060	①	9.60	3600	93	50
			②	7.40	2800	84	
			③	4.40	1700		
	II	960	④	9.40	3600		60
			⑤	5.60	2100	90	
			⑥	3.40	1250	81	
	III	770	⑦	5.20	2000		
			⑧	2.90	1050	83	
			⑨	1.85	660	75	
	IV	580	⑩	2.30	860		
			⑪	1.35	480	75	
			⑫	0.90	300	67	
	V	380	⑬	0.80	250		
			⑭	0.56	150	63	
			⑮	0.44	100	58	

Current values determined at 230V

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	Flattop
						
Type Article no.	ZN091-ZIL.GL.V5P1 169900	ZN091-ZIL.GL.V5P1 165026	ZN091-ZIL.GL.V5P1 165028	ZN091-ZIQ.GL.V5P1 165032	ZN091-ZIQ.GL.V5P1 165034	ZN091-ZIH.GL.V5P1 165042
Weight kg	47.20	43.50	45.40	46.70	48.60	45.40
ZAplus attachable on both sides.						

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

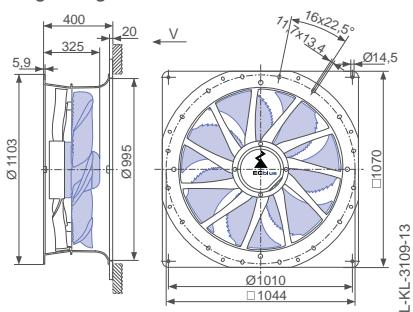

Design Q - ZAplus with adapter plate, guard grille pressure side

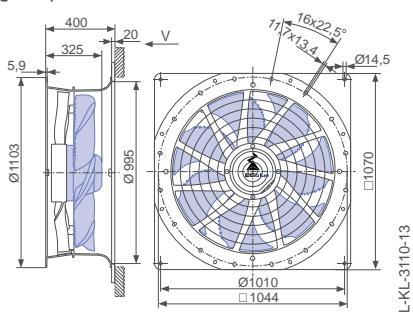

Design H - ZAplus Flattop, guard grille pressure side


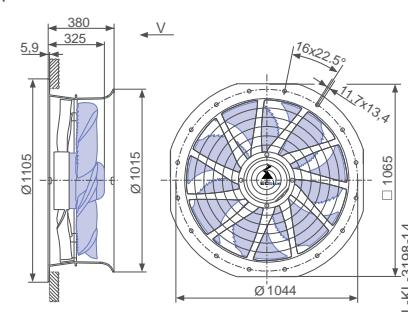


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_.DG.V4P3	I	570	① ② ③	1.40 1.15 0.78	840 680 400	74 70	55
	II	540	④ ⑤ ⑥	1.35 1.00 0.70	840 560 330	72 68	60
	III	460	⑦ ⑧ ⑨	1.05 0.72 0.50	600 350 210	67 64	
	IV	340	⑩ ⑪ ⑫	0.56 0.42 0.30	240 150 95	59 56	
	V	230	⑬ ⑭ ⑮	0.30 0.24 0.20	85 55 40	48 47	

Current values determined at 400V

Fan ordering information

Design	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille) Q (guard grille pressure H (guard grille pressure side))	Q (guard grille pressure H (guard grille pressure side)) Flattop
					
Type Article no.	ZN091-ZIL.DG.V4P3 167286	ZN091-ZIL.DG.V4P3 164909	ZN091-ZIL.DG.V4P3 164911	ZN091-ZIQ.DG.V4P3 164915	ZN091-ZIQ.DG.V4P3 164917
Weight kg	31.40	27.60	29.50	31.50	33.40
ZAplus attachable on both sides.					

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

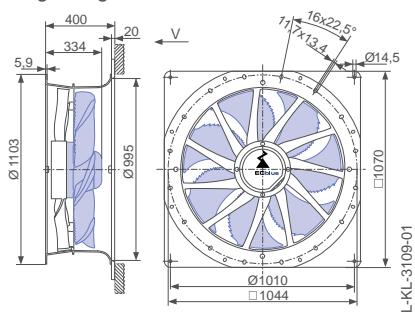

Design Q - ZAplus with adapter plate, guard grille pressure side

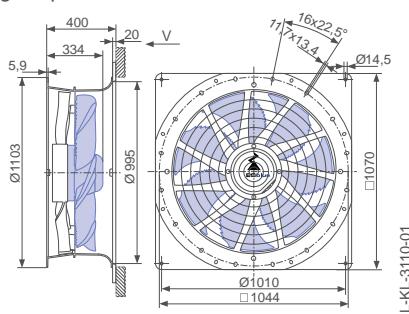

Design H - ZAplus Flattop, guard grille pressure side

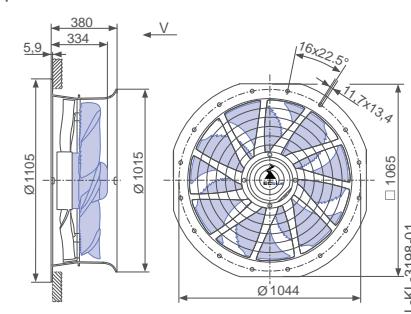

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V


Z N O 91



Description

Motor technology: EC
Rated voltage U_N : 3~ 380-480 V*
Rated frequency f_N : 50/60 Hz*
Input power P_{sys} : 1.90 kW*
Rated current I_N : 3.10- 2.50 A*
Rated speed n_N : 930 min⁻¹*
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -35 °C
Max. permitted ambient temperature $t_{R(max)}$: 55 °C
Electrical connection: integrated Controller
Number of blades: 5
Protection class: IP54
Motor protection: Integrated active temperature management
Blades: Aluminium, uncoated
Rotor: Steel, 2 coat paint, ultramarine blue
Conformity: ErP 2015, CE, UL
ErP-data
Efficiency η_{startA} : 61.8 %
Efficiency: $N_{actual} = 66.5 / N_{target} = 40^{**}$
EC controller integrated
* Rated data
**ErP 2015

Characteristic curve

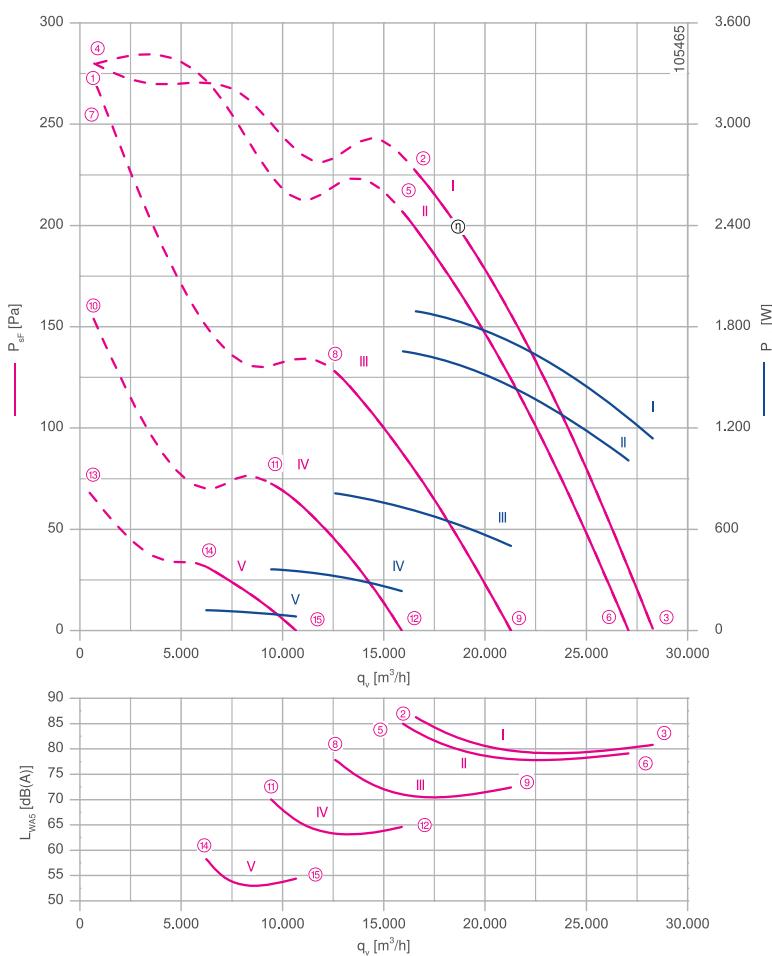

Measured in ZAplus without guard grille in installation type A according to ISO 5801



Connection diagram

Page 530
1360-403

System components

Page 430

Dimensions mm


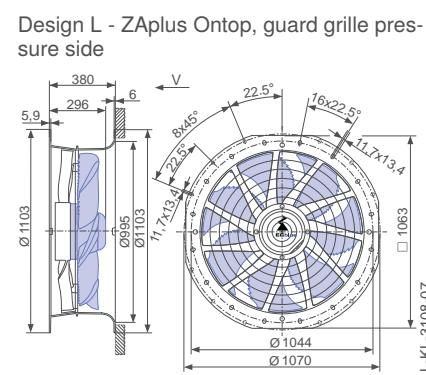
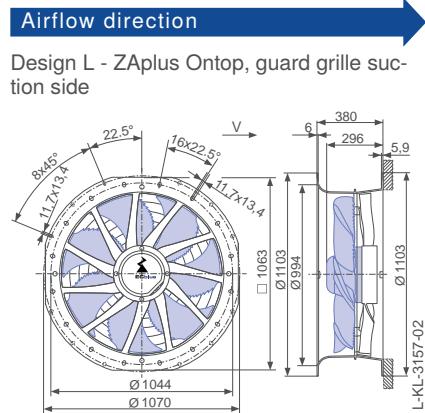


Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_GG.V5P1	I	930	①	2.50	1600	86	55
			②	2.90	1900	81	
			③	1.80	1150		
	II	890	④	2.50	1600		60
			⑤	2.60	1650	85	
			⑥	1.60	1000	79	
	III	700	⑦	2.30	1500		
			⑧	1.35	820	78	
			⑨	0.90	500	72	
	IV	530	⑩	1.10	640		
			⑪	0.76	360	70	
			⑫	0.56	230	65	
	V	350	⑬	0.52	200		
			⑭	0.38	120	58	
			⑮	0.30	85	54	

Current values determined at 400V

Fan ordering information

Airflow direction		Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille) Q (guard grille pressure H (guard grille pressure side) Flattop	
					
Type Article no.	ZN091-ZIL.GG.V5P1 167287	ZN091-ZIL.GG.V5P1 164972	ZN091-ZIL.GG.V5P1 164974	ZN091-ZIQ.GG.V5P1 164978	ZN091-ZIQ.GG.V5P1 164980
Weight kg	43.00	39.30	41.20	42.30	44.20
ZAplus attachable on both sides.					

Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
			


Page 452

Page 454


Page 463

Page 472


Design Q - ZAplus with adapter plate, without guard grille

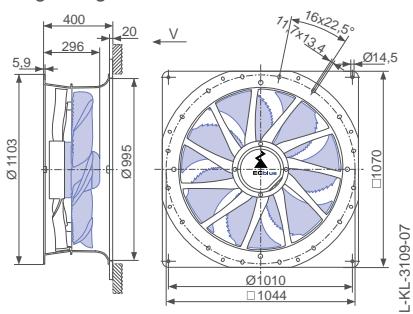

Design Q - ZAplus with adapter plate, guard grille pressure side

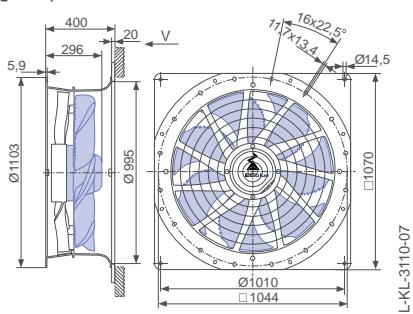

Design H - ZAplus Flattop, guard grille pressure side

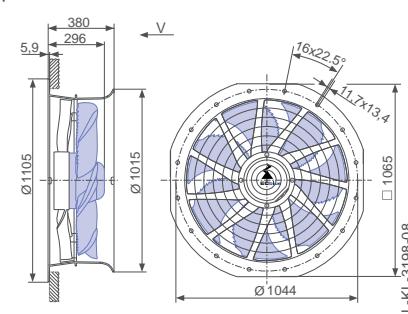

FE2owlet-ECblue with ZAplus

for three phase alternating current, 380-480 V

Z N O 91



Description

Motor technology: EC

Rated voltage U_N : 3~ 380-480 V*

Rated frequency f_N : 50/60 Hz*

Input power P_{sys} : 3.20 kW*

Rated current I_N : 5.20- 4.20 A*

Rated speed n_N : 1100 min⁻¹*

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -35 °C

Max. permitted ambient temperature $t_{R(max)}$: 45 °C

Electrical connection: integrated Controller

Number of blades: 5

Protection class: IP54

Motor protection: Integrated active temperature management

Blades: Aluminium, uncoated

Rotor: Steel, 2 coat paint, ultramarine blue

Conformity: ErP 2015, CE, UL

ErP-data

Efficiency η_{startA} : 62.0 %


Efficiency: $N_{actual} = 65.3 / N_{target} = 40^{**}$

EC controller integrated

* Rated data

**ErP 2015

Characteristic curve

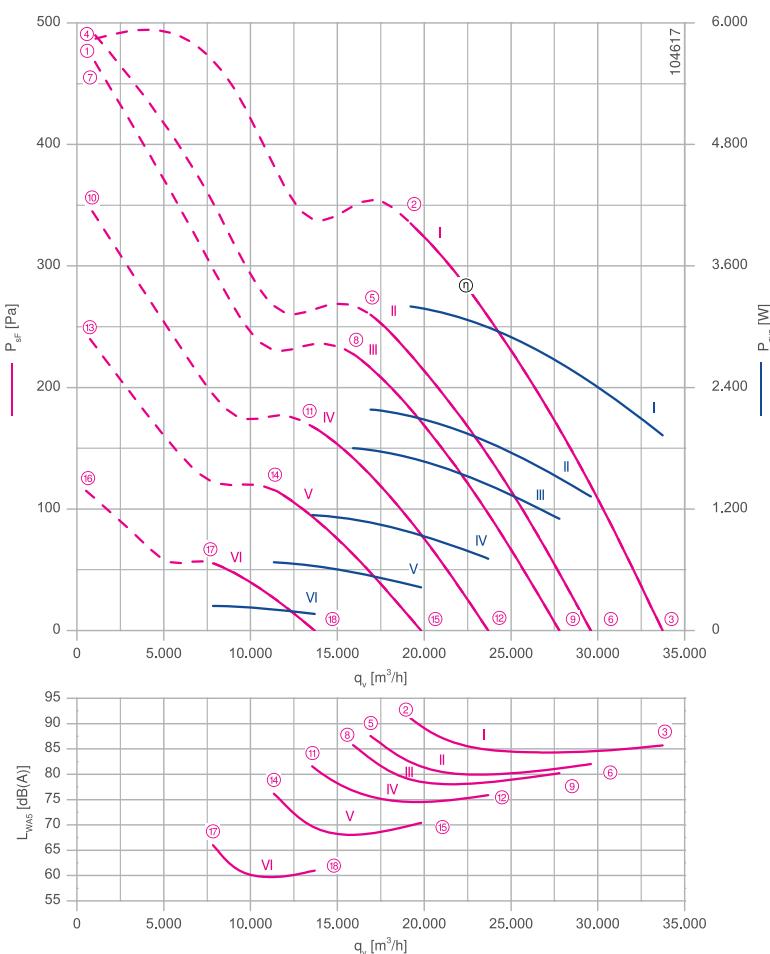

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 530

1360-403


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

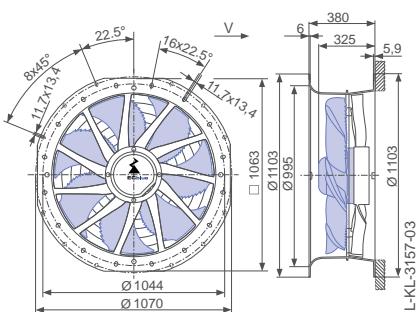


← Airflow direction

Design L - ZAplus Ontop without guard grille

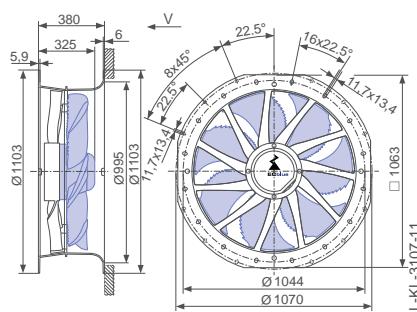

Design L - ZAplus Ontop, guard grille pressure side

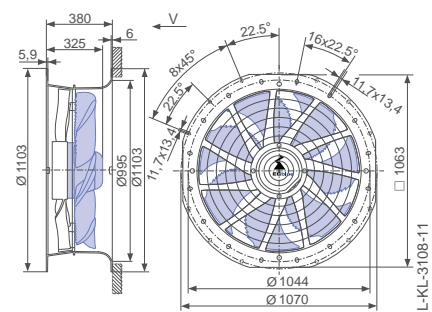

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Input power	Suction side sound power level	Maximum ambient temperature
		n min ⁻¹		I A	P _{sys} W	L _{WA5} dB(A)	t _R °C
ZN091-ZI_GL.V5P1	I	1100	① ② ③	5.40 4.80 3.00	3600 3200 1950	92 86	45
	II	970	④ ⑤ ⑥	5.40 3.40 2.10	3600 2200 1300	88 82	60
	III	910	⑦ ⑧ ⑨	5.00 2.80 1.75	3300 1800 1100	86 80	
	IV	780	⑩ ⑪ ⑫	3.20 1.80 1.20	2100 1150 700	82 76	
	V	650	⑬ ⑭ ⑮	1.90 1.15 0.82	1200 680 420	77 70	
	VI	450	⑯ ⑰ ⑱	0.82 0.58 0.44	420 240 160	66 61	

Current values determined at 400V


Fan ordering information

Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	H (guard grille pressure side) Flattop
Type Article no.	ZN091-ZIL.GL.V5P1 167288	ZN091-ZIL.GL.V5P1 165008	ZN091-ZIL.GL.V5P1 165010	ZN091-ZIQ.GL.V5P1 165014	ZN091-ZIQ.GL.V5P1 165016	ZN091-ZIH.GL.V5P1 165024
Weight kg	47.20	43.50	45.40	46.70	48.60	45.40


Control technology

Control modules	Sensor control modules	Add-on modules	Operating terminal
Page 452	Page 454	Page 463	Page 472


Design Q - ZAplus with adapter plate, without guard grille

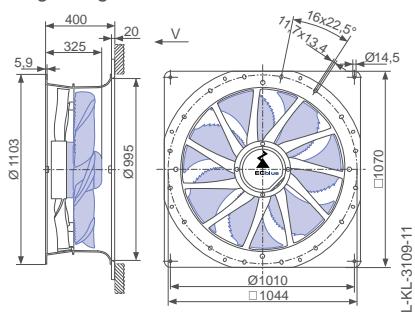

Design Q - ZAplus with adapter plate, guard grille pressure side

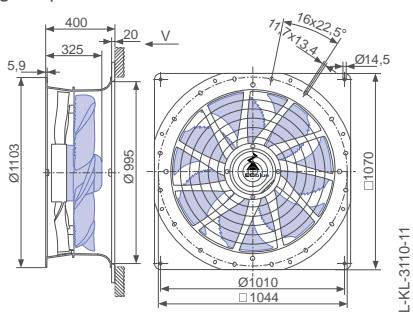

Design H - ZAplus Flattop, guard grille pressure side

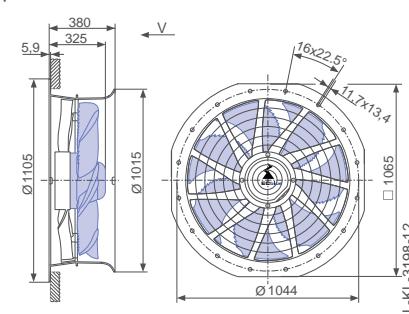




FE2owlet with ZAplus AC-Technology

Product overview

Quick selection	Page 356
Size 450	Page 358
Size 500	Page 374
Size 630	Page 388
Size 710	Page 402
Size 800	Page 412
Size 910	Page 420



Size	Voltage	Number of poles	Type	Airflow direction	ErP	Page
450	1~ 230 V	4	ZN045-4E_.2F.V7P2		2015	358
		6	ZN045-4E_.4I.V7P1		2015	360
		ZN045-6E_.2F.V7P3		2015	362	
		ZN045-6E_.4F.V7P1		2015	364	
		ZN045-VD_.2F.V7P2		2015	366	
	3~ 400 V	4-4	ZN045-VD_.4F.V7P1		2015	368
		ZN045-SD_.2C.V7P3		2015	370	
		ZN045-SD_.4F.V7P1		2015	372	
		ZN050-4E_.4I.V7P1		2015	374	
		ZN050-6E_.4F.V7P1		2015	376	
500	1~ 230 V	4	ZN050-8E_.4C.V7P1		2015	378
		6	ZN050-VD_.4I.V7P1		2015	380
		ZN050-VD_.4I.V7P1		2015	382	
		ZN050-SD_.4F.V7P1		2015	384	
		ZN050-AD_.4C.V7P1		2015	386	
	3~ 400 V	4-4	ZN063-6E_.4I.V7P1		2015	388
		ZN063-6E_.4M.V7P1		2015	390	
		ZN063-VD_.6N.V7P6		2015	392	
		ZN063-VD_.6N.V7P7		2015	394	
		ZN063-SD_.4I.V7P1		2015	396	
630	1~ 230 V	6	ZN063-AD_.4I.V7P1		2015	398
		ZN063-ND_.4F.V7P1		2015	400	
		ZN071-VD_.6N.V7P2		2015	402	
		ZN071-SD_.6F.V7P1		2015	404	
		ZN071-SD_.6K.V7P1		2015	406	
	3~ 400 V	8-8	ZN071-AD_.6F.V7P1		2015	408
		ZN071-ND_.6F.V7P1		2015	410	
		ZN080-SD_.6N.V7P5		2015	412	
		ZN080-SD_.6N.V7P5		2015	414	
		ZN080-AD_.6N.V7P5		2015	416	
710	3~ 400 V	12-12	ZN080-ND_.6N.V7P5		2015	418
		ZN091-VD_.7Q.V5P1		2015	420	
		ZN091-SD_.6N.V7P2		2015	422	
		ZN091-SD_.7M.V5P1		2015	424	
		ZN091-AD_.6N.V7P2		2015	426	
	3~ 400 V	12-12	ZN091-ND_.6N.V7P2		2015	428

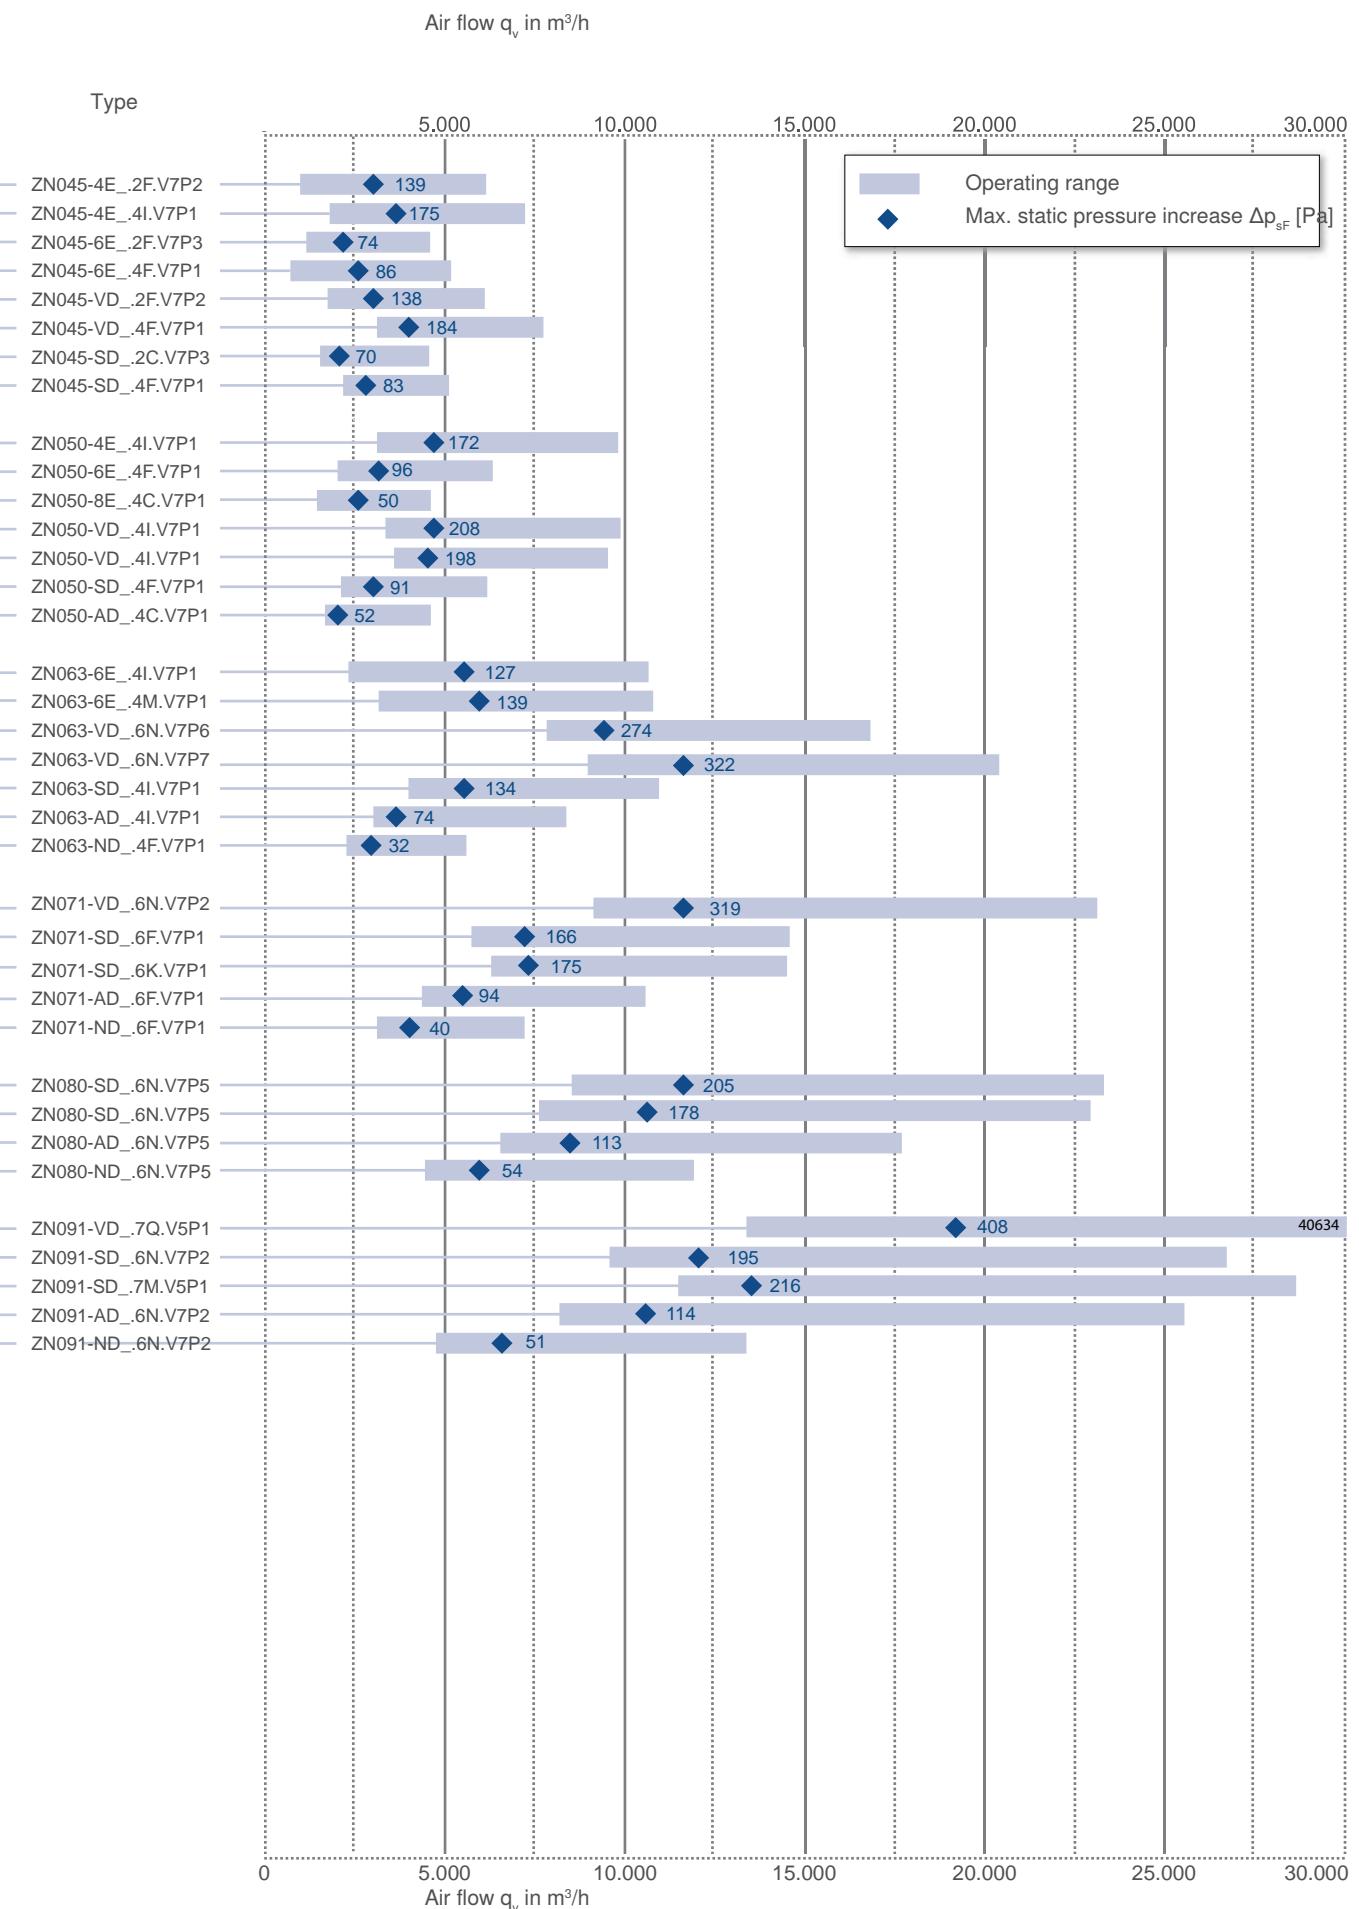

FE2owlet with ZAplus

for single phase alternating current, 4 pole

ZNO45-4E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V ±10 %*

Rated frequency f_N : 50 Hz*

Input power P_i : 380 W*

Rated current I_N : 1.70 A*

Rated speed n_N : 1250 min⁻¹*

Starting current I_A : 3.60 A

Current increase ΔI : 5 %

Service capacitor C_{400V} : 7.0 µF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -25 °C

Max. permitted ambient temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP44

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,

Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 34.5 %

Efficiency: $N_{actual} = 43.6 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

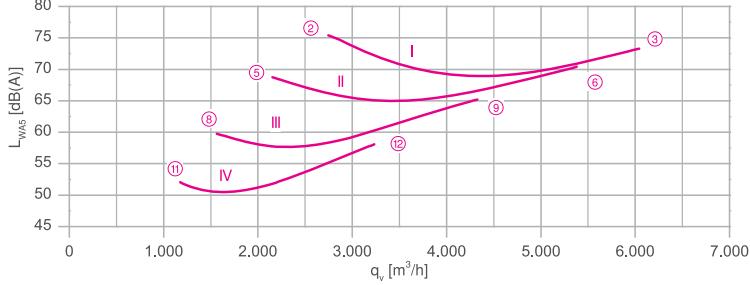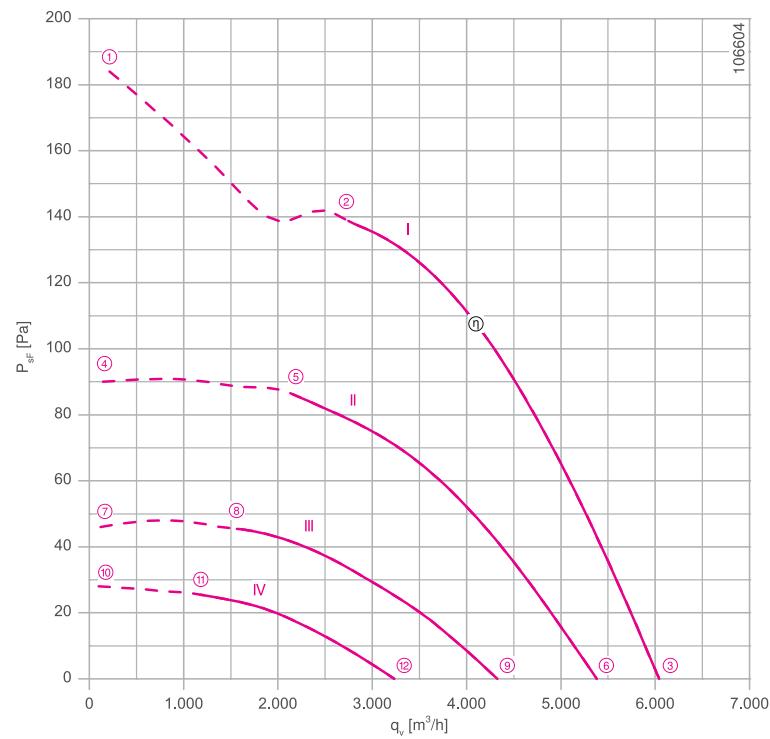

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

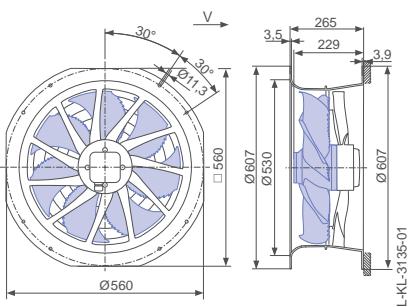


← Airflow direction

Design L - ZAplus Ontop without guard grille

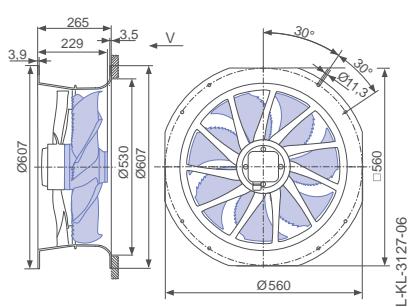

Design L - ZAplus Ontop, guard grille pressure side

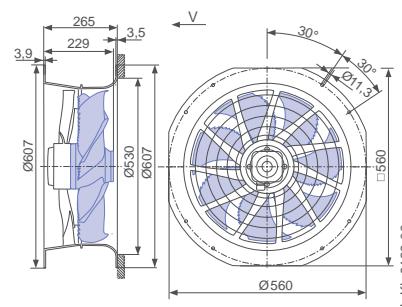

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P_1 W	Speed n min ⁻¹	Suction side sound power level L_{WAS} dB(A)
ZN045-4E..2F..7P2	I	230	①	2.10	460	1150	
		230*	②	1.70*	380*	1250*	76
		230	③	1.35	300	1340	73
	II	170	④	2.00	330	800	
		170	⑤	1.75	300	990	69
		170	⑥	1.40	230	1200	70
	III	135	⑦	1.70	220	580	
		135	⑧	1.65	220	720	60
		135	⑨	1.45	190	970	65
	IV	110	⑩	1.45	160	440	
		110	⑪	1.40	150	540	52
		110	⑫	1.35	140	730	58

*rated data

Fan ordering information


Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN045-4EL.2F.V7P2 166922	ZN045-4EL.2F.V7P2 166885	ZN045-4EL.2F.V7P2 166886	ZN045-4EQ.2F.V7P2 166890	ZN045-4EQ.2F.V7P2 166891
Weight kg	9.20	8.20	8.80	8.90	9.60

ZAplus attachable on both sides.


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design Q - ZAplus with adapter plate, without guard grille

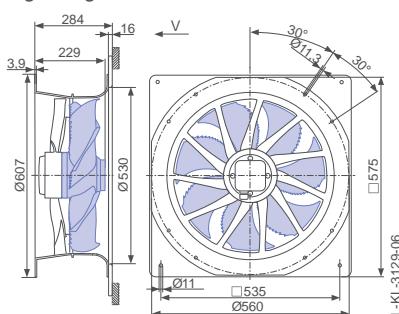

Design Q - ZAplus with adapter plate, guard grille pressure side

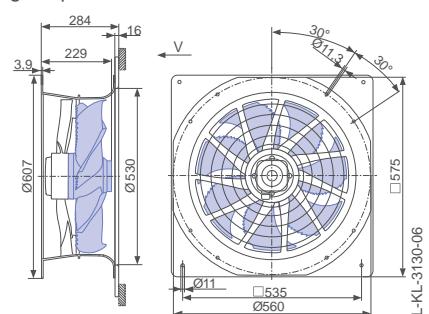

Design H - ZAplus Flattop, guard grille pressure side

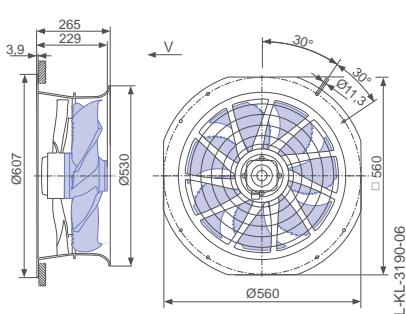

FE2owlet with ZAplus

for single phase alternating current, 4 pole



ZNO45-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.54 kW*
Rated current I_N : 2.50 A*
Rated speed n_N : 1310 min $^{-1}$ *
Starting current I_A : 6.50 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 14.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 38.8 %
Efficiency: $N_{actual} = 46.9 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Characteristic curve

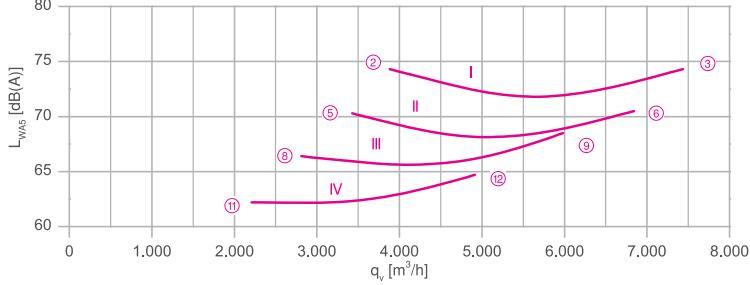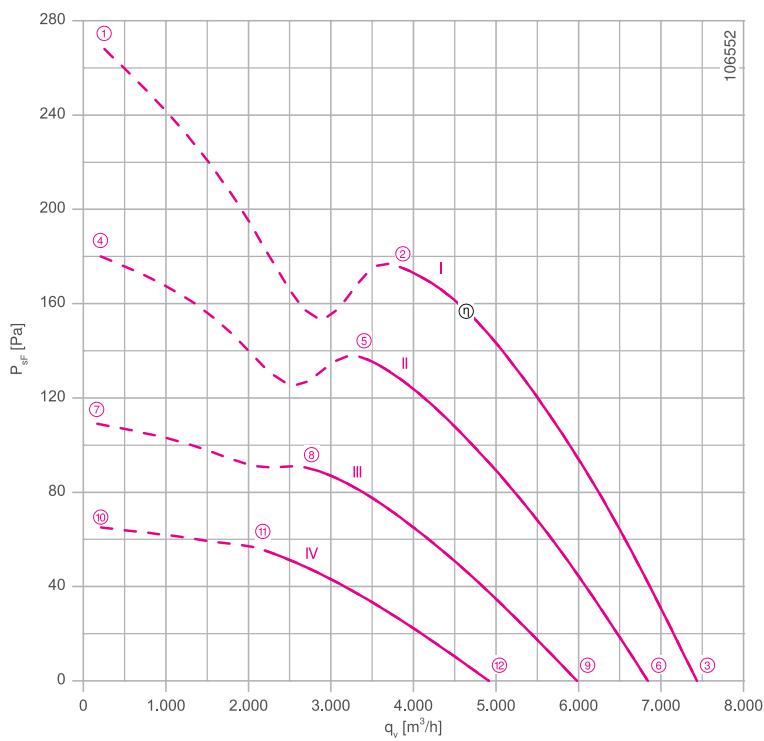

Measured in ZAplus without guard grille in installation type A according to ISO 5801




Connection diagram

Page 531
1360-104XA

System components

Page 430

Dimensions mm

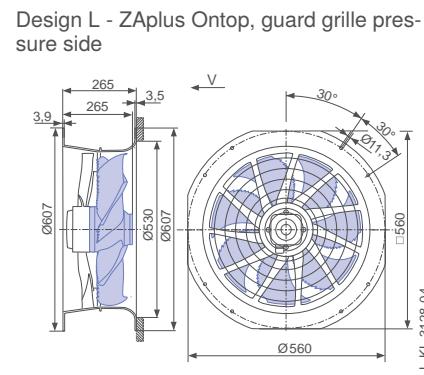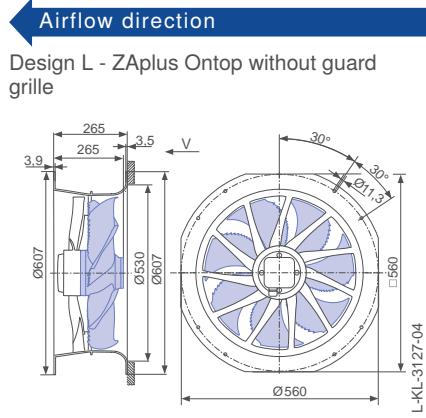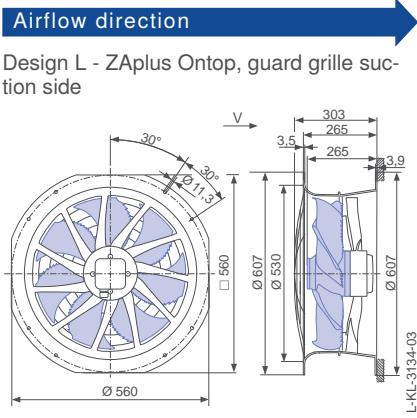

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P_1 W	Speed n min ⁻¹	Suction side sound power level L_{WAS} dB(A)
ZN045-4E..4I..7P1	I	230	①	2.90	640	1250	
		230*	②	2.50*	540*	1310*	74
		230	③	2.10	460	1360	74
	II	170	④	2.90	480	1020	
		170	⑤	2.50	420	1150	70
		170	⑥	2.10	350	1260	71
	III	135	⑦	2.70	340	800	
		135	⑧	2.50	320	940	67
		135	⑨	2.20	280	1100	69
	IV	110	⑩	2.40	240	620	
		110	⑪	2.30	230	740	62
		110	⑫	2.10	220	900	65

*rated data

Fan ordering information


Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN045-4EL.4I.V7P1 169868	ZN045-4EL.4I.V7P1 166841	ZN045-4EL.4I.V7P1 166842	ZN045-4EQ.4I.V7P1 166846	ZN045-4EQ.4I.V7P1 166847
Weight kg	13.60	14.20	14.80	14.90	15.60

ZAplus attachable on both sides.


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design Q - ZAplus with adapter plate, without guard grille

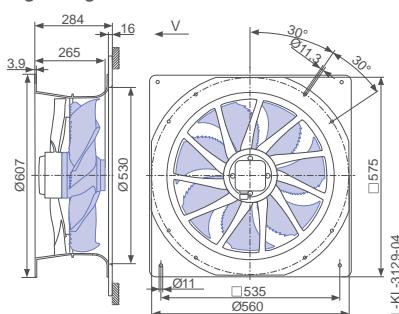

Design Q - ZAplus with adapter plate, guard grille pressure side

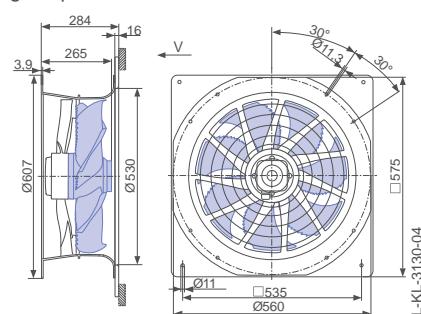

Design H - ZAplus Flattop, guard grille pressure side

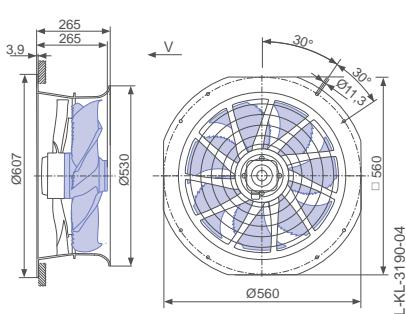

FE2owlet with ZAplus

for single phase alternating current, 6 pole



ZNO45-6E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 180 W*
Rated current I_N : 0.80 A*
Rated speed n_N : 870 min $^{-1}$ *
Starting current I_A : 1.50 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 6.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP44
Motor protection: thermal contact
Blades: High Performance Composite Material, uncoated,
Rotor: Aluminium, 1 coat paint, jet black
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 30.0 %
Efficiency: $N_{actual} = 41.1 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Characteristic curve

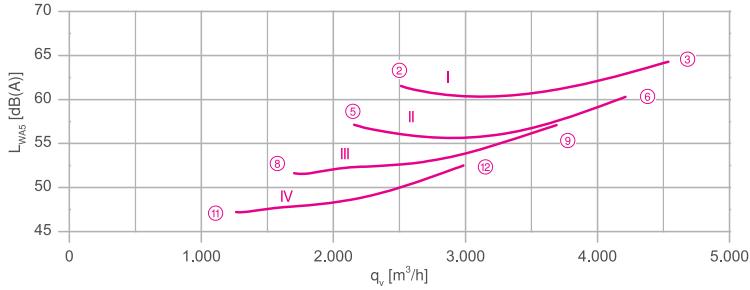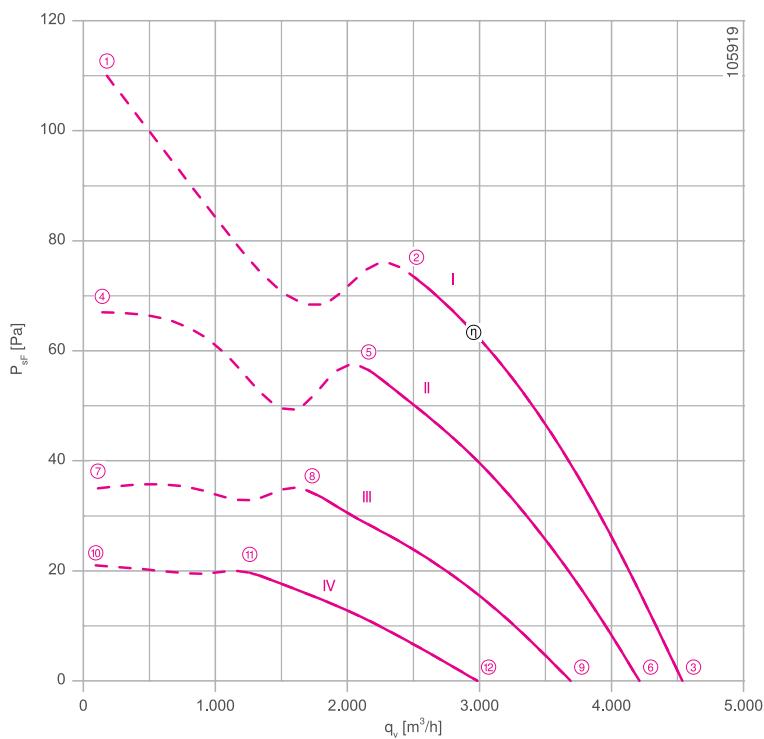

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

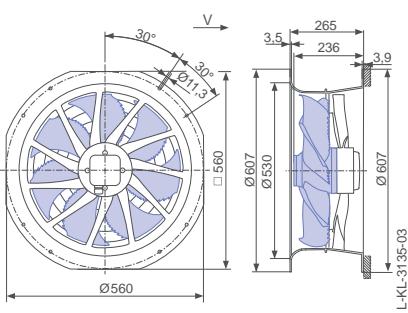


← Airflow direction

Design L - ZAplus Ontop without guard grille

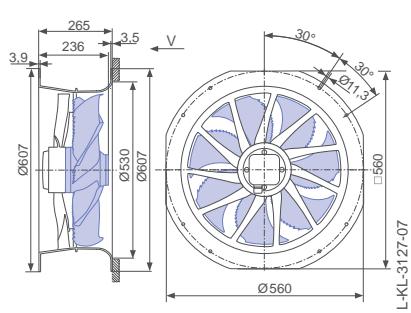

Design L - ZAplus Ontop, guard grille pressure side

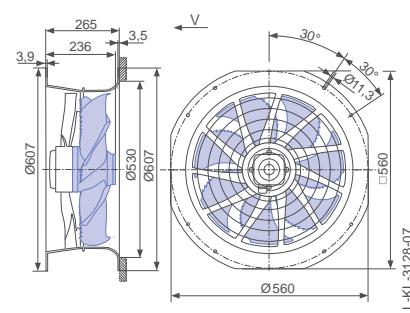

Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level
		U V		I A	P ₁ W	n min ⁻¹	L _{WAS} dB(A)
ZN045-6E_.2F._7P3	I	230	①	0.94	210	820	
		230*	②	0.80*	180*	870*	62
		230	③	0.70	160	920	64
	II	170	④	0.90	150	630	
		170	⑤	0.76	130	760	57
		170	⑥	0.62	110	850	60
	III	135	⑦	0.78	100	460	
		135	⑧	0.74	100	590	53
		135	⑨	0.62	85	750	57
	IV	110	⑩	0.68	70	350	
		110	⑪	0.66	70	440	48
		110	⑫	0.60	65	600	53

*rated data

Fan ordering information

Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN045-6EL.2F.V7P3 166924	ZN045-6EL.2F.V7P3 166907	ZN045-6EL.2F.V7P3 166908	ZN045-6EQ.2F.V7P3 166912	ZN045-6EQ.2F.V7P3 166913
Weight kg	9.30	8.20	8.90	9.00	9.60


ZAplus attachable on both sides.

Control technology


Frequency inverters Fcontrol 1~		Motor protection units 1~		Electronic voltage controllers 1~	

Page 474 Page 518 Page 492


Design Q - ZAplus with adapter plate, without guard grille

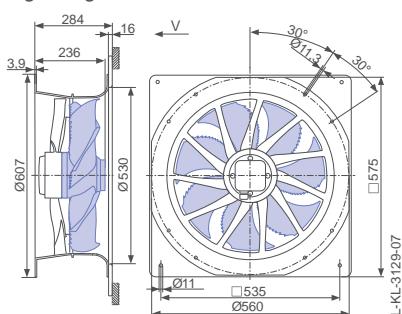

Design Q - ZAplus with adapter plate, guard grille pressure side

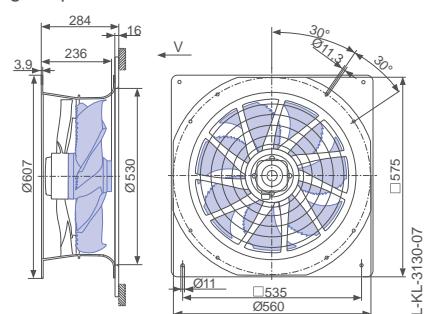

Design H - ZAplus Flattop, guard grille pressure side

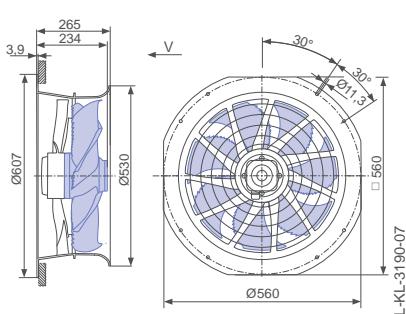

FE2owlet with ZAplus

for single phase alternating current, 6 pole



ZNO45-6E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 190 W*
Rated current I_N : 0.92 A*
Rated speed n_N : 910 min $^{-1}$ *
Starting current I_A : 2.00 A
Current increase ΔI : 25 %
Service capacitor C_{400V} : 6.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 37.0 %
Efficiency: $N_{actual} = 47.9 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

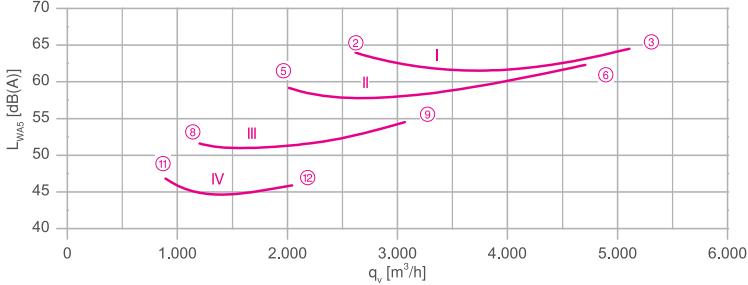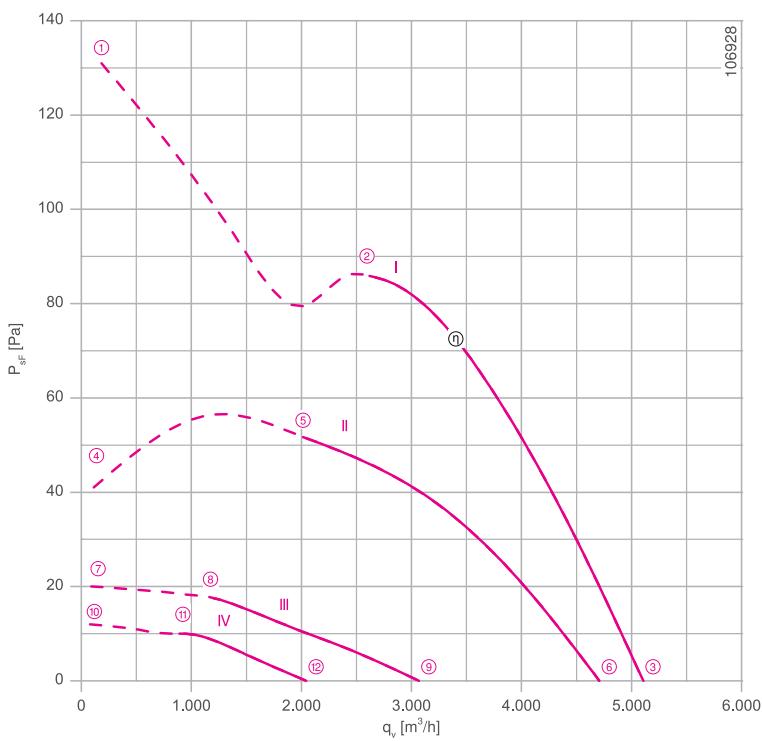

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

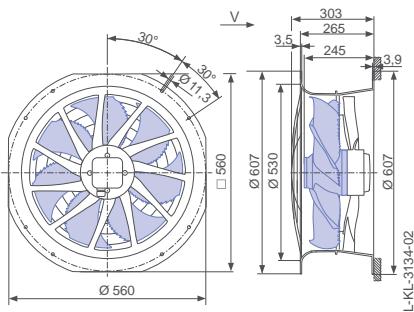


← Airflow direction

Design L - ZAplus Ontop without guard grille

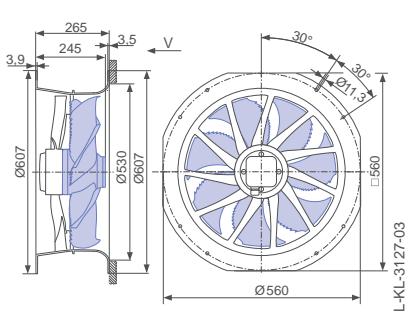

Design L - ZAplus Ontop, guard grille pressure side

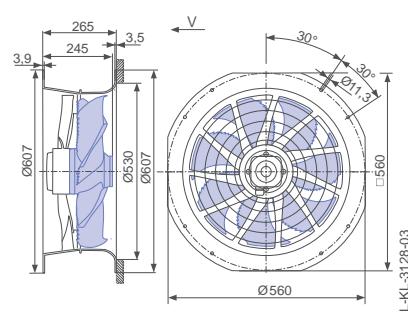

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P_1 W	Speed n min ⁻¹	Suction side sound power level L_{WAS} dB(A)
ZN045-6E..4F..7P1	I	230	①	1.15	240	860	
		230*	②	0.90*	190*	910*	64
		230	③	0.76	160	940	65
	II	170	④	1.30	180	490	
		170	⑤	1.10	170	710	59
		170	⑥	0.80	130	870	62
	III	135	⑦	1.00	110	330	
		135	⑧	1.00	110	400	52
		135	⑨	0.96	110	570	55
	IV	110	⑩	0.84	75	260	
		110	⑪	0.84	75	310	47
		110	⑫	0.82	70	380	46

*rated data

Fan ordering information


Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN045-6EL.4F.V7P1 166921	ZN045-6EL.4F.V7P1 166863	ZN045-6EL.4F.V7P1 166864	ZN045-6EQ.4F.V7P1 166868	ZN045-6EQ.4F.V7P1 166869
Weight kg	13.60	12.60	13.20	13.30	14.00

ZAplus attachable on both sides.


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design Q - ZAplus with adapter plate, without guard grille

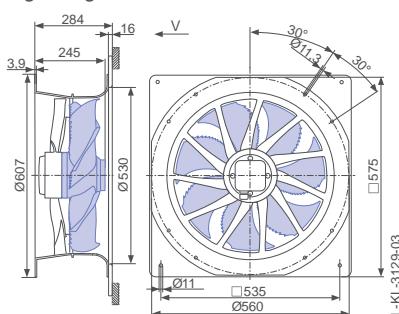

Design Q - ZAplus with adapter plate, guard grille pressure side

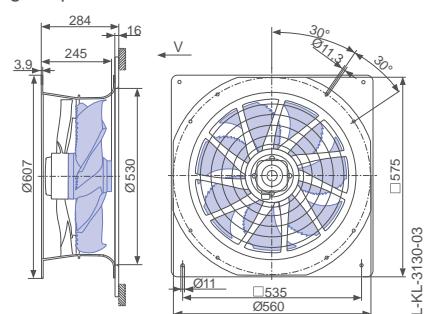

Design H - ZAplus Flattop, guard grille pressure side

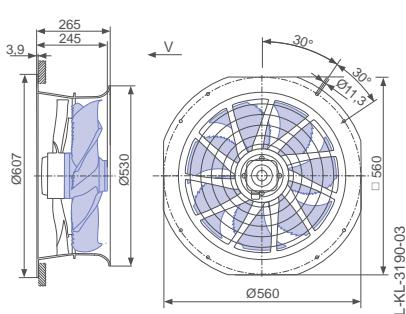

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole



Z NO 45-VD

**Description**

Motor technology: AC
 Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
 Rated frequency f_N : 50 Hz* (60Hz data available)
 Input power P_i : 0.35/0.22 kW*
 Rated current I_N : 0.64/0.35 A*
 Rated speed n_N : 1260/ 950 min⁻¹*
 Starting current I_A : 1.90 / 0.65 A
 Current increase ΔI : 0 %
 Thermal class: THCL155*
 Min. permitted ambient temperature $t_{R(min)}$: -40 °C
 Max. permitted ambient temperature $t_{R(max)}$: 70 °C
 Electrical connection: Terminal box
 Number of blades: 7
 Protection class: IP44
 Motor protection: thermal contact
 Blades: High Performance Composite Material, uncoated,
 Rotor: Aluminium, 1 coat paint, jet black
 Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 38.5 %
 Efficiency: $N_{actual} = 47.9 / N_{target} = 40^{**}$
 * Rated data
 **ErP 2015

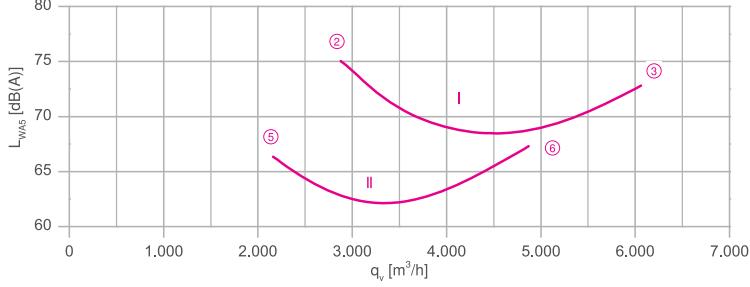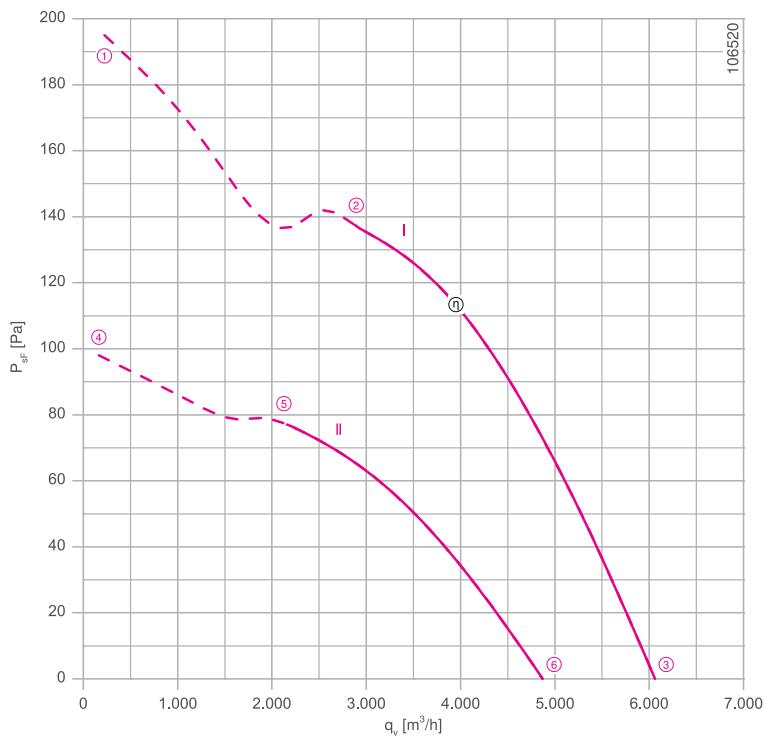Characteristic curve




Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA

System components

Page 430

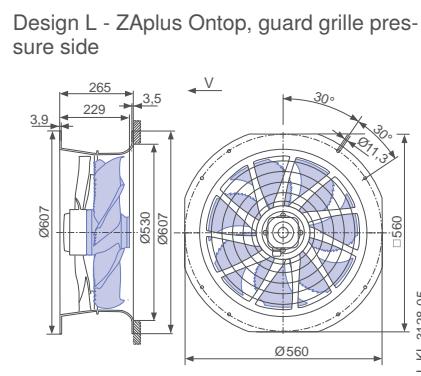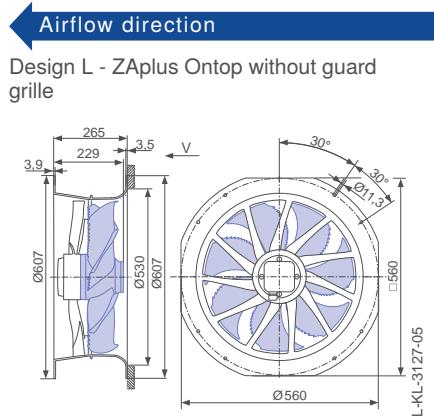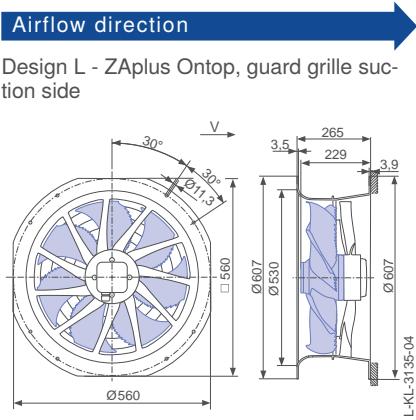Dimensions mm

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN045-VD_.2F._7P2	Δ	I	400	①	0.72	420	1190	
			400*	②	0.64*	350*	1260*	75
			400	③	0.54	260	1340	73
	Y	II	400	④	0.38	240	850	
			400*	⑤	0.34*	220*	950*	67
			400	⑥	0.28	180	1090	67

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN045-VDL.2F.V7P2 169870	ZN045-VDL.2F.V7P2 166874	ZN045-VDL.2F.V7P2 166875	ZN045-VDQ.2F.V7P2 166879	ZN045-VDQ.2F.V7P2 166880	ZN045-VDH.2F.V7P2 166884
Weight kg	9.20	8.20	8.80	8.90	9.60	8.60
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - ZAplus with adapter plate, without guard grille

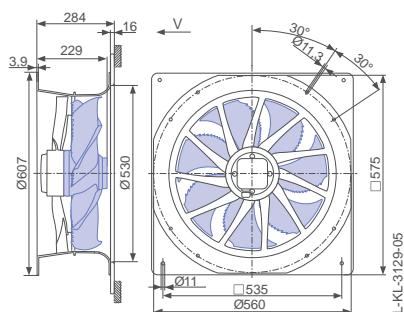

Design Q - ZAplus with adapter plate, guard grille pressure side

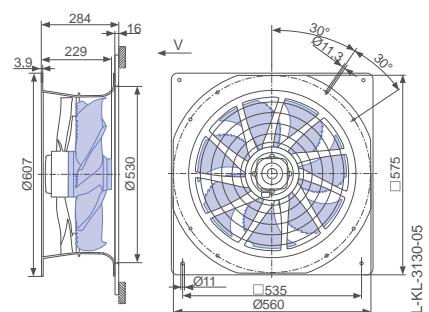

Design H - ZAplus Flattop, guard grille pressure side

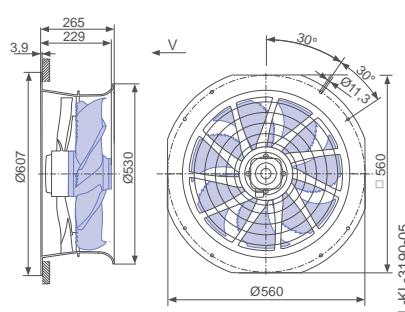

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole

Z NO 45-VD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.56/0.38 kW*
Rated current I_N : 1.10/0.68 A*
Rated speed n_N : 1350/1020 min⁻¹*
Starting current I_A : 4.00 / 1.20 A
Current increase ΔI : 10 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 41.6 %
Efficiency: $N_{actual} = 49.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

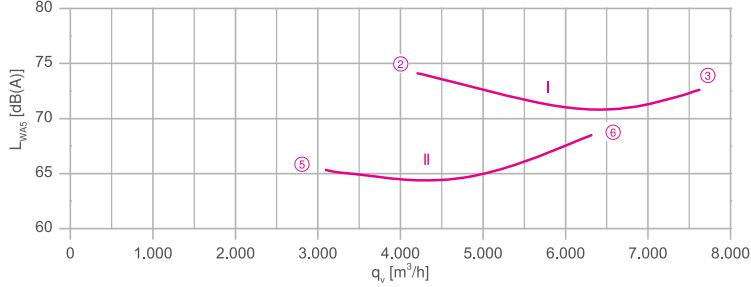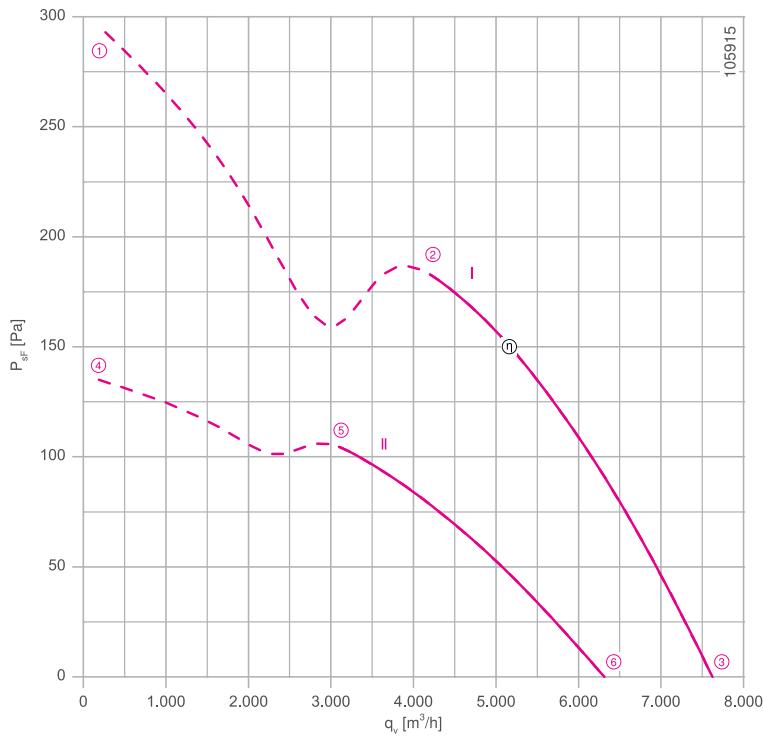

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

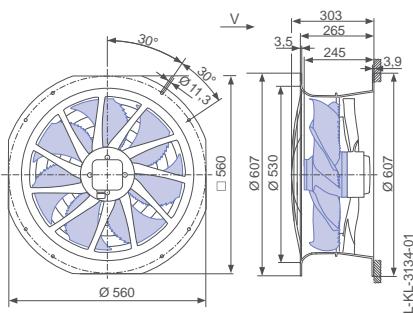


← Airflow direction

Design L - ZAplus Ontop without guard grille

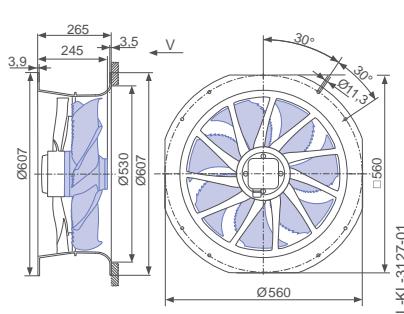

Design L - ZAplus Ontop, guard grille pressure side

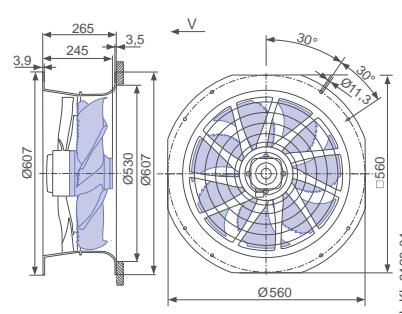

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P_1 W	n min ⁻¹	
ZN045-VD_.4F._7P1	Δ	I	400	①	1.30	700	1300	
			400*	②	1.10*	560*	1350*	74
			400	③	0.92	420	1400	73
	Y	II	400	④	0.76	420	880	
			400*	⑤	0.68*	380*	1010*	66
			400	⑥	0.58	320	1160	69

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN045-VDL.4F.V7P1 166920	ZN045-VDL.4F.V7P1 166830	ZN045-VDL.4F.V7P1 166831	ZN045-VDQ.4F.V7P1 166835	ZN045-VDQ.4F.V7P1 166836	ZN045-VDH.4F.V7P1 166840
Weight kg	13.60	12.60	13.20	13.30	14.00	13.20
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - ZAplus with adapter plate, without guard grille

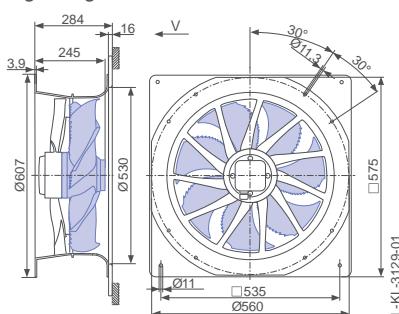

Design Q - ZAplus with adapter plate, guard grille pressure side

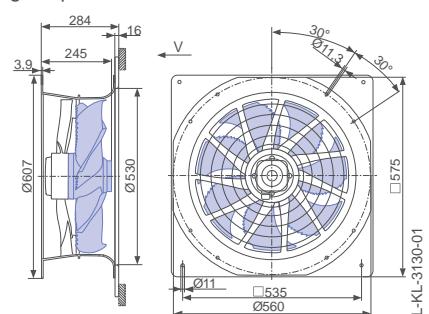

Design H - ZAplus Flattop, guard grille pressure side

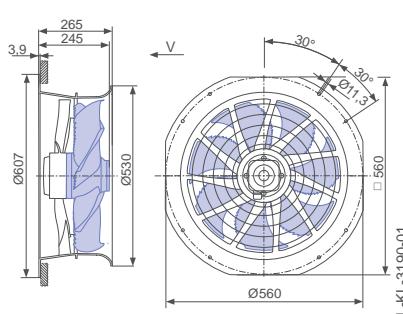

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole

ZNO45-SD

**Description**

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *Rated frequency f_N : 50 Hz* (60Hz data available)Input power P_i : 170/95 W*Rated current I_N : 0.38/0.175 A*Rated speed n_N : 840/ 600 min⁻¹*Starting current I_A : 0.75 / 0.26 ACurrent increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °CMax. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: High Performance Composite Material, uncoated,



Rotor: Aluminium, 1 coat paint, jet black

Conformity: ErP 2015, CE

ErP-dataEfficiency η_{statA} : 29.1 %Efficiency: $N_{actual} = 40.3 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

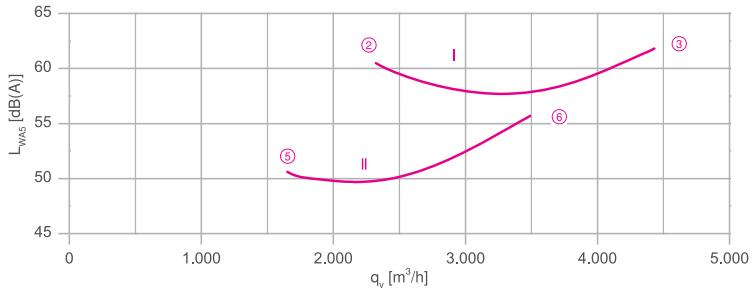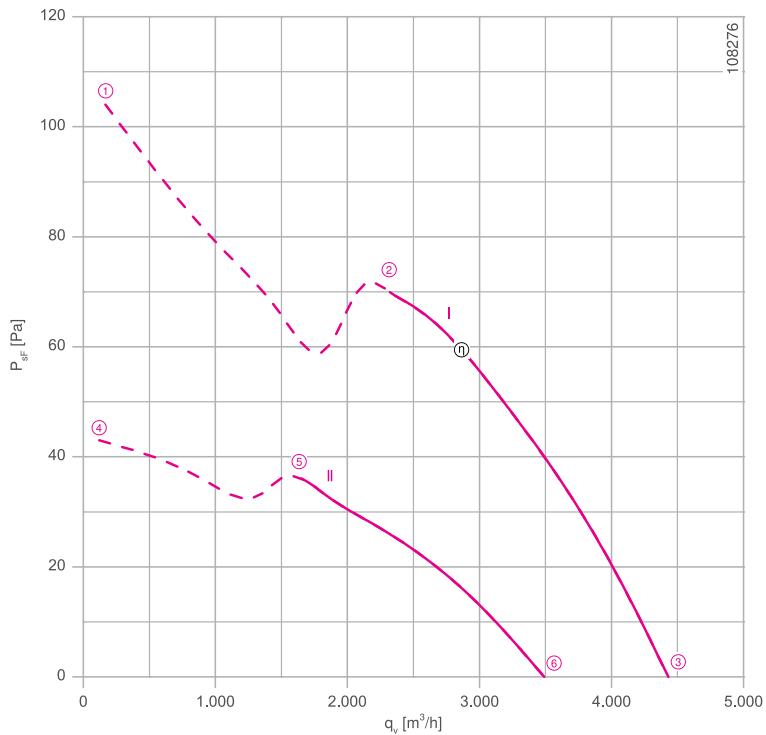Characteristic curve

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

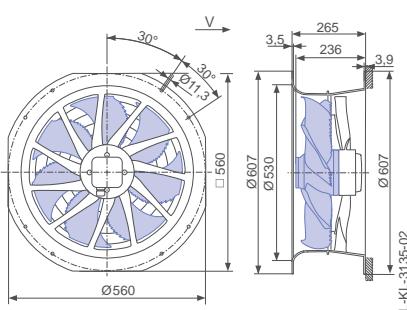


← Airflow direction

Design L - ZAplus Ontop without guard grille

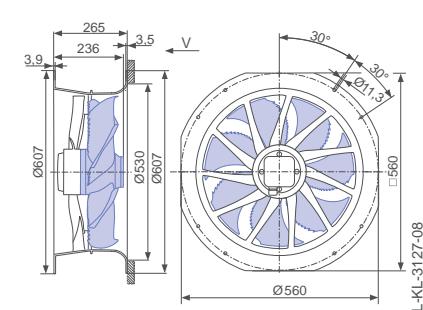

Design L - ZAplus Ontop, guard grille pressure side

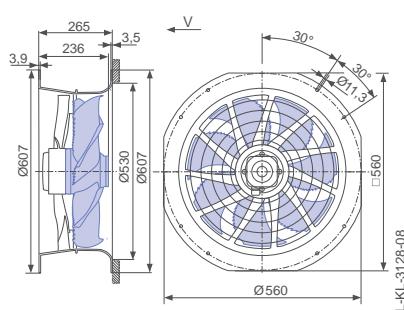

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN045-SD_.2C._7P3	Δ	I	400	①	0.42	210	780	
			400*	②	0.38*	170*	840*	61
			400	③	0.35	140	890	62
	Y	II	400	④	0.19	100	500	
			400*	⑤	0.17*	95*	600*	51
			400	⑥	0.15	80	710	56

*rated data


Fan ordering information

	Airflow direction	Airflow direction					
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side)	Flattop
Type Article no.	ZN045-SDL.2C.V7P3 166923	ZN045-SDL.2C.V7P3 166896	ZN045-SDL.2C.V7P3 166897	ZN045-SDQ.2C.V7P3 166901	ZN045-SDQ.2C.V7P3 166902	ZN045-SDH.2C.V7P3 166906	
Weight kg	8.50	7.40	8.10	8.20	8.80	8.10	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - ZAplus with adapter plate, without guard grille

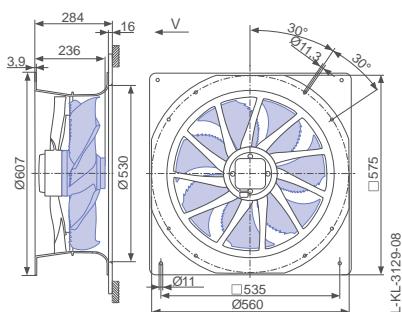

Design Q - ZAplus with adapter plate, guard grille pressure side

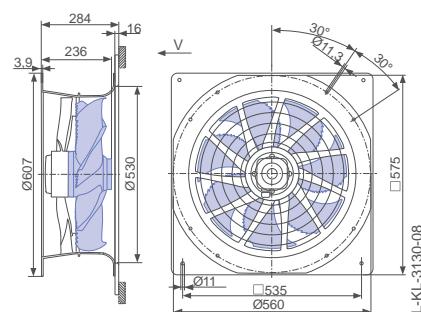

Design H - ZAplus Flattop, guard grille pressure side

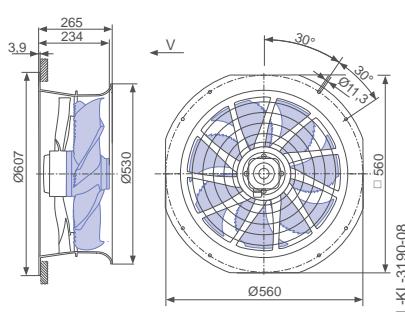

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole

ZNO45-SD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 190/110 W*
Rated current I_N : 0.50/0.27 A*
Rated speed n_N : 910/ 650 min⁻¹*
Starting current I_A : 1.10 / 0.32 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 36.6 %
Efficiency: $N_{actual} = 47.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

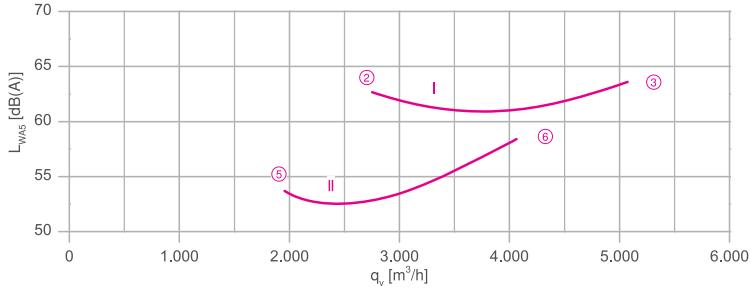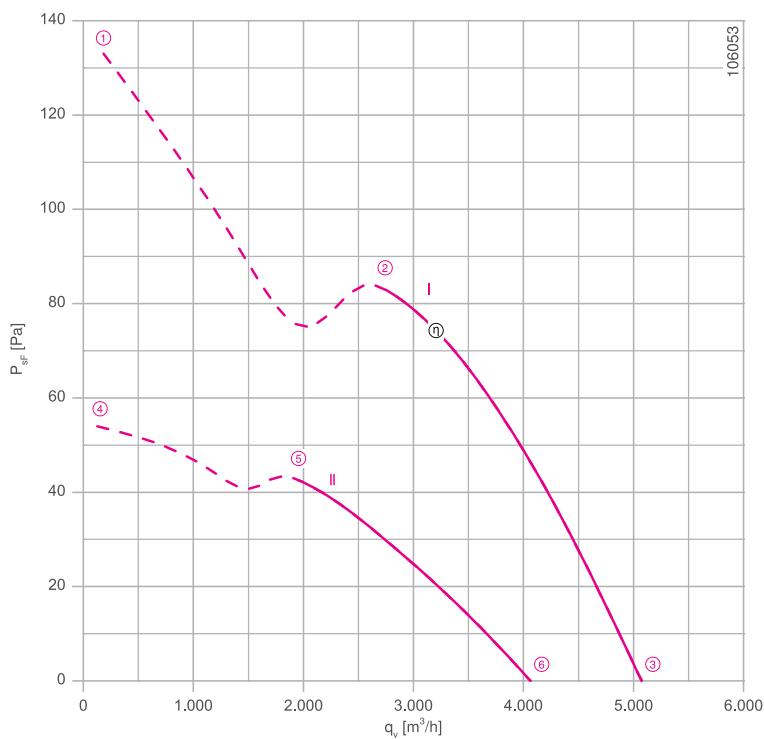

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

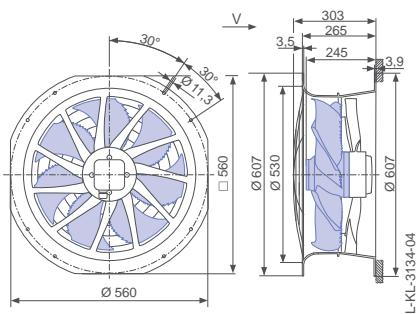


← Airflow direction

Design L - ZAplus Ontop without guard grille

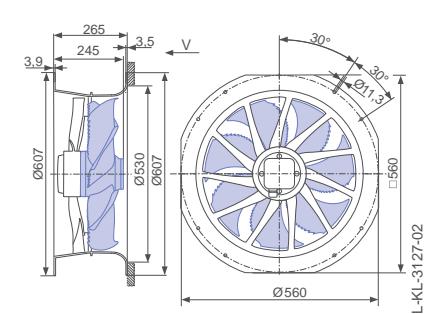

Design L - ZAplus Ontop, guard grille pressure side

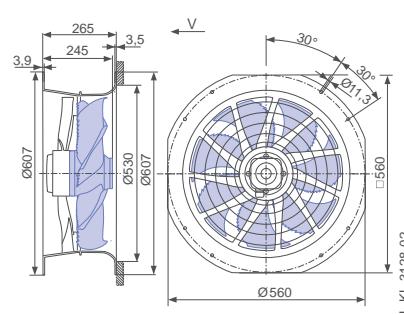

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN045-SD_.4F._7P1	Δ	I	400	①	0.58	240	870	
			400*	②	0.50*	190*	910*	63
			400	③	0.46	150	940	64
	Y	II	400	④	0.29	120	560	
			400*	⑤	0.27*	110*	640*	54
			400	⑥	0.24	100	750	58

*rated data


Fan ordering information

	Airflow direction	Airflow direction					
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side)	Flattop
Type Article no.	ZN045-SDL.4F.V7P1 169869	ZN045-SDL.4F.V7P1 166852	ZN045-SDL.4F.V7P1 166853	ZN045-SDQ.4F.V7P1 166857	ZN045-SDQ.4F.V7P1 166858	ZN045-SDH.4F.V7P1 166862	
Weight kg	13.60	12.60	13.20	13.30	14.00	13.20	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	


Design Q - ZAplus with adapter plate, without guard grille

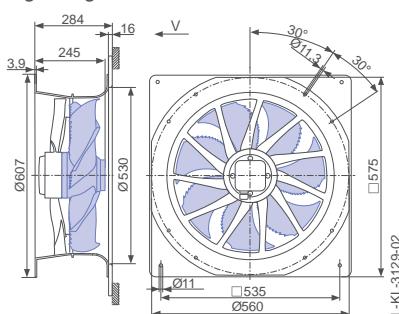

Design Q - ZAplus with adapter plate, guard grille pressure side

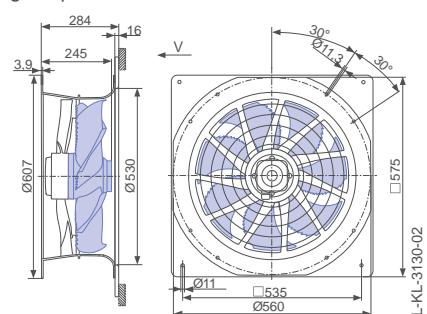

Design H - ZAplus Flattop, guard grille pressure side

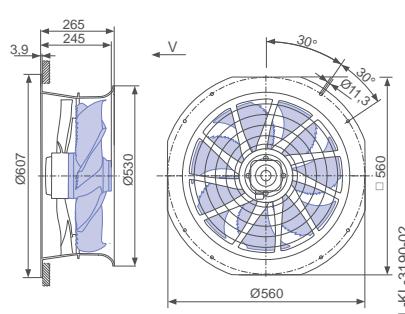

FE2owlet with ZAplus

for single phase alternating current, 4 pole



ZN050-4E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V \pm 10 %*
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.72 kW*
Rated current I_N : 3.20 A*
Rated speed n_N : 1230 min $^{-1}$ *
Starting current I_A : 6.50 A
Current increase ΔI : 0 %
Service capacitor C_{400V} : 16.0 μ F
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -25 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 35.8 %
Efficiency: $N_{actual} = 43.1 / N_{target} = 40^{**}$
* Rated data
** ErP 2015

Characteristic curve

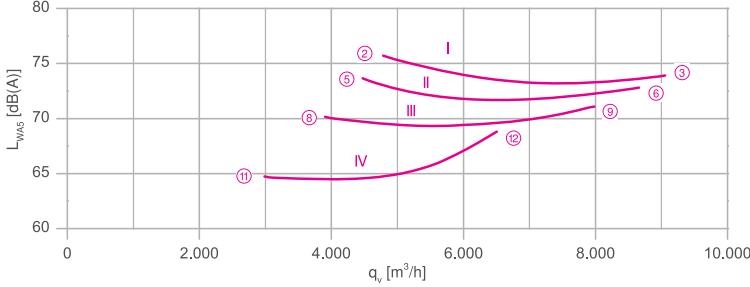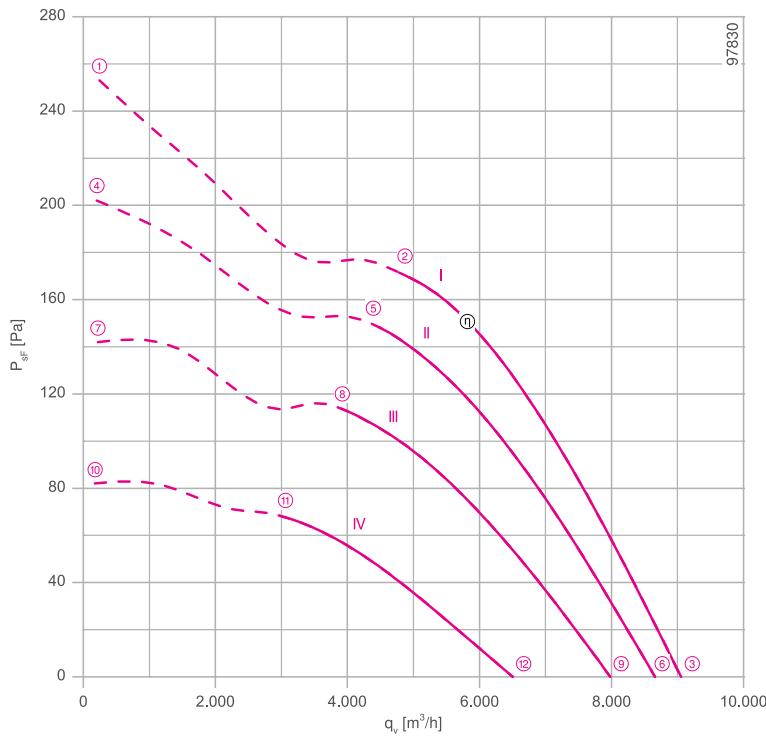

Measured in ZAplus without guard grille in installation type A according to ISO 5801



Connection diagram

Page 531
1360-104XA

System components

Page 430

Dimensions mm



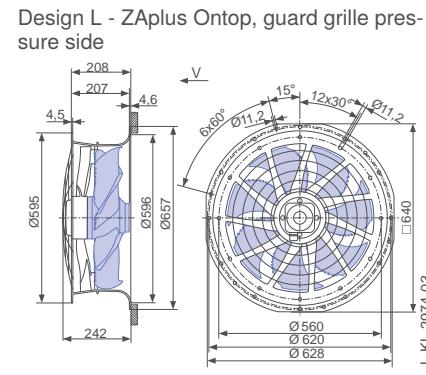
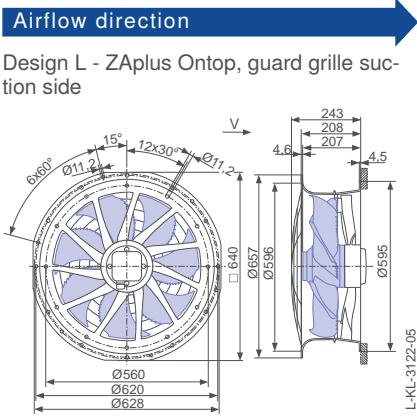


Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level
		U V		I A	P ₁ W	n min ⁻¹	L _{WAS} dB(A)
ZN050-4E..4I..7P1	I	230	①	3.70	840	1120	
		230*	②	3.20*	720*	1230*	76
	II	230	③	2.60	600	1310	74
		200	④	3.70	720	1000	
		200	⑤	3.20	620	1140	74
	III	200	⑥	2.60	520	1260	73
		170	⑦	3.40	560	840	
		170	⑧	3.10	520	1000	71
		170	⑨	2.60	440	1160	71
	IV	135	⑩	2.90	370	640	
		135	⑪	2.80	360	780	65
		135	⑫	2.50	330	950	69

*rated data


Fan ordering information

Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure H (guard grille pressure side) side) Flattop
				
Type Article no.	ZN050-4EL.4I.V7P1 169875	ZN050-4EL.4I.V7P1 161772	ZN050-4EL.4I.V7P1 161773	ZN050-4EQ.4I.V7P1 161777
Weight kg	16.20	14.90	16.00	17.30


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492

Design Q - ZAplus with adapter plate, guard grille pressure side

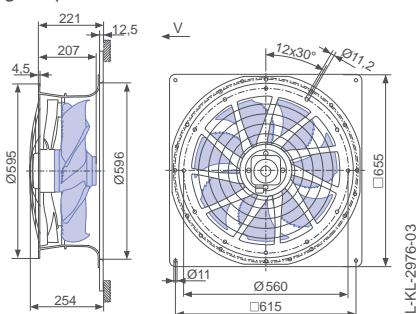

Design H - ZAplus Flattop, guard grille pressure side

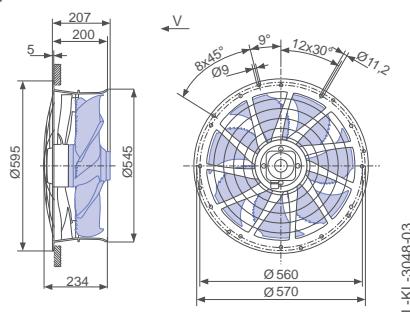

FE2owlet with ZAplus

for single phase alternating current, 6 pole

ZN050-6E



Description

Motor technology: AC
Rated voltage U_N : 1~ 230 V $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 290 W*
Rated current I_N : 1.30 A*
Rated speed n_N : 900 min $^{-1}$ *
Starting current I_A : 2.60 A
Current increase ΔI : 5 %
Service capacitor C_{400V} : 10.0 μF
Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -25 °C
Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 35.0 %

Efficiency: $N_{\text{actual}} = 44.8 / N_{\text{target}} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

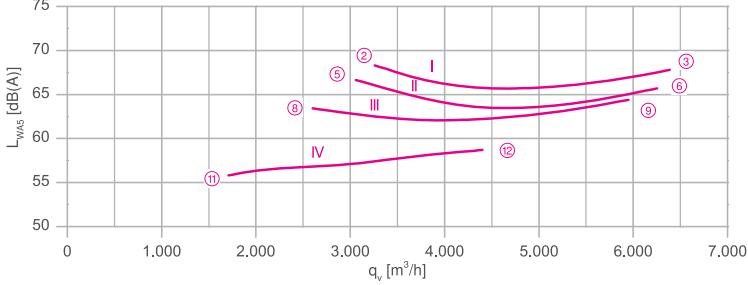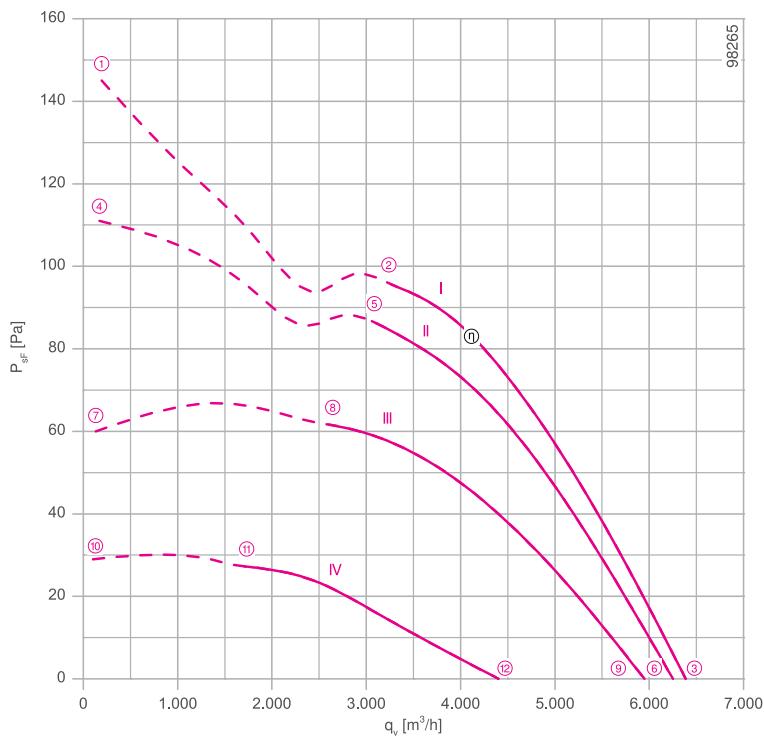

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

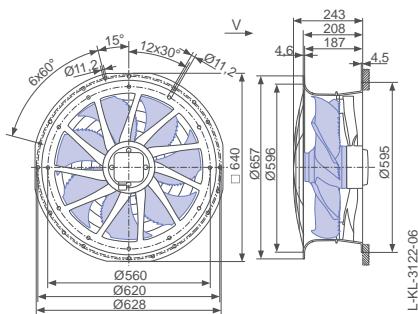


← Airflow direction

Design L - ZAplus OnTop without guard grille

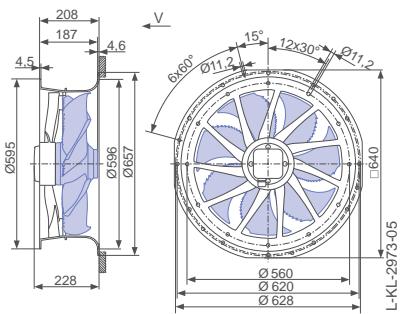

Design L - ZAplus OnTop, guard grille pressure side

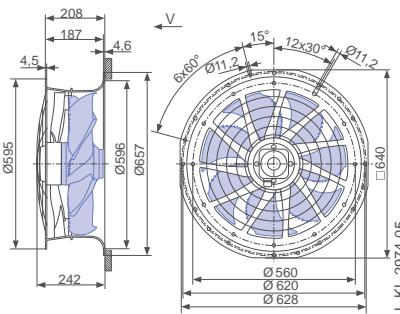

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
ZN050-6E_.4F._7P1	I	230	①	1.55	340	840	
		230*	②	1.30*	290*	900*	68
		230	③	1.10	240	930	68
	II	200	④	1.60	300	730	
		200	⑤	1.30	250	850	67
		200	⑥	1.05	200	910	66
	III	170	⑦	1.50	220	540	
		170	⑧	1.35	210	720	64
		170	⑨	1.05	180	870	64
	IV	135	⑩	1.20	140	380	
		135	⑪	1.20	140	480	56
		135	⑫	1.10	140	650	59

*rated data


Fan ordering information

Design	Airflow direction	Airflow direction	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type	ZN050-6EL.4F.V7P1	ZN050-6EL.4F.V7P1	ZN050-6EL.4F.V7P1	ZN050-6EQ.4F.V7P1	ZN050-6EH.4F.V7P1		
Article no.	169876	161788	161789	161793	161795		
Weight kg	14.70	13.40	14.50	15.80	13.90		
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 1~		Page 474	Motor protection units 1~		Page 518	Electronic voltage controllers 1~		Page 492
------------------------------------	--	----------	------------------------------	--	----------	-----------------------------------	--	----------

Design Q - ZAplus with adapter plate, guard grille pressure side

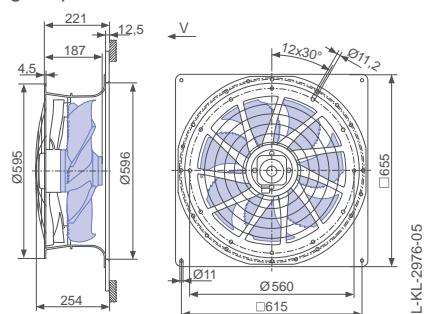

Design H - ZAplus Flattop, guard grille pressure side

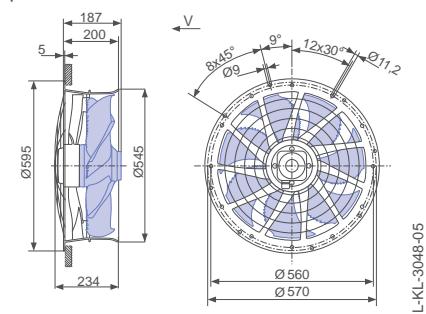

FE2owlet with ZAplus

for single phase alternating current, 8 pole

ZN050-8E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V $\pm 10\%$ *

Rated frequency f_N : 50 Hz*

(60Hz data available)

Input power P_i : 140 W*

Rated current I_N : 0.68 A*

Rated speed n_N : 670 min $^{-1}$ *

Starting current I_A : 1.30 A

Current increase ΔI : 0 %

Service capacitor C_{400V} : 3.0 μF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -25 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{statA} : 28.3 %

Efficiency: $N_{actual} = 40.0 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

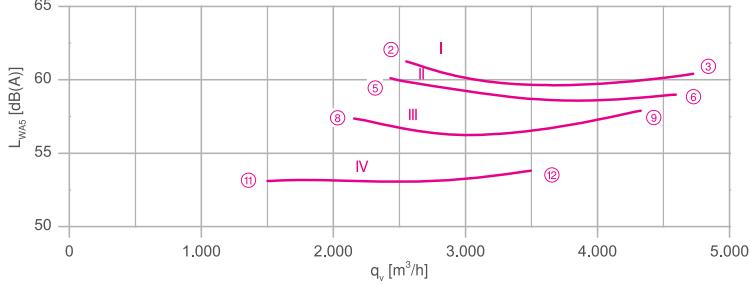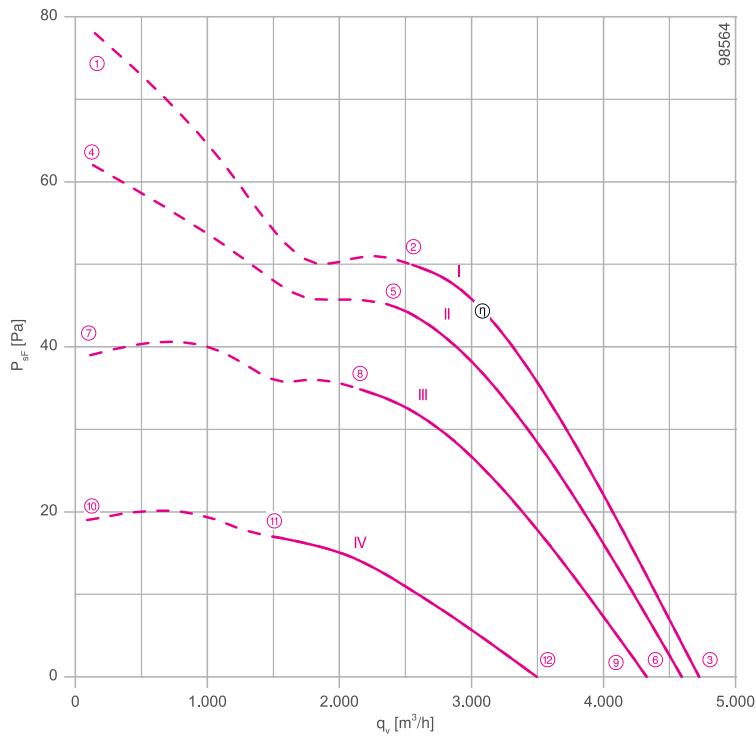

Measured in ZAplus without guard grille in installation type A according to ISO 5801




Connection diagram

Page 531
1360-104XA

System components

Page 430

Dimensions mm



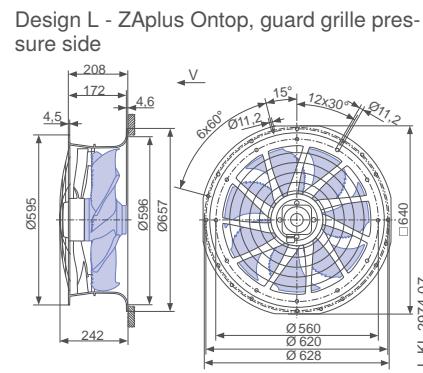
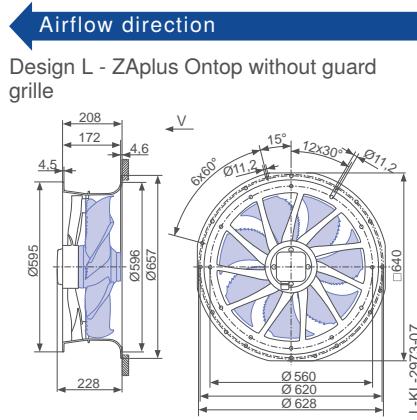
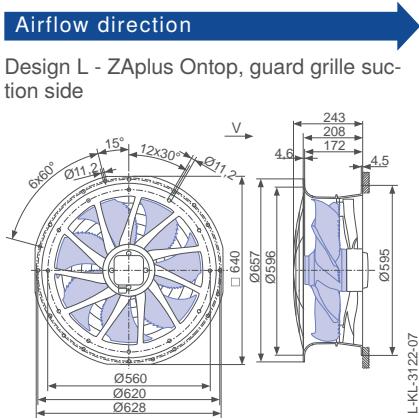


Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P ₁ W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
ZN050-8E_4C.V7P1	I	230	①	0.80	170	620	
		230*	②	0.68*	140*	670*	61
		230	③	0.60	120	690	60
	II	200	④	0.80	150	560	
		200	⑤	0.66	120	630	60
		200	⑥	0.56	100	680	59
	III	170	⑦	0.78	120	440	
		170	⑧	0.68	110	560	57
		170	⑨	0.56	85	640	58
	IV	135	⑩	0.66	80	310	
		135	⑪	0.64	75	400	53
		135	⑫	0.58	70	520	54

*rated data


Fan ordering information

Design	Airflow direction	Airflow direction	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
							
Type	ZN050-8EL.4C.V7P1	ZN050-8EL.4C.V7P1	ZN050-8EL.4C.V7P1	ZN050-8EQ.4C.V7P1	ZN050-8EH.4C.V7P1		
Article no.	169877	161804	161805	161809	161811		
Weight kg	13.00	11.70	12.80	14.10	12.20		
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492

Design Q - ZAplus with adapter plate, guard grille pressure side

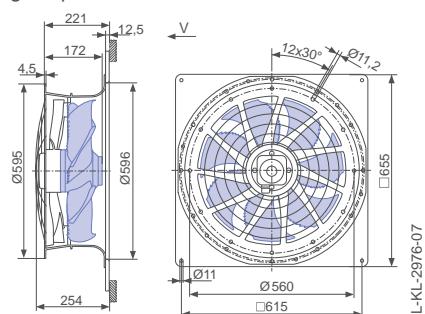

Design H - ZAplus Flattop, guard grille pressure side

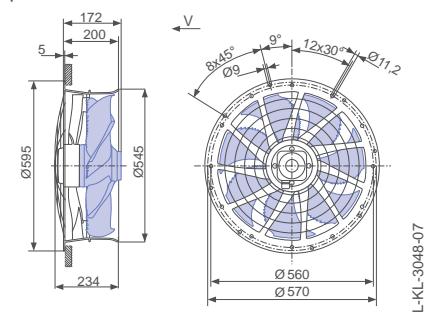

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole

ZN050-VD

**Description**

Motor technology: AC

Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *Rated frequency f_N : 50 Hz*Input power P_i : 0.80/0.54 kW*Rated current I_N : 1.40/0.94 A*Rated speed n_N : 1330/960 min⁻¹*Starting current I_A : 5.00 / 1.60 ACurrent increase ΔI : 15 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °CMax. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated



Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-dataEfficiency η_{statA} : 41.2 %Efficiency: $N_{actual} = 48.3 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

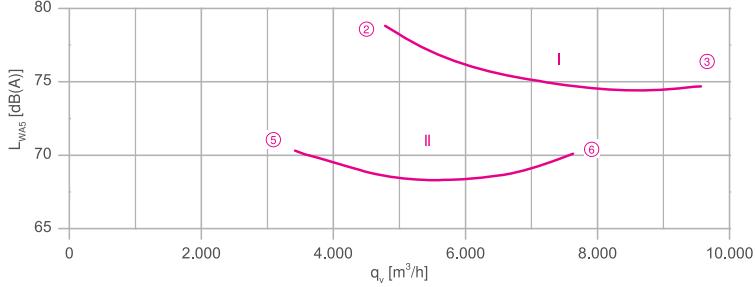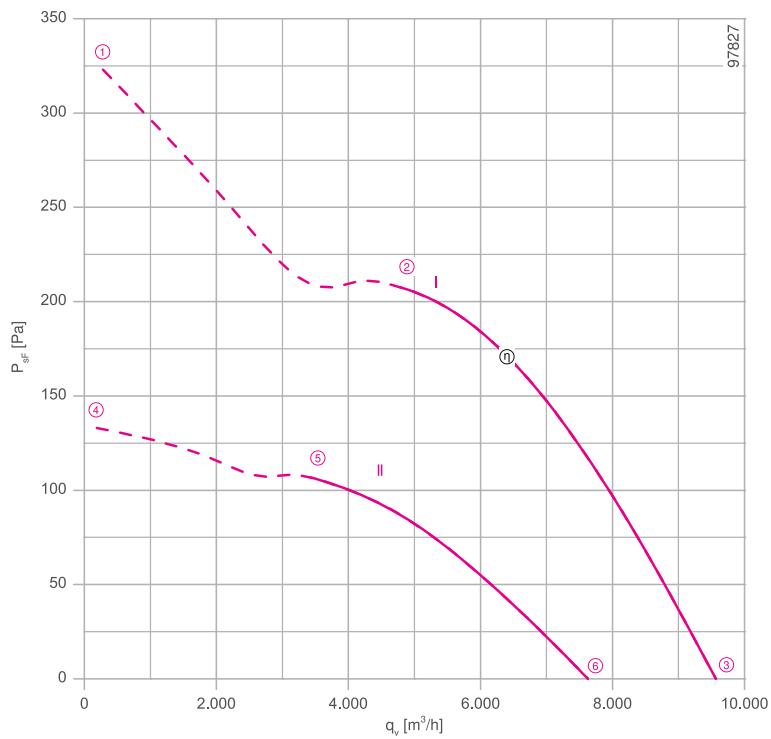Characteristic curve

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

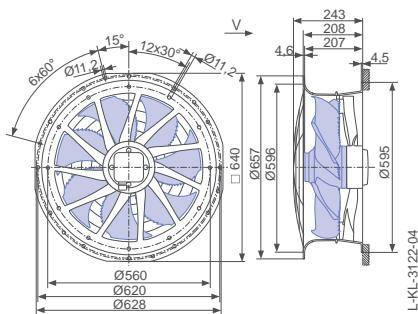


← Airflow direction

Design L - ZAplus OnTop without guard grille

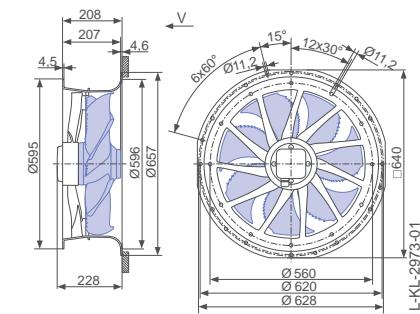

Design L - ZAplus OnTop, guard grille pressure side

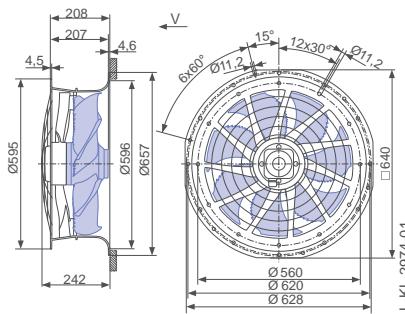


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN050-VD_.4I.V7P1	Δ	I	400	①	1.80	1050	1260	
			400*	②	1.40*	800*	1330*	79
			400	③	1.10	580	1390	75
	Y	II	400	④	1.05	580	810	
			400*	⑤	0.94*	540*	950*	71
			400	⑥	0.78	460	1110	70

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
					
Type Article no.	ZN050-VDL.4I.V7P1 169874	ZN050-VDL.4I.V7P1 161756	ZN050-VDL.4I.V7P1 161757	ZN050-VDQ.4I.V7P1 161761	ZN050-VDH.4I.V7P1 161763
Weight kg	16.20	14.90	16.00	17.30	15.40
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design Q - ZAplus with adapter plate, guard grille pressure side

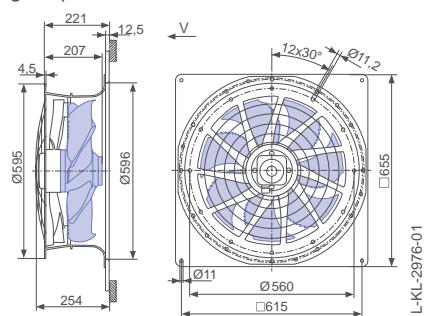

Design H - ZAplus Flattop, guard grille pressure side

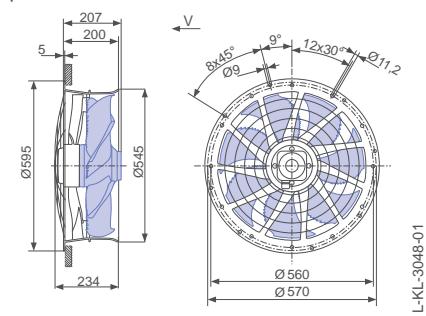

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole

ZN050-VD





Description

Motor technology: AC
Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.74/0.46 kW*
Rated current I_N : 1.60/0.80 A*
Rated speed n_N : 1290/1020 min⁻¹*
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statis} : 41.0 %
Efficiency: $N_{\text{actual}} = 48.3 / N_{\text{target}} = 40\%$
* Rated data
**ErP 2015

Characteristic curve

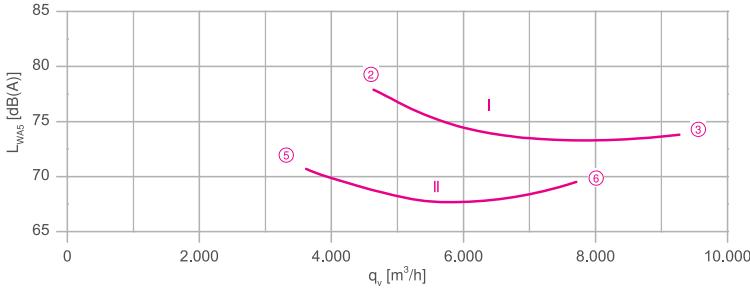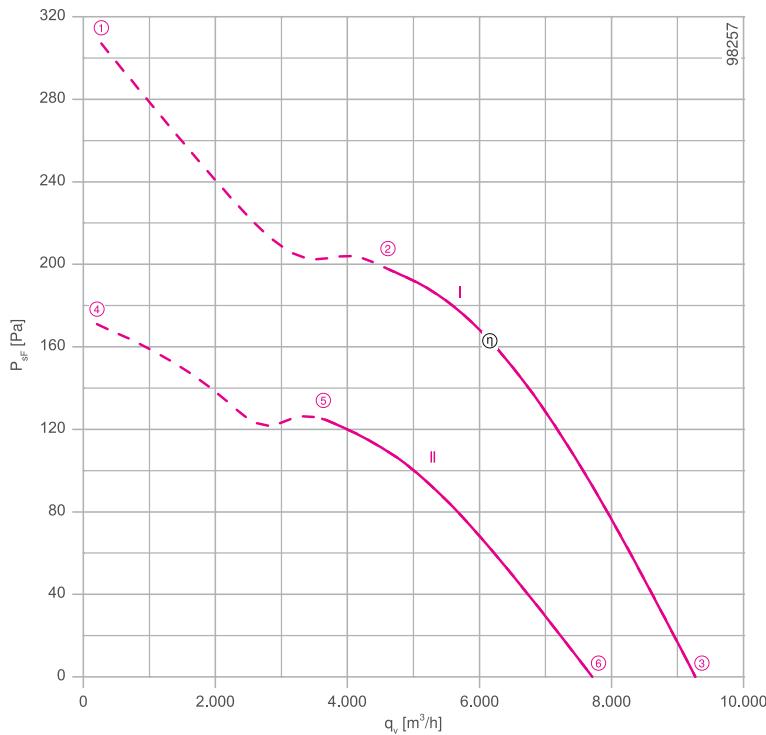

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

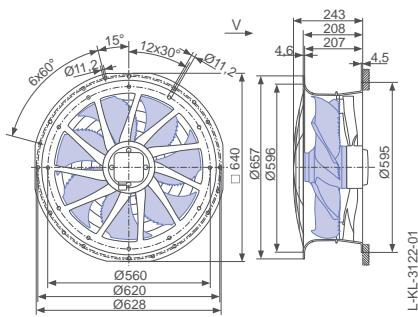


← Airflow direction

Design L - ZAplus OnTop without guard grille

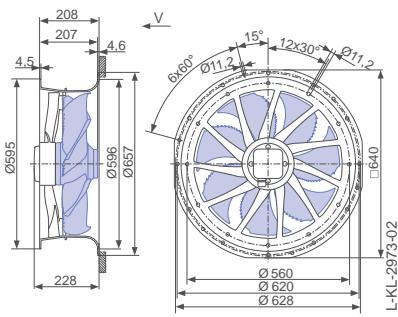

Design L - ZAplus OnTop, guard grille pressure side

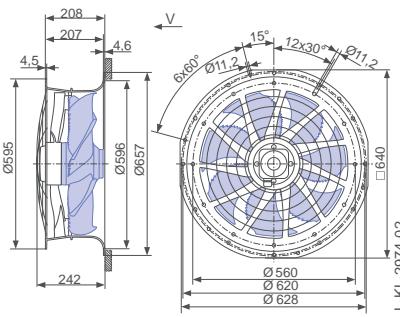


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I	A	P ₁ W	n min ⁻¹	
ZN050-VD_.4I.V7P1	Δ	I	400	①	1.80	900	1230	
			400*	②	1.60*	740*	1280*	78
			400	③	1.45	560	1340	74
	Y	II	400	④	0.90	520	910	
			400*	⑤	0.80*	460*	1020*	71
			400	⑥	0.68	380	1120	70

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
					
Type Article no.	ZN050-VDL.4I.V7P1 165327	ZN050-VDL.4I.V7P1 161764	ZN050-VDL.4I.V7P1 161765	ZN050-VDQ.4I.V7P1 161769	ZN050-VDH.4I.V7P1 161771
Weight kg	16.20	14.90	16.00	17.30	15.40
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design Q - ZAplus with adapter plate, guard grille pressure side

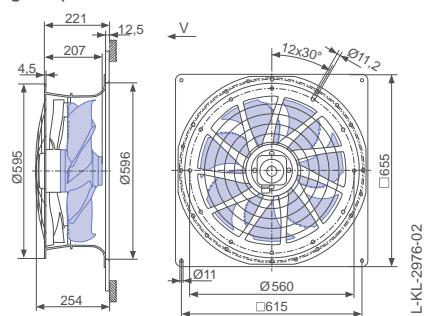

Design H - ZAplus Flattop, guard grille pressure side

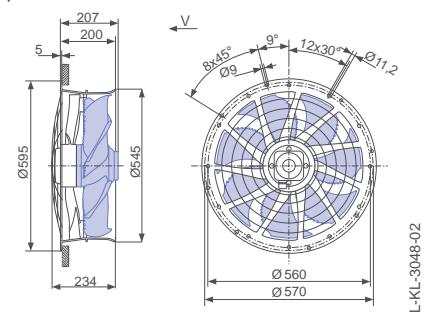

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole

Z NO 50-SD

**Description**

Motor technology: AC

Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *Rated frequency f_N : 50 Hz* (60Hz data available)Input power P_i : 270/150 W*Rated current I_N : 0.66/0.34 A*Rated speed n_N : 880/600 min⁻¹*Starting current I_A : 1.50 / 0.40 ACurrent increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °CMax. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated



Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-dataEfficiency η_{statA} : 33.8 %Efficiency: $N_{actual} = 43.8 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

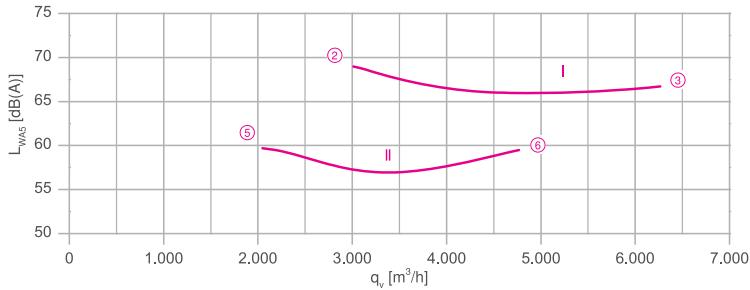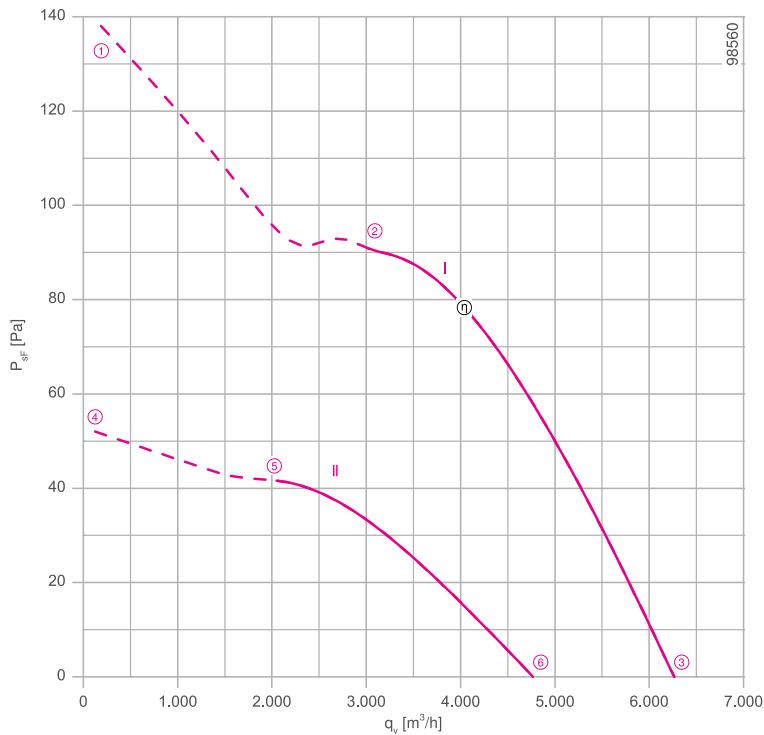Characteristic curve

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

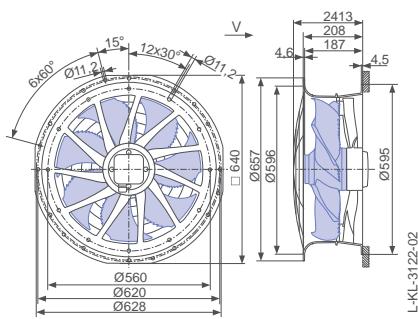


← Airflow direction

Design L - ZAplus OnTop without guard grille

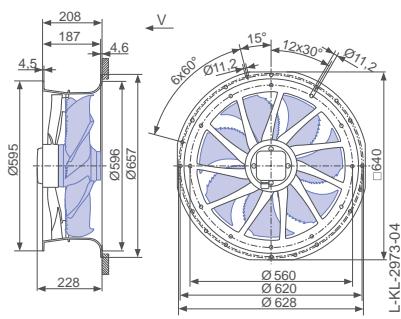

Design L - ZAplus OnTop, guard grille pressure side

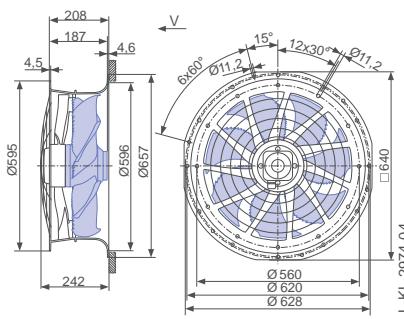


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN050-SD_.4F.V7P1	Δ	I	400	①	0.78	340	830	
			400*	②	0.68*	280*	880*	69
			400	③	0.58	210	920	67
	Y	II	400	④	0.36	150	510	
			400*	⑤	0.34*	150*	590*	60
			400	⑥	0.31	130	700	60

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
					
Type	ZN050-SDL.4F.V7P1	ZN050-SDL.4F.V7P1	ZN050-SDL.4F.V7P1	ZN050-SDQ.4F.V7P1	ZN050-SDH.4F.V7P1
Article no.	165328	161780	161781	161785	161787
Weight kg	14.70	13.40	14.50	15.80	13.90
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - ZAplus with adapter plate, guard grille pressure side

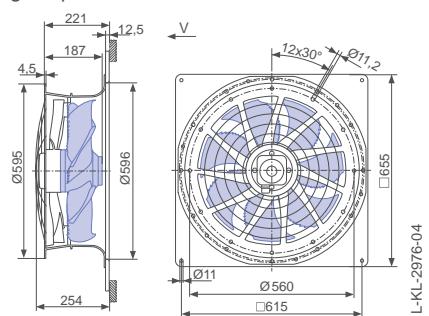

Design H - ZAplus Flattop, guard grille pressure side

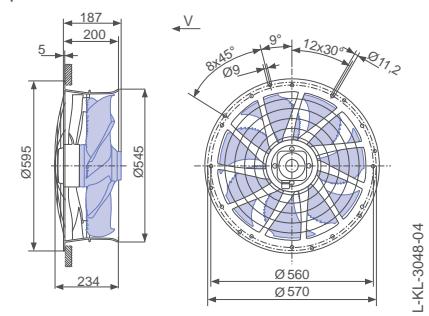

FE2owlet with ZAplus

for three phase alternating current, 8-8 pole

ZN050-AD

**Description**

Motor technology: AC

Rated voltage U_N : 3~400 V (Δ/Y) $\pm 10\%$ *Rated frequency f_N : 50 Hz* (60Hz data available)Input power P_i : 130/80 W*Rated current I_N : 0.31/0.155 A*Rated speed n_N : 670/530 min⁻¹*Starting current I_A : 0.80 / 0.26 ACurrent increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(min)}$: -40 °CMax. permitted ambient temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated



Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-dataEfficiency η_{statA} : 30.6 %Efficiency: $N_{actual} = 42.5 / N_{target} = 40^{**}$

* Rated data

**ErP 2015

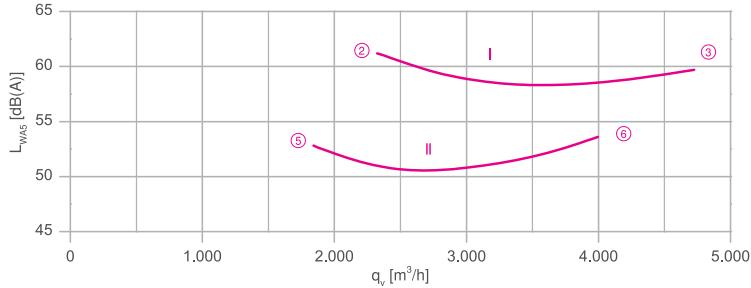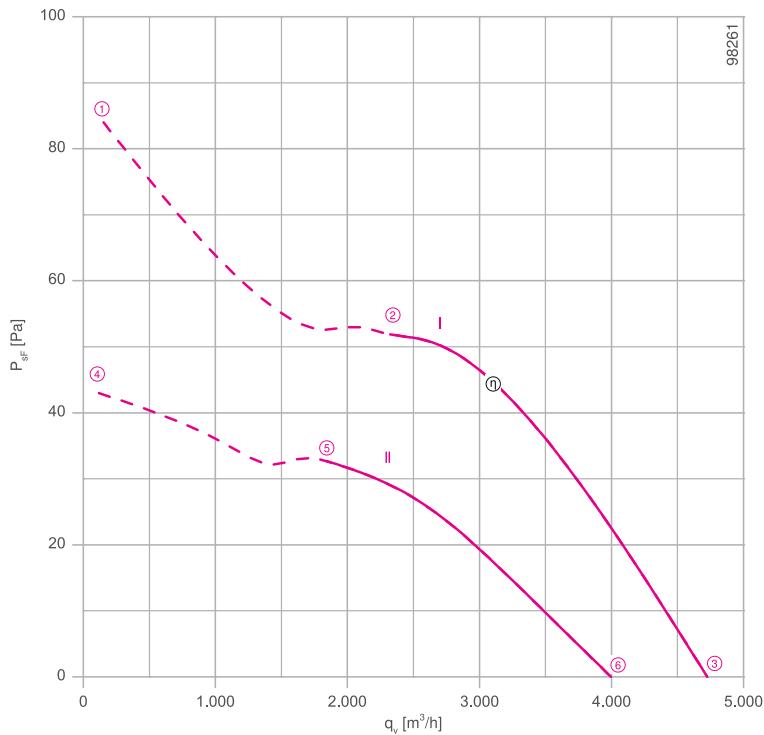Characteristic curve

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

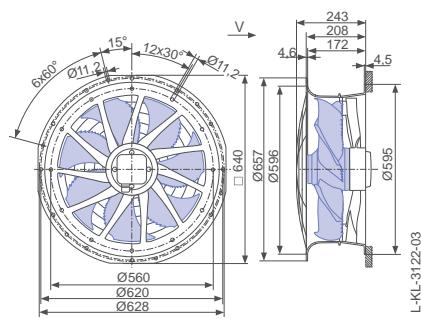


← Airflow direction

Design L - ZAplus OnTop without guard grille

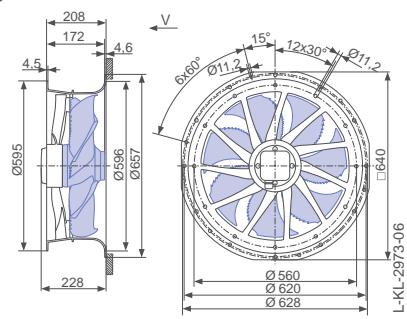

Design L - ZAplus OnTop, guard grille pressure side



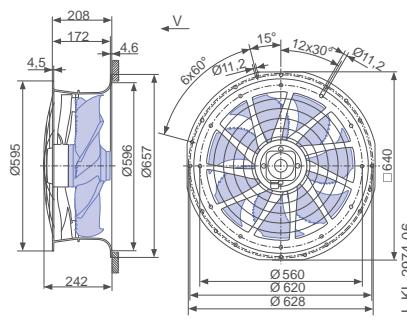


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN050-AD_.4C.V7P1	Δ	I	400	①	0.34	160	640	
			400*	②	0.31*	130*	670*	61
			400	③	0.30	110	700	60
	Y	II	400	④	0.17	95	460	
			400*	⑤	0.15*	85*	530*	53
			400	⑥	0.13	70	590	54

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
					
Type	ZN050-ADL.4C.V7P1	ZN050-ADL.4C.V7P1	ZN050-ADL.4C.V7P1	ZN050-ADQ.4C.V7P1	ZN050-ADH.4C.V7P1
Article no.	165329	161796	161797	161801	161803
Weight kg	13.00	11.70	12.80	14.10	12.20
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - ZAplus with adapter plate, guard grille pressure side

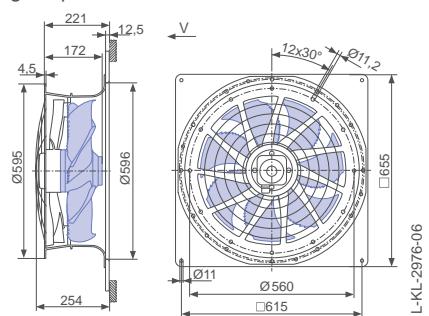

Design H - ZAplus Flattop, guard grille pressure side

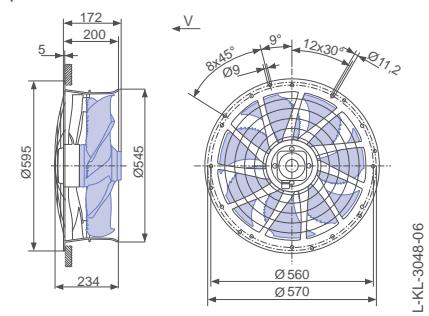

FE2owlet with ZAplus

for single phase alternating current, 6 pole

ZN063-6E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V \pm 10 %*

Rated frequency f_N : 50 Hz*

Input power P_i : 0.64 kW*

Rated current I_N : 2.90 A*

Rated speed n_N : 860 min $^{-1}$ *

Starting current I_A : 5.50 A

Current increase ΔI : 5 %

Service capacitor C_{400V} : 12.0 μ F

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -25 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data


Efficiency η_{statA} : 35.5 %

Efficiency: $N_{\text{actual}} = 43.2 / N_{\text{target}} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

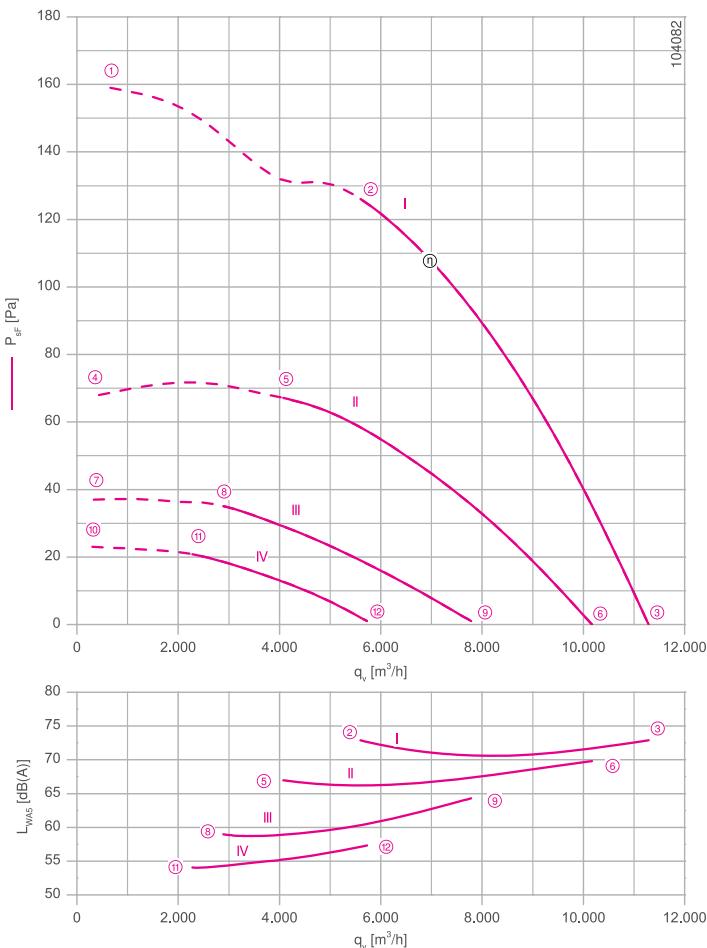

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531

1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

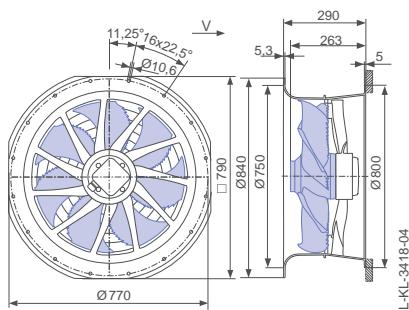


← Airflow direction

Design L - ZAplus Ontop without guard grille

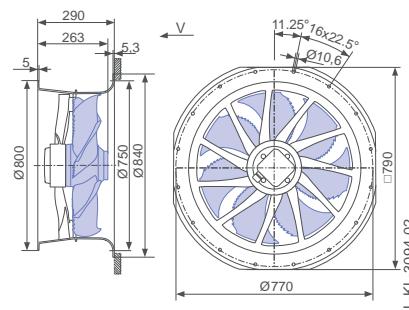

Design L - ZAplus Ontop, guard grille pressure side



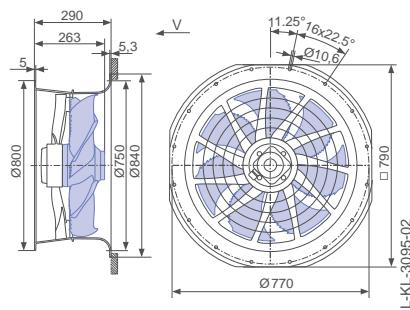


Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P W	Speed n min ⁻¹	Suction side sound power level L_{WAS} dB(A)
ZN063-6E_4I.V7P1	I	230	①	3.60	760	750	73
		230*	②	2.90*	620*	860*	73
		230	③	2.10	460	930	73
	II	170	④	3.10	460	490	67
		170	⑤	2.90	440	630	70
		170	⑥	2.20	360	850	
	III	135	⑦	2.50	290	360	
		135	⑧	2.40	290	460	59
		135	⑨	2.20	270	650	64
	IV	110	⑩	2.10	200	290	
		110	⑪	2.10	200	350	54
		110	⑫	2.00	190	480	57

*rated data


Fan ordering information

Design	Airflow direction	Airflow direction	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
							
Type Article no.	ZN063-6EL.4I.V7P1 169883	ZN063-6EL.4I.V7P1 164366	ZN063-6EL.4I.V7P1 164367	ZN063-6EQ.4I.V7P1 164371	ZN063-6EQ.4I.V7P1 164372	ZN063-6EH.4I.V7P1 164376	
Weight kg	20.40 ZAplus attachable on both sides.	18.50	19.60	20.60	21.60	18.70	


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~ 
Page 474	Page 518	Page 492


Design Q - ZAplus with adapter plate, without guard grille

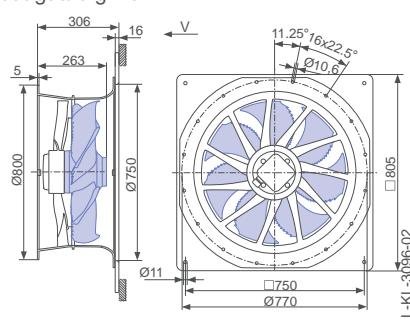

Design Q - ZAplus with adapter plate, guard grille pressure side

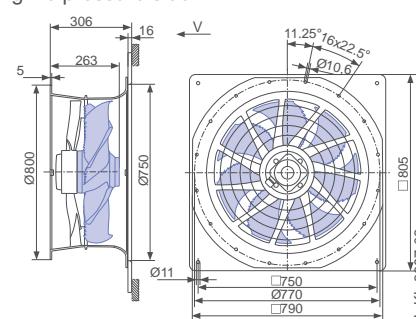

Design H - ZAplus Flattop, guard grille pressure side

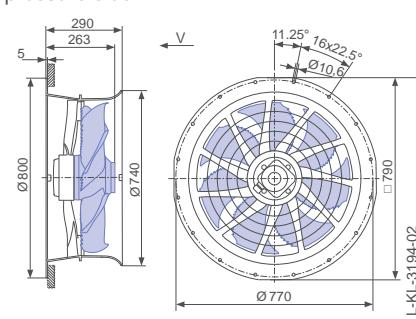

FE2owlet with ZAplus

for single phase alternating current, 6 pole

ZN063-6E



Description

Motor technology: AC

Rated voltage U_N : 1~ 230 V $\pm 10\%$ *

Rated frequency f_N : 50 Hz* (60Hz data available)

Input power P_i : 0.70 kW*

Rated current I_N : 3.30 A*

Rated speed n_N : 920 min $^{-1}$ *

Starting current I_A : 8.00 A

Current increase ΔI : 5 %

Service capacitor C_{400V} : 16.0 μF

Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -25 °C

Max. permitted ambient temperature $t_{R(\max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP-data



Efficiency η_{startA} : 35.7 %

Efficiency: $N_{\text{actual}} = 43.1 / N_{\text{target}} = 40^{**}$

* Rated data

**ErP 2015

Characteristic curve

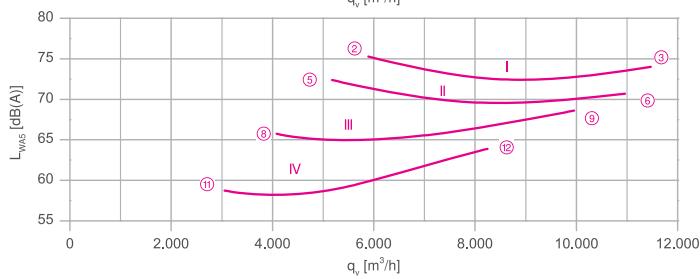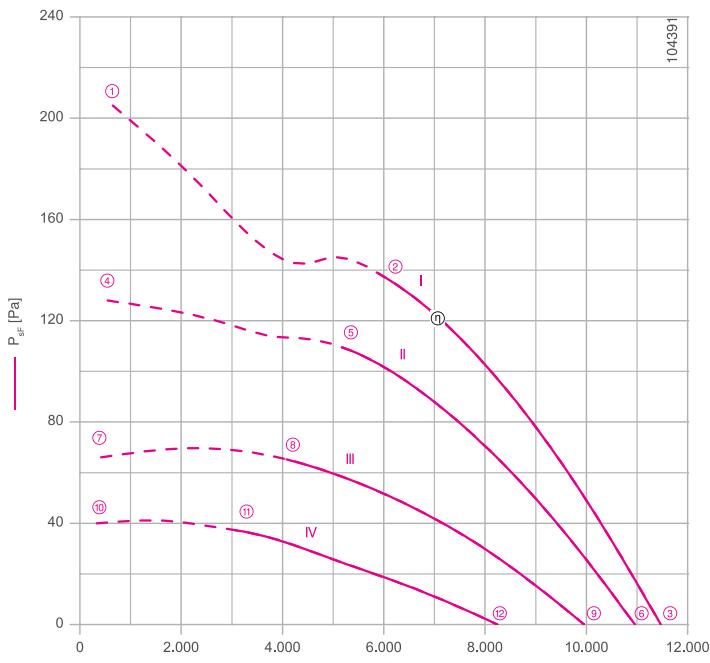

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-104XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

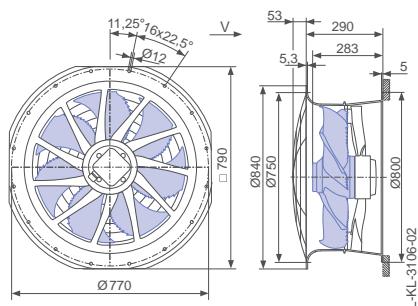


← Airflow direction

Design L - ZAplus OnTop without guard grille

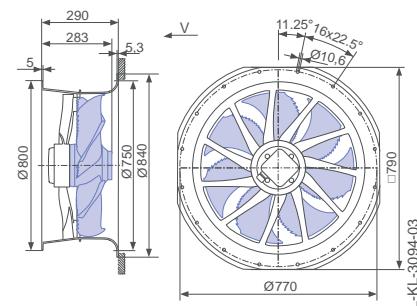

Design L - ZAplus OnTop, guard grille pressure side

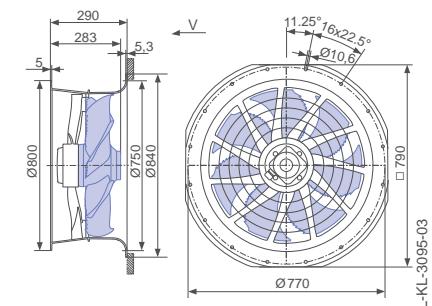

Performance data

Type	Characteristic curve	Voltage U V	Operating point	Current I A	Input power P W	Speed n min ⁻¹	Suction side sound power level L _{WAS} dB(A)
ZN063-6E_.4M.V7P1	I	230	①	4.00	860	870	
		230*	②	3.20*	700*	920*	75
		230	③	2.60	540	950	74
	II	170	④	4.20	660	680	
		170	⑤	3.40	560	810	73
		170	⑥	2.40	390	910	71
	III	135	⑦	3.70	440	500	
		135	⑧	3.40	420	630	66
		135	⑨	2.50	330	830	69
	IV	110	⑩	3.10	310	380	
		110	⑪	3.00	300	480	59
		110	⑫	2.60	270	690	64

*rated data


Fan ordering information

Design	Airflow direction	Airflow direction	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side)) Flattop
Type Article no.	ZN063-6EL.4M.V7P1 169884	ZN063-6EL.4M.V7P1 164377	ZN063-6EL.4M.V7P1 164378	ZN063-6EQ.4M.V7P1 164382	ZN063-6EQ.4M.V7P1 164383	ZN063-6EH.4M.V7P1 164387	
Weight kg	22.70	20.70	21.80	22.70	23.80	21.80	ZAplus attachable on both sides.


Control technology

Frequency inverters Fcontrol 1~ 	Motor protection units 1~ 	Electronic voltage controllers 1~
Page 474	Page 518	Page 492


Design Q - ZAplus with adapter plate, without guard grille

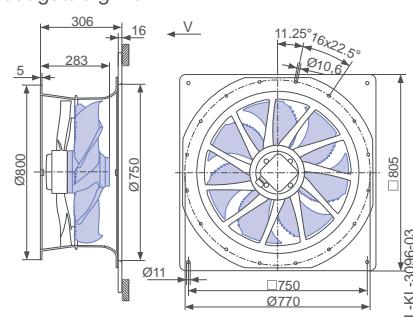

Design Q - ZAplus with adapter plate, guard grille pressure side

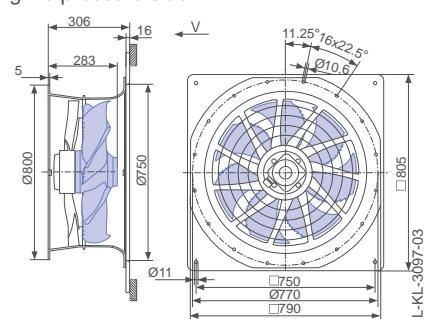

Design H - ZAplus Flattop, guard grille pressure side

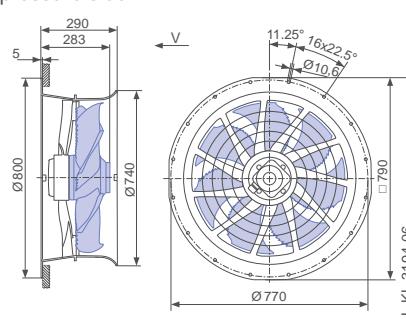

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole



ZN063-VD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.75/1.35 kW*
Rated current I_N : 3.70/2.20 A*
Rated speed n_N : 1400/1210 min⁻¹*
Starting current I_A : 20.00 / 6.50 A
Current increase ΔI : 5 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 44.8 %
Efficiency: $N_{actual} = 49.7 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

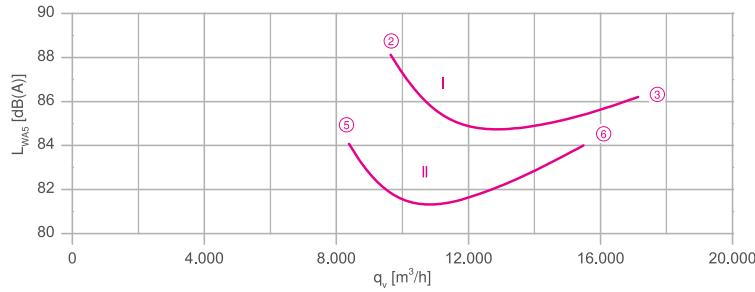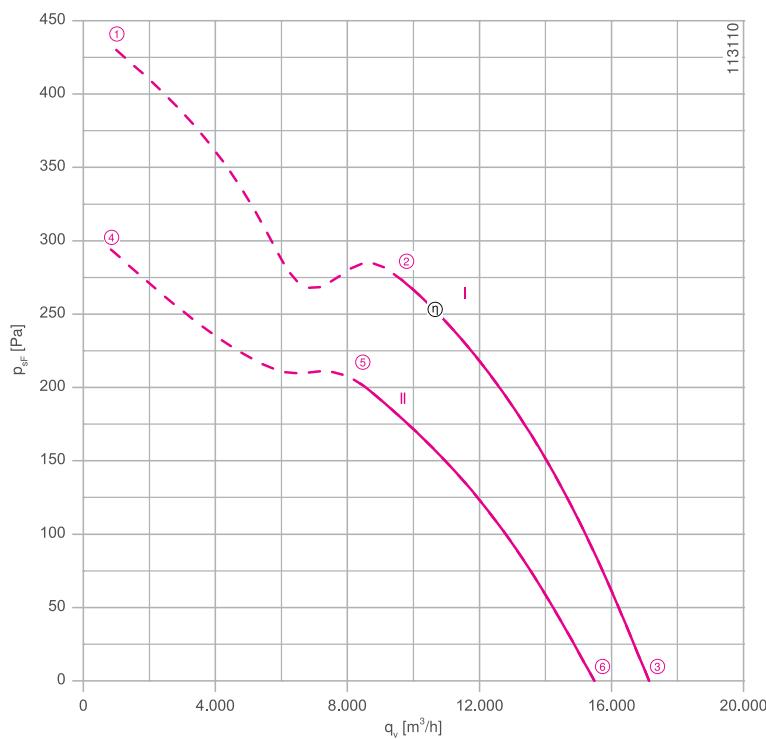

Measured in ZAplus without guard grille in installation type A according to ISO 5801




Connection diagram

Seite 531
1360-108XA

System components

Seite 430

Dimensions mm

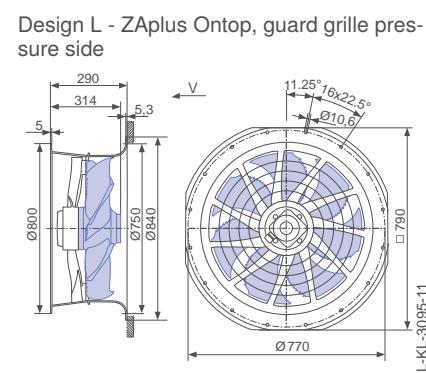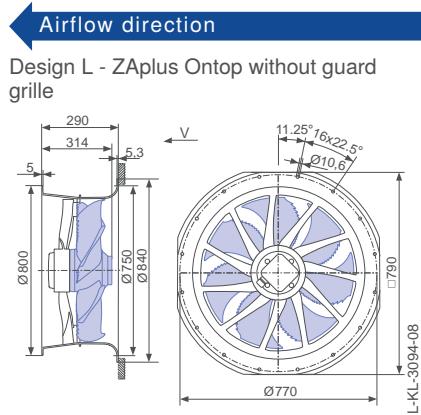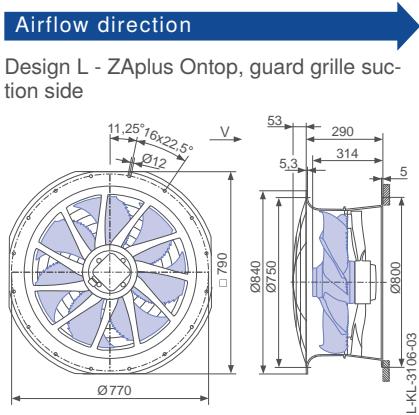


Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
ZN063-VD_.6N.V7P6	Δ	I	400	①	4.20	2200	1370	
			400*	②	3.70*	1750*	1400*	88
			400	③	3.10	1250	1440	86
	Y	II	400	④	2.60	1550	1130	
			400*	⑤	2.20*	1300*	1210*	84
			400	⑥	1.75	1000	1300	84

*rated data

Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
					
Type	ZN063-VDL.6N.V7P6	ZN063-VDL.6N.V7P6	ZN063-VDL.6N.V7P6	ZN063-VDQ.6N.V7P6	ZN063-VDH.6N.V7P6
Article no.	170238	169028	169025	169024	169022
Weight kg	32.30	30.30	31.30	33.40	30.70
ZAplus attachable on both sides.					

Control technology


Frequency inverters Fcontrol 3~	Motor protection units 3~	Electronic voltage controllers 3~
		

Seite 480


Seite 518

Seite 506

Design Q - ZAplus with adapter plate, guard grille pressure side

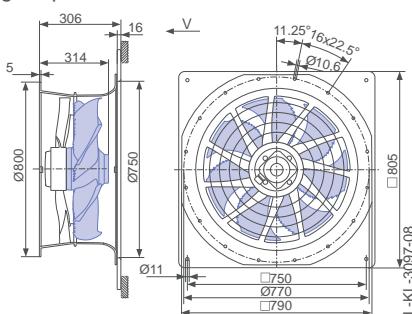

Design H - ZAplus Flattop, guard grille pressure side

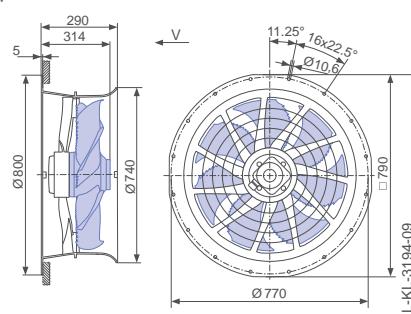

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole



ZN063-VD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_i : 2.70/1.75 kW*
Rated current I_N : 5.00/2.90 A*
Rated speed n_N : 1330/1040 min⁻¹*
Starting current I_A : 19.00 / 6.00 A
Current increase ΔI : 5 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 43.1 %
Efficiency: $N_{actual} = 46.8 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

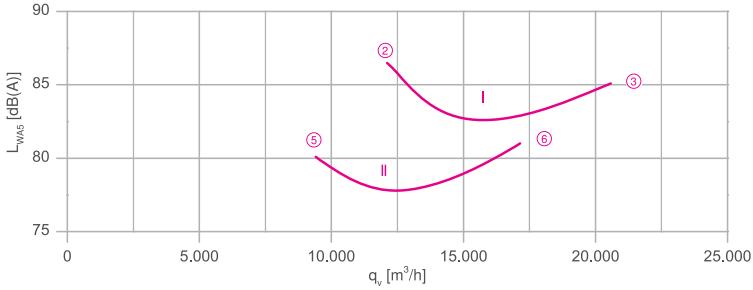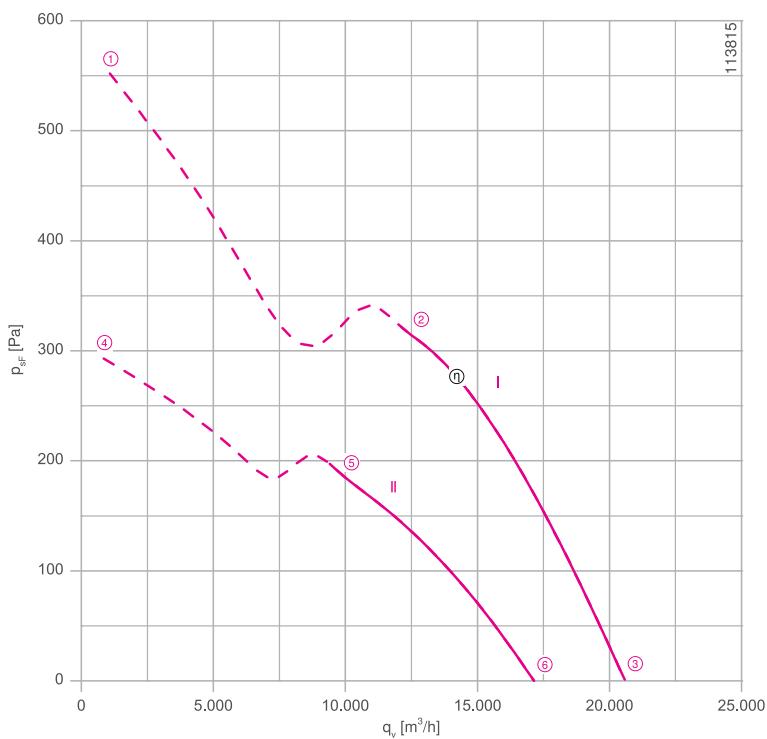

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

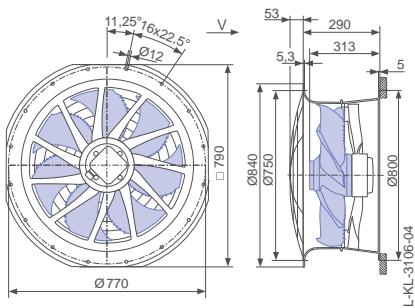


← Airflow direction

Design L - ZAplus Ontop without guard grille

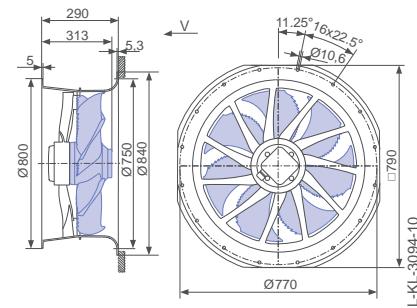

Design L - ZAplus Ontop, guard grille pressure side

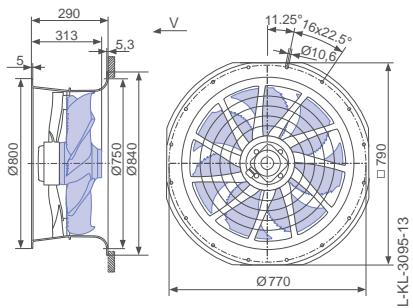

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN063-VD_6N_7P7	Δ	I	400	①	6.00	3400	1270	
			400*	②	5.00*	2700*	1330*	87
			400	③	4.00	2000	1380	85
	Y	II	400	④	3.40	2000	920	
			400*	⑤	2.90*	1750*	1040*	80
			400	⑥	2.50	1450	1150	81

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN063-VDL.6N.V7P7 170239	ZN063-VDL.6N.V7P7 169703	ZN063-VDL.6N.V7P7 169704	ZN063-VDQ.6N.V7P7 169705	ZN063-VDQ.6N.V7P7 169706	ZN063-VDH.6N.V7P7 169708
Weight kg	35.30	33.30	34.30	35.30	36.40	33.70
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

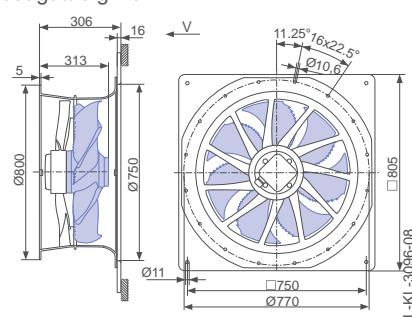

Design Q - ZAplus with adapter plate, guard grille pressure side

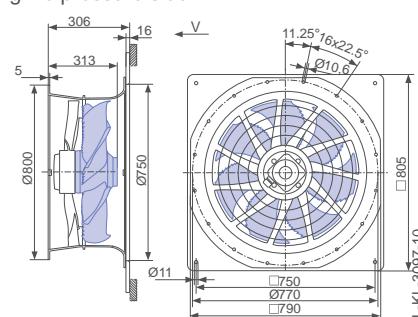

Design H - ZAplus Flattop, guard grille pressure side

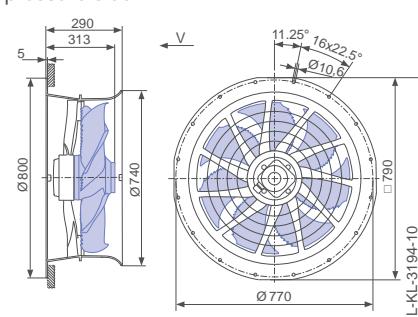



FE2owlet with ZAplus

for three phase alternating current, 6-6 pole

ZN063-SD

**Description**

Motor technology: AC
 Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
 Rated frequency f_N : 50 Hz* (60Hz data available)
 Input power P_i : 0.60/0.37 kW*
 Rated current I_N : 1.30/0.70 A*
 Rated speed n_N : 890/ 660 min⁻¹*
 Starting current I_A : 4.40 / 1.40 A
 Current increase ΔI : 0 %
 Thermal class: THCL155*
 Min. permitted ambient temperature $t_{R(min)}$: -40 °C
 Max. permitted ambient temperature $t_{R(max)}$: 70 °C
 Electrical connection: Terminal box
 Number of blades: 7
 Protection class: IP54
 Motor protection: thermal contact
 Blades: Aluminium, uncoated
 Rotor: Aluminium, uncoated
 Conformity: ErP 2015, CE
ErP-data
 Efficiency η_{statA} : 39.3 %
 Efficiency: $N_{actual} = 47.1 / N_{target} = 40^{**}$
 * Rated data
 **ErP 2015

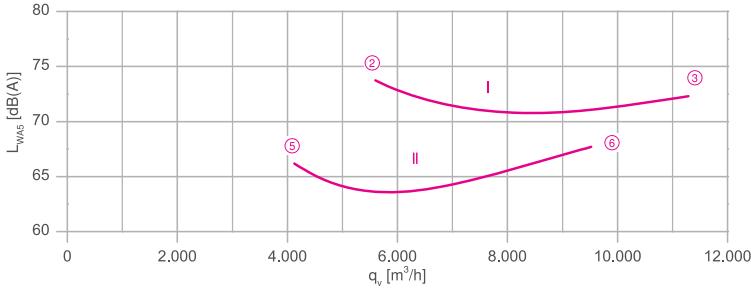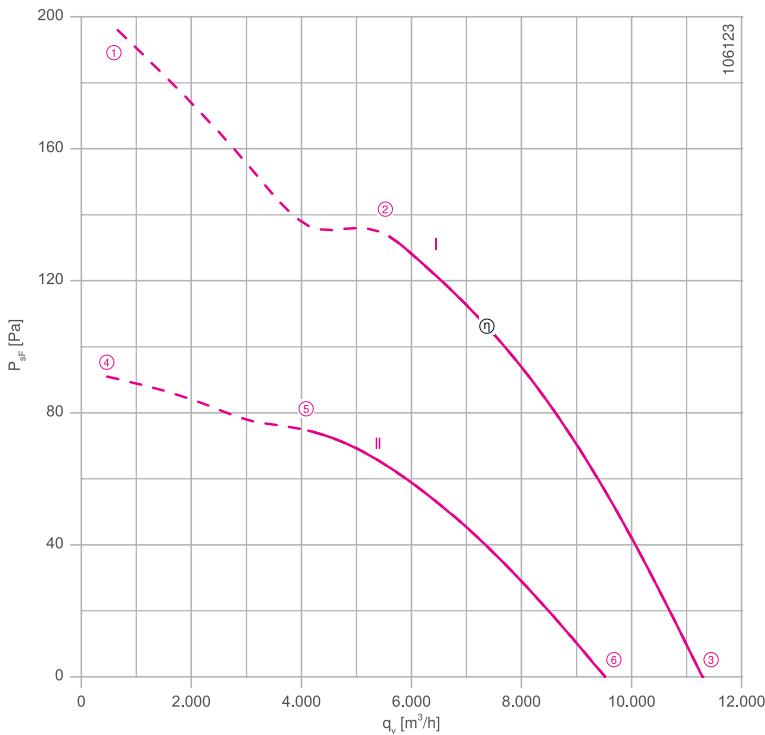Characteristic curve

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

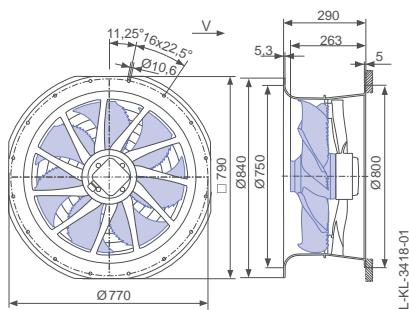


← Airflow direction

Design L - ZAplus Ontop without guard grille

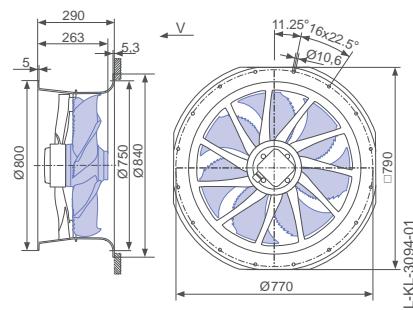

Design L - ZAplus Ontop, guard grille pressure side

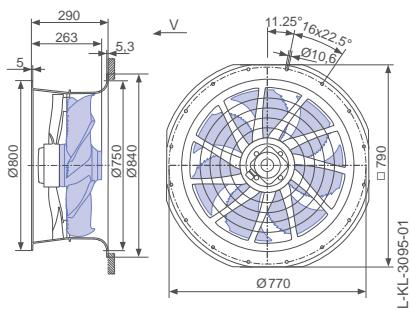

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P_1 W	n min ⁻¹	
ZN063-SD_.4I.V7P1	Δ	I	400	①	1.50	780	840	
			400*	②	1.30*	600*	890*	74
			400	③	1.10	400	930	72
	Y	II	400	④	0.78	420	570	
			400*	⑤	0.70*	370*	670*	66
			400	⑥	0.54	290	790	68

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN063-SDL.4I.V7P1 166783	ZN063-SDL.4I.V7P1 164355	ZN063-SDL.4I.V7P1 164356	ZN063-SDQ.4I.V7P1 164360	ZN063-SDQ.4I.V7P1 164361	ZN063-SDH.4I.V7P1 164365
Weight kg	20.40	18.50	19.60	20.60	21.60	18.70
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

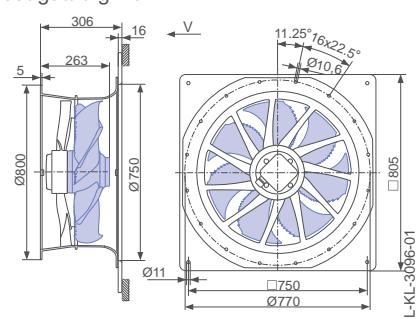

Design Q - ZAplus with adapter plate, guard grille pressure side

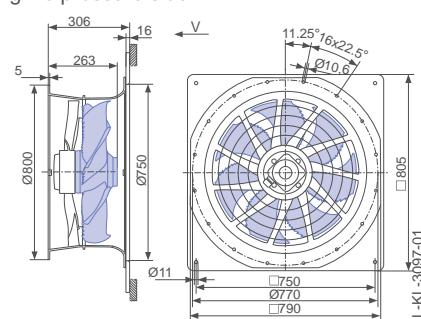

Design H - ZAplus Flattop, guard grille pressure side

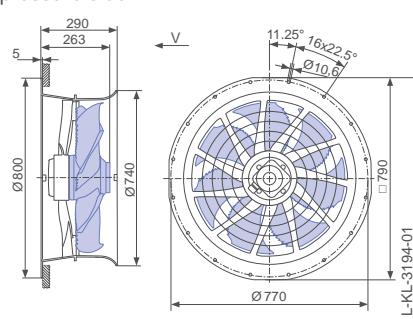

FE2owlet with ZAplus

for three phase alternating current, 8-8 pole



ZN063-AD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 290/170 W*
Rated current I_N : 0.78/0.37 A*
Rated speed n_N : 660/ 490 min⁻¹*
Starting current I_A : 1.70 / 0.50 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 33.6 %
Efficiency: $N_{actual} = 43.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

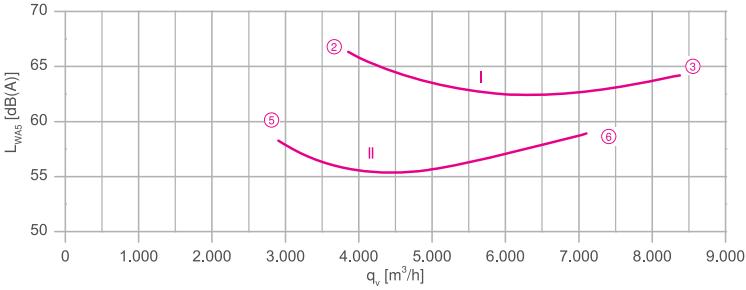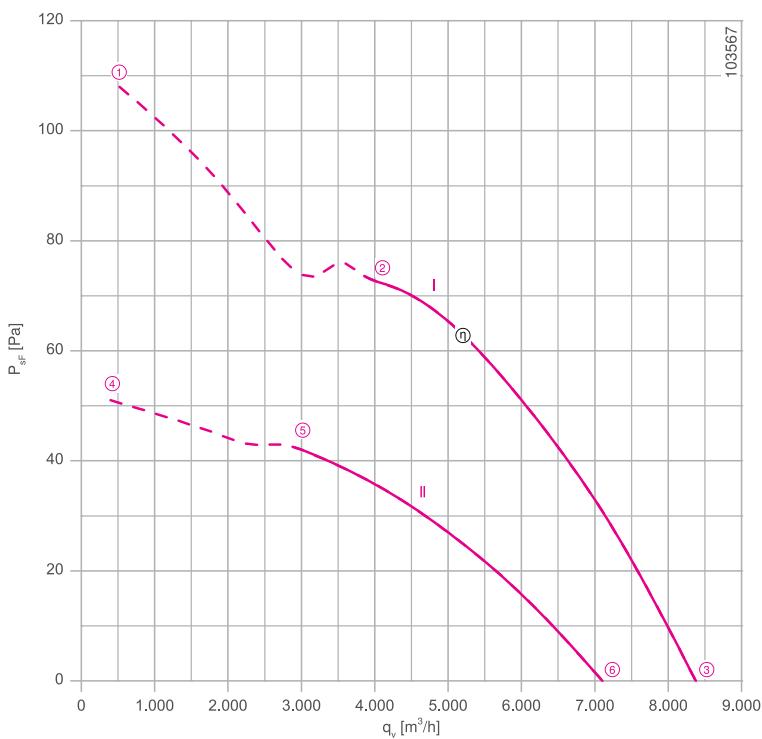

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

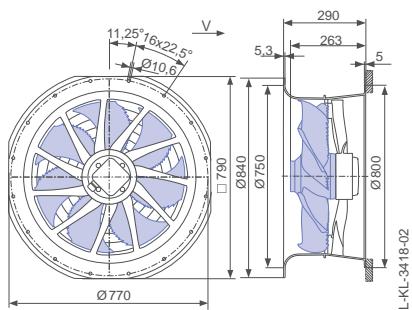


← Airflow direction

Design L - ZAplus Ontop without guard grille

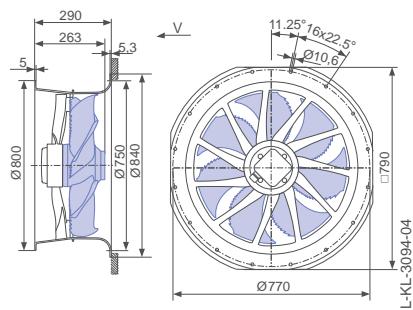

Design L - ZAplus Ontop, guard grille pressure side

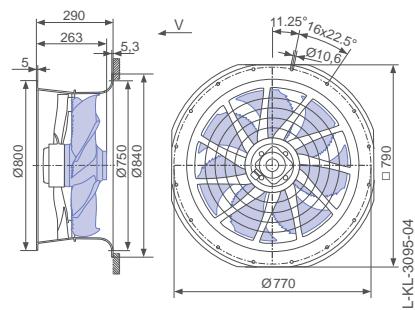

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN063-AD_.4I.V7P1	Δ	I	400	①	0.88	360	620	
			400*	②	0.78*	290*	660*	67
			400	③	0.72	210	690	64
	Y	II	400	④	0.40	180	430	
			400*	⑤	0.37*	170*	490*	58
			400	⑥	0.31	130	590	59

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side) H (guard grille pressure side) Flattop	
Type Article no.	ZN063-ADL.4I.V7P1 166784	ZN063-ADL.4I.V7P1 164388	ZN063-ADL.4I.V7P1 164389	ZN063-ADQ.4I.V7P1 164393	ZN063-ADQ.4I.V7P1 164394	ZN063-ADH.4I.V7P1 164398
Weight kg	20.40	18.50	19.60	20.60	21.60	18.70
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
	Page 480		Page 518		Page 506


Design Q - ZAplus with adapter plate, without guard grille

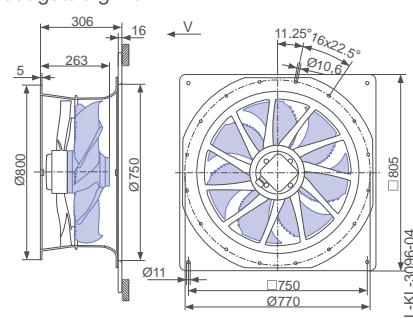

Design Q - ZAplus with adapter plate, guard grille pressure side

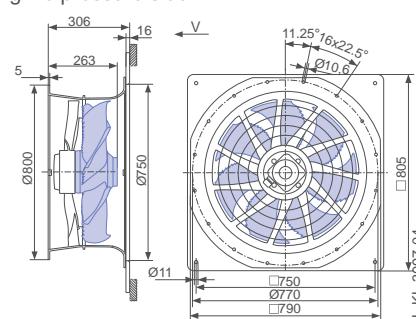

Design H - ZAplus Flattop, guard grille pressure side

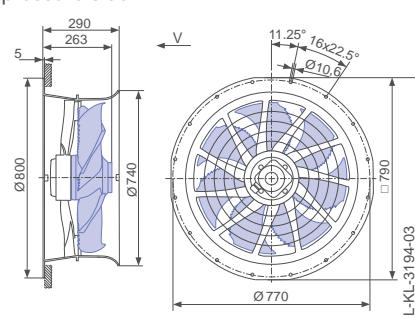

FE2owlet with ZAplus

for three phase alternating current, 12-12 pole

ZNO63-ND





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 120/65 W*
Rated current I_N : 0.31/0.13 A*
Rated speed n_N : 440/ 340 min⁻¹*
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: CE
ErP-data
Not subject to the regulations of ErP directive ($P_i < 125$ W)

* Rated data

Characteristic curve

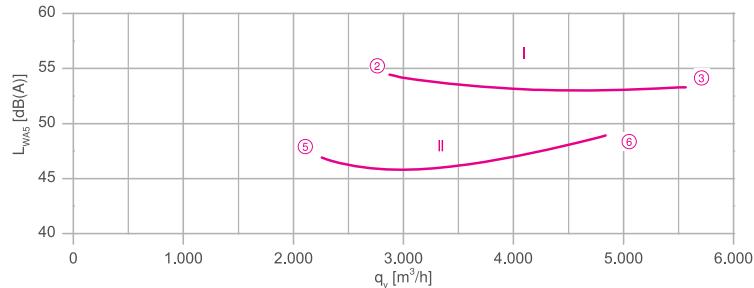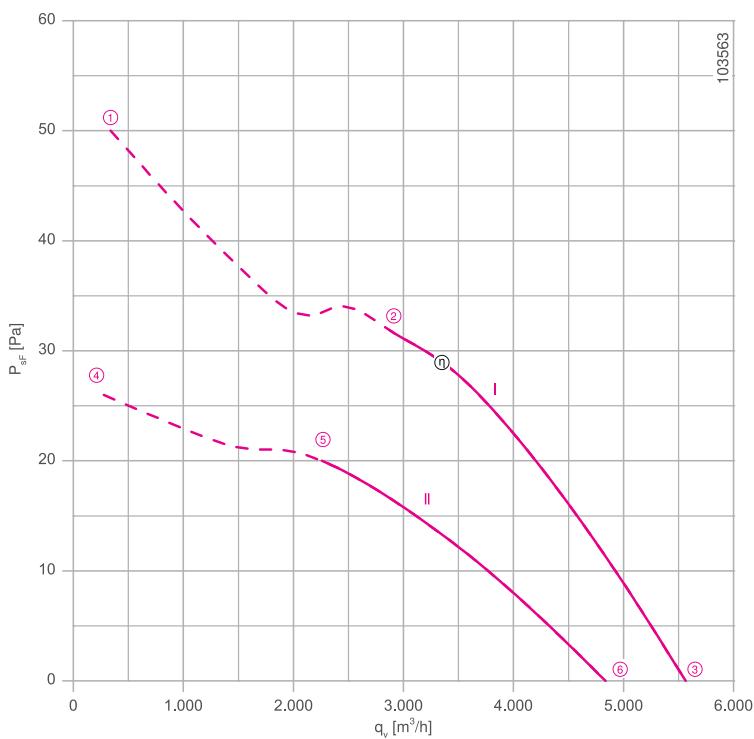

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

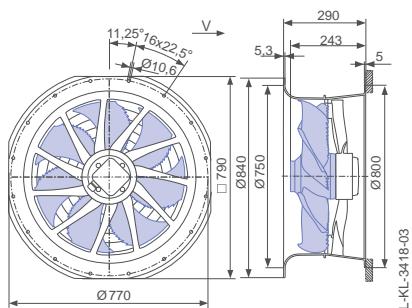


← Airflow direction

Design L - ZAplus Ontop without guard grille

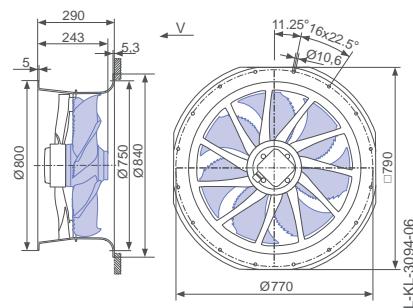

Design L - ZAplus Ontop, guard grille pressure side

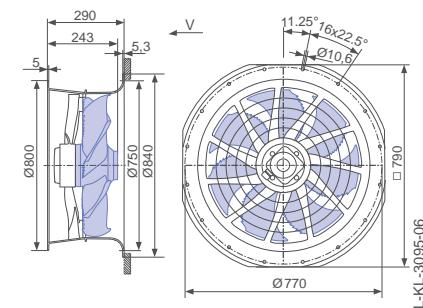

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN063-ND_.4F.V7P1	Δ	I	400	①	0.32	140	420	
			400*	②	0.31*	120*	440*	55
			400	③	0.29	95	460	53
	Y	II	400	④	0.14	70	300	
			400*	⑤	0.13*	65*	350*	47
			400	⑥	0.11	50	400	49

*rated data

Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN063-NDL.4F.V7P1 166785	ZN063-NDL.4F.V7P1 164410	ZN063-NDL.4F.V7P1 164411	ZN063-NDQ.4F.V7P1 164415	ZN063-NDQ.4F.V7P1 164416	ZN063-NDH.4F.V7P1 164420
Weight kg	18.80	16.90	18.00	19.00	20.00	17.10
ZAplus attachable on both sides.						

Control technology


Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	

Page 480


Page 518

Page 506


Design Q - ZAplus with adapter plate, without guard grille

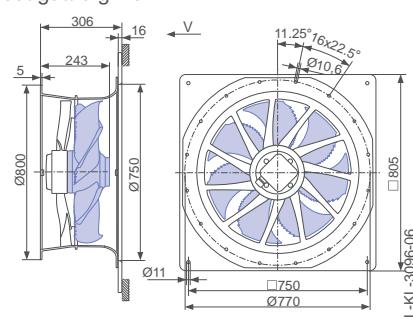

Design Q - ZAplus with adapter plate, guard grille pressure side

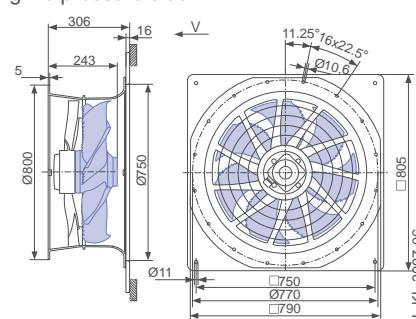

Design H - ZAplus Flattop, guard grille pressure side

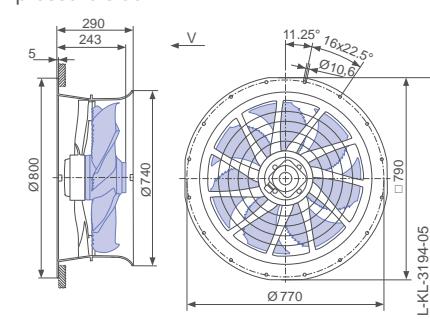

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole

ZNO71-VD





Description

Motor technology: AC
Rated voltage U_{N_r} : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_{N_r} : 50 Hz*
Input power P_{N_r} : 2.60/1.80 kW*
Rated current I_{N_r} : 4.80/3.00 A*
Rated speed n_{N_r} : 1340/1060 min⁻¹*
Starting current I_A : 20.00 / 6.50 A
Current increase ΔI : 5 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 44.7 %
Efficiency: $N_{actual} = 48.4 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

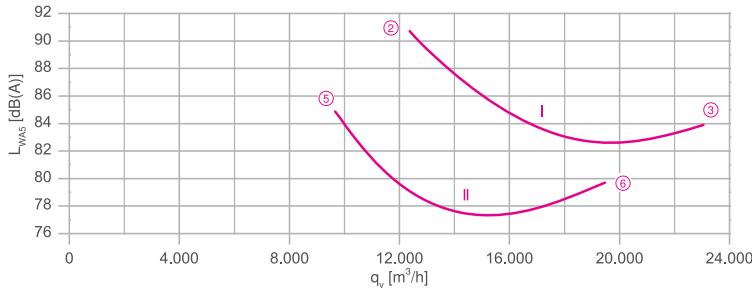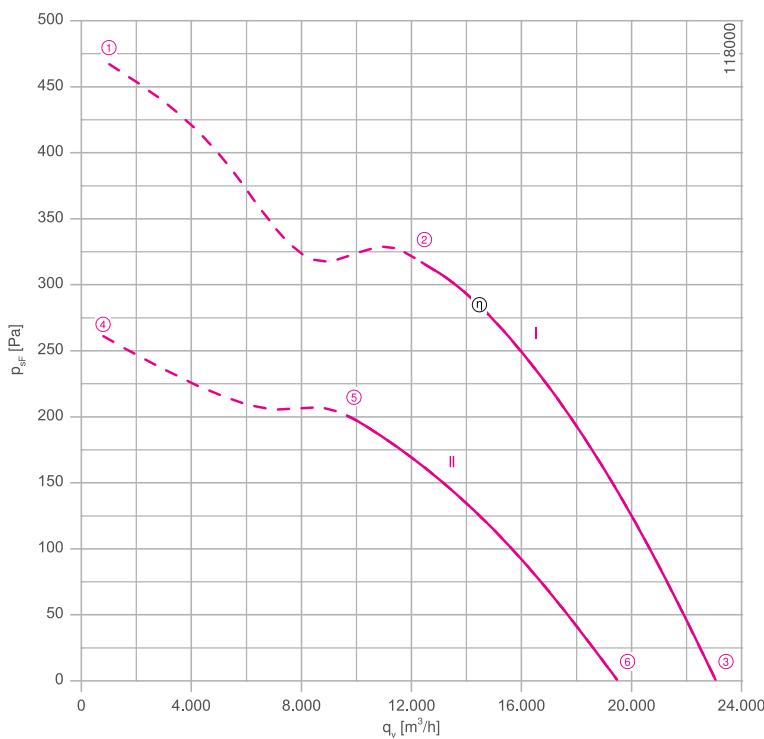

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

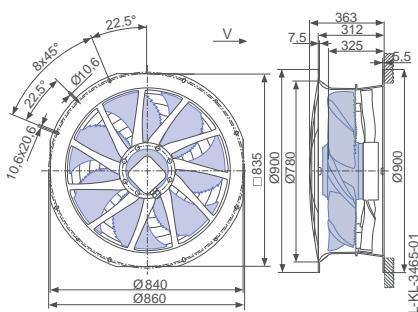


← Airflow direction

Design L - ZAplus OnTop without guard grille

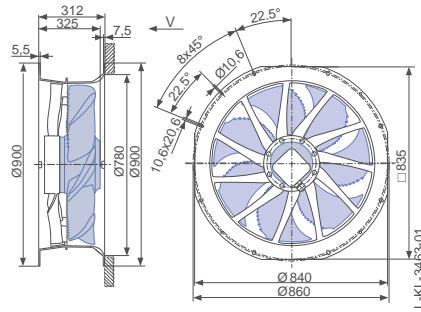

Design L - ZAplus OnTop, guard grille pressure side

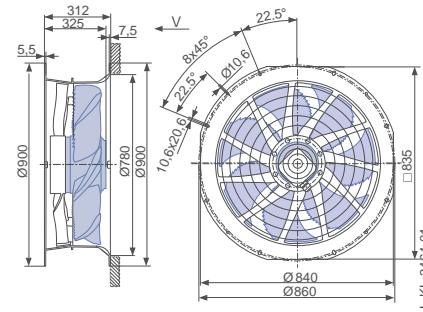


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN071-VD..6N..7P2	Δ	I	400	①	5.80	3300	1290	
			400*	②	4.80*	2600*	1340*	91
			400	③	3.90	1900	1390	84
	Y	II	400	④	3.40	2100	950	
			400*	⑤	2.90*	1800*	1060*	85
			400	⑥	2.40	1450	1180	80

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	H (without guard grille) Flaptop	H (guard grille pressure side) Flaptop
					
Type	ZN071-VDL.6N.V7P2	ZN071-VDL.6N.V7P2	ZN071-VDL.6N.V7P2	ZN071-VDH.6N.V7P2	ZN071-VDH.6N.V7P2
Article no.	170443	170353	170354	170441	170442
Weight kg	34.40	31.80	33.00	30.90	32.10
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design H - ZAplus Flaptop, without guard grille

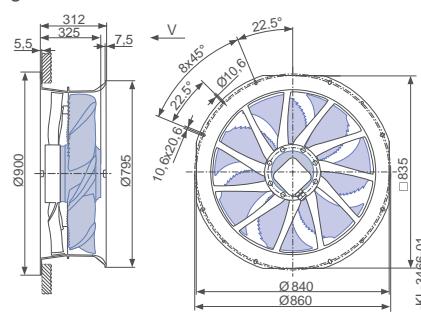

Design H - ZAplus Flaptop, guard grille pressure side

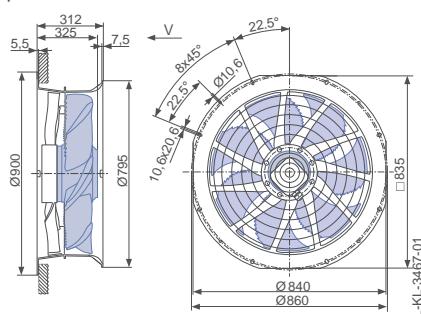

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole



ZN071-SD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_i : 0.88/0.62 kW*
Rated current I_N : 1.65/1.10 A*
Rated speed n_N : 900/ 690 min⁻¹*
Starting current I_A : 6.00 / 1.80 A
Current increase ΔI : 10 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 43.8 %
Efficiency: $N_{actual} = 50.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

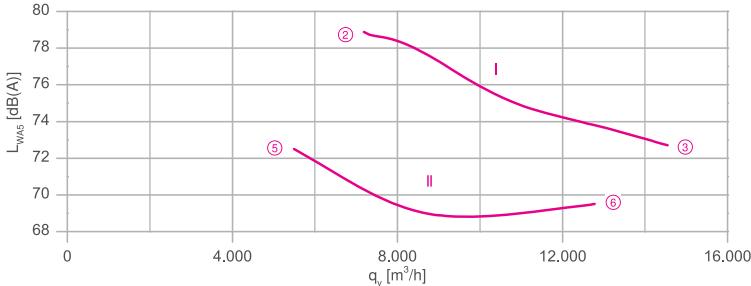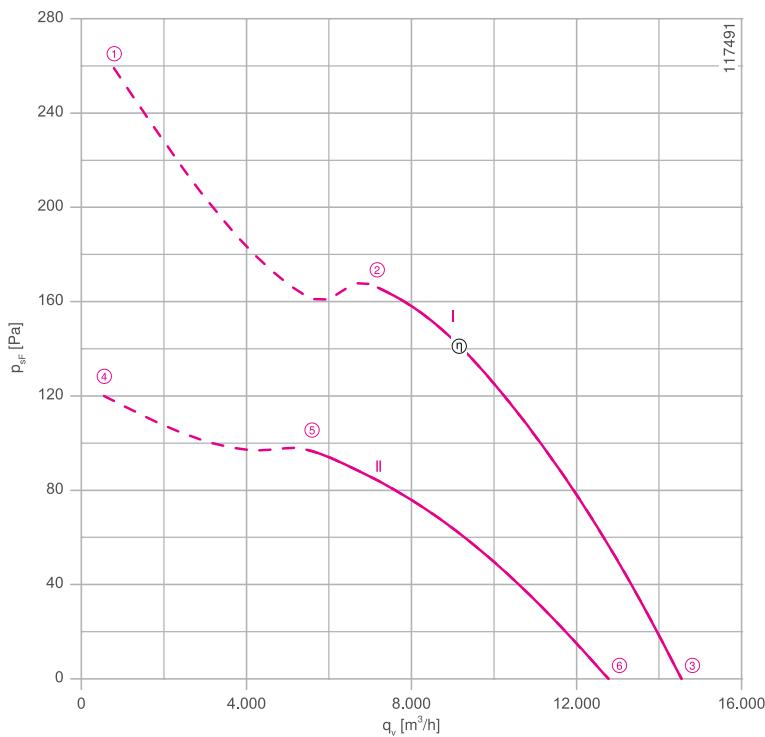

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

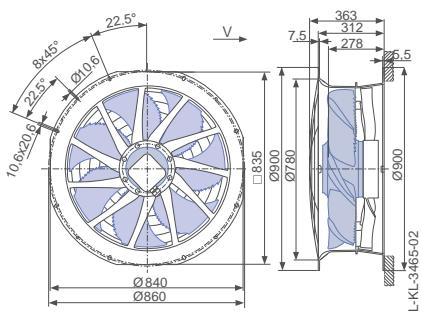


← Airflow direction

Design L - ZAplus OnTop without guard grille

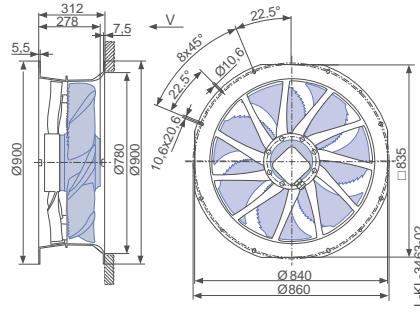

Design L - ZAplus OnTop, guard grille pressure side

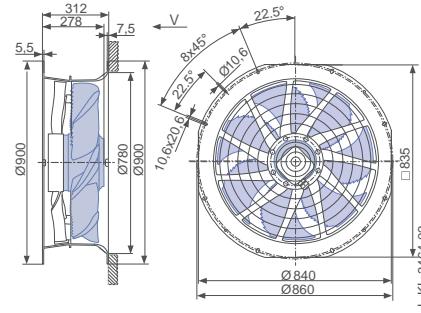


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN071-SD_.6F._7P1	Δ	I	400	①	2.10	1200	850	
			400*	②	1.65*	880*	900*	79
			400	③	1.30	540	950	73
	Y	II	400	④	1.25	720	570	
			400*	⑤	1.05*	620*	690*	73
			400	⑥	0.74	440	830	70

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	H (without guard grille) Flaptop	H (guard grille pressure side) Flaptop
					
Type Article no.	ZN071-SDL.6F.V7P1 170447	ZN071-SDL.6F.V7P1 170355	ZN071-SDL.6F.V7P1 170356	ZN071-SDH.6F.V7P1 170445	ZN071-SDH.6F.V7P1 170446
Weight kg	28.90	26.40	27.50	25.40	26.60
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design H - ZAplus Flaptop, without guard grille

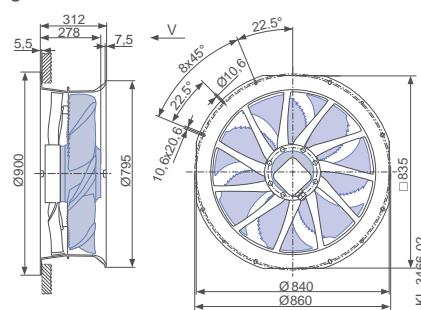

Design H - ZAplus Flaptop, guard grille pressure side

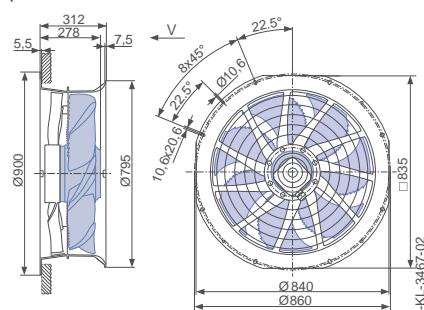

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole



ZN071-SD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.94/0.66 kW*
Rated current I_N : 2.40/1.20 A*
Rated speed n_N : 920/ 770 min⁻¹*
Starting current I_A : 9.50 / 3.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 43.9 %
Efficiency: $N_{actual} = 50.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

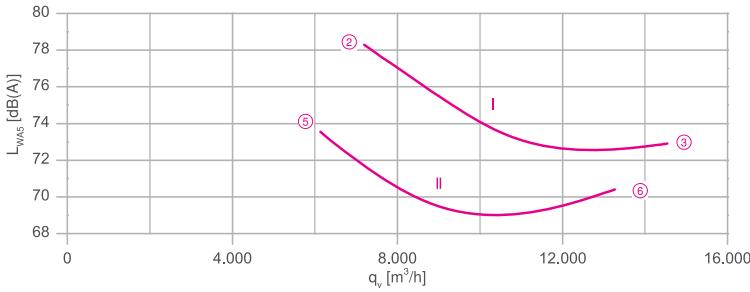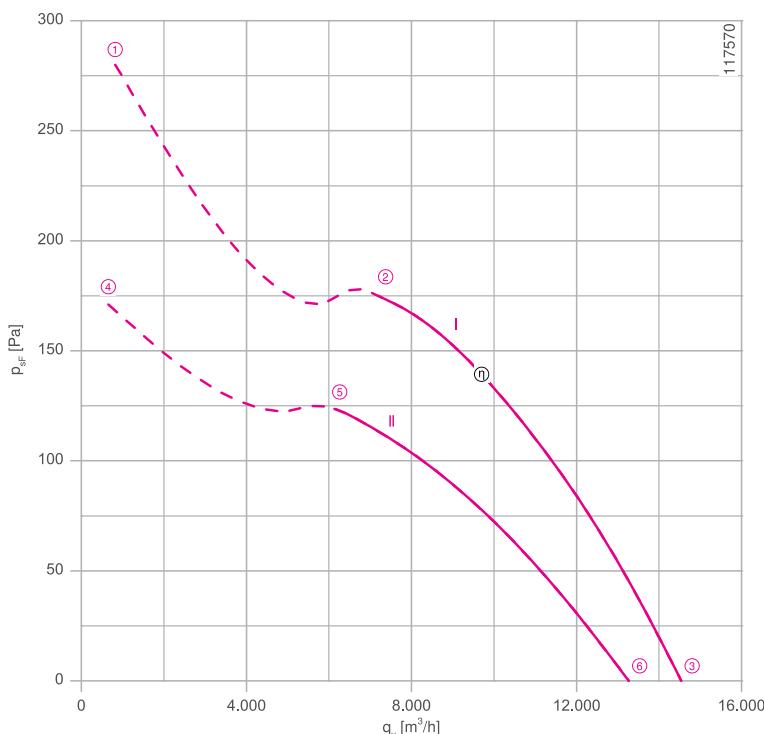

Measured in ZAplus without guard grille in installation type A according to ISO 5801




Connection diagram

Page 531
1360-108XA

System components

Page 430

Dimensions mm

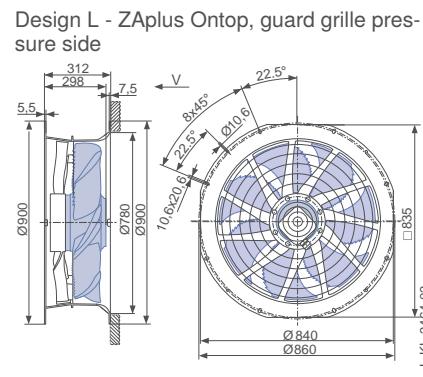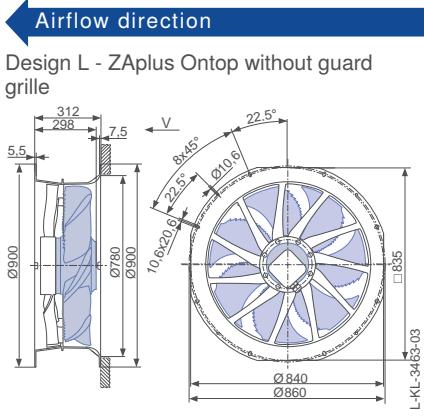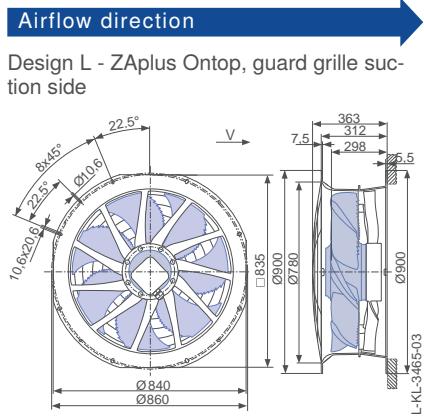


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V	I A	P ₁ W	n min ⁻¹		
ZN071-SD_.6K.V7P1	Δ	I	400	① 2.70	1250	880		
			400*	② 2.40*	940*	920*	78	
			400	③ 2.10	580	950	73	
	Y	II	400	④ 1.45	800	690		
			400*	⑤ 1.20*	660*	770*	74	
			400	⑥ 0.86	440	870	70	

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	H (without guard grille) Flaptop	H (guard grille pressure side) Flaptop
					
Type Article no.	ZN071-SDL.6K.V7P1 170455	ZN071-SDL.6K.V7P1 170357	ZN071-SDL.6K.V7P1 170358	ZN071-SDH.6K.V7P1 170452	ZN071-SDH.6K.V7P1 170453
Weight kg	32.50	30.00	31.20	29.00	30.20
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design H - ZAplus Flaptop, without guard grille

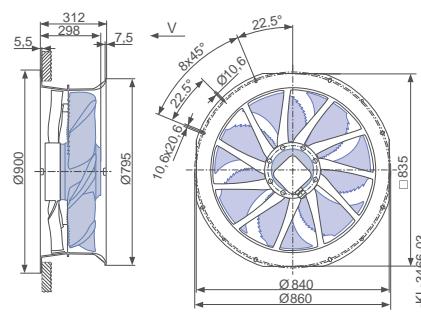

Design H - ZAplus Flaptop, guard grille pressure side

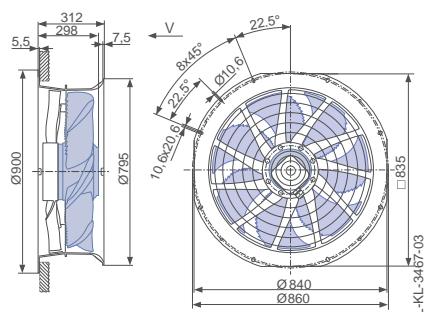

FE2owlet with ZAplus

for three phase alternating current, 8-8 pole



ZN071-AD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.44/0.30 kW*
Rated current I_N : 1.05/0.60 A*
Rated speed n_N : 680/ 530 min⁻¹*
Starting current I_A : 3.20 / 0.95 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 38.0 %
Efficiency: $N_{actual} = 46.7 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

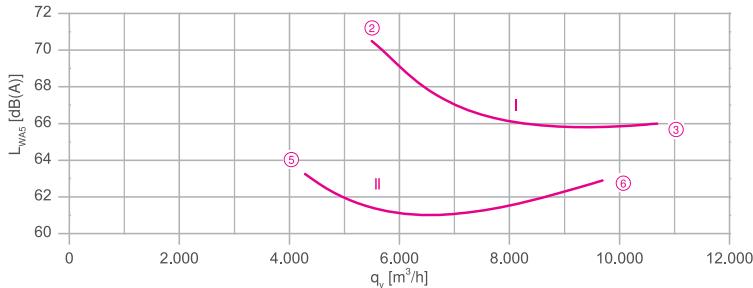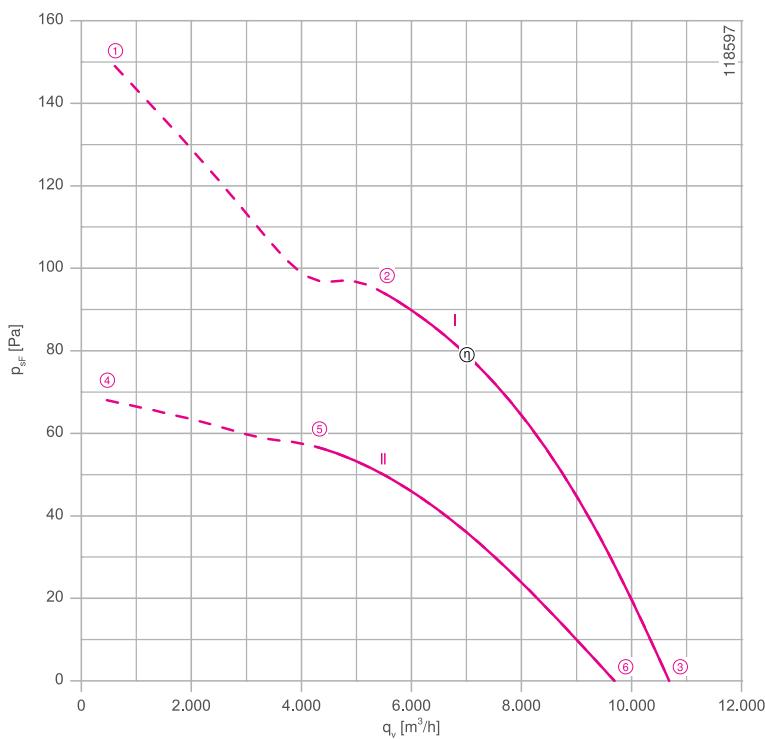

Measured in ZAplus without guard grille in installation type A according to ISO 5801




Connection diagram

Page 531
1360-108XA

System components

Page 430

Dimensions mm

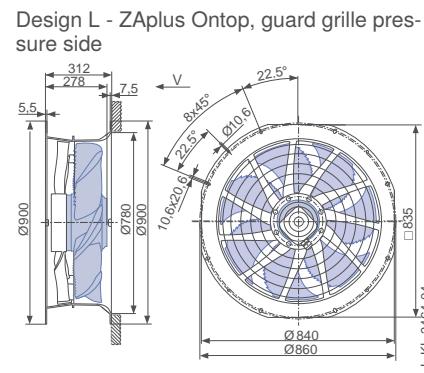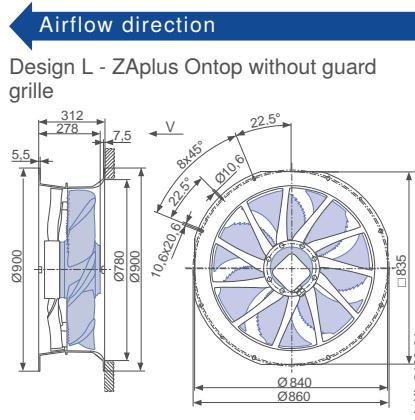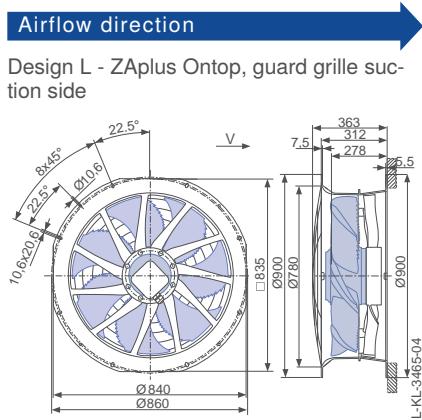


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN071-AD_.6F._7P1	Δ	I	400	①	1.25	580	650	
			400*	②	1.05*	440*	680*	71
			400	③	0.92	290	710	66
	Y	II	400	④	0.68	330	440	
			400*	⑤	0.58*	290*	530*	63
			400	⑥	0.42	210	630	63

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	H (without guard grille) Flaptop	H (guard grille pressure side) Flaptop
					
Type Article no.	ZN071-ADL.6F.V7P1 170465	ZN071-ADL.6F.V7P1 170456	ZN071-ADL.6F.V7P1 170457	ZN071-ADH.6F.V7P1 170462	ZN071-ADH.6F.V7P1 170463
Weight kg	28.90	26.40	27.60	25.40	26.60


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design H - ZAplus Flaptop, without guard grille

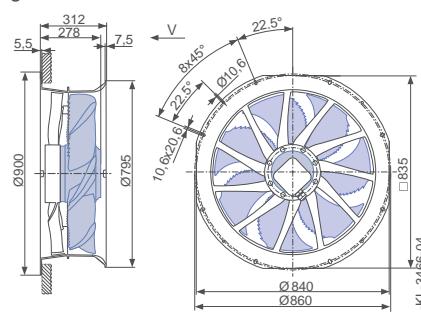

Design H - ZAplus Flaptop, guard grille pressure side

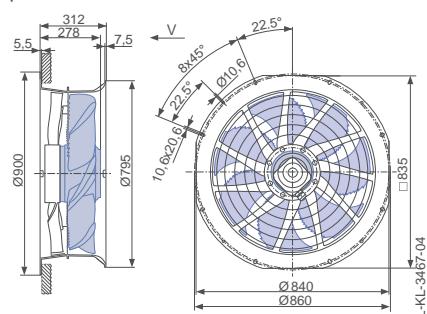

FE2owlet with ZAplus

for three phase alternating current, 12-12 pole



ZNO71-ND



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 170/100 W*
Rated current I_N : 0.54/0.23 A*
Rated speed n_N : 450/ 360 min⁻¹*
Starting current I_A : 1.10 / 0.34 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 28.8 %
Efficiency: $N_{actual} = 40.1 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

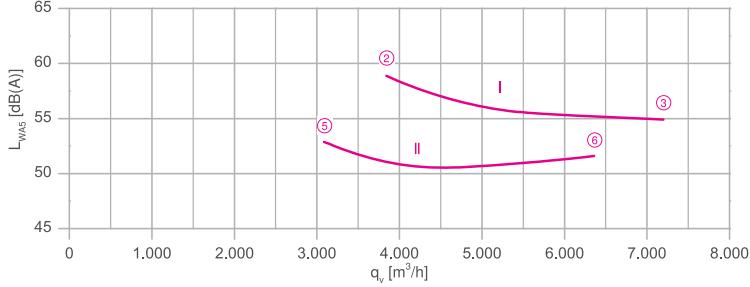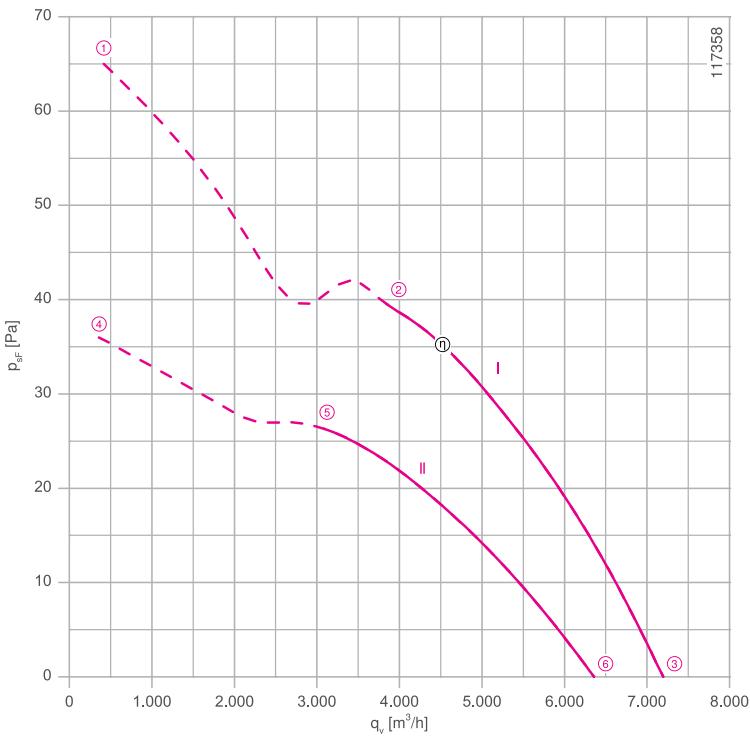

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

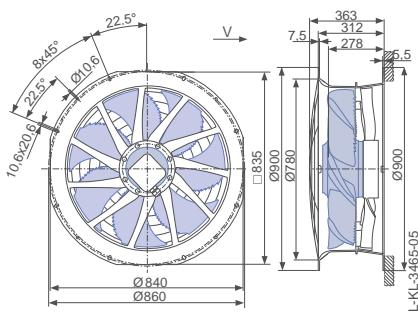


← Airflow direction

Design L - ZAplus Ontop without guard grille

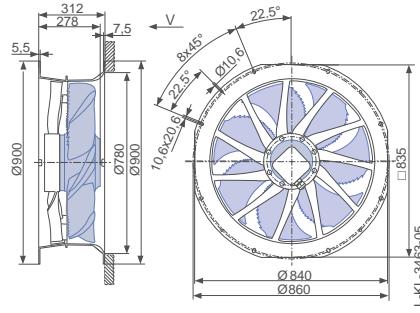

Design L - ZAplus Ontop, guard grille pressure side

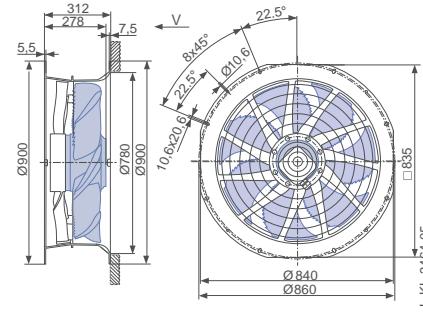


Performance data


Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN071-ND..6F..7P1	Δ	I	400	①	0.56	210	430	
			400*	②	0.54*	170*	450*	59
			400	③	0.52	130	470	55
	Y	II	400	④	0.25	110	320	
			400*	⑤	0.23*	100*	370*	53
			400	⑥	0.19	75	420	52

*rated data


Fan ordering information

	Airflow direction	Airflow direction			
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	H (without guard grille) Flattop	H (guard grille pressure side) Flattop
					
Type Article no.	ZN071-NDL.6F.V7P1 170475	ZN071-NDL.6F.V7P1 170466	ZN071-ADL.6F.V7P1 170467	ZN071-NDH.6F.V7P1 170472	ZN071-ADH.6F.V7P1 170473
Weight kg	28.90	26.40	27.60	25.40	26.60
ZAplus attachable on both sides.					


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~ 
Page 480	Page 518	Page 506

Design H - ZAplus Flattop, without guard grille

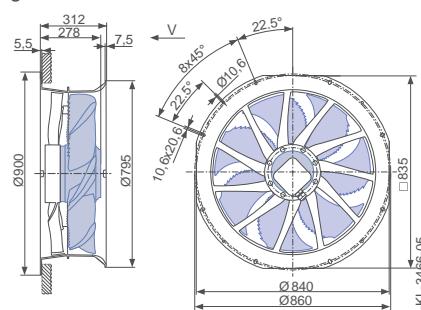

Design H - ZAplus Flattop, guard grille pressure side

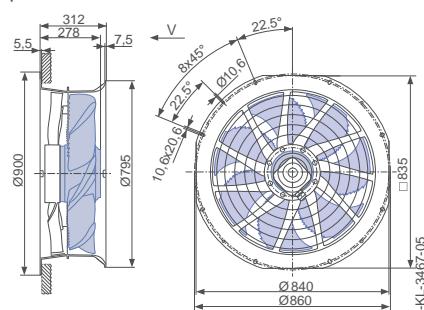

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole

ZNO80-SD





Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
Rated frequency f_N : 50 Hz*
Input power P_i : 1.85/1.05 kW*
Rated current I_N : 3.80/2.00 A*
Rated speed n_N : 870/ 640 min⁻¹*
Starting current I_A : 11.00 / 3.40 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 60 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE

ErP-data

Efficiency η_{statA} : 42.7 %
Efficiency: $N_{actual} = 47.5 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

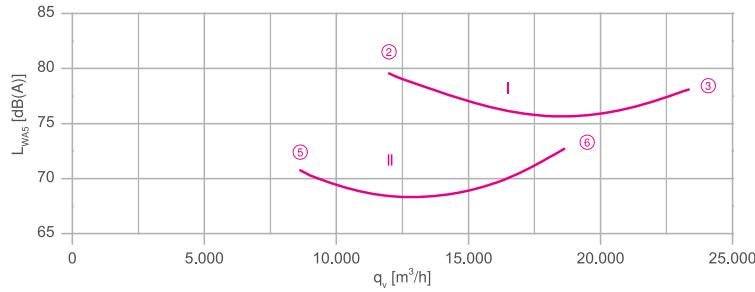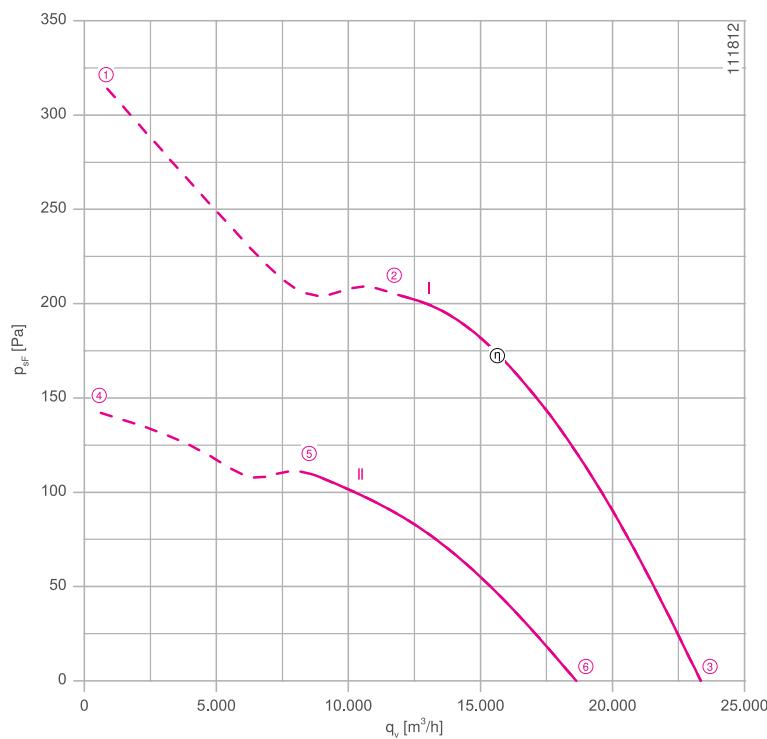

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

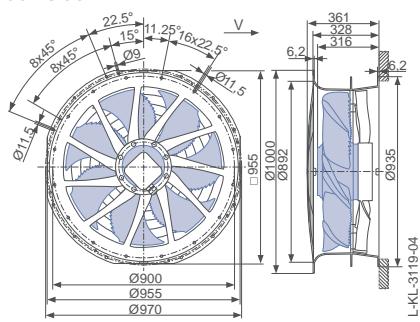


← Airflow direction

Design L - ZAplus OnTop without guard grille

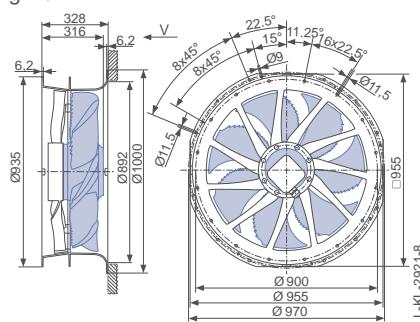

Design L - ZAplus OnTop, guard grille pressure side

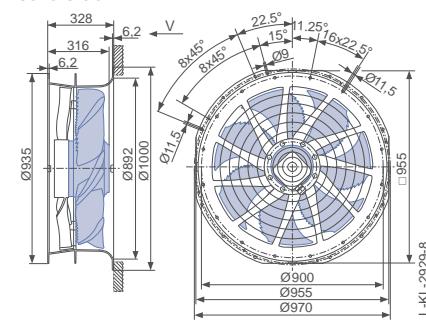

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P_1 W	n min ⁻¹	
ZN080-SD_.6N.V7P5	Δ	I	400	①	4.80	2400	800	
			400*	②	3.80*	1850*	870*	80
			400	③	3.10	1350	920	78
	Y	II	400	④	2.20	1200	540	
			400*	⑤	2.00*	1050*	640*	71
			400	⑥	1.70	900	730	73

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type	ZN080-SDL.6N.V7P5	ZN080-SDL.6N.V7P5	ZN080-SDL.6N.V7P5	ZN080-SDQ.6N.V7P5	ZN080-SDQ.6N.V7P5	ZN080-SDH.6N.V7P5
Article no.	170240	168918	168919	168920	168921	168925
Weight kg	41.70	38.80	40.30	41.90	43.40	38.60
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

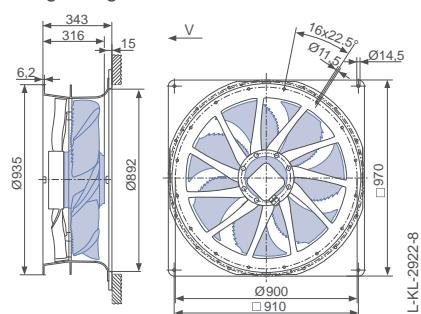

Design Q - ZAplus with adapter plate, guard grille pressure side

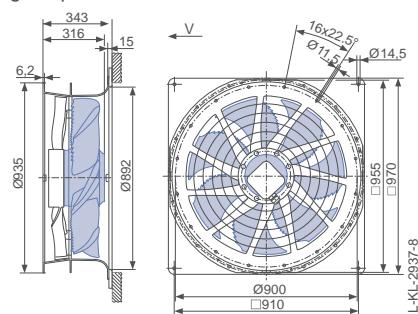

Design H - ZAplus Flattop, guard grille pressure side

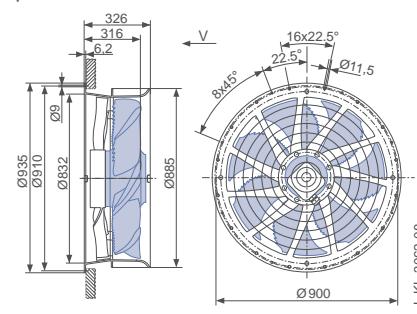

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole



ZNO80-SD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 1.60/0.80 kW*
Rated current I_N : 3.50/1.55 A*
Rated speed n_N : 800/ 560 min⁻¹*
Starting current I_A : 9.50 / 3.00 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 39.6 %
Efficiency: $N_{actual} = 44.7 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

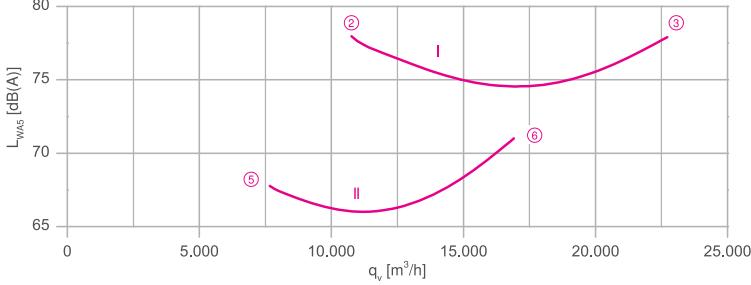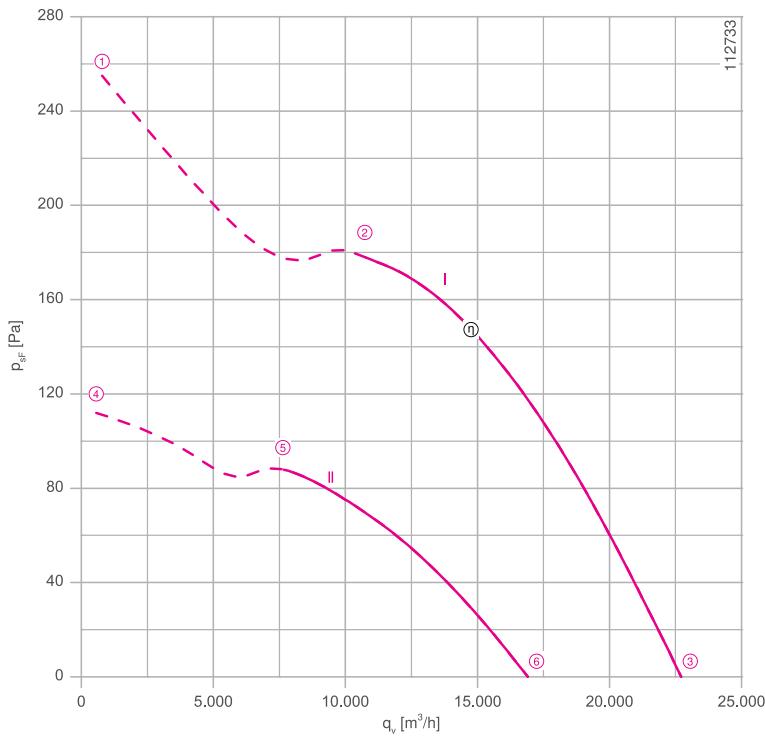

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

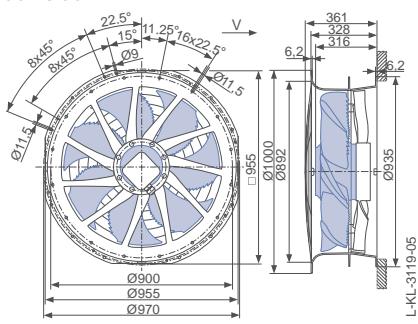


← Airflow direction

Design L - ZAplus OnTop without guard grille

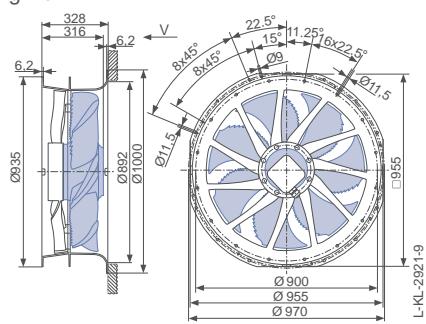

Design L - ZAplus OnTop, guard grille pressure side

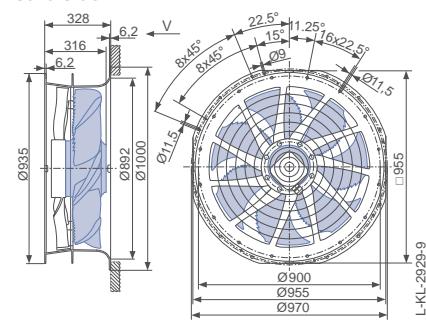

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P_1 W	n min ⁻¹	
ZN080-SD_.6N.V7P5	Δ	I	400	①	4.00	1950	730	
			400*	②	3.50*	1600*	800*	78
			400	③	3.00	1250	860	78
	Y	II	400	④	1.70	880	480	
			400*	⑤	1.55*	800*	560*	68
			400	⑥	1.40	700	650	71

*rated data


Fan ordering information

	Airflow direction	Airflow direction					
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side)	Flattop
Type	ZN080-SDL.6N.V7P5	ZN080-SDL.6N.V7P5	ZN080-SDL.6N.V7P5	ZN080-SDQ.6N.V7P5	ZN080-SDQ.6N.V7P5	ZN080-SDH.6N.V7P5	
Article no.	170241	168928	168929	168930	168931	168935	
Weight kg	41.70	38.80	38.80	41.90	43.40	38.60	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

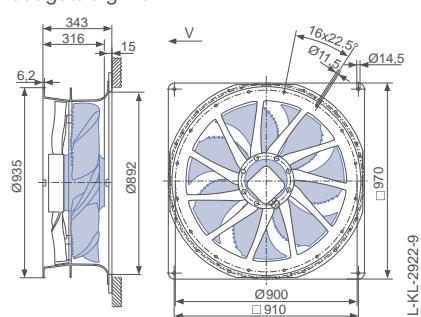

Design Q - ZAplus with adapter plate, guard grille pressure side

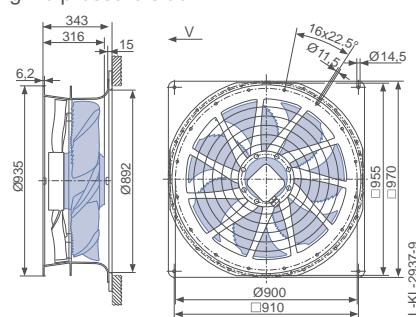

Design H - ZAplus Flattop, guard grille pressure side

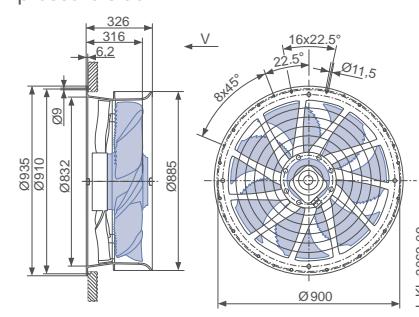

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN080-AD_.6N.V7P5	Δ	I	400	①	2.50	1050	600	
			400*	②	2.10*	840*	650*	72
			400	③	1.90	620	690	71
	Y	II	400	④	1.10	520	410	
			400*	⑤	0.98*	460*	480*	64
			400	⑥	0.86	390	550	66

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type	ZN080-ADL.6N.V7P5	ZN080-ADL.6N.V7P5	ZN080-ADL.6N.V7P5	ZN080-ADQ.6N.V7P5	ZN080-ADQ.6N.V7P5	ZN080-ADH.6N.V7P5
Article no.	170242	168989	168990	168991	168992	168996
Weight kg	41.70	38.80	40.30	41.90	43.40	38.60
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

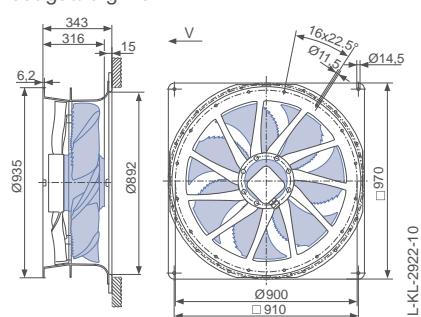

Design Q - ZAplus with adapter plate, guard grille pressure side

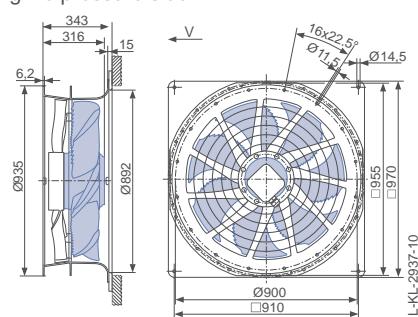

Design H - ZAplus Flattop, guard grille pressure side

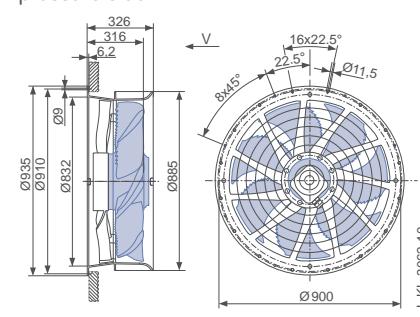

FE2owlet with ZAplus

for three phase alternating current, 12-12 pole



ZNO80-ND



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 310/190 W*
Rated current I_N : 0.78/0.38 A*
Rated speed n_N : 440/ 340 min⁻¹*
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{startA} : 33.6 %
Efficiency: $N_{actual} = 43.2 / N_{target} = 40\%$ **
* Rated data
**ErP 2015

Characteristic curve

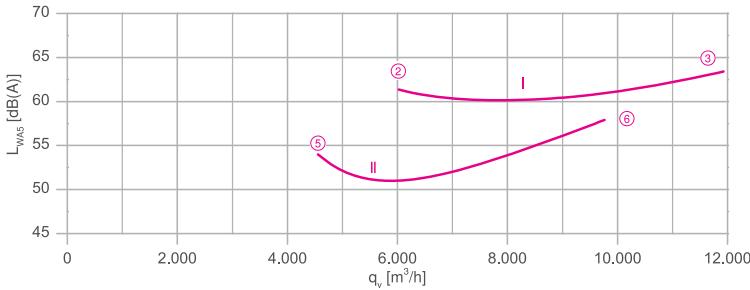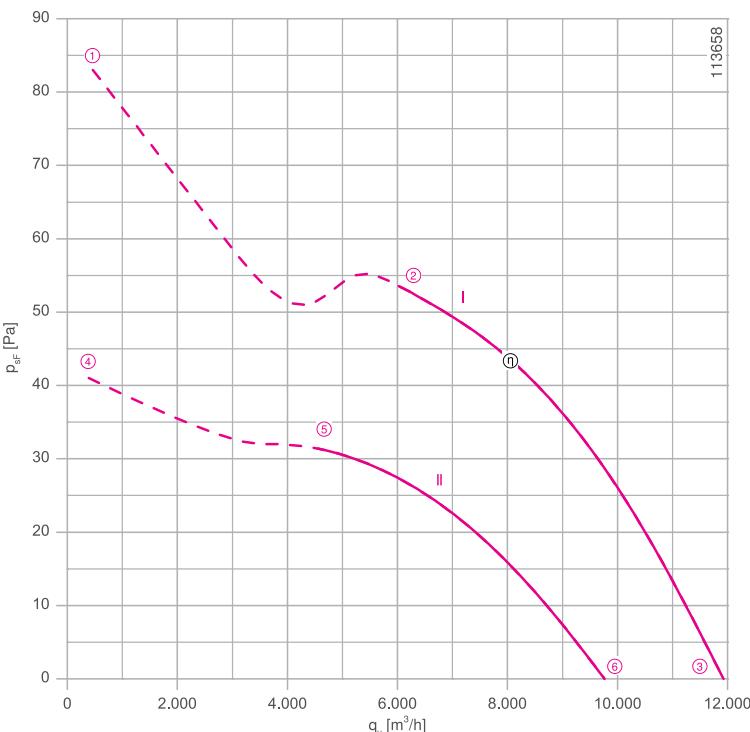

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus OnTop, guard grille suction side

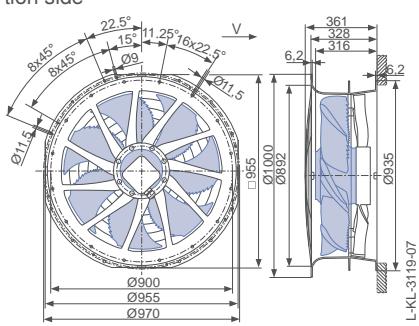


← Airflow direction

Design L - ZAplus OnTop without guard grille

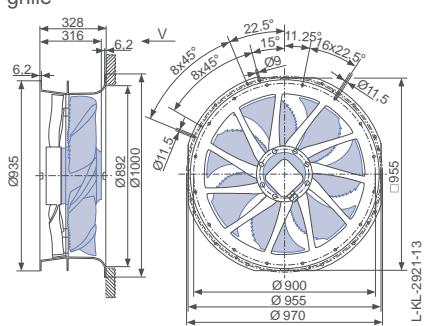

Design L - ZAplus OnTop, guard grille pressure side

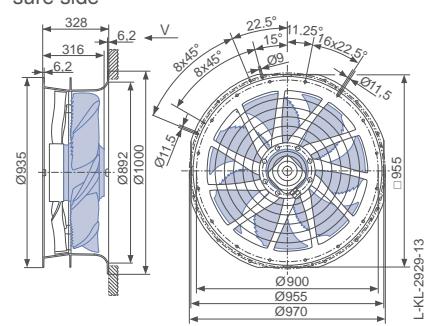

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U V		I A	P ₁ W	n min ⁻¹	
ZN080-NDL..6N..V7P5	Δ	I	400	①	0.88	390	410	
			400*	②	0.78*	310*	440*	62
			400	③	0.74	240	460	63
	Y	II	400	④	0.42	210	290	
			400*	⑤	0.38*	190*	340*	54
			400	⑥	0.33	160	380	58

*rated data


Fan ordering information

	Airflow direction	Airflow direction				
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type	ZN080-NDL..6N..V7P5	ZN080-NDL..6N..V7P5	ZN080-NDL..6N..V7P5	ZN080-NDQ..6N..V7P5	ZN080-NDQ..6N..V7P5	ZN080-NDH..6N..V7P5
Article no.	170243	169061	169062	169063	169064	169068
Weight kg	41.70	38.80	40.30	41.90	43.40	38.60
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

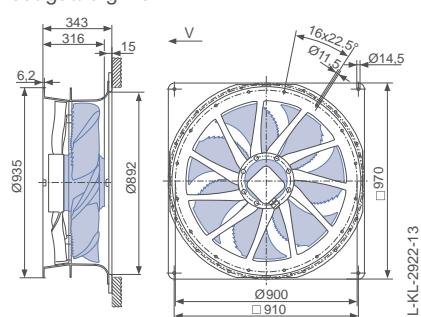

Design Q - ZAplus with adapter plate, guard grille pressure side

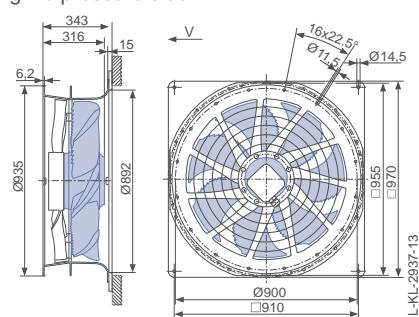

Design H - ZAplus Flattop, guard grille pressure side

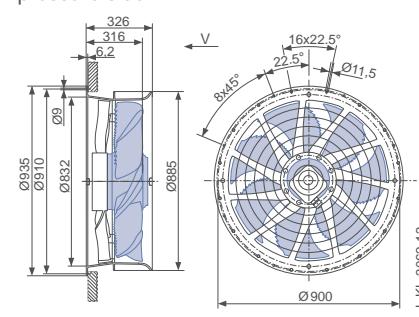

FE2owlet with ZAplus

for three phase alternating current, 4-4 pole

ZN091-VD



**Description**

Motor technology: AC
 Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$
 Rated frequency f_N : 5 Hz*
 Input power P_i : 5.40/3.20 kW*
 Rated current I_N : 9.00/5.20 A*
 Rated speed n_N : 1230/ 900 min⁻¹*
 Starting current I_A : 32.00 / 10.00 A
 Current increase ΔI : 0 %
 Thermal class: THCL155*

Min. permitted ambient temperature $t_{R(\min)}$: -40 °C
 Max. permitted ambient temperature $t_{R(\max)}$: 40 °C
 Electrical connection: Terminal box

Number of blades: 5
 Protection class: IP54
 Motor protection: thermal contact
 Blades: Aluminium, uncoated
 Rotor: Aluminium, uncoated
 Conformity: ErP 2015, CE

ErP-data
 Efficiency η_{statA} : 45.7 %
 Efficiency: $N_{actual} = 47.6 / N_{target} = 40^{**}$
 * Rated data
 **ErP 2015

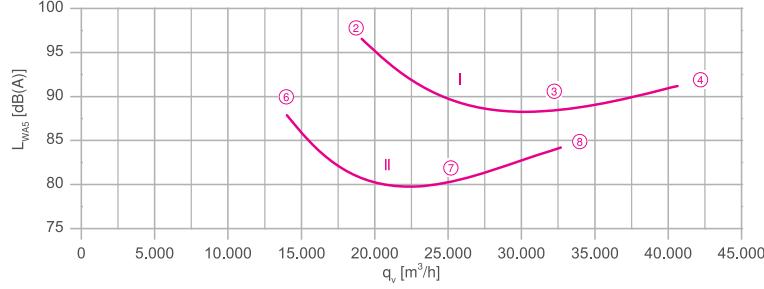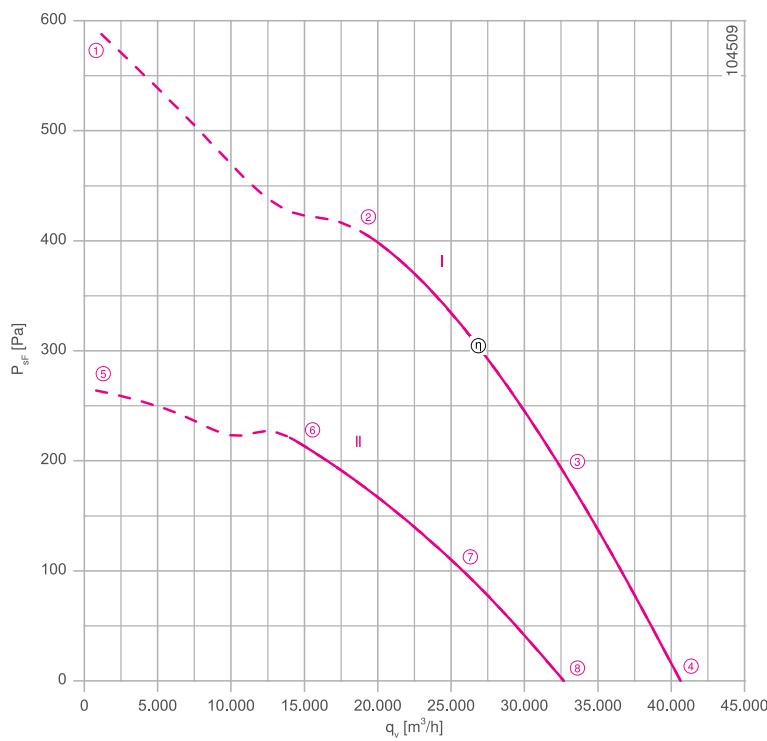Characteristic curve




Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA

System components

Page 430


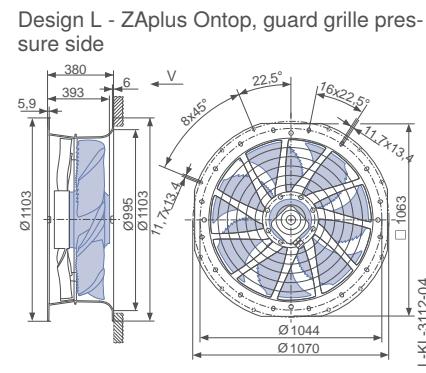
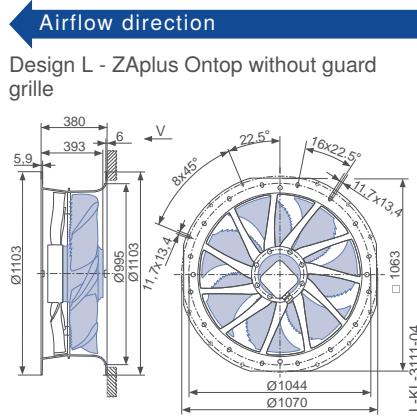
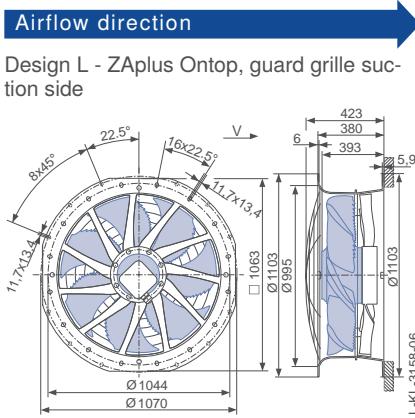
Dimensions mm

Performance data

Type	Connection	Characteristic curve	Voltage	Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)	Maximum ambient temperature t_R °C
			U V		I A	P W	n min⁻¹		
ZN091-VD_7Q_5P1	Δ	I	400	①	12.00	7400	1100	97	40
			400*	②	9.00*	5400*	1230*	88	60
			400	③	7.80	4600	1280	91	40
			400	④	6.40	3700	1330	88	60
	Y	II	400	⑤	6.00	3700	740	80	40
			400*	⑥	5.20*	3200*	900*	88	60
			400	⑦	4.80	2900	980	80	40
			400	⑧	4.00	2500	1070	84	40

*rated data


Fan ordering information

Airflow direction		Airflow direction				
Design	L (guard grille suction side) Ontop	L (without guard grille) Ontop	L (guard grille pressure side) Ontop	Q (guard grille pressure side)	H (guard grille pressure side)	Flattop
						
Type Article no.	ZN091-VDL.7Q.V5P1 169901	ZN091-VDL.7Q.V5P1 165077	ZN091-VDL.7Q.V5P1 165078	ZN091-VDQ.7Q.V5P1 165083	ZN091-VDH.7Q.V5P1 165087	
Weight kg	60.00	56.40	58.30	62.20	58.30	
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~		Motor protection units 3~		Electronic voltage controllers 3~	
Page 480		Page 518		Page 506	

Design Q - ZAplus with adapter plate, guard grille pressure side

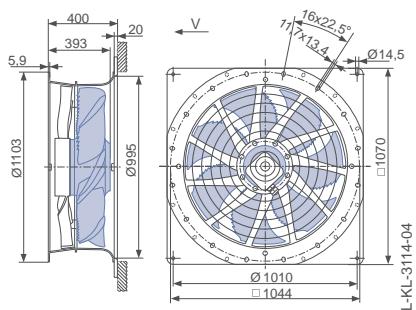

Design H - ZAplus Flattop, guard grille pressure side

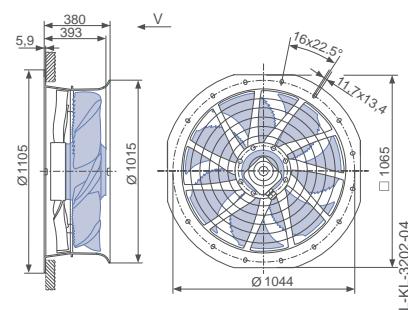

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole



ZN091-SD



Description

Motor technology: AC
Rated voltage U_n : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_n : 50 Hz* (60Hz data available)
Input power P_i : 1.85/1.05 kW*
Rated current I_n : 3.80/1.90 A*
Rated speed n_n : 850/ 640 min⁻¹*
Starting current I_A : 11.00 / 3.40 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(min)}$: -40 °C
Max. permitted ambient temperature $t_{R(max)}$: 65 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 44.7 %
Efficiency: $N_{actual} = 49.6 / N_{target} = 40^{**}$
* Rated data
**ErP 2015

Characteristic curve

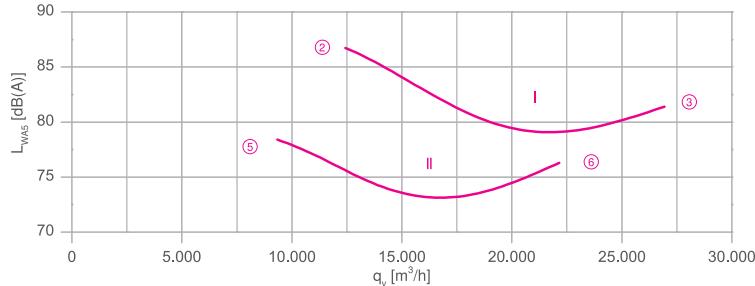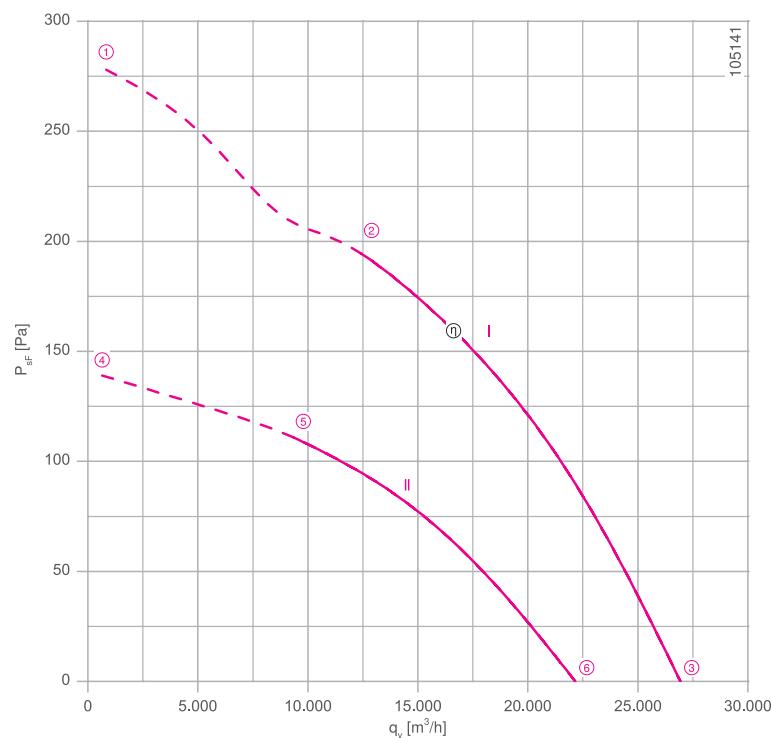

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

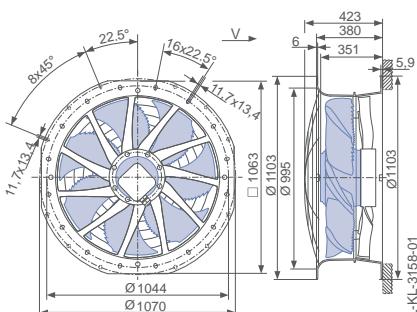


← Airflow direction

Design L - ZAplus Ontop without guard grille

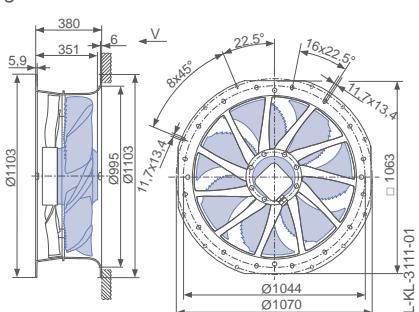

Design L - ZAplus Ontop, guard grille pressure side

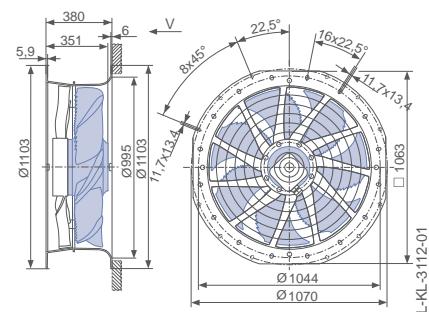

Performance data

Type	Connection	Characteristic curve	Voltage		Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U	V					
ZN091-SD_6N.V7P2	Δ	I	400		①	4.40	2300	790	
			400*		②	3.80*	1750*	840*	87
			400		③	3.10	1200	910	81
	Y	II	400		④	2.10	1200	550	
			400*		⑤	1.85*	1050*	640*	78
			400		⑥	1.50	800	750	76

*rated data


Fan ordering information

Design	Airflow direction		Airflow direction			
	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop
Type Article no.	ZN091-SDL.6N.V7P2 167289	ZN091-SDL.6N.V7P2 165044	ZN091-SDL.6N.V7P2 165045	ZN091-SDQ.6N.V7P2 165049	ZN091-SDQ.6N.V7P2 165050	ZN091-SDH.6N.V7P2 165054
Weight kg	44.50	40.90	42.80	44.40	46.30	42.50
ZAplus attachable on both sides.						


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

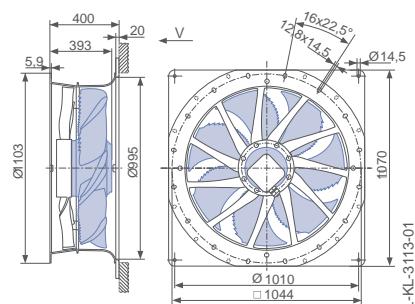

Design Q - ZAplus with adapter plate, guard grille pressure side

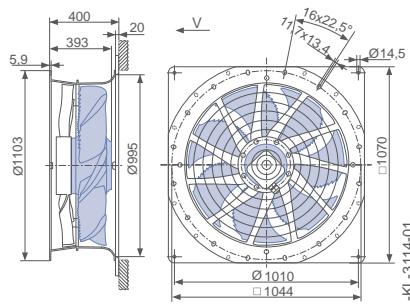

Design H - ZAplus Flattop, guard grille pressure side

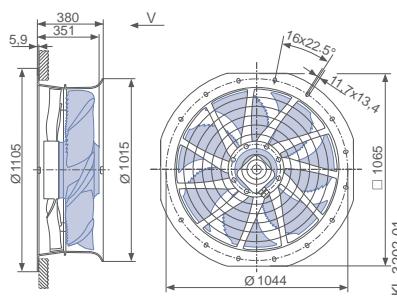

FE2owlet with ZAplus

for three phase alternating current, 6-6 pole



ZN091-SD



Description

Motor technology: AC
Rated voltage U_n : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_n : 50 Hz* (60Hz data available)
Input power P_i : 1.95/1.30 kW*
Rated current I_n : 4.20/2.30 A*
Rated speed n_n : 890/730 min⁻¹*
Starting current I_A : 17.00 / 5.50 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(\min)}$: -40 °C
Max. permitted ambient temperature $t_{R(\max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 5
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 49.3 %
Efficiency: $N_{actual} = 53.9 / N_{target} = 40$ **
* Rated data
**ErP 2015

Characteristic curve

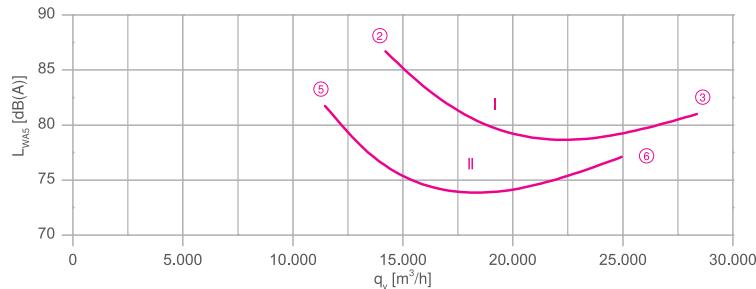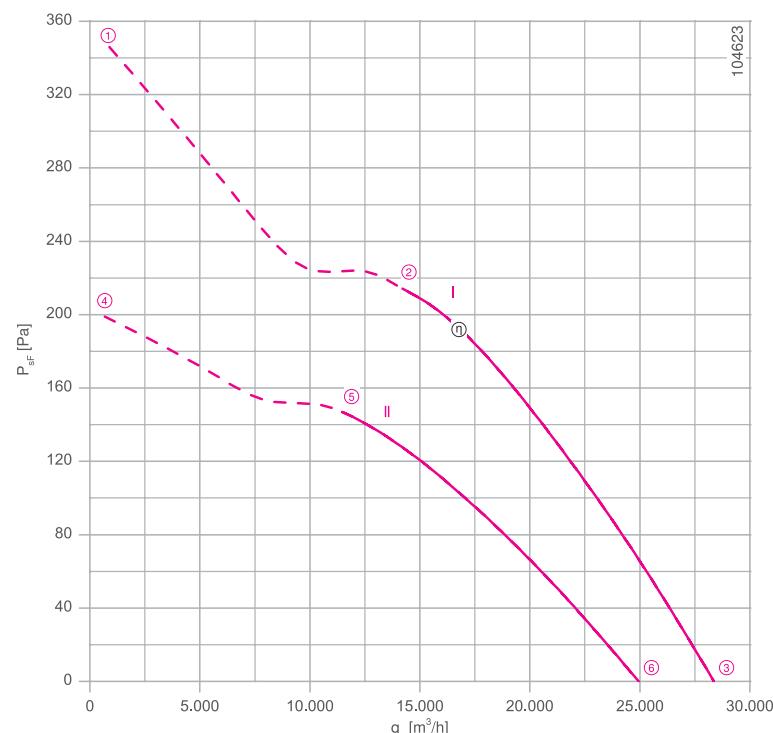

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

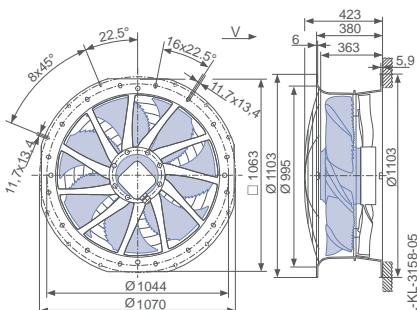


← Airflow direction

Design L - ZAplus Ontop without guard grille

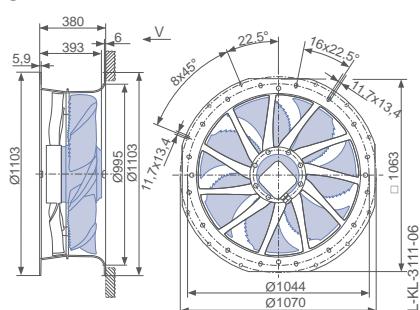

Design L - ZAplus Ontop, guard grille pressure side

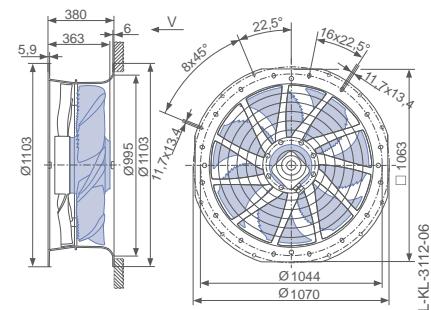

Performance data

Type	Connection	Characteristic curve	Voltage		Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U	V					
ZN091-SD_.7M.V5P1	Δ	I	400		①	5.40	2800	830	
			400*		②	4.20*	1950*	890*	87
			400		③	3.60	1300	930	81
	Y	II	400		④	2.90	1700	630	
			400*		⑤	2.30*	1300*	730*	82
			400		⑥	1.75	980	820	77

*rated data


Fan ordering information

Airflow direction		Airflow direction					
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure H (guard grille pressure side))	H (guard grille pressure side) Flattop	
Type Article no.	ZN091-SDL.7M.V5P1 167293	ZN091-SDL.7M.V5P1 165099	ZN091-SDL.7M.V5P1 165100	ZN091-SDQ.7M.V5P1 165104	ZN091-SDQ.7M.V5P1 165105	ZN091-SDH.7M.V5P1 165109	
Weight kg	53.70	50.10	52.00	54.00	55.90	52.00	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

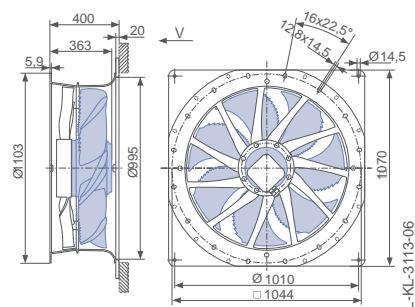

Design Q - ZAplus with adapter plate, guard grille pressure side

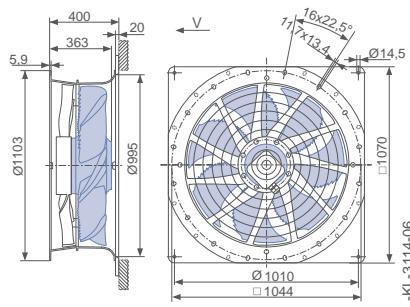

Design H - ZAplus Flattop, guard grille pressure side

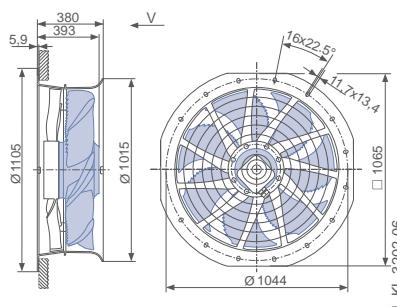

FE2owlet with ZAplus

for three phase alternating current, 8-8 pole



ZN091-AD



Description

Motor technology: AC
Rated voltage U_N : 3~ 400 V (Δ/Y) $\pm 10\%$ *
Rated frequency f_N : 50 Hz* (60Hz data available)
Input power P_i : 0.90/0.54 kW*
Rated current I_N : 2.20/1.10 A*
Rated speed n_N : 660/ 500 min⁻¹*
Starting current I_A : 5.50 / 1.60 A
Current increase ΔI : 0 %
Thermal class: THCL155*
Min. permitted ambient temperature $t_{R(\min)}$: -40 °C
Max. permitted ambient temperature $t_{R(\max)}$: 70 °C
Electrical connection: Terminal box
Number of blades: 7
Protection class: IP54
Motor protection: thermal contact
Blades: Aluminium, uncoated
Rotor: Aluminium, uncoated
Conformity: ErP 2015, CE
ErP-data
Efficiency η_{statA} : 43.4 %
Efficiency: $N_{actual} = 50.1 / N_{target} = 40$ **
* Rated data
**ErP 2015

Characteristic curve

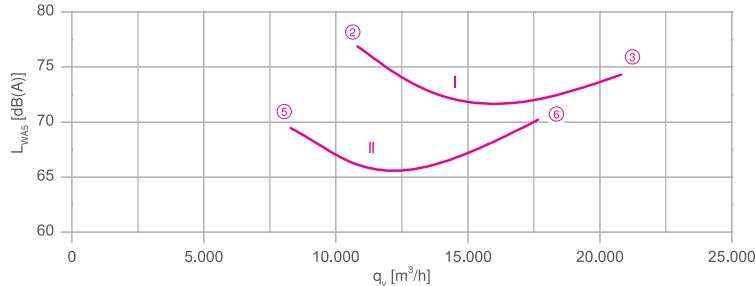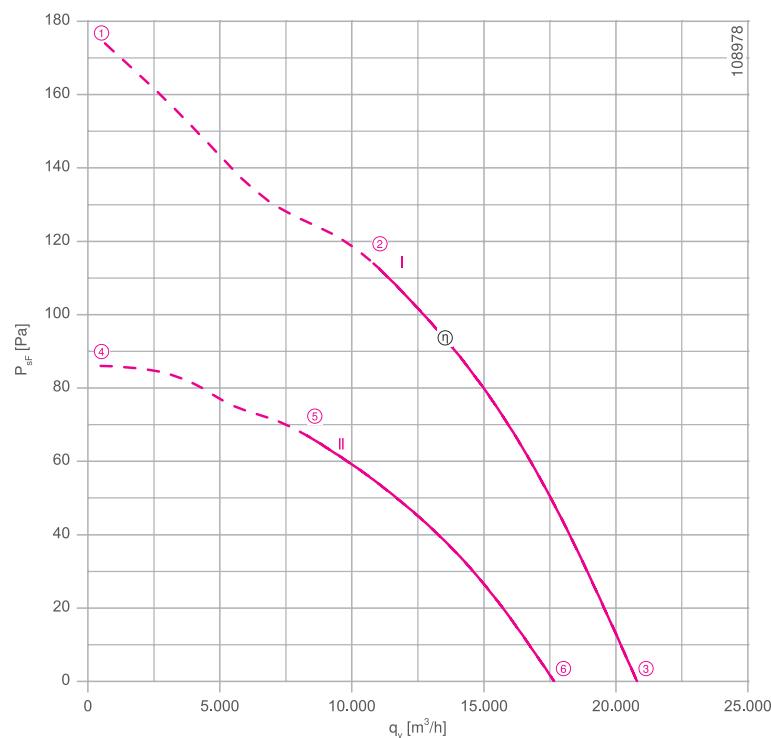

Measured in ZAplus without guard grille in installation type A according to ISO 5801

Connection diagram

Page 531
1360-108XA


System components

Page 430

Dimensions mm


Airflow direction →

Design L - ZAplus Ontop, guard grille suction side

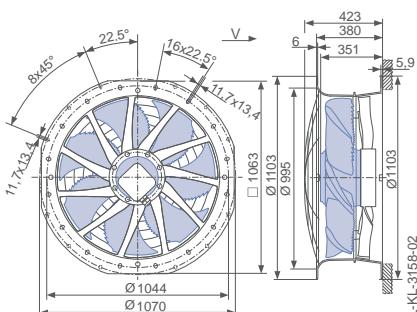


← Airflow direction

Design L - ZAplus Ontop without guard grille

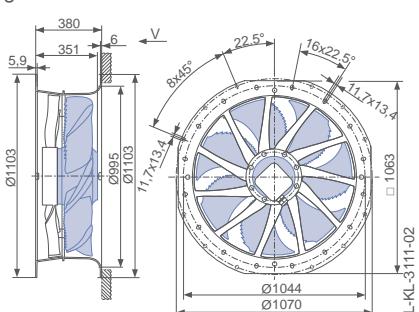

Design L - ZAplus Ontop, guard grille pressure side

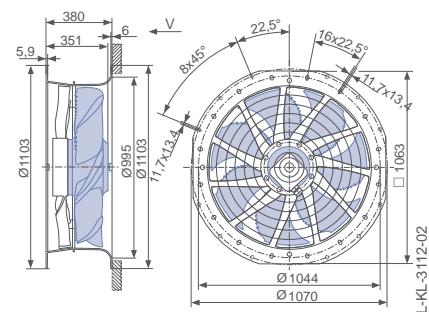

Performance data

Type	Connection	Characteristic curve	Voltage		Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U	V					
ZN091-AD_6N_7P2	Δ	I	400		①	2.50	1150	610	77
			400*		②	2.10*	880*	660*	
			400		③	1.80	600	700	74
	Y	II	400		④	1.25	620	430	
			400*		⑤	1.10*	540*	510*	69
			400		⑥	0.88	420	600	70

*rated data


Fan ordering information

Airflow direction		Airflow direction					
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop	
Type Article no.	ZN091-ADL.6N.V7P2 167290	ZN091-ADL.6N.V7P2 165055	ZN091-ADL.6N.V7P2 165056	ZN091-ADQ.6N.V7P2 165060	ZN091-ADQ.6N.V7P2 165061	ZN091-ADH.6N.V7P2 165065	
Weight kg	44.50	40.90	42.80	44.40	46.30	42.50	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

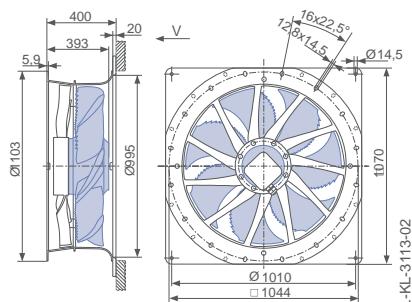

Design Q - ZAplus with adapter plate, guard grille pressure side

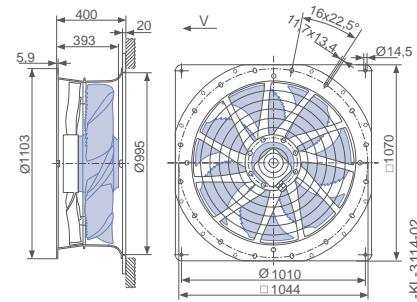

Design H - ZAplus Flattop, guard grille pressure side

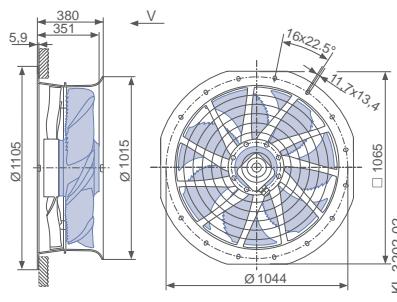

Information

FE2owlet-FCblue

FE2owlet

FE2owlet-FCblue with ZAplus

FE2owlet with ZAplus

System components

Control technology

Appendix

Performance data

Type	Connection	Characteristic curve	Voltage		Operating point	Current	Input power	Speed	Suction side sound power level L_{WAS} dB(A)
			U	V					
ZN091-ND_6N.V7P2	Δ	I	400		①	0.84	380	410	67
			400*		②	0.76*	300*	430*	64
			400		③	0.68	220	460	64
	Y	II	400		④	0.40	210	290	
			400*		⑤	0.37*	180*	330*	60
			400		⑥	0.30	140	390	60

*rated data


Fan ordering information

Airflow direction		Airflow direction					
Design	L (guard grille suction side) On top	L (without guard grille) On top	L (guard grille pressure side) On top	Q (without guard grille)	Q (guard grille pressure side)	H (guard grille pressure side) Flattop	
Type Article no.	ZN091-NDL.6N.V7P2 167291	ZN091-NDL.6N.V7P2 165066	ZN091-NDL.6N.V7P2 165067	ZN091-NDQ.6N.V7P2 165071	ZN091-NDQ.6N.V7P2 165072	ZN091-NDH.6N.V7P2 165076	
Weight kg	44.50	40.90	42.80	44.40	46.30	42.50	
ZAplus attachable on both sides.							


Control technology

Frequency inverters Fcontrol 3~ 	Motor protection units 3~ 	Electronic voltage controllers 3~
Page 480	Page 518	Page 506


Design Q - ZAplus with adapter plate, without guard grille

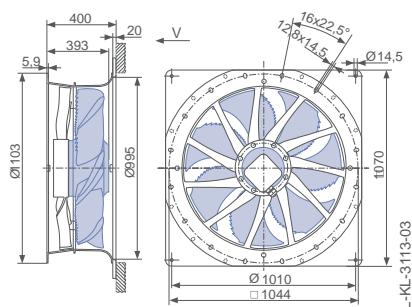


Design Q - ZAplus with adapter plate, guard grille pressure side

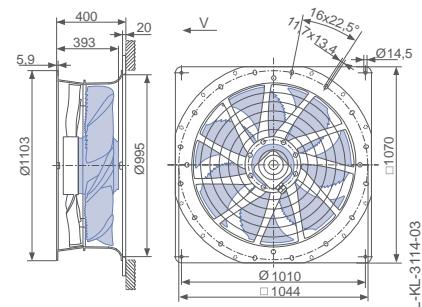

Design H - ZAplus Flattop, guard grille pressure side

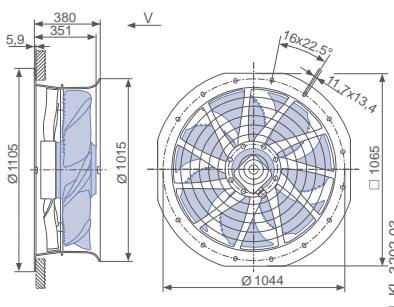

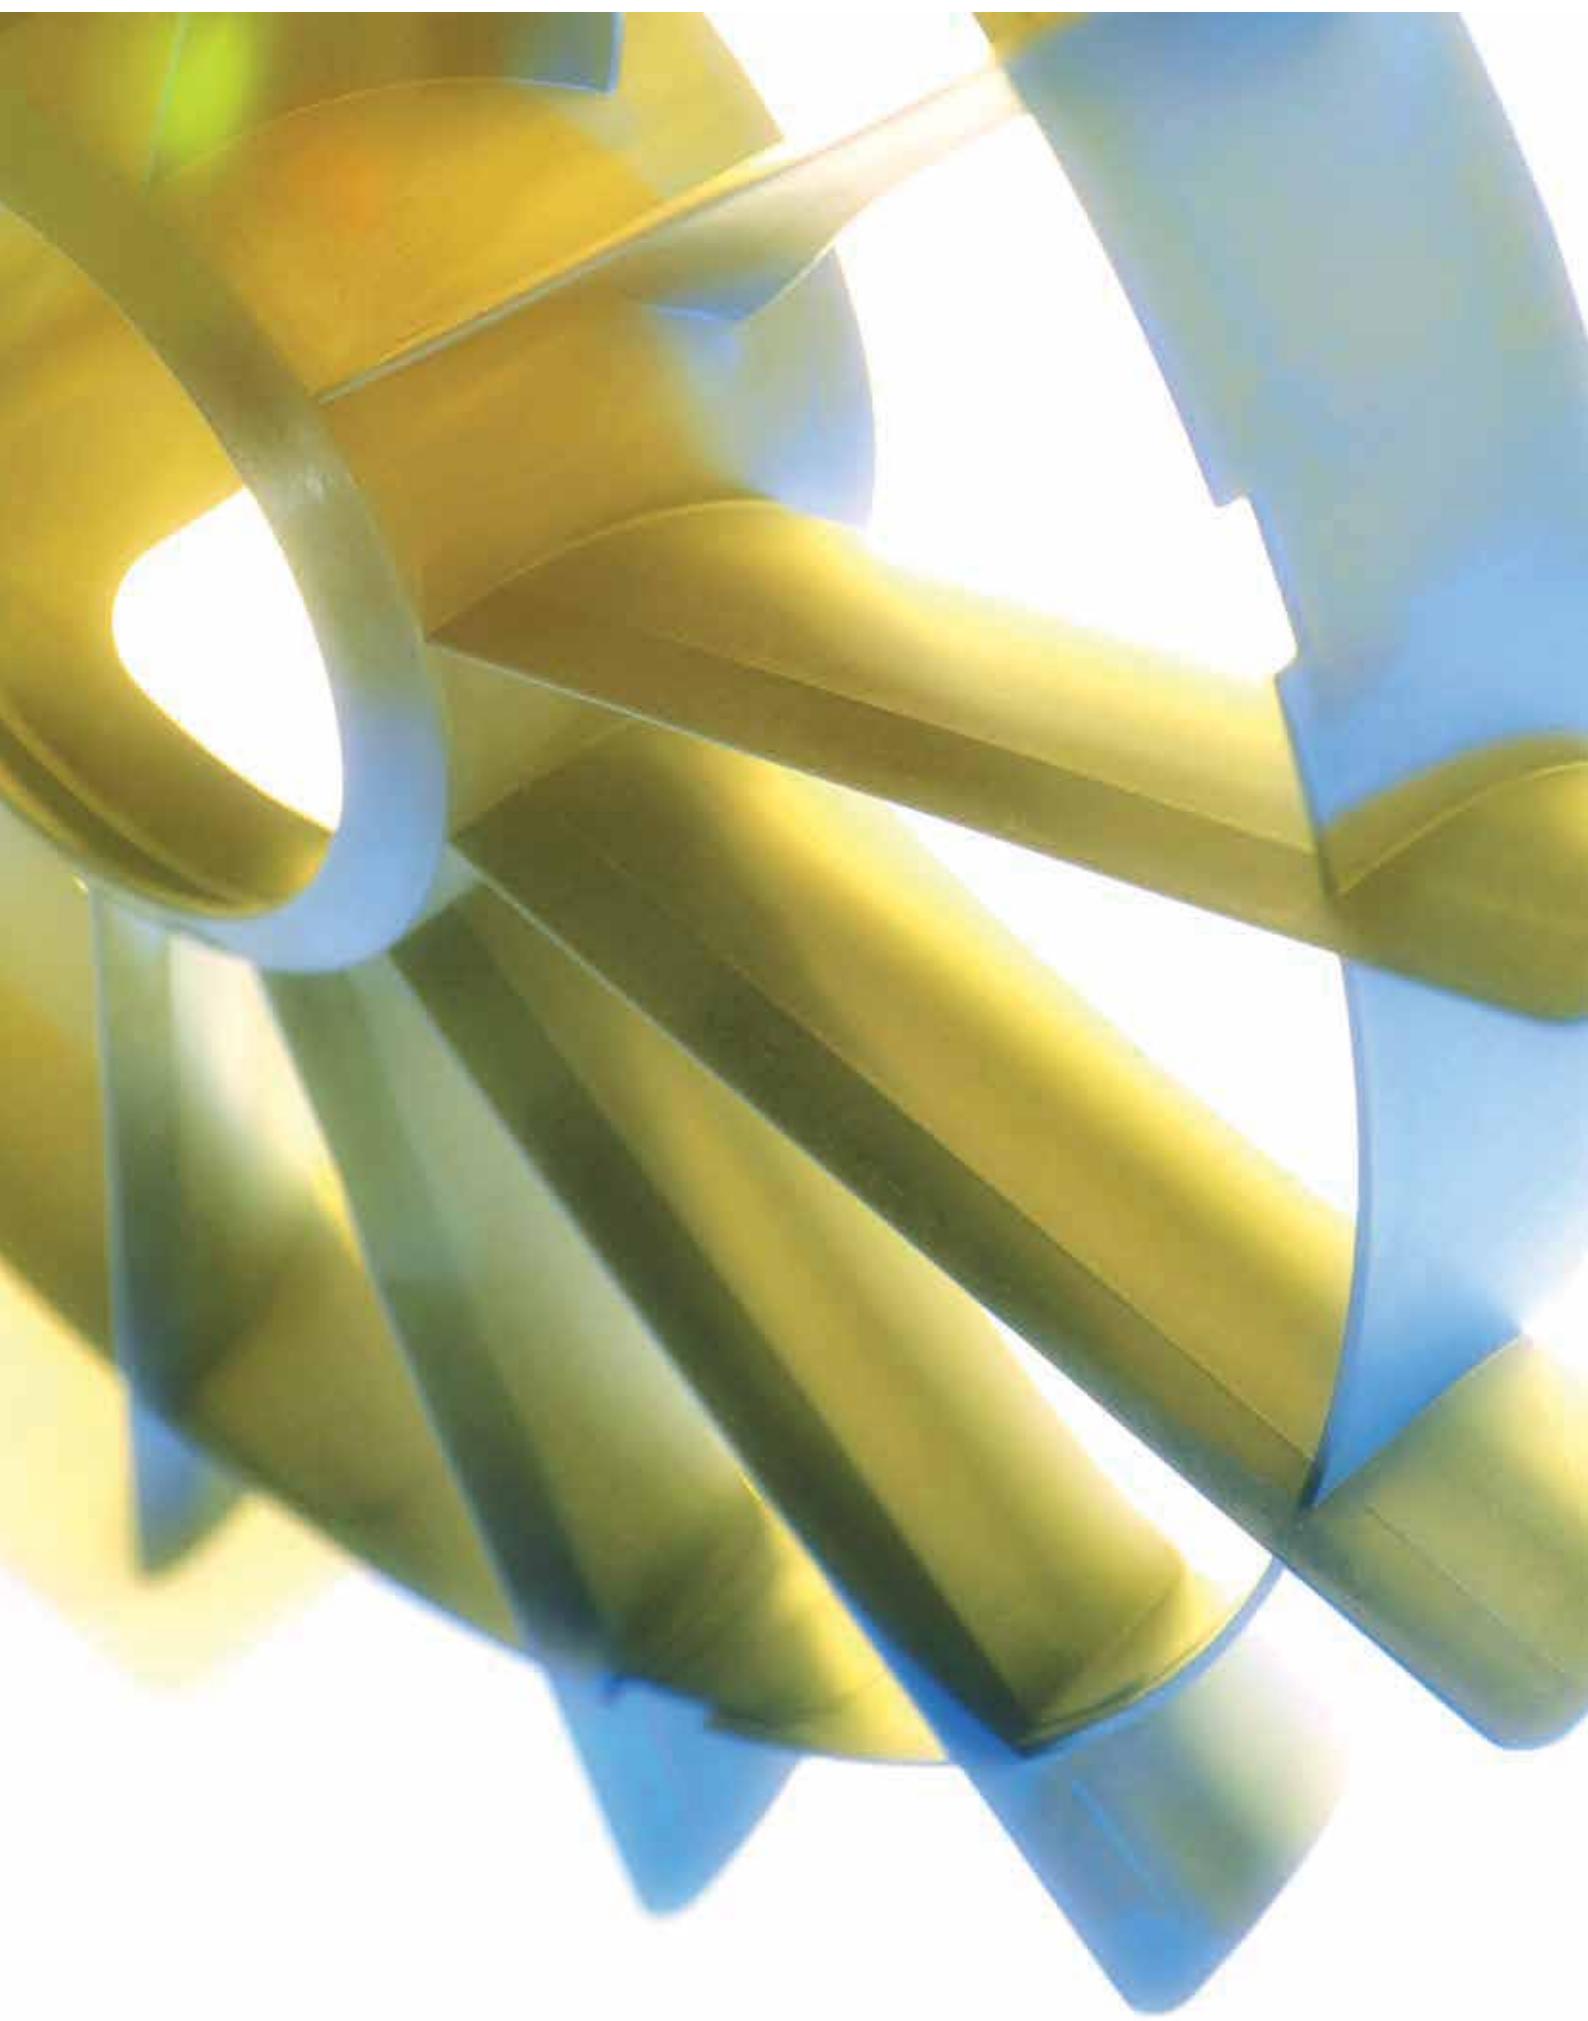

System components

Product overview

Guiding vane	Page 432
Guard grille	Page 434
ZAplus+	Page 438
Optimised sound emission with ZAplus+	Page 440
ZAplus Heater	Page 441
Backdraft fan shutter	Page 442
Service capacitor	Page 443
Capacitor junction box	Page 444
Terminal box K52 / K09	Page 445

Information

FE2owlet- ECblue

FE2owlet

FE2owlet- ECblue
with ZAplus

System
components

Control
technology

Appendix


Guiding vane

for airflow direction V and pressure side guard grille



Guiding vane

Guiding vane mounted
on fan



Description

Range: FE2owlet (see type key FN)
Application range: for improvement of the long flow-range behaviour
Applications: Evaporators, condensers, cold storage, etc.

Advantages:

- Increased throw distance
- Avoidance of "thermal short circuit"
- Minimal pressure losses
- Easy to connect
- Fast retrofitting

Special guiding vane

Material: Polyamide PA6 GF30, UL-listed
Permissible ambient temperature: -30 °C...70 °C
Mounting: Clip onto the frame support grate

Guiding vane								
for fan			for wire carrying grille		Guiding vane	Dimensions		
Motor	Size	Design	Type	Article no.	Article no.	ØD	H1	H2
	mm					mm	mm	mm
4_	450	K	K	00260180	00291528	479	101	179
	500	K	K	00260160	00286705	528	113	168
		K	K	00287445	00291529	530	101	190
6_	630	Q	S	00288513	00288666	671	118	183
	710	Q	I	00290635	00291514	715	115	178
	800	Q	I	00290636	00291515	805	115	176


Universal guiding vane

Material: Polyamide PA6 GF30, UL-listed
Permissible ambient temperature: -30 °C...70 °C
Mounting: Screwed on the frame support grate


Guiding vane			
for fan	Guiding vane	Dimensions	
Size	Article no.	ØD	H1
mm		mm	mm
450	00369240	479	120-135
500	00369241	530	120-135
630	00369242	671	140-155
710	00369243	714	114-134
800	00369244	805	114-134



Functional principle

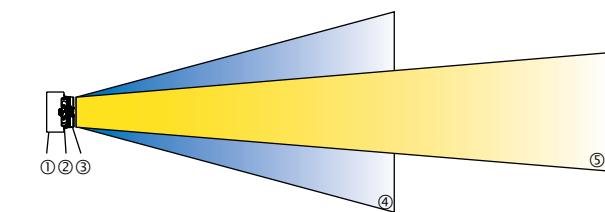


- ① Evaporator
- ② Fan
- ③ Guiding vane
- ④ without Guiding vane
- ⑤ with Guiding vane

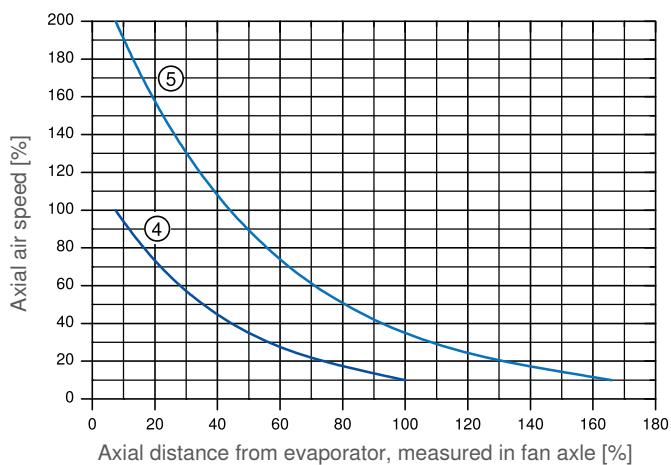

Guard grille

on suction side, for design Q/L, air flow direction A

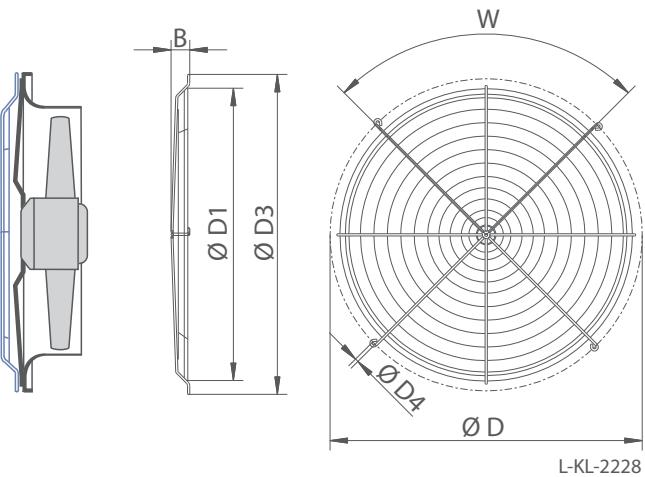


Description

Material: Steel-wire

Coating: phosphated, powder-coated

Color: RAL 9005, black matt

on blower side, for design F, air flow direction A and V

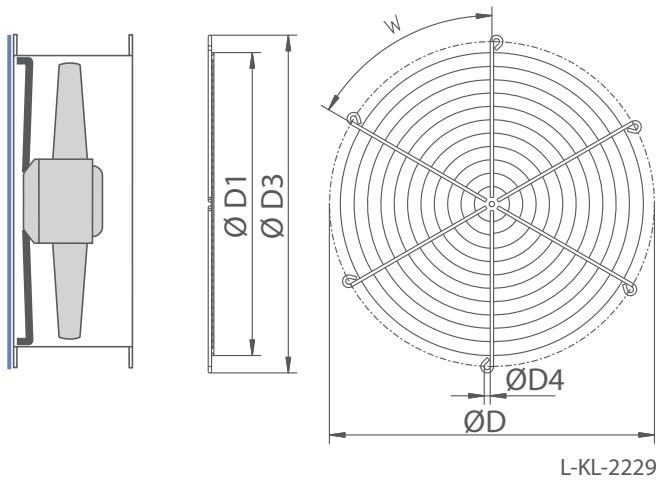

Description

Material: Steel-wire

Coating: phosphated, powder-coated

Color: RAL 9005, black matt


Guard grille on suction side							
Size mm	Article no.	B mm	D mm	D1 mm	D3 mm	D4 mm	W
710	00283714	50	835	782	856	9	4x90°
800	00283713	50	960	901	979	9	4x90°
910	00283570	56	1115	1030	1134	9	4x90°
1000	00284414	85	1140	1110	1161	9	4x90°
1250	00284523	105	1480	1405	1501	9	8x45°

Guard grille on blower side						
Size mm	Article no.	D mm	D1 mm	D3 mm	D4 mm	W
315	00285790	356	334	375	9	4x90°
350	00285792	395	374	414	9	4x90°
400	00285798	438	414	461	9	6x60°
450	00285793	487	454	506	9	6x60°
500	00285794	541	514	560	9	6x60°
560	00285795	605	574	626.5	11.5	8x45°
630	00285796	674	634	695.5	11.5	8x45°
710	00285850	751	714	772.5	11.5	8x45°
800	00284896	837	794	858.5	11.5	8x45°
900	00284510	934	891	958	11.5	8x45°
1000	00284511	1043	987	1067	11.5	8x45°
1120	00284512	1174	1123	1198	11.5	8x45°
1250	00284513	1311	1251	1335	11.5	8x45°



Guard grille

on blower side, for design Q/L, air flow direction A

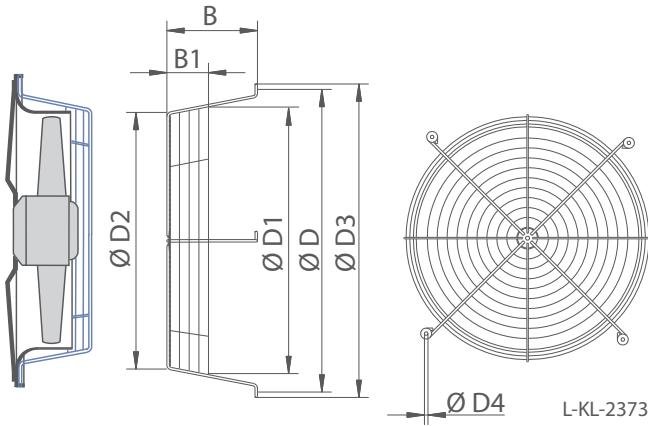

Guard grille on blower side								
Size mm	Article no.	B mm	B1 mm	D mm	D1 mm	D2 mm	D3 mm	D4 mm
350	00286215	154	95	422	380	387	444	7
400	00287758	145	64	500	431	424	522	7
450	00286217	187	131	560	487	455	582	7
500	00286218	187	83	615	539	522	637	7
560	00286202	223	120	658	597	569	680	7
630	00286219	231	127	720	682	677	724	7
710	00286201	295	152	835	743	701	857	9.5


Description

Material: Steel-wire

Coating: phosphated, powder-coated

Color: RAL 9005, black matt

on blower side, for design W, air flow direction A

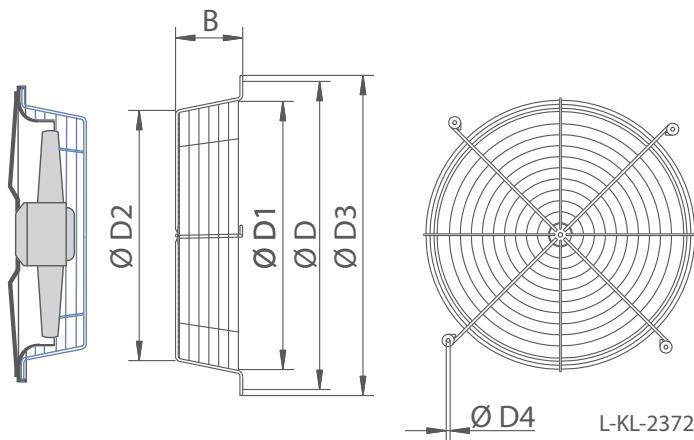

Guard grille on blower side						
Size mm	Article no.	B mm	D mm	D1 mm	D2 mm	D3 mm
350	00286216	112	420	373	387	442
420	00286407	122	560	487	456	582
560	00286203	134	658	597	570	680
650	00286204	156	750	682	677	772

Description

Material: Steel-wire




Coating: phosphated, powder-coated

Color: RAL 9005, black matt

Guard grille for ZAplus

Description

Material: Steel-wire
Coating: phosphated, powder-coated
Color: RAL 9005, black matt

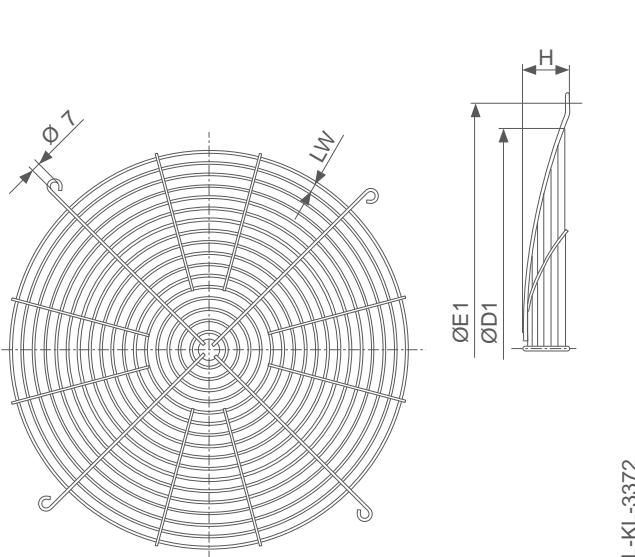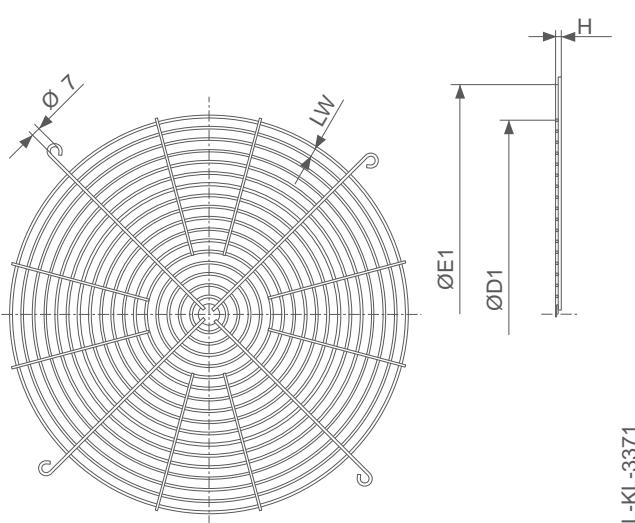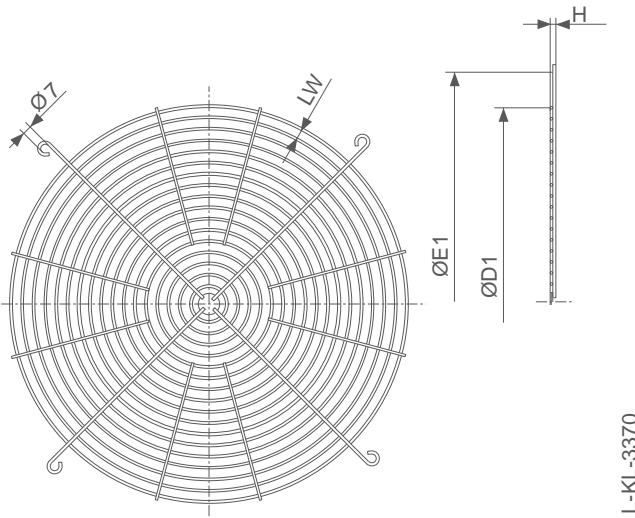


Guard grille on suction side							
Motor size	Size	Article no.	Drawing	E1 mm	H mm	D1 mm	LW mm
2_	450	00700873	3370	510	8	475	7.5
4_	450	00700874	3372	510	53	475	7.5
	500	00703180	3372	560	47	529	7.5
	630	00700576	3370	720	8	670	7.5
4M	630	00703463	3372	720	68	677	7.5
6_	630	00703463	3372	720	68	677	7.5
	910	00700894	3372	1000	58	945	7.5
6K	800	00700163	3370	900	8	840	7.5
6N	800	00702900	3372	900	27	840	7.5
7_	910	00700894	3372	1000	58	945	7.5
BD	450	00700873	3370	510	8	475	7.5
	500	00703463	3372	560	47	529	7.5
	630	00700576	3370	720	8	670	7.5
	710	00289811	3370	840	8	790	7.5
D_	500	00703180	3372	560	47	529	7.5
	630	00700576	3370	720	8	670	7.5
	710	00289811	3370	840	8	790	7.5
	800	00700163	3370	900	8	840	7.5
	910	00700893	3370	1000	8	938	7.5
G_	630	00703463	3372	720	68	677	7.5
	710	00702509	3372	840	53	790	7.5
	800	00700163	3370	900	8	840	7.5
	910	00700893	3370	1000	8	938	7.5

Guard grille on pressure side							
Motor size	Size	Article no.	Drawing	E1 mm	H mm	D1 mm	LW mm
2_	450	00700872	3371	510	8	460	19.5
4_	450	00700872	3371	510	8	460	19.5
	500	00299801	3372	560	47	535	7.5
	630	00700182	3371	720	8	635	19.5
6_	630	00700182	3371	720	8	635	19.5
	800	00299071	3371	860	8	810	19.5
	910	00700575	3371	1000	8	910	19.5
7_	910	00700575	3371	1000	8	910	19.5
	BD	00700872	3371	510	8	460	19.5
	500	00299801	3372	560	47	535	7.5
D_	710	00701557	3371	780	7	710	19.5
	500	00299803	3372	560	24	513	7.5
	630	00700182	3371	720	8	635	19.5
	710	00701557	3371	780	7	710	19.5
	800	00299070	3370	860	8	810	8.5
G_	910	00700575	3371	1000	8	910	19.5
	630	00700182	3371	720	8	635	19.5
	710	00701557	3371	780	7	710	19.5
	800	00299071	3371	860	8	810	19.5
	910	00700575	3371	1000	8	910	19.5


Guard grille for ZAplus

Description


Material: Stainless steel 1.4301

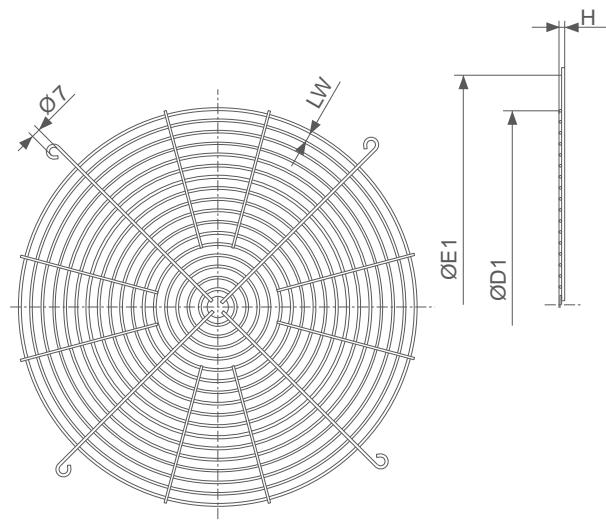

L-KL-3370

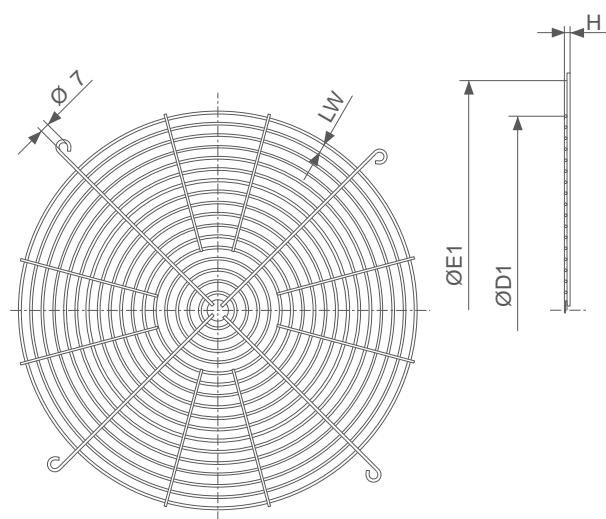

L-KL-3371

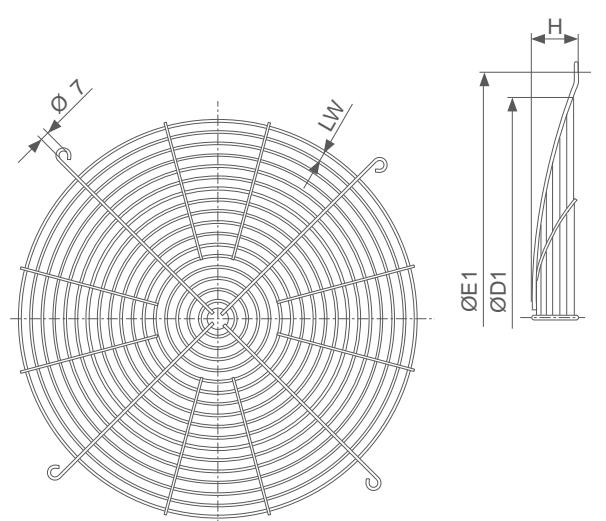

L-KL-3372

Guard grille on suction side							
Motor size	Size	Article no.	Drawing	E1	H	D1	LW
4_B/D	500	00702457	3372	560	47	529	7.5
6_B/D/G	630	00702461	3372	720	68	677	7.5
6N/D/G	800	00702902	3372	900	47	840	7.5
6_7_D/G	910	00702460	3372	1000	58	945	7.5

Guard grille on pressure side							
Motor size	Size	Article no.	Drawing	D1	H	D1	LW
2_4_B	450	00702458	3370	510	8	460	19.5
4_B/D	500	00702455	3372	560	47	535	7.5
4, 6, D, G	630	00702459	3370	720	8	635	19.5
D	800	00702424	3371	860	8.5	810	11.5
6_G	800	00702453	3371	860	8	810	19.5
6_7_D/G	910	00702462	3370	1000	8	910	19.5




Z Aplus+

Diffusor on ZAplus for greater air flow rate in the lower pressure range



Increase in air flow rate ZAplus+ vs ZAplus

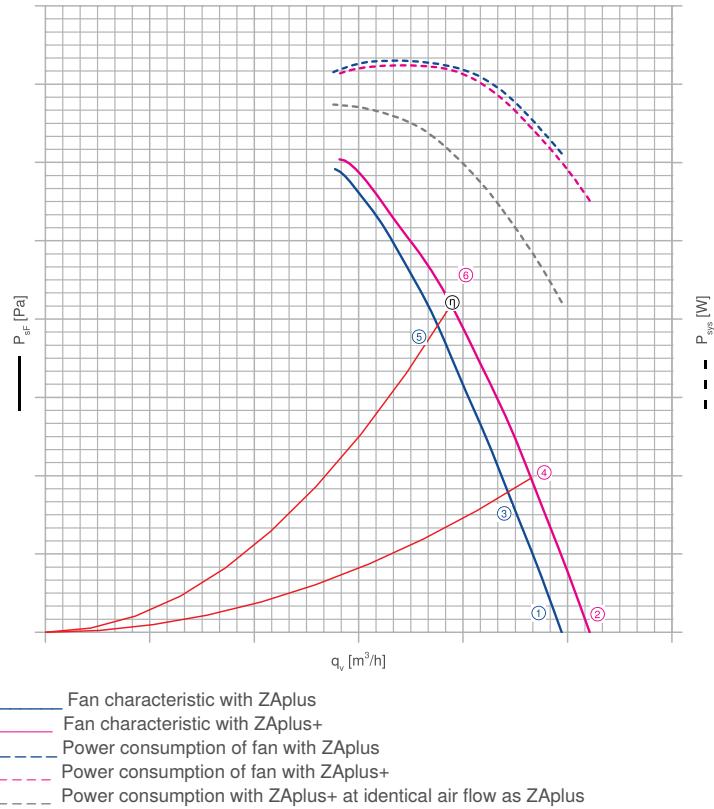

Description


Applications with low pressure losses (including Microchannel)
Sizes: ZN050, ZN063, ZN080 and ZN091
Diffusor: Black-coated metal sheet
Guard grille: Black-coated steel wire
Authorised ambient temperature: -50°C...80°C
Assembly: Screwed to ZAplus

The installation kit includes:

2 diffusor halves
1 guard grille
1 fastening kit
1 assembly instructions

Advantages:

- Noise level improved by up to 4.5 dB(A)
- Acoustic directivity
- Increased air handling capacity
- Easy to retrofit
- Energy optimisation
- Lower operating costs
- 100% recyclable
- Complies with ErP 2015

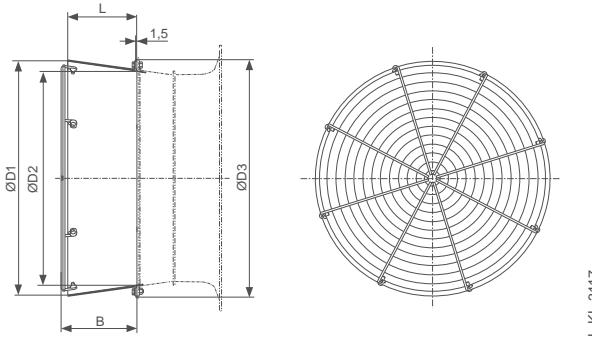

L-KL-3117

ZAplus+


Size	Article no.	$\varnothing D_1$ mm	$\varnothing D_2$ mm	$\varnothing D_3$ mm	B mm	L mm	Weight kg
500	00701319	576	528	579	186	170	5.0
630	00701321	725	675	800	197	180	6.8
800	00701323	908	835	935	197	180	8.6
910	00702652	1006	955	1075	197	180	9.7

Improvement to ZAplus through ZAplus+					
	Operating point		q _v increase*	Energy saving*	Energy saving**
ZN050-6I_.BD.V7P2	①	②	7.0	14.5	30.5
	③	④	6.0	-	21.5
	⑤	⑥	4.0	-	11.5
ZN050-ZI_.DC.V7P2	①	②	9.0	14.5	34.0
	③	④	6.5	-	22.5
	⑤	⑥	4.0	-	14.5
ZN050-VD_.4I.V7P1	①	②	8.5	9.0	28.5
	③	④	5.5	-	18.0
	⑤	⑥	3.0	-	10.0
ZN050-6E_.4F.V7P1	①	②	8.0	6.5	25.5
	③	④	5.5	-	16.5
	⑤	⑥	3.5	-	10.0
ZN050-AD_.4C.V7P1	①	②	8.0	7.0	26.0
	③	④	7.5	-	22.0
	⑤	⑥	4.0	-	12.0
ZN063-6I_.BD.V7P2	①	②	2.5	-	7.0
	③	④	4.0	-	9.5
	⑤	⑥	1.5	-	-
ZN063-ZI_.DG.V7P2	①	②	2.0	3.5	9.5
	③	④	2.5	-	10.0
	⑤	⑥	1.0	-	3.5
ZN063-ZI_.GL.V7P3	①	②	4.5	5.5	16.5
	③	④	1.0	-	6.5
	⑤	⑥	0.5	-	1.5
ZN063-VD_.6N.V7P4	①	②	3.0	0.5	9.5
	③	④	1.0	-	3.0
	⑤	⑥	1.5	-	3.5
ZN063-SD_.4I.V7P1	①	②	1.0	1.0	4.5
	③	④	1.0	-	4.5
	⑤	⑥	1.0	-	3.5
ZN063-6E_.4M.V7P1	①	②	1.5	2.0	6.5
	③	④	1.5	-	6.0
	⑤	⑥	1.0	-	4.5
ZN063-AD_.4I.V7P1	①	②	1.0	-	3.0
	③	④	1.0	-	2.5
	⑤	⑥	1.0	-	3.0
ZN080-ZI_.DG.V5P4	①	②	4.5	8.5	19.5
	③	④	3.5	-	13.5
	⑤	⑥	2.5	-	7.5
ZN080-ZI_.GG.V7P3	①	②	4.5	7.0	18.0
	③	④	3.0	-	10.0
	⑤	⑥	1.0	-	1.5
ZN080-ZI_.GL.V7P3	①	②	4.5	6.0	18.0
	③	④	3.0	-	8.5
	⑤	⑥	1.5	-	2.0
ZN080-SD_.6N.V7P2	①	②	4.5	4.0	15.5
	③	④	2.5	-	11.5
	⑤	⑥	-	-	-
ZN080-AD_.6N.V7P2	①	②	3.5	6.5	16.0
	③	④	3.0	-	11.5
	⑤	⑥	-	-	-
ZN080-ND_.6K.V7P2	①	②	5.5	2.5	17.0
	③	④	1.0	-	8.0
	⑤	⑥	0.5	-	3.5
ZN091-ZI_.DL.V5P1	①	②	2.1	2.2	8.0
	③	④	1.5	-	5.1
	⑤	⑥	1.0	-	2.1

* Comparison at identical speed/ ** identical air flow - using AC motors with Fcontrol

Optimized Sound Emission with ZAplus+

Acoustic directivity = reduced centrifugal sound emission

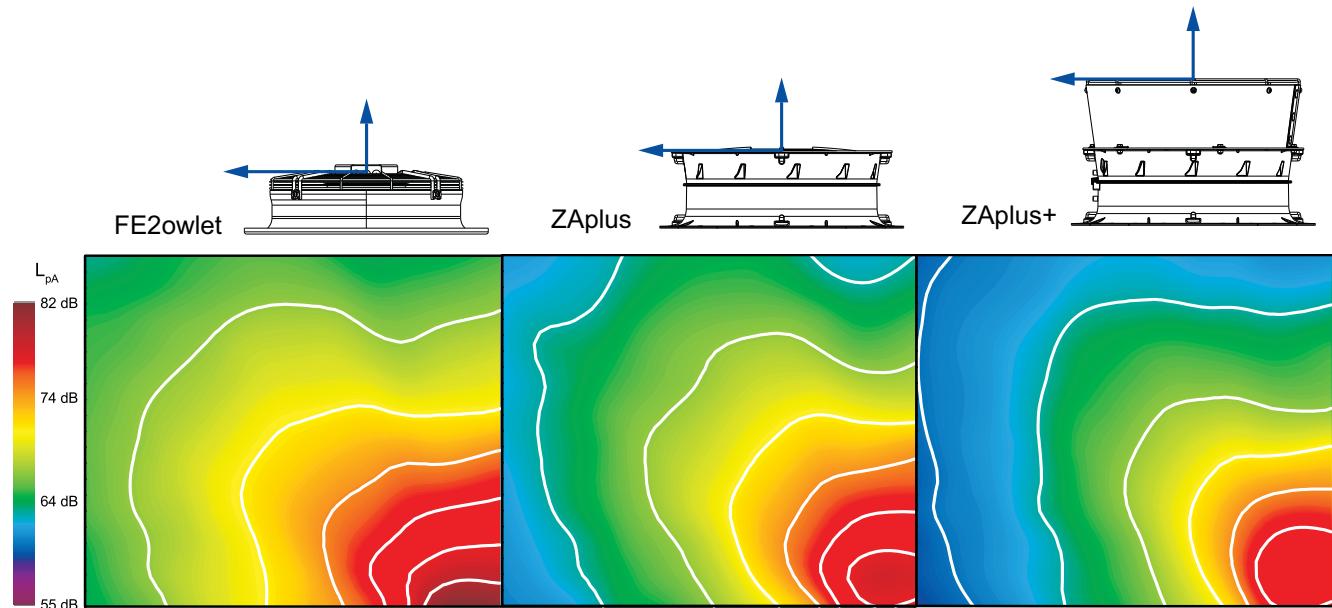

Sound emission with ZAplus mainly vertical. Lower noise for your neighbour



ZAplus Heater



Technical characteristics

Aluminium Heater

Rated voltage U_N : 1 200-250 V

Rated frequency f_N : 50/60 Hz

Approval CE

1 m cold tail insulated

60 ° C thermostat

120 ° C safety limiter

Adhesive backside on the whole surface


Additional adhesive over perimeter length for legendary fixing on itself

This way of fixing warrenties a better contact and so better heat exchange efficiency

As an option there is an isolation jacket available. Herewith the loss of heat can be minimized.

ZAplus Heater			
Size	Power W	ZAplus Heater UL-certified	Isolation jacket
450	210	00702486	00702492
500	180	00702487	00702493
630	280	00702488	00702494
710	400	00702489	00702495
800	470	00702490	00702496
910	550	00702491	00702497

Backdraft fan shutter

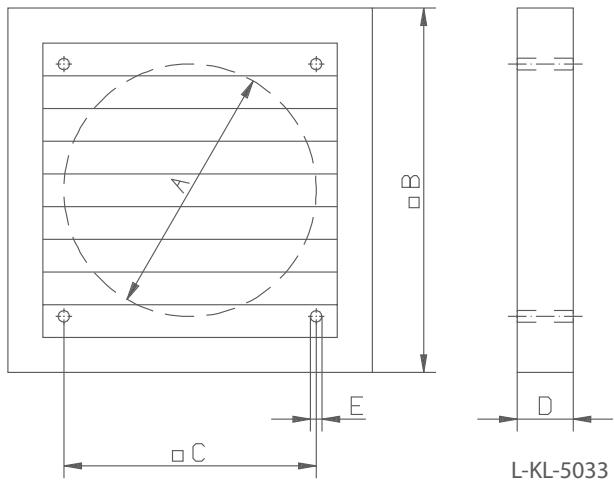

Description

Made of shock-proof and UV-resistant plastic

Colour: light grey.

Package includes mounting fixtures.


Type SVK1000: Delivery in three pieces for self assembling.

Larger shutters available on request.

Backdraft fan shutter					
Article no.	Type	A mm	B mm	C mm	D mm
00234330	SVK315	310	346	276	26
00234340	SVK350	360	397	310	26
00234350	SVK400	422	462	366	26
00234360	SVK450	462	501	395	31
00234370	SVK500	505	548	443	31
00234380	SVK560	563	603	520	28
00244980	SVK630	655	696	628	31
00236390	SVK710	720	760	692	40
00264387	SVK800	800	840	772	40
00264388	SVK1000	1000	1040	972	40



Service capacitor

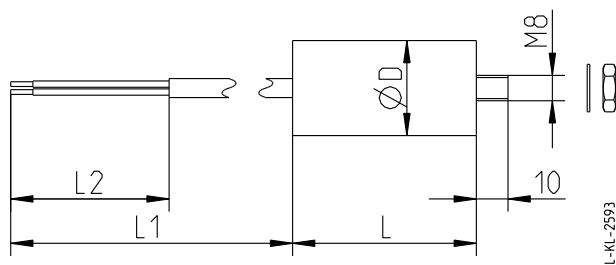

Description

Material: plastic housing


Wiring: AWG18 or AWG20

Max. Voltage: Umax = 400V

Ambient temperature: -25 °C to +85 °C

Service capacitor					
Capacity (μF)	Article no.	D mm	L mm	L1 mm	L2 mm
1,0	02006926	26	53	350	50
1,5	02006927	25	57	180	50
2,0	02006930	25	57	350	50
2,5	02006931	25	57	350	50
3,0	02006932	26	53	350	50
3,5	02011670	30	57	210	210
4,0	02006933	25	71	350	50
5,0	02006934	30	58	350	50
6,0	02006935	30	72	350	50
7,0	02006936	30	78	350	50
8,0	02006937	30	98	350	50
10,0	02006938	35	71	350	50

Capacitor junction box

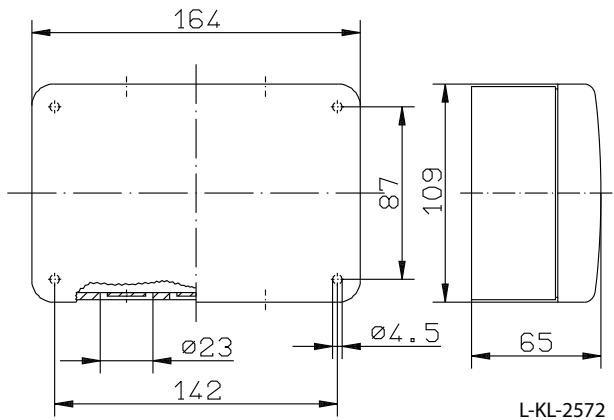

Description

Material: shock-proof polystyrene

Protection class: IP54

Color: light grey


Package includes pre-assembled capacitor, terminal strip, and two cable glands Pg16 with locking nut.

Capacitor junction box		
Article no.	Type	C400 V (μ)
00266159	GC1.5 / 400	1.5
00264073	GC2 / 400	2
00264065	GC3 / 400	3
00264066	GC4 / 400	4
00264067	GC5 / 400	5
00264069	GC6 / 400	6
00264068	GC8 / 400	8
00264071	GC10 / 400	10
00264072	GC12 / 400	12
00264074	GC14 / 400	14
00308236	GC16 / 400	16
00266154	GC_	without capacitor



Terminal box

K52

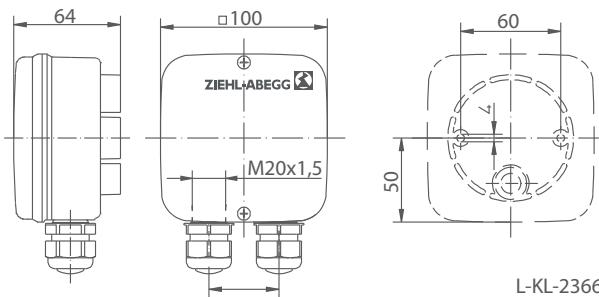

Description

Material: PC/ABS blend

Protection class: IP55

Max. rated voltage: 500 V

Available with European terminal strip 2.5 mm² with wire protection. Capacitor for single phase AC up to 16 µF, 400 V can be fitted. With two plastic cable glands M20 x 1.5 with seal.


Attention: Metall cable glands must not be used for plastic terminal boxes!

The hole in the bottom must be closed / sealed by the customer.

Article no.

00341564

K09

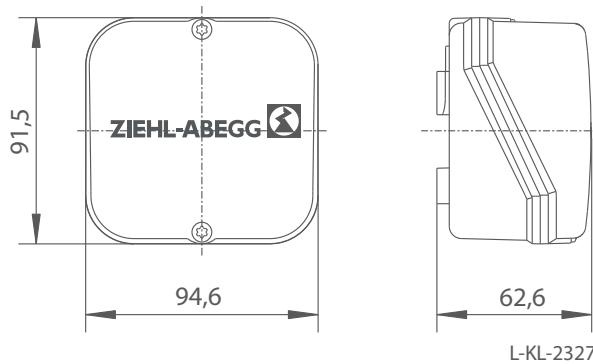

Description

Material: PC/ABS-Blend

Protection class: IP55


Max. rated voltage: 500 V

Available with European terminal strip 2.5 mm² with wire protection. Capacitor for single phase AC up to 16 µF, 400 V can be fitted. With two plastic cable glands M20 x 1.5 with seal.

Attention: Metal-cable glands must not be used for plastic terminal boxes!

The hole in the bottom must be closed / sealed by the customer.

Terminal box K09		
Article no.	Capacitor µF/400V	Capacitor dimensions DxL mm
00293197	1.0	25x58
00293198	1.5	25x58
00293199	2.0	25x58
00293200	2.5	25x58
00293201	3.0	25x58
00293910	3.5	30x58
00293202	4.0	25x72
00293203	5.0	30x58
00293204	6.0	30x72
00293205	7.0	30x72
00293206	8.0	35x72
00293207	10.0	35x72

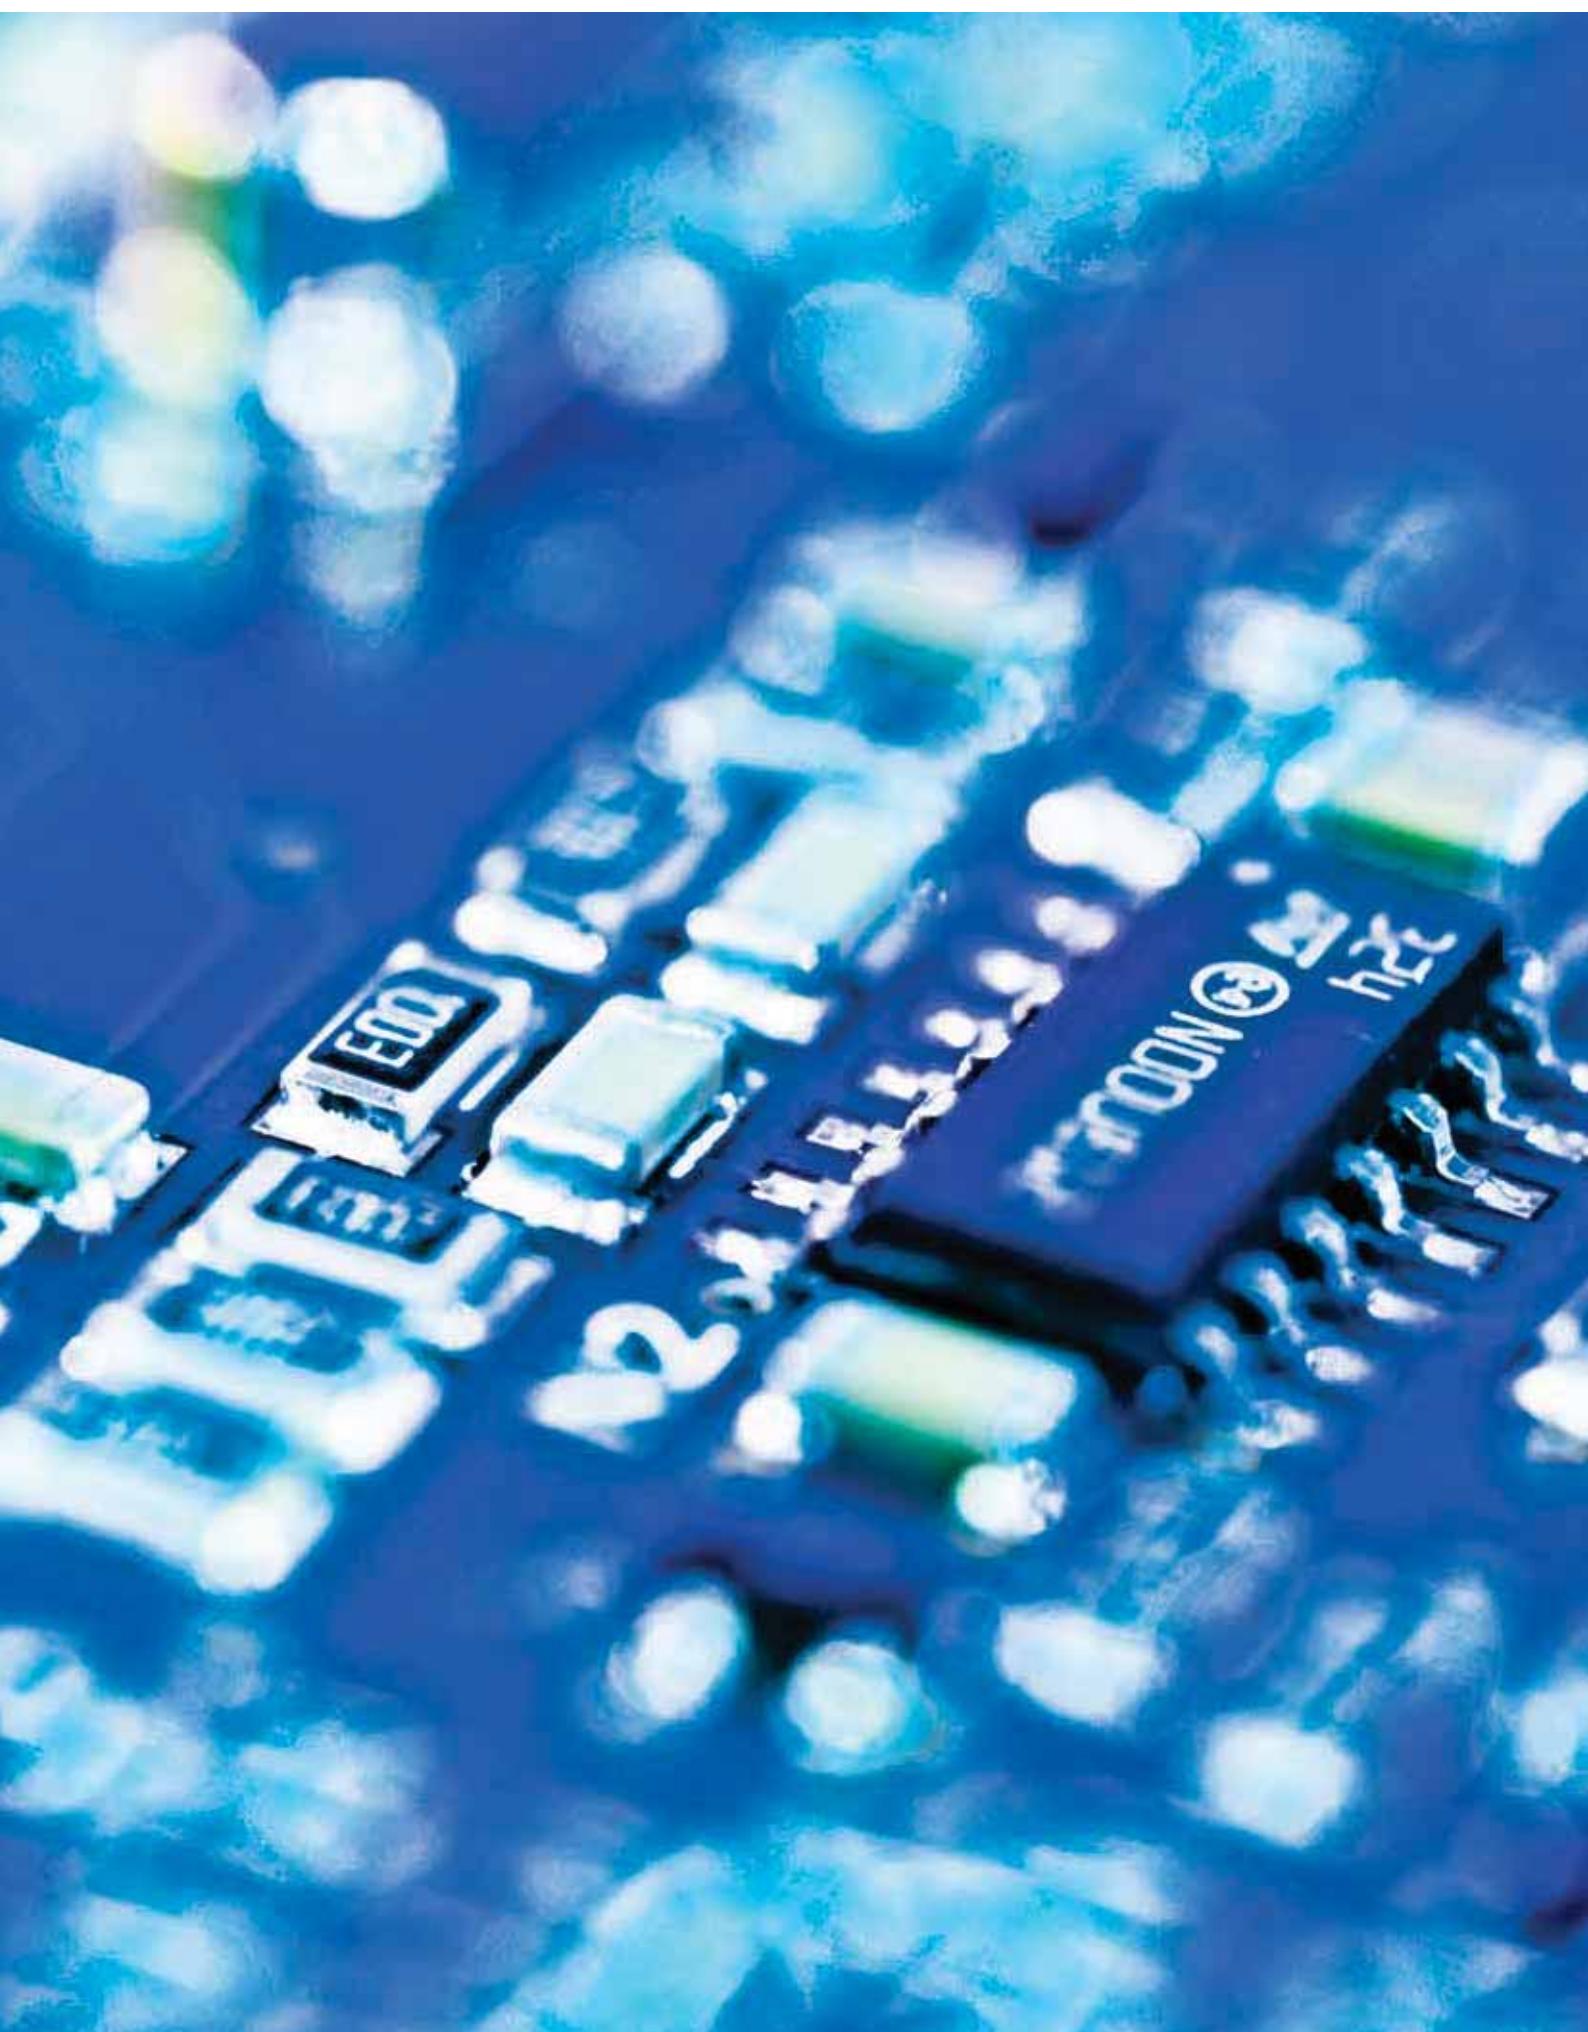

Control technology

Product overview

Selection criteria for control devices	Page 448
Options for speed control	Page 449
Motor protection concept	Page 450
UNIcon control modules	Page 452
System components for ECblue	Page 461
Add-on modules	Page 463
Display and operator terminals	Page 470
Hand held terminal	Page 472
Frequency inverters 1~	Page 474
Frequency inverters 3~	Page 482
Electronic voltage controllers 1~	Page 492
Electronic voltage controllers 3~	Page 506
Motor protection units	Page 518

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Selection criteria for control devices

ZIEHL-ABEGG is the only fan manufacturer who develops its own methods for changing the speed of fans and produces the controllers for this:

- voltage controllers
- frequency inverters
- EC controllers

It is not general solutions which bring the decisive advantage in a special application. It is far more the criteria related to a system which are to be considered and which therefore lead to the best result. ZIEHL-ABEGG gives you neutral advice. The most suitable control procedure is chosen according to the system-related criteria. The following criteria are decisive for the selection of the right controller:

- control variable
- motor noises
- economy


Control variable

Basically it is a case of whether you want to implement an open control circuit (only one speed controller which operates based on a setting signal) or a closed control circuit (independent control to a physical variable, e.g. temperature, pressure, etc., in connection with appropriate sensors). In our program you will find controllers which operate only as speed controllers and versions which control processes independently, sometimes with extensive additional functions. We also supply the necessary sensors.


Sensors for process control:



Pressure sensor
MBG-301



Temperature sensors
TF...



Air velocity sensors
MAL...



Pressure sensor
MPG... (gases)



Combined sensor for
CO₂, humidity, tem-
perature

Quiet motor operation

Depending on the application, different requirements are placed on low noise emission by the control method. For instance, due to its very low investment cost, electronic voltage control is very popular. However, electromagnetic excitation can arise due to the principle of phase-cut control, causing humming noises in the motors. As these excitations can be further amplified through resonances throughout the entire device, it is recommended to fall back on the control method (as early as in the planning stages), which does not cause electromagnetic excitation in the motors when these are to be used in noise-sensitive areas.

For 1~ alternating current fans, 1~ Fcontrol frequency inverters are available.

In the 3~ area, the noise filter GFD is available for voltage control devices as an accessory. Alternatively, these components can also be retrofitted. As another option, we recommend using the Fcontrol frequency inverter (3~) or EC technology as these systems work without the inference of electromagnetic motor noises.

Control devices for noiseless speed control:



Frequency inverter
Fcontrol



EC-controller Econtrol



ECblue fan with inte-
grated EC controller

Cost effectiveness

In addition to the investment costs, it is absolutely essential to take the energy costs incurred during the service life into account for an assessment of the control system. Voltage control units are very favourable in terms of their investment costs for instance. The Fcontrol frequency inverters or ECblue fans have clear advantages in comparison with voltage control.



Options for speed control

Speed control with frequency inverter

We specifically developed frequency inverters for trouble-free, quiet and cost-effective speed control of fans in parallel operation.

Fcontrol frequency inverter

Our Fcontrol frequency inverters with integrated, all pole effective sine filters enable parallel operation without placing restrictions on the cable lengths and without using shielded motor cables. The frequency inverters have stored, selectable operating modes, e.g. for refrigeration, air-conditioning and clean room technology along with agricultural applications.

Fcontrols can also be supplied for controlling pumps and for compressors.

The advantages of the Fcontrol frequency inverter:

- Speed control without electromagnetic motor noises
- Motors are not exposed to risk
- Operation without shielded motor cables
- No restriction during parallel operation of motors on the Fcontrol
- Very energy efficient
- The motor cable lengths are not restricted by Fcontrol
- Universal control functions are already integrated



Frequency inverter Fcontrol

Icontrol frequency inverters

Standard Icontrol frequency inverters are available for controlling internal rotor motors (IEC standard motors).

Speed control with voltage control devices

ZIEHL-ABEGG offers a comprehensive product range of electronic voltage control devices for continuously adjustable speed control of voltage controllable 3~ and 1~ fans. From simple devices (control through potentiometer) up to multifunction devices with display can be used for numerous applications. Multifunction devices have selectable operating modes already stored, e.g. for refrigeration, air-conditioning, clean room technology and even for agricultural applications.

Since when using the principle of phase-cut control electromagnetic noises can arise in the motors, we recommend the Fcontrol frequency inverter for noise-sensitive applications.

The advantages of electronic voltage control:

- Reasonably priced investment
- Universal control functions are already integrated

Important when selecting devices:

A voltage drop can lead to an increase of the current consumption on the motor. Please take this into consideration with a current reserve when designing voltage control devices. In this connection please note the technical data of the fans, especially regarding the statement of ΔI .



Basic 1~ voltage control device



Universal 3~ voltage control device

Speed control with transformers

Voltage controllable fans can have their speed changed by using transformers. For this purpose, we supply individual transformers (e.g. installation in switch cabinets) and complete transformer-based controllers with 5-step switch with various equipment:

- Control devices with and without integrated motor protection function
- Control devices with additional contacts and additional functions

The advantages of transformer-based speed control:

- Simple, robust technology
- No electromagnetic motor noises



Transformer-based 5-stage control devices for 1~ and 3~

Motor protection concept

The majority of ZIEHL-ABEGG external rotor motors (excluding ex-motors) are equipped with "TB" thermostats.

Standard protective switches or bi-metal actuators in the motor feed line work dependent of current and thus offer only incomplete protection as the current does not allow conclusions to be made about the motor winding temperature under all conditions.

In contrast, thermostats are bimetal switches embedded in the motor winding and they can react directly to the motor's winding temperature. They open an electrical contact, as soon as their nominal switch temperature (NST) is attained.



Thermal contact

Fans can be securely protected by ZIEHL-ABEGG motor protection devices. Especially when they are

- speed controlled by voltage,
- operated with excessive switching frequency,
- when they are stalled,
- or exposed to high ambient temperatures.

Thermostats must be connected in the control circuit so that during a malfunction the fans are not independently reconnected after cooling off. ZIEHL-ABEGG devices meet these conditions. Mutual protection of several motors is possible with one protection device. In order to do this, the temperature protectors of the individual motors have to be connected in series. Please pay attention to the fact that all motors are disconnected at the same time in case of a temperature failure in a single motor. In real life applications, motors are grouped, so in case one motor fails it is still possible to run in emergency mode with reduced power.

To ensure optimum motor protection we provide motor protection units in various designs.

Motor protection units for 3~ motors

The STDT motor protection units for 3~ motors combine several functions:

The motor is primarily protected by "TB" thermostat monitoring. This ensures direct monitoring of the winding temperature. On top of that, the STDT has an integrated overcurrent release that protects the lead to the motor from overcurrent. This feature - plus the integrated double terminals- allow the STDT to be used like a "current distribution" of sorts.




Motor protection units and system components

Application example with 3 ~ motor protection units as "current distribution"

Network or control devices output

Single fans or groups of fans protected by thermostats

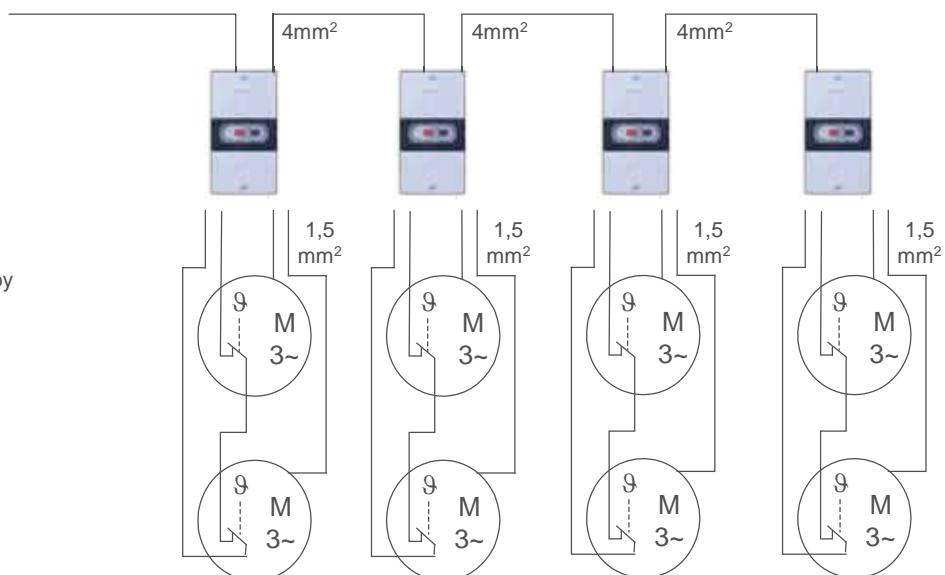

Motor protection units for 1~ motors

In the 1~ motor protection units, it is intended that each motor is allocated one motor protection device. Motor protection is also carried out using "TB" thermostat monitoring.

Monitor unit for thermistors

Our U-EK monitor device is available for monitoring "TP" thermistors, which are also approved for monitoring Ex-protected motors (ATEX approval).

Motor protection and switchgear

For speed selecting motors in which the motor windings are intended for this, we supply the switchgear with integrated monitoring functions for the "TB" thermostats.



Monitoring device U-EK230E for thermistor

Information

FE2owlet-EOblue

FE2owlet

FE2owlet-EOblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Control modules

UNIcon universal control module (with MODBUS Master function)



All ZIEHL-ABEGG sensors can be combined with the UNIcon CXE/A(E) universal control module. The actual value measured at the sensor is compared with the setpoint. This results in the 0-10 V output signal. Two 0-10 V outputs are integrated. These serve to activate EC fans, frequency inverters or other devices. Optionally, connected field devices (frequency inverters/EC fans with plugged MODBUS add-on module) can be activated by the integrated MODBUS-RTU interface (MODBUS Master function). Groups of frequency inverters or ECblue fans can be conveniently addressed quickly and automatically. The device also contains two separate control circuits, a real time clock and timer functions. UNIcon universal control modules are especially suitable for the following applications: Refrigeration, air conditioning, general ventilation tasks, clean room technology. For typical applications in the areas mentioned, fast start-up is possible by selecting pre-programmed operating modes.

We supply special control modules for agriculture.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e.g. sensors type TF.., e.g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

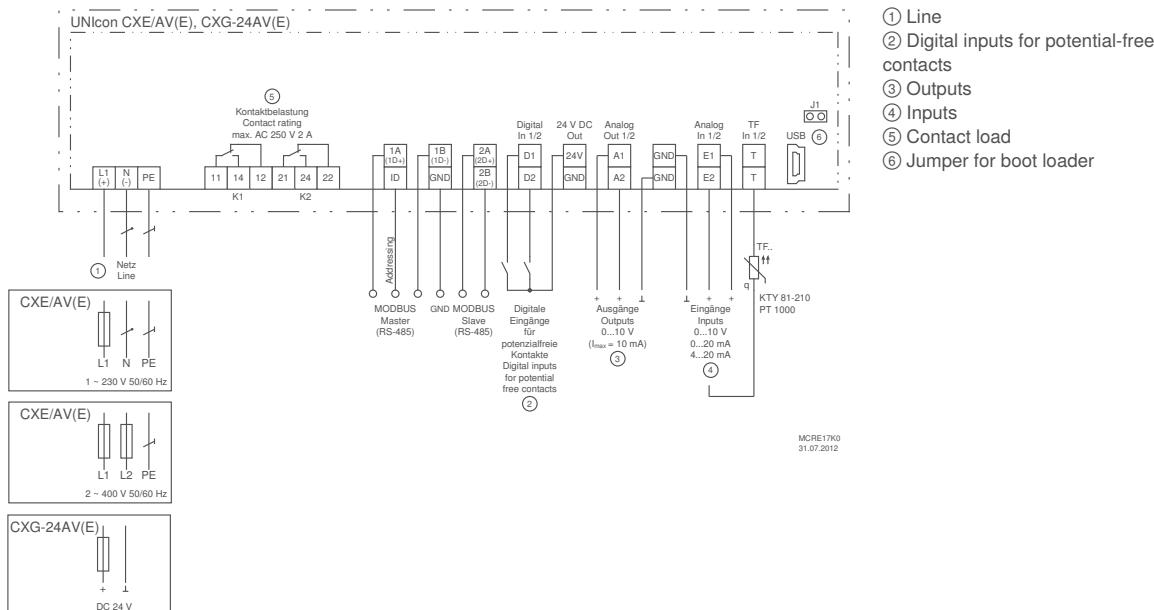

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Multifunction display with clear text display:
Different menu languages are selectable

Simple commissioning by operating modes:

Typical operating modes, e.g. for air-conditioning, refrigeration or ventilation technology can be selected.

Simple programmability:

e. g. setting of a minimum speed, limitation of the maximum speed, inversions and limits.

Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

Analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA

Analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outside temperature-dependent)

2 digital inputs D1, D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E2, control function reversal, output limitation, display of external fault

2 analog outputs for controlling external speed controllers, EC fans, other devices:

Analog output A1 and A2: Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, group control fans, etc.

2 interfaces RS485:

a) For connecting ZIEHL-ABEGG field devices with MODBUS RTU interface (e.g. field devices with integrated add-on module "AM-MODBUS"). With the possibility of automatic addressing of these field devices.

b) MODBUS Slave function of the UNIcon, for connection to a master control station (GLT).

Set protection/memory for settings:

Activation of set protection against unauthorised access, restoration of made settings

Event memory:

Query of occurred events, operating times etc.

Integrated real-time clock with timer:

The timer function behaves like a digital input, the desired function can be selected accordingly. Up to four switching times per day can be set for the desired function.

Information

FE2owlet-EObblue

FE2owlet

FE2owlet-EObblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

UNIcon universal control module

Line	Type	Article no.	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
1~ 230V 50/60Hz	CXE/AV	320053	10	5	55	IP54	0.90	223 x 200 x 115
1~ 230V 50/60Hz	CXE/AVE	320056	10	5	55	IP00	0.65	166 x 106 x 55 mm / mounting depth: max. 105
2~ 400V 50/60Hz	CXE/AV	320055	10	5	55	IP54	0.90	223 x 200 x 115

Panel-mounting (front side IP54)

UNIcon universal control module

Line voltage	Type	Article no.	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
			A	W	°C		kg	mm
	CXG-24AV	320057	10	5	55	IP54	0.75	223 x 200 x 115
24VDC	CXG-24AVE	320058	10	5	55	IP00	0.50	166 x 106 x 55 mm / mounting depth: max. 105

Panel-mounting (front side IP54)

Control modules

UNIcon sensor control module for pressure



The sensor control module for pressure measures and displays the pressure, for instance in refrigeration circuits. Depending on the desired setpoint and control range, the sensor control module generates 0-10 V to control the EC fan or, for example, a frequency inverter.


The sensor control module is supplied with 10 V DC from the fan or frequency inverter that it controls. No additional supply voltage is required.

Input for sensors or speed settings through



Pressure sensor and control intelligence are combined in one device

Connection diagram

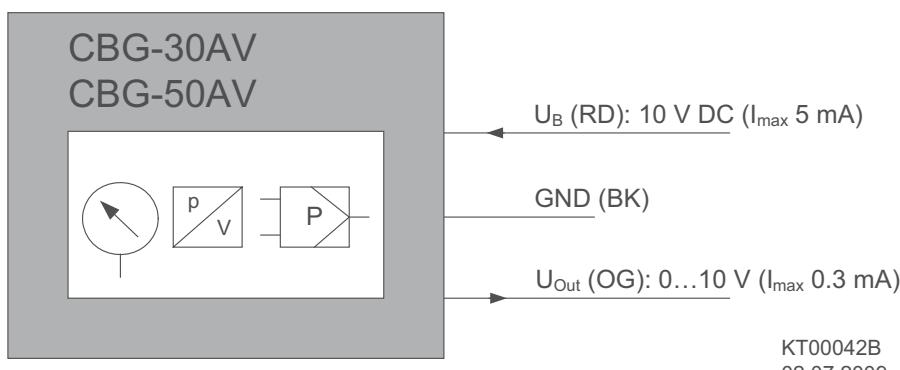

Equipment/properties:**Analog pressure display for measured actual value:**

Device versions for 0-30 bar and 0-50 bar are available
Display of the system pressure also without energy supply
A second scale shows the pressure in PSI

Setting of the desired system pressure by integrated potentiometer:

Version 0-30 bar: Setpoint 6-21 bar settable
Version 0-50 bar: Setpoint 10-35 bar settable

Setting of the desired control range by integrated potentiometer:

Version 0-30 bar: Control range 3-9 bar settable
Version 0-50 bar: Control range 5-15 bar settable

Extended, 3-wire cable approx. 2 m:

1 x output 0-10 V: for controlling EC fans, frequency inverters, other devices
1 x supply with 10 V DC: From the connected EC fan, frequency inverter, other device
1 x GND

Application/Function

The sensor control module is screwed through a female thread with the Schrader valve directly onto the refrigerant circuit on the condenser outlet.

Under the influence of pressure, an integrated elastic tube spring measuring element deforms. The measured pressure can be read immediately.

Through a Hall sensor, the deformation is transmitted non-contact and wear-free to the integrated control electronics. An automatic alignment with the measured value is made through the facility of being able to set the desired pressure in the plant with a potentiometer on the unit. The consequential 0-10 V signal controls connected EC fans, frequency inverters or other devices.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplusFE2owlet
with ZAplusSystem
componentsControl
technology

Appendix

UNIcon sensor control module for pressure**10VDC**

Type	Article no.	Minimum ambient temperature °C	Maximum ambient temperature °C	Set value range	Protection class	Weight kg
CBG-30AV	320039	-20	60	6...21 bar	IP65	0.17
CBG-50AV	320040	-20	60	10...35 bar	IP65	0.17

UNIcon sensor control module for pressure in stainless steel**10VDC**

Type	Article no.	Minimum ambient temperature °C	Maximum ambient temperature °C	Set value range	Protection class	Weight kg
CBG-30AV (CrNi)	320054	-20	60	6...21 bar	IP65	0.17

Suitable for all refrigerants except NH₃

Control modules

UNIcon sensor control module for differential pressure/air flow (2nd edition)



The sensor control module for differential pressure and volume flow measures and indicates the pressure or, optionally, the volume flow in a ventilation system. The calculation of the volume flow is performed by entering the K-factor of the fan inlet ring.

Depending on the desired setpoint value and control range, the sensor control module generates 0-10 V to control the EC fan or e.g., a frequency inverter.

The sensor control module is supplied by the fan or frequency inverter which it controls, e.g., with 10-24 V DC. No additional supply voltage is necessary.

Input for sensors or speed settings through




Pressure sensor and control intelligence are combined in one device



Air flow sensor (by input of K-factor) and control intelligence are combined in one device

Connection diagram

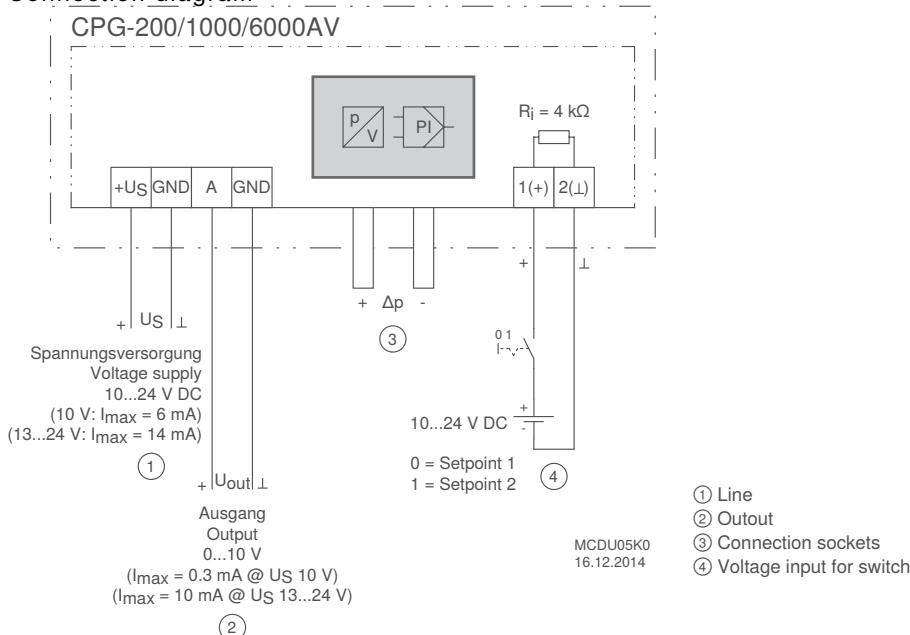

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated display:

For pressure or volumetric air flow display and for programming
It is possible to switch over the display from SI units to Imperial units.
A zero point calibration of the integrated sensor is possible into the menu of the unit.

Simple commissioning by operating modes:

Operation as pressure or volumetric air flow sensor
Operation as pressure or volumetric air flow controller

Simple programmability by 3 buttons:

Selection of measuring range, input of setpoints (1/2),
Control range, K-factor for volumetric air flow determination,
minimum or maximum output signal.

Different measuring ranges can be selected depending on the version:

CPG-200AV: 0-50 / 100 / 150 / 200 Pa
CPG-1000AV: 0-200 / 300 / 500 / 1000 Pa
CPG-6000AV: 0-2000 / 3000 / 4000 / 6000 Pa
Maximum air flow measuring range: 65,000 m³/h

Voltage input for switch over:

Setpoint 1 or 2

1 analog output:

For activation of EC fans, frequency inverters, other devices

Application/Function

The sensor control module is connected to the ventilation system via 2 pressure ports (pressure socket + and -). The differential pressure registered on the ventilation system affects the sensor on a silicone membrane in the device. The deformation of the membrane is registered through a measuring element and transmitted to the integrated electronics. Function: Pressure rise on +, compared to pressure on - connection.
 Optionally, the device can be operated as a pressure sensor, i.e., pressure indicator and proportional output signal 0-10 V corresponding to the set measurement range.
 Optional operation as a volume flow sensor, i.e. volume flow (by entering the K-factor of the centrifugal fans) and 0-10 V proportional output signal corresponding to the set measurement range.
 Optional operation as a control module for pressure or volume flow. The entered setpoint is compared to the actual value; the 0-10 V output signal results from that. That is used to trigger EC fans, frequency inverters or other devices.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

UNIcon sensor control module for pressure

DC10...24

Type	Article no.	Minimum ambient temperature °C	Maximum ambient temperature °C	Protection class	Weight kg	Dimensions (W x H x D) mm
CPG-200AV	320063	-10	50	IP54	0.23	106.3 x 137 x 56
CPG-1000AV	320064	-10	50	IP54	0.23	106.3 x 137 x 56
CPG-6000AV	320065	-10	50	IP54	0.23	106.3 x 137 x 56

Dimensions with cable gland

Control modules

UNIcon temperature control module



The CTG temperature control module can be combined with various temperature sensors.

The actual value measured on the sensor is compared with the set-point. That produces the 0-10 V output signal. This is used to trigger EC fans, frequency inverters or other devices.

The control module is supplied with 10-24 V DC from the fan or frequency inverter it is triggering. No additional power supply necessary.


Optionally, the module can also be used as a temperature display. The 0-10 V output signal is then proportional to the set measurement range.

Input for sensors or speed settings through



Connection of temperature sensors,
e.g. Type TF.. sensors, device measurement range -50...+150°C

Connection diagram

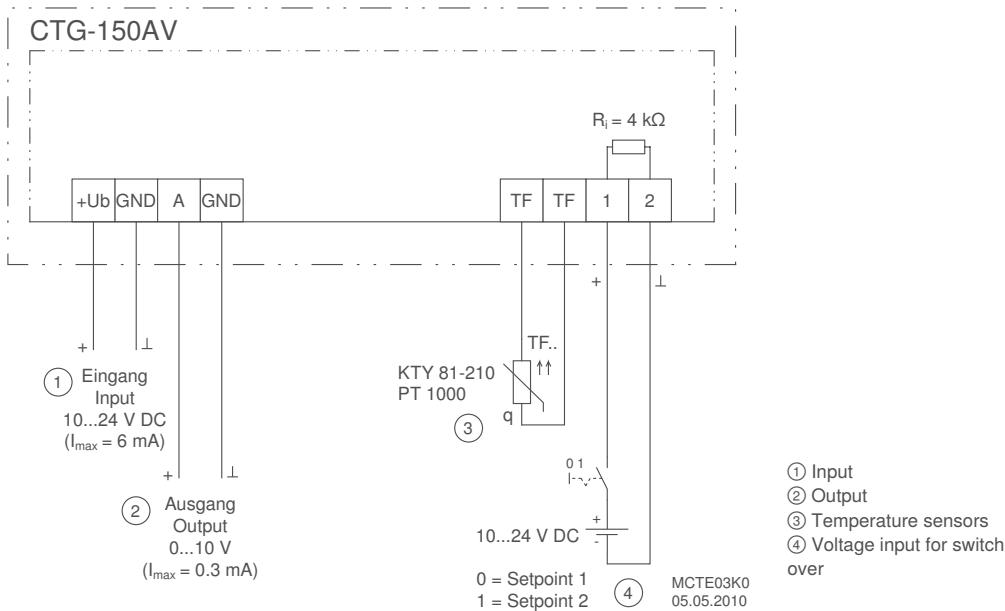

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-1 (domestic)

Equipment/Characteristics

Integrated display:

For temperature display and for programming

Simple commissioning of the operating modes:

Operation as temperature sensor or temperature controller

Easy to program using 3 buttons under the cover:

Select measurement range, enter setpoint (1/2), control range,
Minimum or maximum output signal

Adjustable measurement range when using as temperature sensor:

-50 °C...+150 °C

Voltage input for switch over

Setpoint 1 or 2

1 analogue output:

To control EC fans, frequency inverters, other devices

UNIcon temperature control module

10...24VDC

Type	Article no.	Minimum ambient temperature °C	Maximum ambient temperature °C	Protection class	Weight kg	Dimensions (W x H x D) mm
CTG-150AV	320048	-10	50	IP54	0.20	114 x 108 x 56

Dimensions with cable gland

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

Control
technology

Appendix

Control modules

UNIcon temperature control modul



Input for sensors or speed settings through



Connecting temperature sensors,
e.g. Type TF.. sensors, device measurement range 0...+50°C

The CTE temperature control module can be combined with various temperature sensors.

The actual value measured on the sensor is compared with the setpoint. That produces the 0-10 V output signal, which is used to control EC fans, frequency inverters or other devices.

Equipment/Characteristics

Integrated display:

Display of actual temperature

Integrated LED strip:

Display of 0-10 V modulation

Simple operation with rotary knob

Set the desired setpoint

Additional settings via controls under the cover:

Switch over control function (heating or cooling), setting control range, set minimum or maximum output signal


Standard conformity

Interference emission according to EN 61000-6-3 (domestic)

Interference immunity according to EN 61000-6-2 (industrial)

UNIcon sensor control module for pressure						
1~ 230V Hz						
Type	Article no.	Minimum ambient temperature °C	Maximum ambient temperature °C	Protection class	Weight kg	Dimensions (W x H x D) mm
CTE-50AV	320038	-10	50	IP54	0.37	125 x 85 x 68.7

Connection diagram

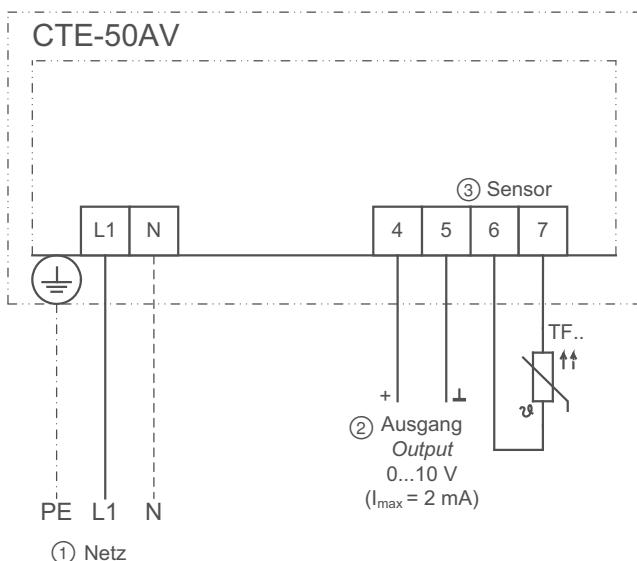

KT00041F
16.09.2008

① Line
② output
③ Sensor



Potentiometer



A speed setting can be made through energetic recovery to the input of the fan/controller by connecting the potentiometer to a supply voltage(10 V) provided by an EC fan or controller.
Alternatively, a setpoint (external setpoint) can be preset through the potentiometer.

Alternatively a setpoint setting (external setpoint) 0 - 10 V can be made with the potentiometer.

Equipment/Characteristics:

Rackmount version:

e.g. for installation in control cabinet doors

Axis length 50 mm, Ø 6 mm

Included front plate: 40 x 40 mm

Included rotary knob

Design version in housing:

Surface mounting or mounting in existing flush receptacles. Device with additional switch contact.


Simple control via rotary knob

Set the desired resistance

Potentiometer

Type	Article no.	Mounting type	Setpoint range	Protection class	Weight	Dimensions (W x H x D)
					kg	mm
Potentiometer 1K	00153986	Panel mounting	0...1kOhm	IP00	0.04	Shaft d 6 x 50
Potentiometer 10K	00153989	Panel mounting	0...10kOhm	IP00	0.04	Shaft d 6 x 50
Potentiometer 10K (IP54)	380058	Wall mounting	0...10kOhm	IP54	0.15	82 x 82 x 65

Connections

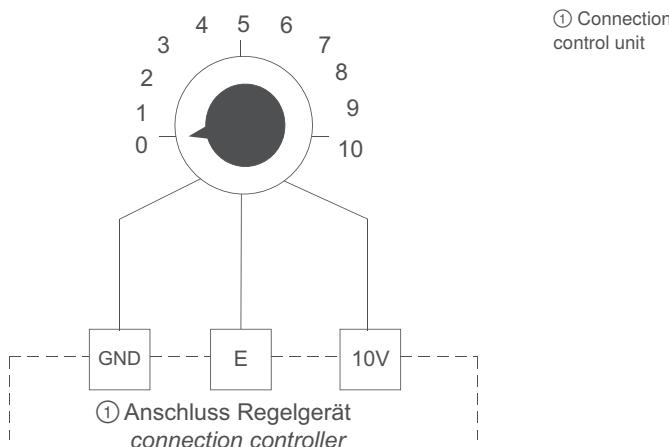



Add-on modules

AM-MODBUS (-W) for Basic Frequency inverter and ECblue



Pluggable add-on modules for function extension of the "Icontrol Basic" and "Fcontrol Basic" frequency inverters without integrated display as well as ECblue motors and fans.

With the AM-MODBUS/-W add-on modules, the devices integrated into MODBUS networks or the A-G-247NW operator terminal can be connected. Parameterization and data polling by radio (with AM-MODBUS-W) are optionally possible.

Whole groups of frequency inverters or ECblue motors and fans that are equipped with these AM-MODBUS add-on modules can be addressed quickly and automatically by a ZIEHL-ABEGG UNIcon control module with MODBUS-Master function. These devices are then controlled conveniently by the UNIcon "master" device.

Equipment/properties

2 x interface RS485:

For integration into a MODBUS RTU network (MODBUS Slave). With the possibility of automatic addressing by a UNIcon control module with MODBUS-Master function.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components


Control
technology

Appendix

Add-on module - AM-MODBUS (-W)

Type	Article no.	Weight
		kg
AM-MODBUS	349045	0.03
AM-MODBUS-W	349050	0.03

Connection diagram

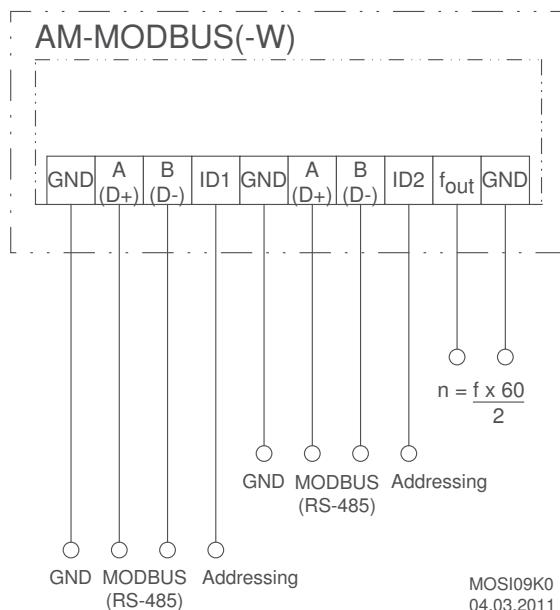

Add-on modules

AM-PREMIUM (-W) for Basic Frequency inverter and ECblue



Pluggable add-on modules for function extension of the "Icontrol Basic" and "Fcontrol Basic" frequency inverters without integrated display as well as ECblue motors and fans.

With the AM-PREMIUM/-W add-on modules, the devices can be functionally extended as a control unit. In addition, it is possible to link to MODBUS networks or connect operator terminals (A-G-247NW / AXG-1A / AXG-1AE). Radio parameterization and data polling (with AM-PREMIUM-W) is also possible as an option.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning),
e.g. type DSG.. sensors, measuring range 0...6000 Pa,
acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors,
e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors,
e.g. combination sensors, CO₂,
sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

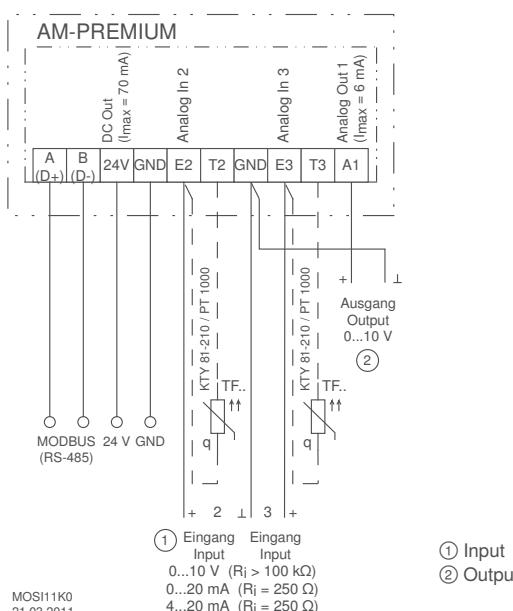

Equipment/properties

Simple start-up by operating modes:

When an operator terminal is connected to the AM-PREMIUM add-on module plugged into the frequency inverter (for AM-PREMIUM-W via radio), typical operating modes, e.g. for air conditioning, refrigerant or ventilation technology can be selected.

2 analog inputs for sensors or setting signals:

analog input E2 and E3: Setting by operating modes or manually programmable, e.g. 0-10 V, 0,20 mA, 4-20 mA

analog input E3: Programmable, e.g. comparison with sensor E2, difference to sensor E2, average value formation, setpoint setting, setpoint adaptation (e.g. outdoor temperature-dependent) connection of passive thermistors: On E2 and T2, E3 and T3.

1 analog output A1:

Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control.

Functional extension: Digital input D1 in the basic device:

programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E3, control function inversion, output limitation, external fault, reset, reversal of direction of rotation.

Functional extension: Digital output K1 in the basic device:

setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, shutters, group control fans, etc.

1 x interface RS485:

For linking to a MODBUS RTU network (MODBUS Slave). Manual addressing of the devices in the network

Add-on module AM-PREMIUM/-W

Type	Article no.	Weight kg
AM-PREMIUM	349046	0.03
AM-PREMIUM-W	349051	0.04

Add-on modules

AM-CAN-OPEN for Basic Frequency inverter and ECblue



Pluggable add-on modules for a function extension of the "Icontrol Basic" and "Fcontrol Basic" frequency inverters without integrated display as well as ECblue motors and fans.
With the AM-CAN-OPEN add-on modules the devices can be integrated into CANopen networks.

An Electronic Datasheet (EDS file) is required for a device integration into the CANopen network.
This file is provided free of charge by our Control Engineering Support Department.

Equipment/properties

CANopen®

cANUS

3 integrated LEDs


For status display and error message.

3 integrated rotary switches

2 rotary switches for manual address setting.

1 rotary switch for setting the baud rate

Connection diagram

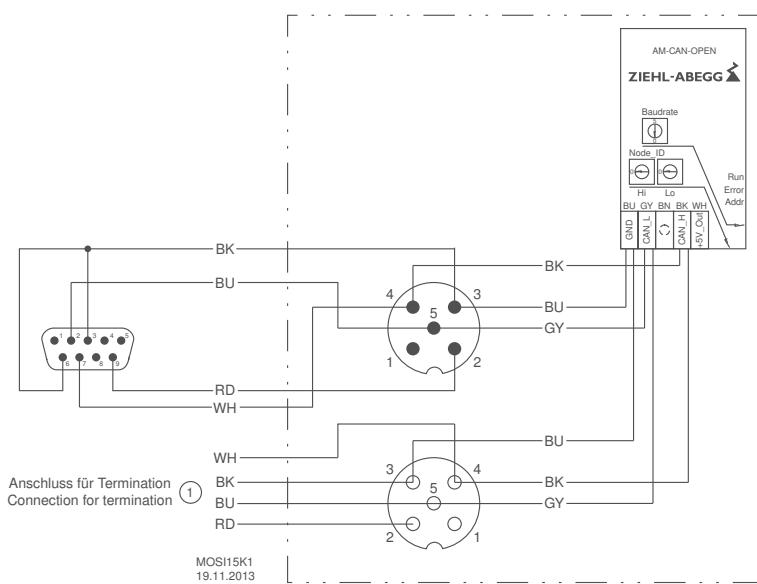

Add-on module - AM-CAN-OPEN

Type	Article no.	Weight
		kg
AM-CAN-OPEN	349064	0.03



Add-on modules

AM-LON for Basic Frequency inverter and ECblue



Pluggable add-on modules for function extension of the "Icontrol Basic" and "Fcontrol Basic" frequency inverters without integrated display as well as ECblue motors and fans.
With AM-LON add-on modules the devices can be integrated into LON networks.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components


Control
technology

Appendix

Add-on module - AM-LON

Type	Article no.	Weight kg
AM-LON	349049	0.03

Connection diagram

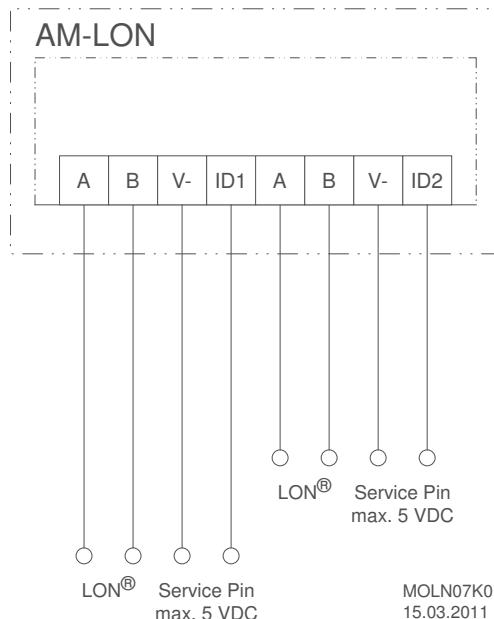

Add-on modules

AM-PROFIBUS for Basic Frequency inverter and ECblue



Pluggable add-on modules for function extension of the "Icontrol Basic" and "Fcontrol Basic" without integrated display as well as ECblue motors and fans.

With the AM-PROFIBUS add-on modules the devices can be integrated into PROFIBUS networks.

A device master data file (GSD file) is required for integration of the device into the PROFIBUS network. This is provided free by our Control Engineering Support Department.

Equipment/properties

3 integrated LEDs

For status display and error message.

2 integrated rotary switches

For manual address setting.

Automatic baud rate detection

Optionally available connectors

Plug with connecting wires 80 mm:

5-pole, M12, wall installation M16, Article No. 00161258

5-pole, M12, wall installation M20, Article No. 00161263

Socket with connecting wires 80 mm:


5-pole, M12, wall installation M16, Article No. 00161259

5-pole, M12, wall installation M20, Article No. 00161264

Add-on module AM-PROFIBUS

Type	Article no.	Weight
		kg
AM-PROFIBUS	349063	0.03

Connection diagram

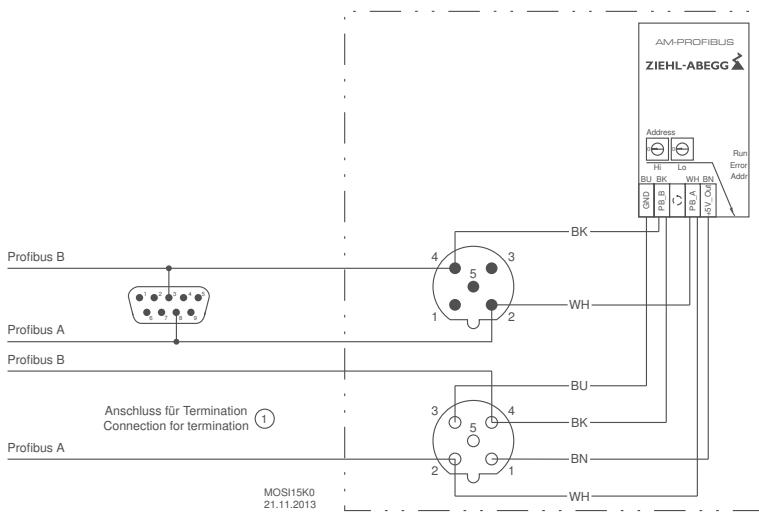

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Display and operator terminal

For frequency inverter without integrated display and ECblue




Display and operator terminal for parameterization and operation of the basic frequency inverters "Icontrol Basic" and "Fcontrol Basic" as well as ECblue motors and fans.

The basic frequency inverters without integrated display and ECblue motors have a slot for the AM-PREMIUM add-on modules. By plugging the add-on modules, the AXG-1A(E) operator terminal or the A-G-247NW hand held terminal can be connected.

The display and operator terminal AXG-1A can be installed flexibly in plants or machines in the IP54 housing. Alternatively, a unit for control panel integration is available (AXG-1AE).

The + 24 V voltage supply comes from the frequency inverter, a separate mains supply is not required.

Connection diagram

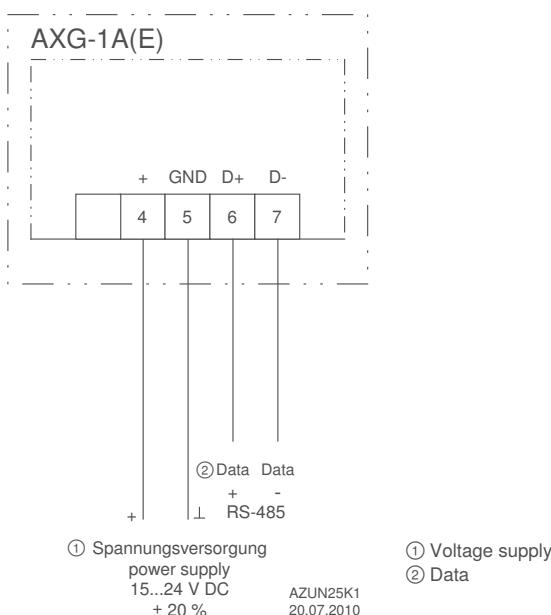

AZUN25K1
20.07.2010



Technical data

- Voltage supply: 15-24 VDC (I_{max} 24 V: 50 mA / 14 V: 80mA)
- Maximum ambient temperature: + 40 °C

Equipment/properties

LC multi-function display with plain text display:

Different menu languages can be selected. Display of the connected frequency inverter menu.

1 interface RS485:

for connection to an AM-PREMIUM add-on module. Frequency inverters as well as ECblue motors and fans can be parameterized and operated with this.

Display and operator terminals

24VDC

Type	Article no.	Mounting type	Protection class	Weight	Dimensions (W x H x D)
				kg	mm
AXG-1A	349034	Wall mounting	IP54	0.60	166 x 160 x 87
AXG-1AE	349008	Panel mounting	IP54	0.55	166 x 106 x 57 mm / mounting depth: max. 75



Hand held terminal

Parameterization of the basic frequency inverters and ECblue



Hand held terminal for parameterization and operation of the "Icontrol Basic" and "Fcontrol Basic" frequency inverters as well as ECblue motors and fans.


The basic frequency inverters without integrated display and ECblue motors can be extended with AM-MODBUS or AM-PREMIUM add-on modules. The A-G-247NW operator terminal can be connected to this by plugging add-on modules.

When using the AM-MODBUS-W or AM-PREMIUM-W add-on modules, communication with this operator terminal can take place without cables, wirelessly, by radio.

The hand held terminal enables storing of data records and transmission of these to other devices.

Application example

Optional connection of the hand held terminal by cable (connection by interface RS485, MODBUS RTU) or radio communication.

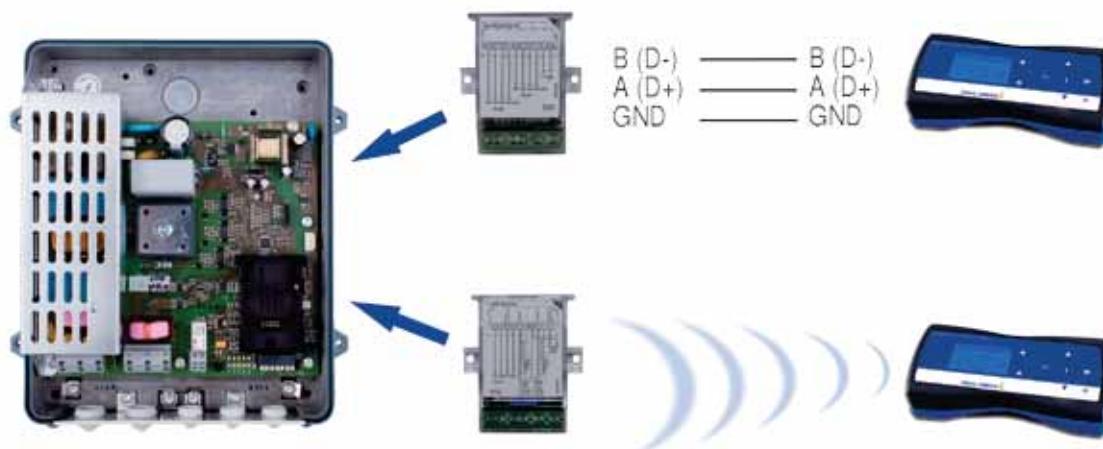

Technical data

- External voltage supply:
by plug power pack (1~ 230 V, 50/60 Hz)
- Internal voltage supply:
3 x Mignon rechargeable batteries (NiMh 1.2 V)

Equipment/properties

LC multi-function display with plain text display:

Different menu languages can be selected

1 x Mini USB interface:

voltage supply / data transfer with a PC

1 x interface RS485:

for connection to an AM-MODBUS or AM-Premium add-on module.
Frequency inverters, ECblue motors and fans can be parameterized and operated with this. It is possible to save data records and transfer them to these devices.

Data transmission by radio:

for communication with AM-MODBUS-W or AM-Premium-W add-on module.

Hand held terminal

Type	Article no.	Weight kg
A-G-247NW	380090	0.42



Frequency inverters

1~ Fcontrol, universal controller with display and bypass main switch



Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e.g. sensors type TF..
e.g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h



Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

The Fcontrol frequency inverters provide special advantages. Fcontrols have an all pole effective sine filter integrated which provides sinusoidal output voltage that is comparable with the standard mains. That means the frequency inverter enables reliable, demand-oriented and energy-saving control of asynchronous motors (external rotor motors, IEC standard motors) without having to take measures into consideration required by standard frequency inverters.

The advantages provided by the Fcontrol frequency inverter are:


- Operation without shielded motor feed lines
- The line length is not restricted by Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No risk to motors (they do not have to be frequency inverter compatible) since they are supplied with sinusoidal voltage that corresponds to the line voltage.

The benefits are especially advantageous in plants in which motors or fans are operated in parallel on a frequency inverter. Motors connected in parallel often means long cable lengths which is no problem with the Fcontrol. On top of that, unshielded cables can be used.

The Fcontrol universal devices are ideal for the following applications: refrigeration, air conditioning, agriculture, general air supply and ventilation tasks, clean room technology.

Fast commissioning for typical applications in the stated sectors by selecting pre-programmed operating modes possible.

Connection diagram

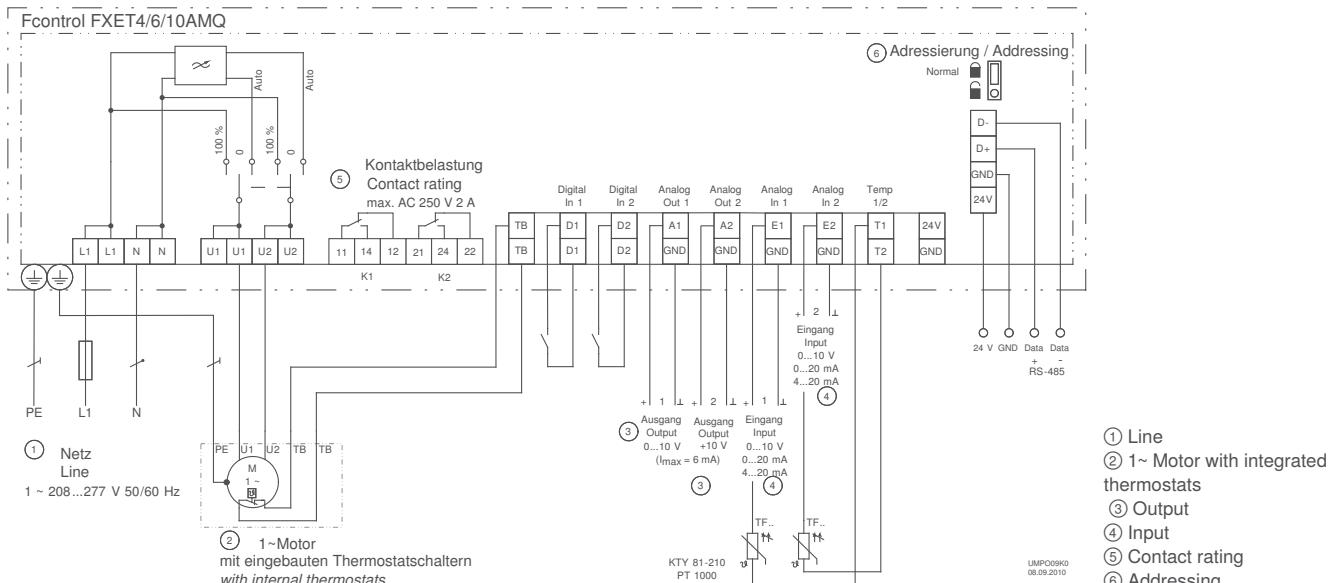

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated all-pole effective sine filter

Phase to phase and phase to PE conductor. Thus sinusoidal output voltage. Frequency inverter typical measures such as shielded motor cables are not necessary.

Integrated PFC (Power Factor Controller)

Active power factor adaptation for sinusoidal current consumption. Therefore low line feedback.

Integrated main switch with bypass function

Switch positions: Auto (for control mode), 0 and 100 % (100 % means that the integrated device electronics are bypassed, the applied line voltage is switched to the output).

LC multifunction display with clear text display:

Different menu languages are selectable

Simple commissioning by operating modes:

Typical operating modes, e.g. for air conditioning, refrigeration or ventilation technology can be selected.

Simple programmability:

Typical settings can be made easily: e.g. setting of a minimum speed, limitation of the maximum speed, inversions and limits. Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

Analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA
 analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outside temperature-dependent)

2 digital inputs D1 and D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E2, control function reversal, output limitation, display of external fault, reset, direction of rotation reversal

1 analog output A1:

Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital output, activation of external devices, e.g. heating, shutters, group control fans, etc.

Integrated motor protection function:

Connection possibility for thermostats TB

Interface RS485 MODBUS RTU:

Integration into bus system

Set protection / memory for settings:

Activation of set protection against unauthorised access, restoration of made settings

Event memory:

Querying of occurred events, operating times, etc.

Fcontrol, universal controller with display and bypass main switch

1~ 208...277V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXET4AMQ	308134	230	4	35	6	65	55	IP54	3.40	240 x 284 x 132
FXET6AMQ	308157		6	40	10	103	55		5.70	250 x 302 x 212
FXET10AMQ	308136		10	50	16	187	55		6.80	250 x 302 x 212

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Frequency inverters

1~ Fcontrol, temperature controller with display and bypass main switch



The 1~ Fcontrol frequency inverters with all-pole effective sine filter are available in the version as a temperature control unit. A TFR type temperature sensor (room temperature sensor IP54) is contained in the scope of supply. The frequency inverters control asynchronous motors (external rotor motors, IEC standard motors) gently, requirement-based and energy saving.

Advantages achieved by Fcontrol frequency inverters are:

- High energy saving
- Operation without shielded motor cables
- The cable length is not limited by the Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No danger to motors (these must not be suitable for frequency inverters) because they are supplied with sinusoidal voltage according to the mains voltage.


The 1~ Fcontrol temperature control units are especially suitable for the following applications: Agriculture, general ventilation tasks. Fast commissioning is possible by presetting the devices including the integrated inputs and outputs.

Input for sensors or speed settings through



Connecting temperature sensors,
sensor for input 1, type TFR included in scope of supply
Sensor for input 2, optional

Connection diagram

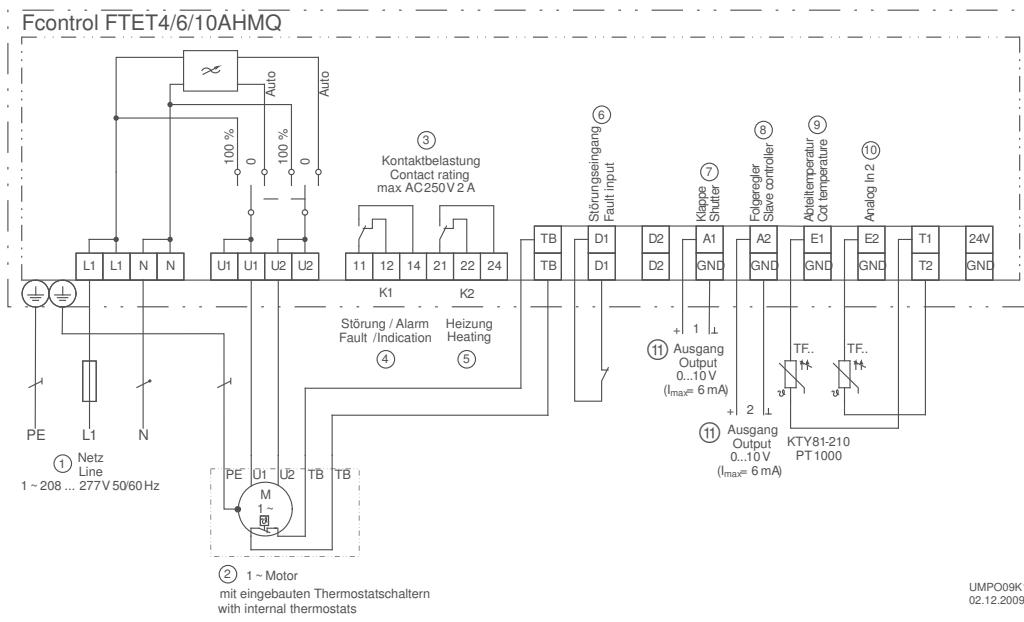

- ① Line
- ② 1~ Motor with integrated thermostats
- ③ Contact rating
- ④ Fault/Alarm
- ⑤ Heating
- ⑥ Fault input
- ⑦ Shutter
- ⑧ Slave controller
- ⑨ Compartment temperature
- ⑩ Analogue In 2
- ⑪ Output

UMPO09K1
02.12.2009

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated all-pole effective sine filter

Phase to phase and phase to PE conductor. Thus sinusoidal output voltage. Frequency inverter-typical measures such as shielded motor cables are not necessary.

Integrated PFC (Power Factor Controller)

Active power factor adaptation for sinusoidal current consumption. Therefore low line feedback.

Integrated main switch with bypass function

Switch positions: Auto (for control operation), 0 and 100 % (100 % means that the integrated device electronics are bypassed, the applied mains voltage is switched to the output)

LC multifunction display with clear text display

Different menu languages can be selected

Easy to program

Setpoint range 0-40 °C. Setting of a minimum speed, limiting of the maximum speed. Alarm on exceeding or dropping below measured temperature values. Second control circuit with separate settings for 0-10 V output, e.g. control of a ventilation damper, etc. Separate adjustability of relay K2, for controlling a heater for example.

2 analogue inputs for temperature sensors

A TFR room temperature sensor in IP54 is included in the scope of supply. A second sensor, for example for measuring the supply air temperature, can be connected optionally.

1 digital input

Input D1 switch an external fault

2 digital outputs (relays) K1 and K2

Relay K1: Fault message relay, overtemperature or undertemperature alarm. Relay K2: Control of a heater, e.g.

Integrated motor protection function

Connection possibility for thermostat "TB"

Memory for settings

Restore saved settings

Event memory

For minimum and maximum temperature values, alarms

Fcontrol, temperature controller with display and bypass main switch

1~ 208...277V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FTET4AHMQ	308131	230	4	35	6	65	55	IP54	3.40	240 x 284 x 132
FTET6AHMQ	308132		6	40	10	103	55		5.70	250 x 302 x 212
FTET10AH-MQ	308133		10	50	16	187	55		6.80	250 x 302 x 212

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Frequency inverters

1~ Fcontrol, speed controller optional with bypass main switch



Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V

The 1~ Fcontrol frequency inverters with all-pole effective sine filter are available in the version as speed controllers. There is an optional version with integrated main switch (Auto – 0 – 100%).


The speed setting can be made by a master control by 0 – 10 V, e.g. by a ZIEHL-ABEGG control module of the UNIcon series. The speed can also be set manually by connecting a potentiometer. Two-stage operation with adjustable speeds is possible optionally. The frequency inverters control asynchronous motors (external rotor motors, IEC standard motors) gently, requirement-based and energy saving.

Advantages achieved by Fcontrol frequency inverters are:

- High energy saving
- Operation without shielded motor cables
- The cable length is not limited by the Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No danger to motors (these must not be suitable for frequency inverters) because they are supplied with sinusoidal voltage according to the mains voltage.

The 1~ Fcontrol speed controllers are universally suitable for many different applications: E.g. refrigerant technology, air conditioning, agriculture, general ventilation tasks, clean room technology.

Connection diagram

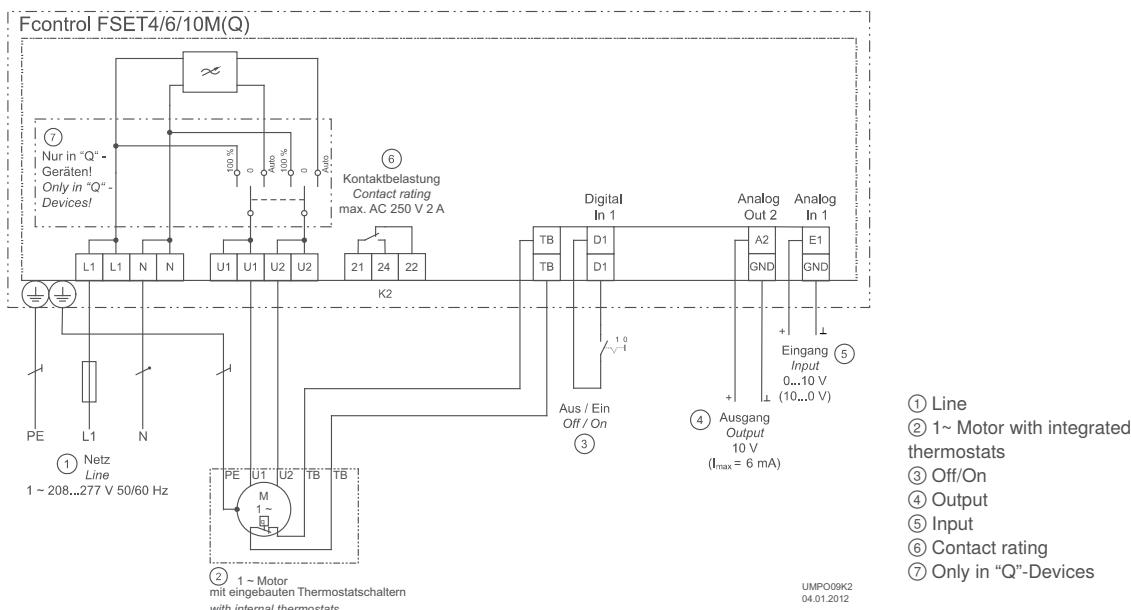

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment / Characteristics

Integrated all pole effective sine filter

Phase to phase and phase to grounded conductor thus producing sinusoidal output voltage. Typical measures for frequency inverters such as shielded motor feeder cables are not necessary.

Integrated PFC (Power Factor Controller)

Active power factor adaptation for sinusoidal current consumption, resulting in lower harmonic current emissions.

1 analogue input for speed preset

Input E1 for 0-10 V setpoint signal or 10-0 V depending on device version

1 digital input

Input D1 for enable (standby), for external reset (motor fault)

1 digital output (relay)

Floating change-over contact for error message

Integrated motor protection function

Connection facility for "TB" thermostat

Optional equipment

Devices with integrated bypass main switch

Switch positions:

Auto (for speed control mode), 0 and 100% (100% = the integrated device electronics are bypassed, the applied line voltage is switched to the output)

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Fcontrol as speed controller

1~ 208...277V 50/60Hz

Input	Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
			V	A	°C	A	W	°C		kg	mm
0-10 V	FSET4M	308128	230	4	35	6	65	55	IP54	3.20	240 x 284 x 115
	FSET6M	308156		6	40	10	103	55		5.50	250 x 302 x 195.5
	FSET10M	308130		10	50	16	187	55		6.60	250 x 302 x 195.5
	FSET4MQ	308154		4	35	6	65	55		3.30	240 x 284 x 132
	FSET6MQ	308155		6	40	10	103	55		5.60	250 x 302 x 212
	FSET10MQ	308187		10	50	16	187	55		6.70	250 x 302 x 212
10-0 V	FSET4M	308158		4	35	6	65	55		3.20	240 x 284 x 115
	FSET6M	308159		6	40	10	103	55		5.50	250 x 302 x 195.5
	FSET10M	308160		10	50	16	187	55		6.60	250 x 302 x 195.5
	FSET4MQ	308248		4	35	6	65	55		3.30	240 x 284 x 132
	FSET6MQ	308249		6	40	10	103	55		5.60	250 x 302 x 212
	FSET10MQ	308250		10	50	16	187	55		6.70	250 x 302 x 212

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.



Frequency inverters

3~ Fcontrol, universal controller with display



Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e. g. sensors type TF.. e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h



Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

The Fcontrol frequency inverters provide special advantages. Fcontrols have an all pole effective sine filter integrated which provides sinusoidal output voltage that is comparable with the standard mains. That means the frequency inverter enables reliable, demand-oriented and energy-saving control of asynchronous motors (external rotor motors, IEC standard motors) without having to take measures into consideration required by standard frequency inverters.

The advantages provided by the Fcontrol frequency inverter are:


- Operation without shielded motor feed lines
- The line length is not restricted by Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No risk to motors (they do not have to be frequency inverter compatible) since they are supplied with sinusoidal voltage that corresponds to the line voltage.

The benefits are especially advantageous in plants in which motors or fans are operated in parallel on a frequency inverter. Motors connected in parallel often means long cable lengths which is no problem with the Fcontrol. On top of that, unshielded cables can be used.

The Fcontrol universal devices are ideal for the following applications: refrigeration, air conditioning, agriculture, general air supply and ventilation tasks, clean room technology.

Fast commissioning for typical applications in the stated sectors by selecting pre-programmed operating modes possible.

Connection diagram

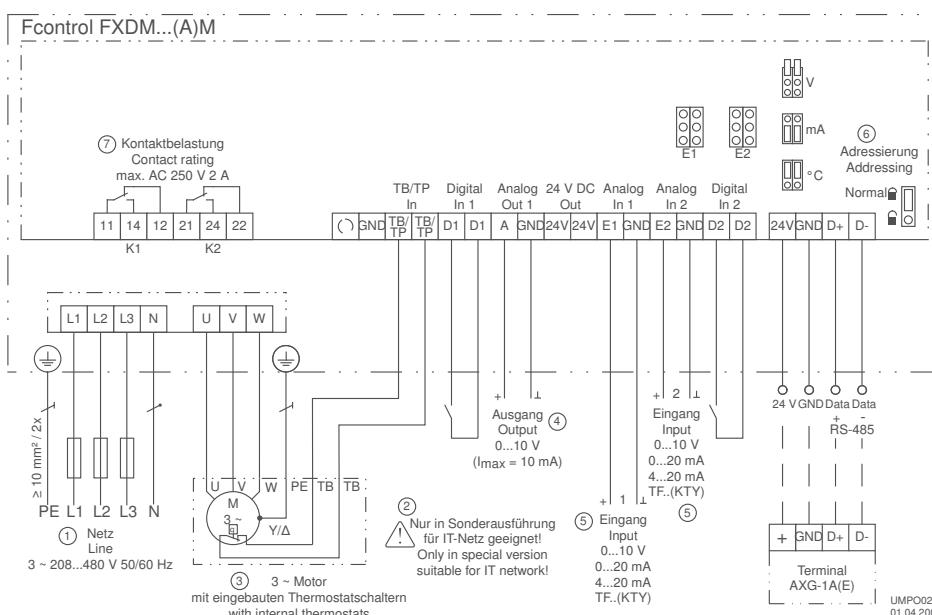

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Characteristics

Integrated all pole effective sine filter

Phase to phase and phase to grounded conductor which means sinusoidal output voltage. Measures typical for frequency inverters such as shielded motor feed lines are not required.

LC-multiplex display with plain text:

Various menu languages can be selected

Simple commissioning through operating modes:

Typical operating modes, e.g. for air-conditioning, refrigeration or ventilation technology can be selected.

Easy to program:

Typical settings can be made: e.g., default a minimum speed, limit the maximum speed, inverting and limits. Setting, e.g. for 2-stage mode

2 analogue inputs for sensors or setpoint signals:

Analogue input E1 and E2: Setting through operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA
Analogue input E2: programmable, e.g. comparison to Sensor 1, difference to Sensor 1, average calculation, setpoint input, setpoint adjustment (e.g. dependent on outdoor temperature)

Two digital inputs. D2 and D1:

Programmable, e.g. enable, switchover Setpoint 2 or 1 switchover control or manual operation, switchover E2, or E2, reverse control function, limit output, display external fault, reset, reverse the rotary direction

2, analogue output A1:

Setting through operating modes or manually programmable, e.g., output signal proportional modulation, output signal proportional input signal, invertible, 10 V constant voltage, group control

10 digital outputs (relays) K1 and K2:

Setting through operating modes or manual programming, e.g. operating status, limits, external fault on digital input, enabling external devices, e.g. heating, dampers, group control of fans, etc.

Integrated motor protection function:

Connection facility for PTC thermistors or alternatively thermostats (TB or TP).

Interface RS485 MODBUS RTU:

Integration into bus system

Setting protection / memory for settings:

Enable settings protection from unauthorised access, restore implemented settings

Event memory:

Query events that have occurred, operating times, etc.

Optional equipment

Add-on modules for frequency inverters

- IO add-on module type Z-module, Article No. **380052**

If the integrated inputs and outputs are not sufficient, other inputs and outputs can be created with the Z-Modul-B. These are also programmable:

- 1 analog input
- 1 analog output
- 3 digital inputs
- 2 digital outputs (relays)

- LON® Add-on module type Z-Modul-L, Article No. **380086**

For integration into a bus system LON® by a two-wire

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix



Frequency inverters

3~ Fcontrol, universal device with display

Fcontrol, universal controller with display

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXDM2.5AM	308099	400	2,5	40	6	50	55	IP54	3.30	240 x 284 x 115
FXDM5AM	308138		5	50	10	100	55		7.20	250 x 302 x 195.5
FXDM8AM	308140		8	50	10	150	55		7.90	250 x 302 x 195.5
FXDM10AM	308142		10	55	16	210	55		8.20	250 x 302 x 195.5
FXDM14AM	308144		14	40	16	310	55		8.70	250 x 302 x 195.5
FXDM18AM	308174		18	40	20	400	55		9.10	250 x 302 x 195.5
FXDM22AM	308108		22	40	25	520	55		14.50	280 x 355 x 239
FXDM32AM	308009		32	50	35	700	55		29.60	386 x 525 x 283
FXDM40AM	308177		40	50	50	790	55		29.60	386 x 525 x 283
FXDM50AM	308183		50	50	63	910	55		32.80	386 x 525 x 283
FXDM32AME	308008	32	50	35	700	55	IP20	33.14	343 x 600 x 280	
FXDM40AME	308176		40	50	50	790		33.10	343 x 600 x 280	
FXDM50AME	308182		50	50	63	910		36.65	343 x 600 x 280	
FXDM5M	308137	5	50	10	100	55	IP54	7.00	250 x 302 x 195.5	

Fcontrol, universal controller without display

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXDM5M	308137	400	5	50	10	100	55	IP54	7.00	250 x 302 x 195.5
FXDM8M	308139		8	50	10	150	55		7.70	250 x 302 x 195.5
FXDM10M	308141		10	55	16	210	55		8.00	250 x 302 x 195.5
FXDM14M	308143		14	40	16	310	55		8.50	250 x 302 x 195.5
FXDM18M	308173		18	40	20	400	55		8.90	250 x 302 x 195.5
FXDM22M	308115		22	40	25	520	55		14.50	280 x 355 x 239
FXDM32M	308096		32	50	35	700	55		29.60	386 x 525 x 283
FXDM40M	308178		40	50	50	790	55		29.60	386 x 525 x 283
FXDM50M	308184		50	50	63	910	55		32.80	386 x 525 x 283
FXDM32ME	308007		32	50	35	700	55	IP20	33.14	343 x 600 x 280
FXDM40ME	308175		40	50	50	790	55		33.10	343 x 600 x 280
FXDM50ME	308181		50	50	63	910	55		36.65	343 x 600 x 280

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Fcontrol, universal controller with display, UL

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXDM32AM	308009-UL	400	32	50	35	700	55	IP54	28.50	386 x 525 x 283
FXDM32AME	308008-UL		32	50	35	700	55		33.10	343 x 600 x 280

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.



Mains supply 1~ 230V


Fcontrol, universal controller with display

1~ 208...277V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXEM6AM	308198	230	6	40	10	220	55	IP54	6.60	250 x 302 x 195.5

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Connection diagram

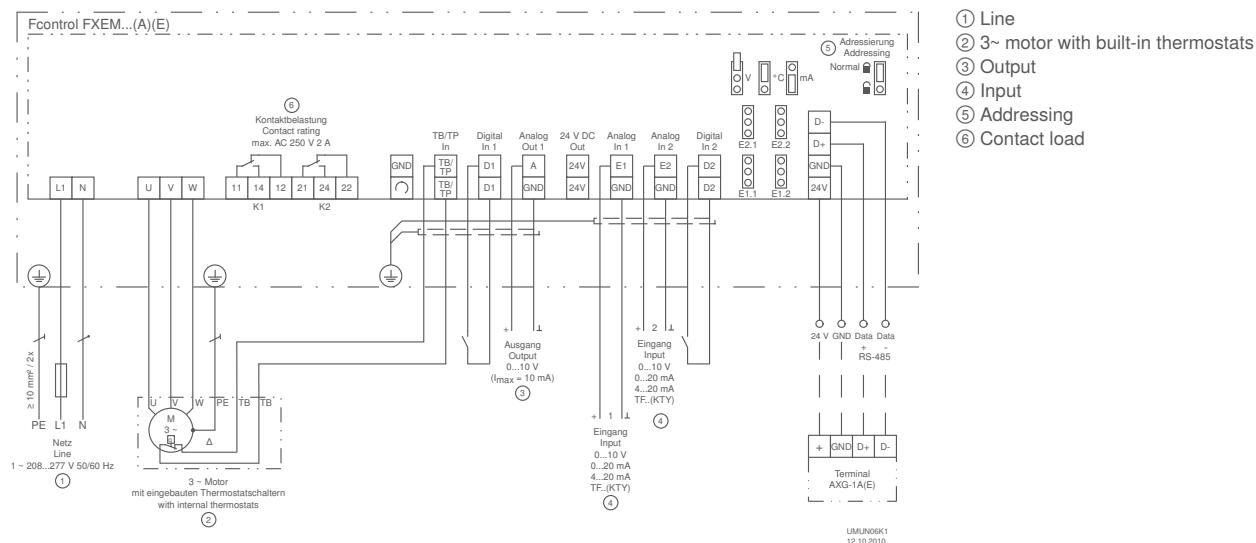

- ① Line
- ② 3~ motor with built-in thermostats
- ③ Output
- ④ Input
- ⑤ Addressing
- ⑥ Contact load

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with Zapplus

FE2owlet
with Zapplus

System components

Control technology

Appendix

Frequency inverters

3~ Fcontrol, universal device with display (2nd edition)



Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e.g. sensors type TF.. e.g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

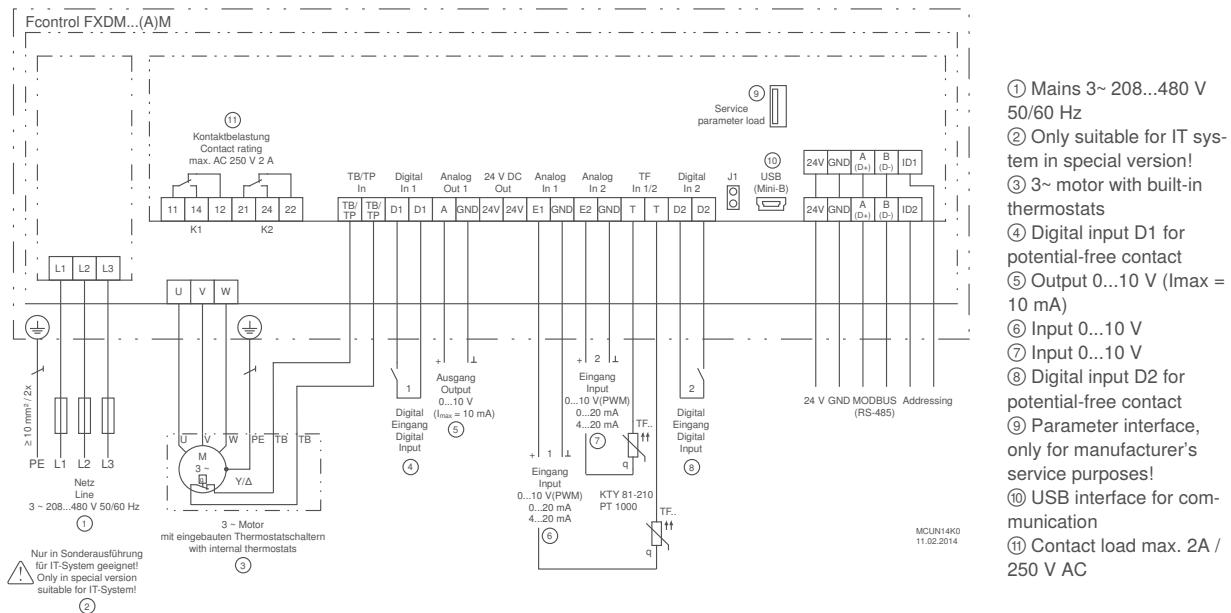

The Fcontrol frequency inverters offer special benefits. Fcontrol have an integrated all-pole active sine filter which ensures a sinusoidal output voltage which is comparable with the normal supply network. This means that the frequency inverters enable reliable, requirement-based, energy-saving control of asynchronous motors (external rotor motors, IEC standard motors) without needing to consider measures that must be observed with standard frequency inverters.

Advantages provided by Fcontrol frequency inverters are:

- Operation without shielded motor cables
- The cable length is not limited by the Fcontrol
- Operation without electromagnetic motor noises (ideal for noise-sensitive areas)
- No danger for motors (these need not be frequency inverter compatible) because they are supplied by sinusoidal voltage according to the line voltage.

Especially in systems in which motors or fans are operated parallel to a frequency inverter, the advantages are particularly valuable. Parallel connected motors often mean long cable lengths, this is no problem with the Fcontrol and unshielded cables can also be used.

The Fcontrol universal devices are especially suitable for the following applications: refrigeration, air-conditioning, agriculture, general airing and venting tasks, clean-room application.

For typical applications in the named areas, fast commissioning by selecting pre-programmed operating modes is possible.

Frequency inverters of the 2nd edition enable modern operation by capacitive keys.

This means that no mechanical key is pressed but the operation is capacitive by touching the key surface. In addition there is a directly selectable On/Off key and two keys the functions of which depend on where you currently are in the menu (softkeys). A commissioning wizard and help texts are available for commissioning.

There is a 2nd control circuit in the device and the possibility of retrofitting a clock module as a timer.

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated all-pole effective sine filter

Phase to phase and phase to PE conductor. Thus sinusoidal output voltage. Frequency inverter typical measures such as shielded motor cables are not necessary.

LC multifunction display with clear text display:

Different menu languages are selectable

Simple commissioning by operating modes:

Typical operating modes, e.g. for air-conditioning, refrigeration or ventilation technology can be selected.

Activation of a 2nd control circuit in the selected operating mode:

By assignment of the sensor function input 2 (E2) for the 2nd control circuit.

Simple programmability:

Typical settings can be made easily: e.g. setting of a minimum speed, limitation of the maximum speed, inversions and limits. Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

Analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA

Analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outside temperature-dependent), activation of 2nd control circuit.

2 digital inputs D1 and D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E2, control function reversal, output limitation, display of external fault, reset, direction of rotation reversal

1 analog output A1:

Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control, activation as output for 2nd control circuit

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, shutters, group control fans, etc.

Integrated motor protection function:

Connection possibility of PTC thermistors or alternatively thermostats (TB or TP).

Interface RS485 for MODBUS RTU:

Integration into bus system, addressing of the device manually or automatically possible.

Interface USB:

For software update, communication with PC, etc.

Set protection / memory for settings:

Activation of set protection against unauthorised access, restoration of made settings

Event memory:

Querying of occurred events, operating times etc.

Information

FE2owlet-EOblue

FE2owlet

FE2owlet-EOblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Fcontrol, universal controller with display, 2nd edition

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FXDM25AM	308289	400	25	55	35	550	55	IP54	21.50	279 x 405 x 260
FXDM32AM	308283		32	50	35	700	55		23.10	279 x 405 x 260

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Frequency inverters

3~ Fcontrol Basic, modularly extendable speed controllers



Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Add-on modules for functional extension

The 3~ Fcontrol frequency inverters with integrated all-pole effective sine filter are available in the "Basic" version as speed controllers. The special feature of the Fcontrol Basic without display is the functional extendibility by pluggable add-on modules. This enables integration into different BUS networks. Functional extension as a controller is also possible with add-on modules.


In operation as a speed controller, the speed setting can be made by a master control by 0 – 10 V, e.g. by a ZIEHL-ABEGG control module of the UNIcon product series. The speed can also be set manually by connecting a potentiometer. Two-stage operation with adjustable speeds is also possible optionally. The frequency inverters control asynchronous motors (external rotor motors, IEC standard motors) gently, requirement-based and energy saving.

Advantages achieved by Fcontrol frequency inverters are:

- High energy saving
- Operation without shielded motor cables
- The cable length is not limited by the Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No danger to motors (these must not be suitable for frequency inverters) because they are supplied with sinusoidal voltage according to the mains voltage.

The 3~ Fcontrol Basic inverters are universally suitable for many different applications: E.g. refrigerant technology, air conditioning, agriculture, general ventilation tasks, clean room technology.

Connection diagram

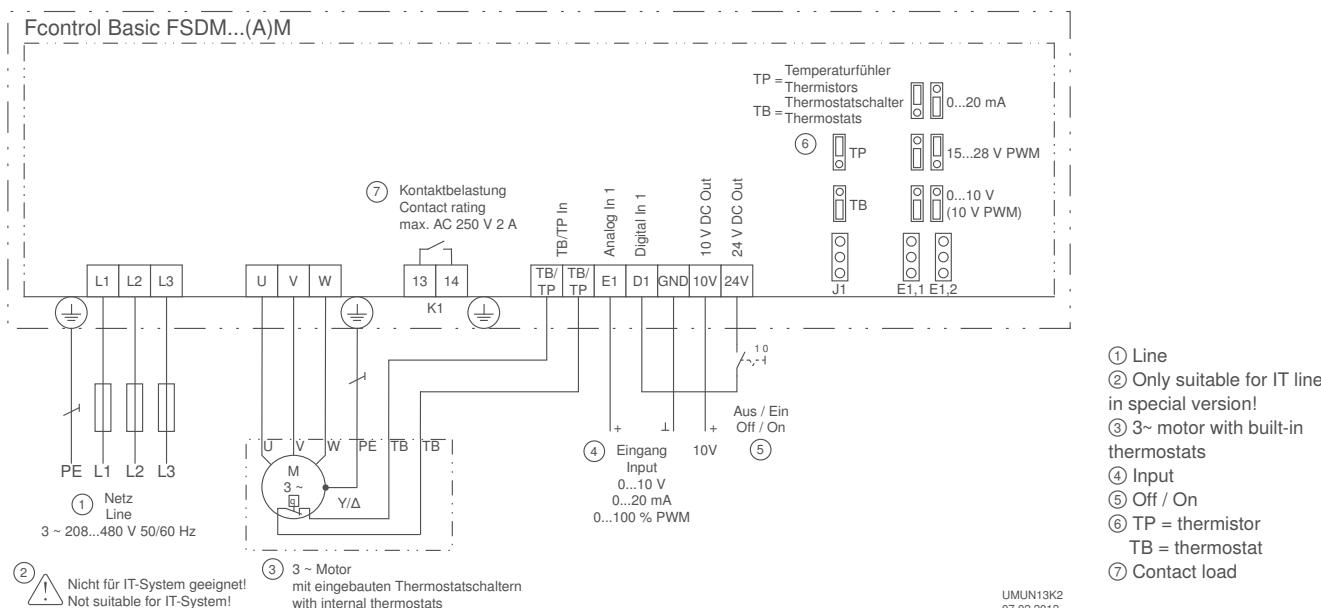

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated all-pole effective sinefilter

Phase to phase and phase to protective earth. Thus sinusoidal output voltage. Frequency inverter typical measures such as shielded motor cables are not necessary.

1 analog input for speed setting:

Analog input E1: Setting by jumper to desired setting signal: 0-10 V, 0-20 mA or PWM

1 digital input:

D1 - 24 V: Enable function On/Off

1 potential-free fault indication contact:

The contact drops out in case of a fault. Max. load 250 V, 2 A.

Integrated motor protection function:

Connection possibility for thermostats "TB" or thermistors "TP".

Optional equipment

Add-on modules for functional extension

- Add-on module AM-MODBUS, Article No. 349045 and AM-MODBUS-W, Article No. 349050:
 - Integration into a MODBUS RTU network with the possibility of automatic addressing by a UNIcon control module with MODBUS-Master function
 - Connection of an A-G-247NW operator terminal
- Additional function in the AM-MODBUS-W:
 - Wireless programming by an A-G-247NW operator terminal via wireless interface
- Add-on module AM-PREMIUM, Article No. 349046 and AM-PREMIUM-W, Article No. 349051:
 - Extension by control functions
 - Connection of sensors
 - Integration into a MODBUS RTU network. Manual addressing in the IO Setup.
 - Additional 0-10 V output for Master-Slave connection
- Additional function in the AM-PREMIUM-W:
 - Cordless programming by an A-G-247NW operating terminal by Wireless Interface
- Add-on module AM-CAN-OPEN, Article No. 349064:
 - Integration into a CAN network. The required EDS file can be provided by our Control Engineering Support Team.
- Add-on module AM-LON, Article No. 349049:
 - Integration into a LON network
- Add-on module AM-PROFIBUS, Article No. 349063:
 - Integration into PROFIBUS networks. The required GSD file can be provided by our Control Engineering Support Team.

Fcontrol Basic without display

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FSDM2.5M	308251	400	2,5	40	6	50	55	IP54	2.70	240 x 284 x 115
FSDM5M	308238		5	55	10	90	55		5.40	250 x 302 x 195.5
FSDM8M	308239		8	40	10	140	55		6.30	250 x 302 x 195.5
FSDM10M	308262		10	55	16	200	55		6.80	250 x 302 x 195.5
FSDM16M	308302		16	40	20	360	55		7.00	250 x 302 x 195.5
FSDM22M	308314		22	40	25	520	55		14.30	280 x 355 x 239
FSDM32M	308316		32	50	35	700	55		29.40	386 x 525 x 283
FSDM40M	308318		32	50	35	700	55		29.40	386 x 525 x 283
FSDM50M	308320		32	50	35	700	55		32.60	386 x 525 x 283

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Frequency inverters

3~ Fcontrol Basic, Speed controller with display



Input for sensors or speed settings through



Setting of the desired speed through device or by external default
e.g. 0...10 V

The 3~ Fcontrol frequency inverters with all-pole effective sine filter are available in the "Basic" version with integrated display as speed controllers.

The speed setting can be made by a master control by 0 – 10 V, e.g. by a ZIEHL-ABEGG control module of the UNIcon product series. The speed can also be set manually by connecting a potentiometer. Two-stage operation with adjustable speeds is also possible optionally.


The frequency inverters control asynchronous motors (external rotor motors, IEC standard motors) gently, requirement-based and energy saving.

Advantages achieved by Fcontrol frequency inverters are:

- High energy saving
 - Operation without shielded motor cables
 - The cable length is not limited by the Fcontrol
 - Operation without electromagnetic motor noises (ideal for noise sensitive areas)
 - No danger to motors (these must not be suitable for frequency inverters) because they are supplied with sinusoidal voltage according to the mains voltage.

The 3~ Fcontrol Basic inverters are universally suitable for many different applications: E.g. refrigerant technology, air conditioning, agriculture, general ventilation tasks, clean room technology.

Connection diagram

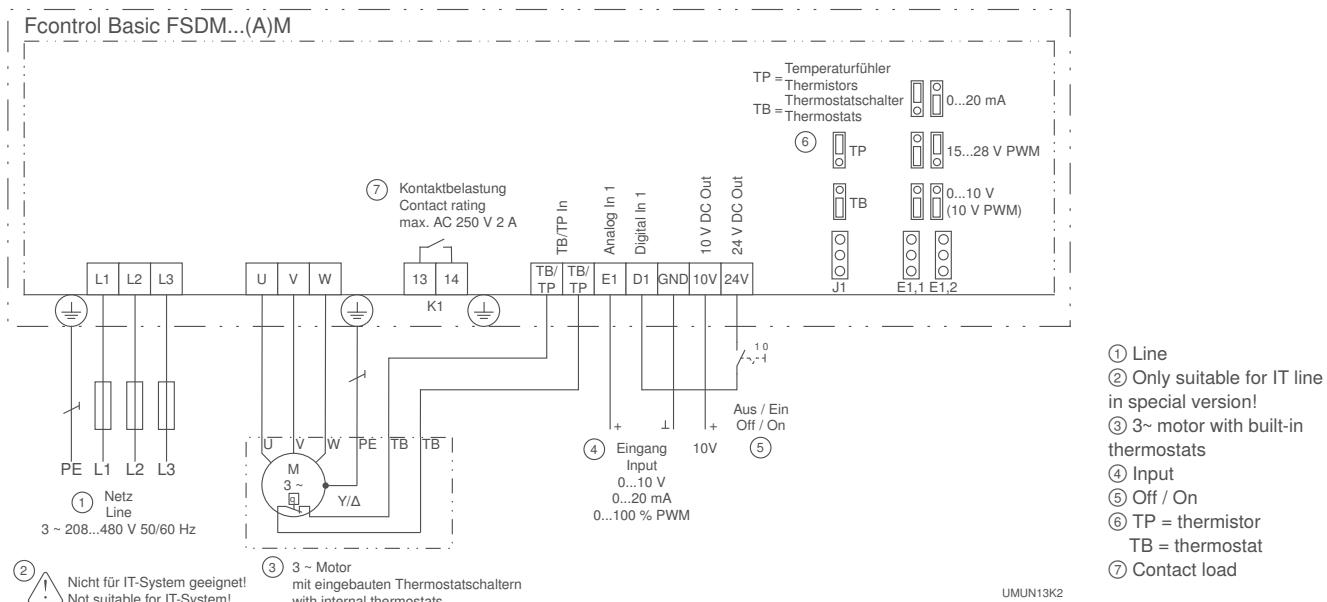

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Integrated all-pole sinefilter

Phase to phase and phase to protective earth. Thus sinusoidal output voltage. Frequency inverter typical measures such as shielded motor cables are not necessary.

LC multi-function display with plain text display:

Setting of desired values: speeds, motor parameters. Display of modulation, operating states etc.

1 analog input for speed setting:

Analog input E1: Setting by jumper to desired setting signal: 0-10 V, 0-20 mA or PWM

1 digital input:

D1 - 24 V: Enable function On/Off

1 potential-free fault indication contact:

The contact drops out in case of a fault. Max. load 250 V, 2 A.

Integrated motor protection function:

Connection possibility for thermostats "TB" or thermistors "TP".

Fcontrol Basic, Speed controller with display

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
FSDM2.5AM	308252	400	2.5	40	6	50	55	IP54	2.90	240 x 284 x 115
FSDM5AM	308240		5	55	10	90	55		5.60	250 x 302 x 195.5
FSDM8AM	308241		8	40	10	140	55		6.50	250 x 302 x 195.5
FSDM10AM	308260		10	55	16	200	55		7.00	250 x 302 x 195.5
FSDM16AM	308303		16	40	20	360	55		7.20	250 x 302 x 195.5
FSDM22AM	308315		22	40	25	520	55		14.50	280 x 355 x 239
FSDM32AM	308317		32	50	35	700	55		29.60	386 x 525 x 283
FSDM40AM	308319		32	50	35	700	55		29.60	386 x 525 x 283
FSDM50AM	308321		32	50	35	700	55		32.80	386 x 525 x 283

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Frequency inverters

3~ Fcontrol Basic 5-Step, Speed controller



The 3~ Fcontrol frequency inverters with all-pole effective sine filter are available in the "Basic" version with integrated 5-step switch as speed controllers.


The speed setting is made by setting manually directly in the unit. This makes the devices perfectly suitable for replacing transformer control units by the modern frequency inverters. The frequency inverters control asynchronous motors (external rotor motors, IEC standard motors) gently, requirement-based and energy saving.

Advantages achieved by Fcontrol frequency inverters are:

- High energy saving
- Operation without shielded motor cables
- The cable length is not limited by the Fcontrol
- Operation without electromagnetic motor noises (ideal for noise sensitive areas)
- No danger to motors (these must not be suitable for frequency inverters) because they are supplied with sinusoidal voltage according to the mains voltage.

The 3~ Fcontrol Basic 5-Step inverters are especially suitable for the following applications: General ventilation tasks, agriculture.

Connection diagram

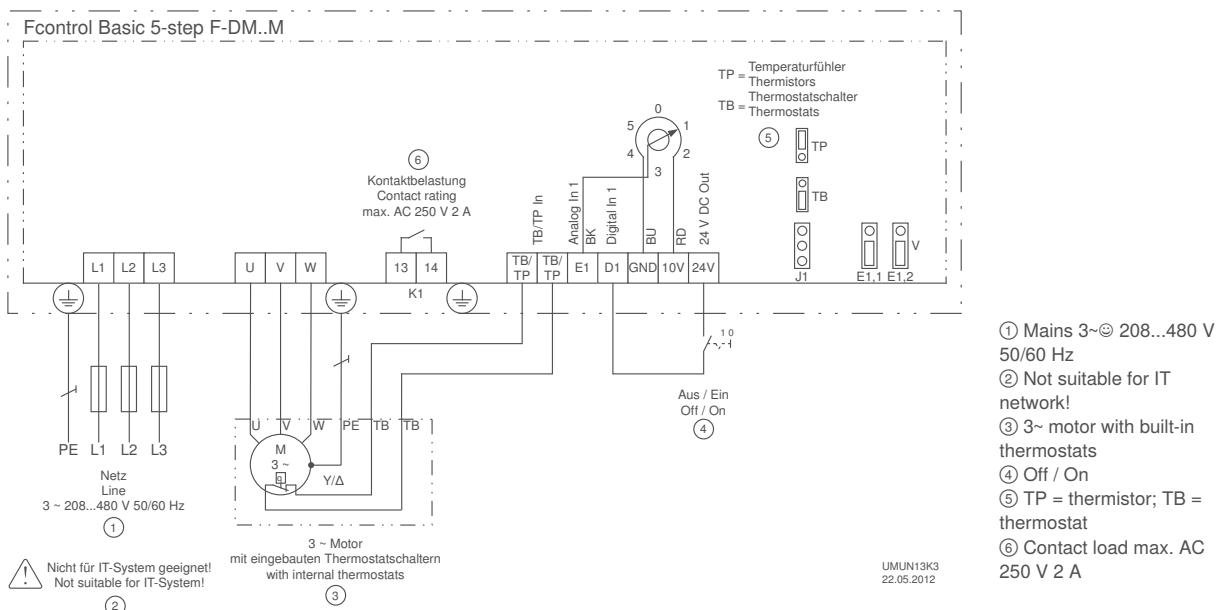

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment / properties

Integrated, all-pole effective sine filter

Phase to phase and phase to PE conductor. Thus sinusoidal output voltage. Frequency inverter typical measures such as shielded motor cables are not necessary.

Simple operation and setting

Desired speeds are set by the 5-step switch

1 digital input

D1 – 24 V: Enable function On/Off

1 potential-free fault indication contact

The contact drops out in the event of a fault. Max. load 250 V, 2A

Integrated motor protection function

Connection possibility for thermostat "TB" or thermistor "TP"

Fcontrol Basic 5-step

3~ 208...480V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
F-DM2.5M	308255	400	2.5	40	6	50	55	IP54	2.80	240 x 284 x 132
F-DM5M	308256		5	55	10	90	55		5.50	250 x 302 x 212
F-DM8M	308257		8	40	10	140	55		6.40	250 x 302 x 212
F-DM10M	308258		10	55	16	200	55		6.90	250 x 302 x 212
F-DM14M	308259		14	40	16	300	55		7.00	250 x 302 x 212

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Electronic voltage controllers

1~ Acontrol, universal controller with display and bypass main switch



Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning),
e.g. type DSG.. sensors, measuring range 0...6000 Pa,
acquisition of volume flows up to 65000 m³/h



Connecting air velocity sensors,
e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors,
e.g. combination sensors, CO₂,
sensor signal 0...10 V / 0...20 mA / 4...20 mA

Most ZIEHL-ABEGG external rotor motors can be voltage controlled. For simple and cost-effective speed control of these motors and fans, electronic voltage controllers are available.

For the various applications in refrigeration, air-conditioning and general ventilation technology we supply universal controllers from the Acontrol product family.

These universal controllers provide a facility for controlling temperature, pressure (for example, refrigerant pressure in cooling devices), differential pressure in ventilation systems and other physical factors.

These units have a multifunctional display used for programming and to display the measured values. A bypass main switch is integrated which allows bypassing the internal device electronics. In the bypass position the applied mains voltage is switched directly to the output.

The Acontrol universal devices are ideal for the following applications: refrigeration, air conditioning, agriculture, general air supply and ventilation, clean room technology.

Quick commissioning is facilitated for typical applications in the stated areas by selecting pre-programmed operating modes.

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

LC multifunction display with clear text display:

Different menu languages are selectable

Simple commissioning by operating modes:

Typical operating modes e.g. for air-conditioning, refrigeration or ventilation technology can be selected.

Easy programmability:

Typical settings can be made easily: e.g. setting of a minimum speed, limitation of the maximum speed, inversions and limits. Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

Analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA

Analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outside temperature-dependent)

2 digital inputs D1 and D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E2, control function reversal, output limitation, display of external fault, reset

1 analog output A1:

Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, shutters, group control, fans, etc.

Integrated motor protection function:

Connection possibility for thermostats "TB".

Interface RS485 MODBUS RTU:

Integration into bus system

Set protection:

Activation of set protection against unauthorised access, restoration of made settings

Event memory:

Query of occurred events, operating times etc.

Acontrol, universal controller with display and bypass main switch

1~ 230V 50/60Hz

Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	A	W	°C		kg	mm
PXET6AQ	303610	6	45	10	20	55	IP54	1.40	223 x 200 x 131
PXET10AQ	303611	10	40	16	40	55	IP54	2.40	240 x 284 x 132

Electronic voltage controllers

1~ Acontrol, universal controller with bypass main switch



A rotary knob is integrated into the front of these devices for speed or setpoint presetting. The illuminated display integrated into the rotary knob indicates the operating condition

A bypass main switch is integrated which facilitates bypassing the internal device electronics. In the bypass position, the applied mains voltage is switched directly to the output.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning),
e.g. type DSG.. sensors, measuring range 0...6000 Pa,
acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors,
e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors,
e.g. combination sensors, CO₂,
sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

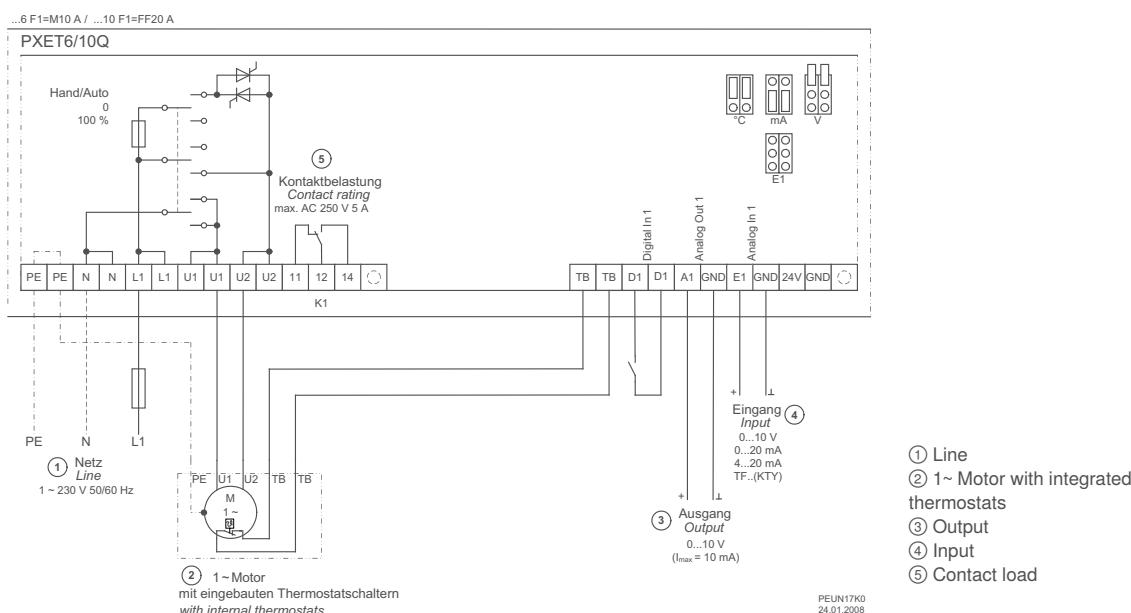

- ① Line
- ② 1~ Motor with integrated thermostats
- ③ Output
- ④ Input
- ⑤ Contact load



Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Properties

Simple commissioning:

This takes place by Dip switches, potentiometers or jumpers.
By setting the Dip switches accordingly, the desired device function (operating modes: speed controller, temperature or pressure controller) can be set. The setpoint setting is made by potentiometers.

An analog input for sensors or setting signal

Analog input E1: Setting/activation by selection of the operating modes (Dip switches, jumpers) e.g. 0-10 V, 4-20 mA. In operation as a controller connection of the appropriate sensor.

1 digital input D1

For connection of an external, potential-free contact.
Enable function On/Off, external reset after motor fault, control function reversal, e.g. heating, cooling

1 analog output A1

Output signal proportional to modulation or constant voltage +10 V (max. 10 mA) for connection of an external potentiometer for speed setting

1 potential-free fault indication relay K1:

The relay drops out in the event of a fault. Max. load 250 V, 5 A.

Integrated motor protection function

Connection possibility for thermostats "TB"

Acontrol, universal controller with bypass main switch

1~ 230V 50/60Hz

Type	Article no.	Rated current A	Rated tem- perature °C	Max. line fuse A	Max. heat dissipation W	Maximum ambient tem- perature °C	Protec- tion class	Weight kg	Dimensions (W x H x D) mm
PXET6Q	303612	6	45	10	20	55	IP54	2.20	223 x 200 x 131
PXET10Q	303613	10	40	16	40	55		2.30	240 x 284 x 132

Electronic voltage controllers

1~ Acontrol, universal controller with high rated current



These versions do not have any controls on the front of the device. Commissioning is through internal dip switches, potentiometer or jumper. Along with higher rated current, these devices also have a wide voltage range.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning),
e.g. type DSG.. sensors, measuring range 0...6000 Pa,
acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors,
e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors,
e.g. combination sensors, CO₂,
sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

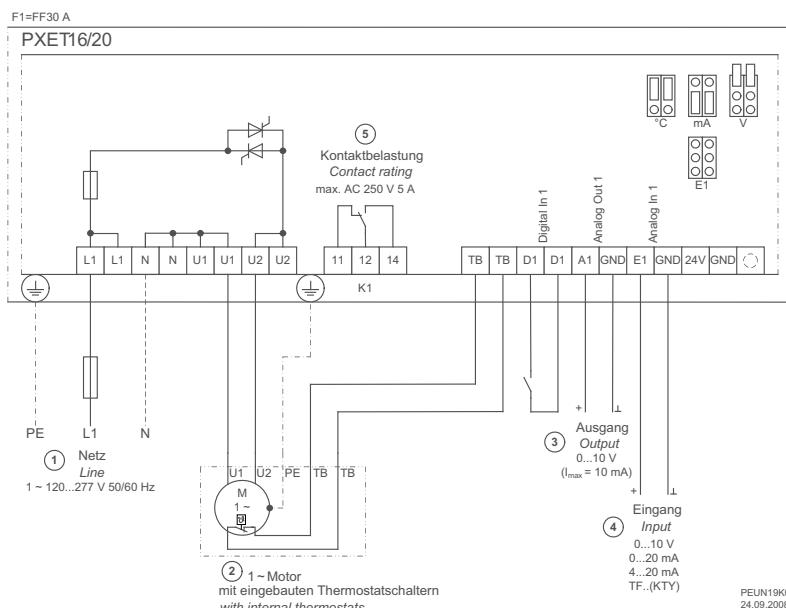

- ① Line
- ② 1~ Motor with integrated thermostats
- ③ Output
0...10 V
0...20 mA
4...20 mA
TF..(KTY)
- ④ Input
0...10 V
0...20 mA
4...20 mA
- ⑤ Contact load

PEUN19K0
24.09.2008



Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Properties

Simple commissioning:

This takes place by Dip switches, potentiometers or jumpers.
By setting the Dip switches accordingly, the desired device function (operating modes: speed controller, temperature or pressure controller) can be set. The setpoint setting is made by potentiometers.

An analog input for sensors or setting signal

Analog input E1: Setting/activation by selection of the operating mode (Dip switches, jumpers) e.g. 0-10 V, 4-20 mA. In operation as a controller connection of the appropriate sensor.

1 digital input D1

For connection of an external, potential-free contact.
Enable function On/Off, external reset after motor fault, control function reversal, e.g. heating, cooling

1 analog output A1

Output signal proportional to modulation or constant voltage +10 V (max. 10 mA) for connection of an external potentiometer for speed setting

1 potential-free fault indication relay K1:

The relay drops out in the event of a fault. Max. load 250 V, 5 A.

Integrated motor protection function

Connection possibility for thermostats "TB"

Acontrol, universal controller with high rated current

1~ 120...277V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PXET16	303598	230	16	55	20	25	55	IP54	1.90	240 x 284 x 115
PXET20	303599	230	20	55	25	30	55		2.30	240 x 284 x 115

Electronic voltage controllers

1~ Acontrol, temperature controller with display and bypass main switch



These versions are ideal for stable climate control in agriculture or for classic temperature-dependent air supply and ventilation jobs. These devices have a multifunctional display used for programming and to display the measured values. A bypass main switch is integrated which provides a facility to bypass the internal device electronics. In the bypass position, the applied line voltage is switched directly to the output.


A room temperature sensor in IP54 is included in the scope of delivery.

Input for sensors or speed settings through



Connecting temperature sensors,
sensor for input 1, type TFR included in scope of supply
Sensor for input 2, optional

Connection diagram

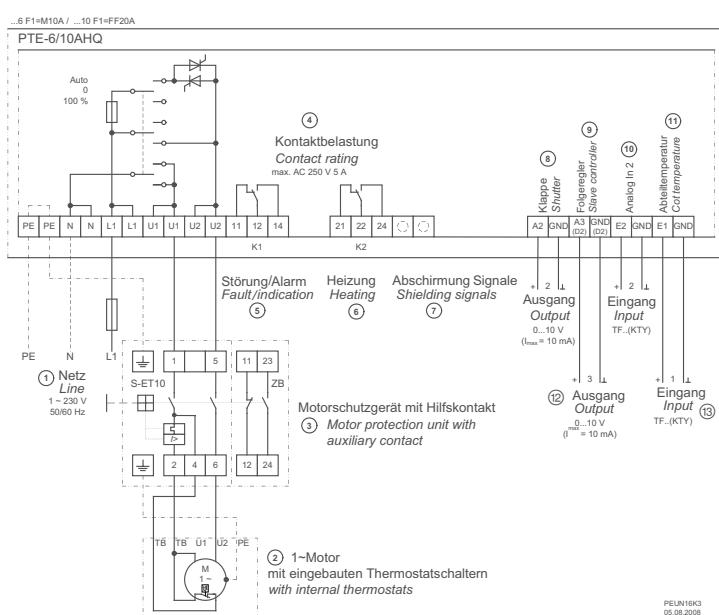

- ① Line
- ② 1~ Motor with integrated thermostats
- ③ Motor protection unit with auxiliary contact
- ④ Contact rating
- ⑤ Fault/Alarm
- ⑥ Heating
- ⑦ Shielding signals
- ⑧ Shutter
- ⑨ Slave controller
- ⑩ Analogue In 2
- ⑪ Compartment temperature
- ⑫ Output
- ⑬ Input

PEUN16K3
05.08.2008

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Characteristic

LC-Multifunctional display with plain text display

Various menu languages can be selected

Simple commissioning:

The device menu for the temperature control regulates the setpoints for triggering the fans, controlling a ventilation damper, triggering a heater, displaying messages in case the temperature is above or below the parameters, etc.

Adjustable setpoint range: 0-40 °C

Input for temperature sensors:

Analogue input E1: Connection for room temperature sensor (included in scope of delivery)

Analogue input E2: Connection facility for an air-supply temperature sensor type TF..., or alternatively as a sensor for dampers or heating control possible

2 analogue outputs

Analogue output A2: to control a ventilation damper

Analogue output A3: as a follow-up controller or to control a heater.

2 digital outputs (relays) K1 and K2

K1: alarm relay, message in case the temperature is above or below set parameters.

K2: Relay to controll a heater

K1 + K2 max. load with 250 V 5 A

Acontrol, function temperature controller with display and bypass main switch

1~ 230V 50/60Hz

Type	Article no.	Rated current A	Rated tem- perature °C	Max. line fuse A	Max. heat dissipation W	Maximum ambient tem- perature °C	Protec- tion class	Weight kg	Dimensions (W x H x D) mm
PTE-6AHQ	303606	6	45	10	20	55	IP54	1.50	223 x 200 x 131
PTE-10AHQ	303607	10	40	16	40	55		2.50	240 x 284 x 132

Electronic voltage controllers

1~ Acontrol, temperature controller with bypass main switch




These versions are ideal for stable climate control in agriculture or for classic temperature-dependent air supply and ventilation jobs. A rotary knob is integrated in the front of the device to set the setpoint temperature. The illuminated display in the rotary knob indicates the operating condition. A bypass main switch is integrated, providing a facility to bypass the internal device electronics. In the bypass position, the applied line voltage is switched directly to the output. A room temperature sensor in IP54 is included in the scope of delivery.

Input for sensors or speed settings through



Connection of thermistors,
Sensor for input 1, type TFR included in the scope of supply

Connection diagram

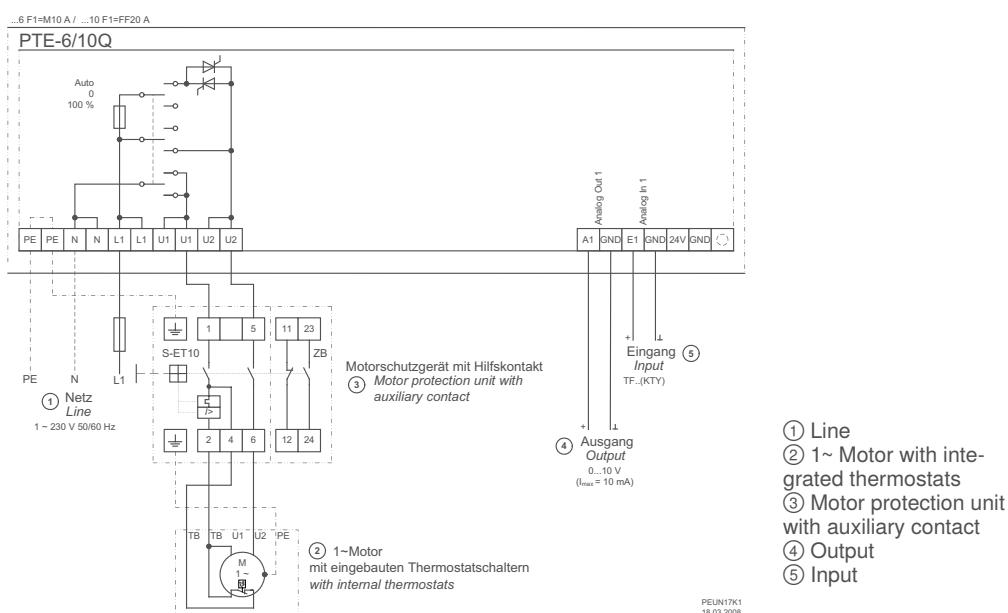

- ① Line
- ② 1~ Motor with integrated thermostats
- ③ Motor protection unit with auxiliary contact
- ④ Output
- ⑤ Input



Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Characteristics

Simple commissioning:

Set the desired temperature setpoint via a rotary knob. Setpoint 0...40 °C (or alternatively -26...+ 76 °C). Additional settings possible with internal potentiometer and dip switch.

Input for temperature sensors:

Analogue input E1: Connection for room temperature sensor (included in scope of delivery)

1 analogue output A1

Control for follow-up controller

Acontrol, temperature controller with bypass main switch

1~ 230V 50/60Hz

Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	A	W	°C		kg	mm
PTE-6Q	303618	6	45	10	20	55	IP54	1.30	223 x 200 x 131
PTE-10Q	303619	10	40	16	40	55		2.30	240 x 284 x 132



Electronic voltage controllers

1~ Acontrol, speed controller or pressure/temperature controller



These versions are primarily used as speed controllers. They are beneficial for upstream control applications or if the device is combined with control modules from the ZIEHL-ABEGG UNIcon product family.

Depending on the device version, speeds can be pre-set. They can also be set to second stage operation with external switchover, or implemented via an external potentiometer.

The Acontrol voltage control devices also provide an option to control based on temperature or pressure (for example, refrigerant pressure in cooling equipment).

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar





Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..



Connecting additional sensors,
e.g. combination sensors, CO₂,
sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

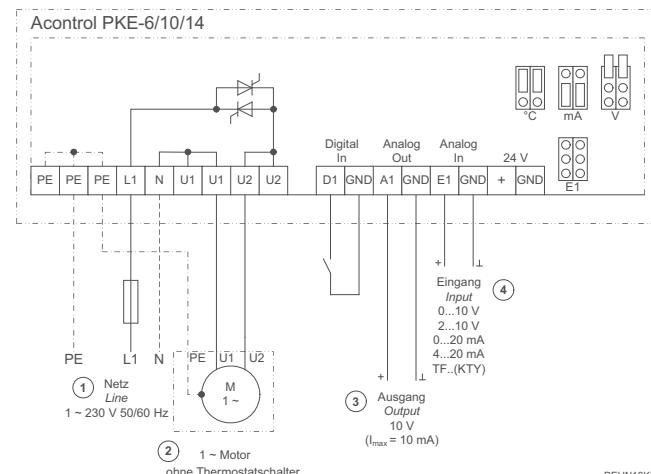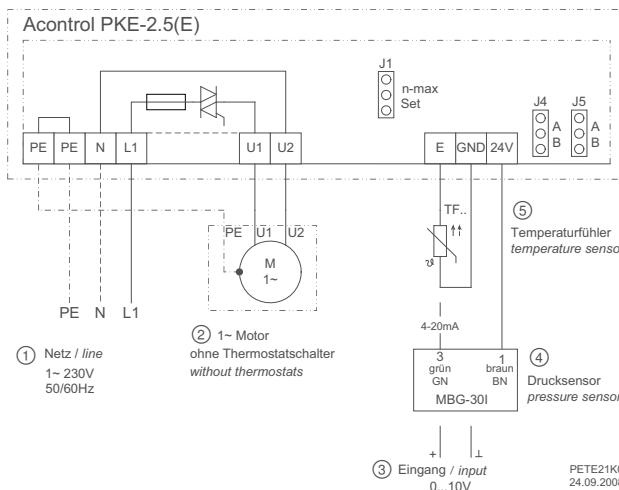

- ① Line
- ② 1~ Motor without thermostats
- ③ Input
- ④ Pressure sensor
- ⑤ Thermistor

- ① Line
- ② 1~ Motor without thermostats
- ③ Output
- ④ Input



Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
 Motor line not shielded
 Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Characteristics

Simple commissioning:

Depending on the device version, commissioning through dip switch, potentiometer or jumper.
 Set the corresponding dip switch to implement the desired device function (operating modes: speed controller, temperature or pressure controller). Set the setpoint default via potentiometer.

One analogue input for sensors or default signal

Analogue input E: Set/enable by selecting the operating mode (dip switch, jumper) e.g. 0-10 V, 4-20 mA. When operating as controller connection of corresponding sensor.

1 digital inputs D1

(only for versions 6-14 A):

For connecting an external, floating contact.
 D1: enable function On/Off

1 analogue output A1

(only for versions 6-14 A):

Output signal proportional modulation or constant voltage +10 V (max. 10 mA) to connect an external potentiometer for speed preset

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplusFE2owlet
with ZAplusSystem
componentsControl
technology

Appendix

Acontrol, speed controller or pressure/temperature controller for cooling 1~ 230V 50/60Hz									
Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
PKE-2.5E	303620	2.5	40	10	10	40	IP20	0.26	93 x 96 x 42
PKE-2.5	303600	2.5	40	10	10	40	IP54	0.45	100 x 190 x 75
PKE-6	303614	6	40	10	15	55		0.60	100 x 190 x 75
PKE-10	303615	10	40	16	25	55		0.90	100 x 190 x 75
PKE-14	303625	14	40	20	35	55		2.00	240 x 284 x 115

Acontrol, speed controller or pressure/temperature controller for heating 1~ 230V 50/60Hz									
Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
PKE-2.5E	303622	2.5	40	10	10	40	IP20	0.26	93 x 96 x 42

Electronic voltage controllers

1~ Acontrol, PID controller for e.g. differential pressure, air velocity



These versions are ideal especially suitable for the differential pressure control in refrigeration technology (control of roof fans, central ventilation systems) or for air velocity control (constant airflow in clean rooms).

The integrated voltage supply +24 V, max. 65 mA, is designed to connect differential pressure or air velocity sensors.

Input for sensors or speed settings through



Connecting differential pressure sensors (air conditioning),
e.g. type DSG.. sensors, measuring range 0...6000 Pa,
acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors,
e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s

Acontrol, PID controller for, e.g., differential pressure, air velocity

1~ 230V 50/60Hz

Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	A	W	°C		kg	mm
PDE-6	303623	6	40	10	15	55	IP54	0.60	100 x 190 x 75
PDE-10	303624	10	40	16	25	55		0.80	100 x 190 x 75

Connection diagram

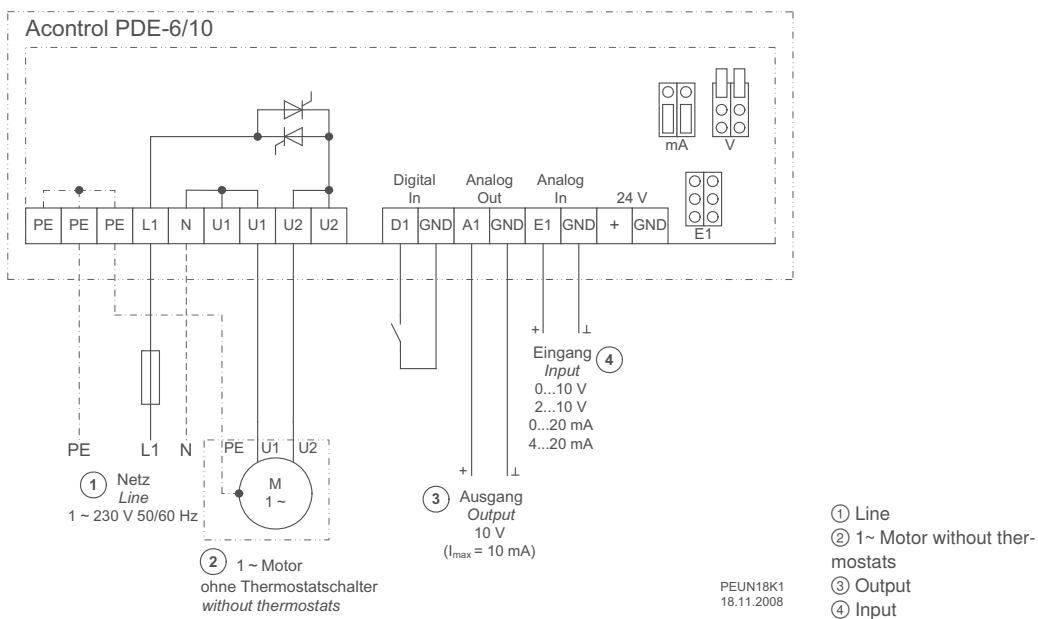

Electronic voltage controllers

1~ speed controller with rotary knob



These devices for continuous speed control of one or more voltage-controlled 1~ fans have a knob installed at the front. This knob sets the desired speed. The speed controller starts with maximum output voltage for safe start-up of the fan.

An integrated operating indicator lamp shows the operating state of the speed controller.

Versions up to 4 Ampere:

Integrated switch function with the knob. One switched output for max. 1 Ampere.

Versions 6 and 10 Ampere:

Side integrated switch. One switched output for max. 6 Ampere.


Acontrol, function temperature controller with display and bypass main switch

1~ 230V 50/60Hz


Type	Article no.	Rated current	Rated tempera-ture	Maximum ambi-ent temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	°C		kg	mm
P-E-1	303586	1	35	35	IP54 / IP44	0.24	82 x 82 x 65
P-E-2.5	303587	2.5	35	35		0.30	82 x 82 x 65
P-E-4	303588	4	35	35	IP54	0.36	82 x 82 x 65
P-E-6	303589	6	35	35		0.68	127 x 202 x 96
P-E-10	303590	10	35	35		0.74	127 x 202 x 96

Connection diagram

P-E-1...4

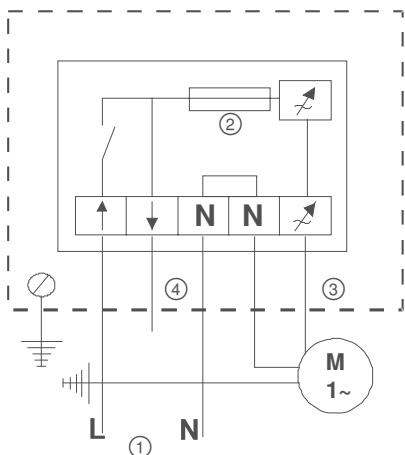

P-E-6/10

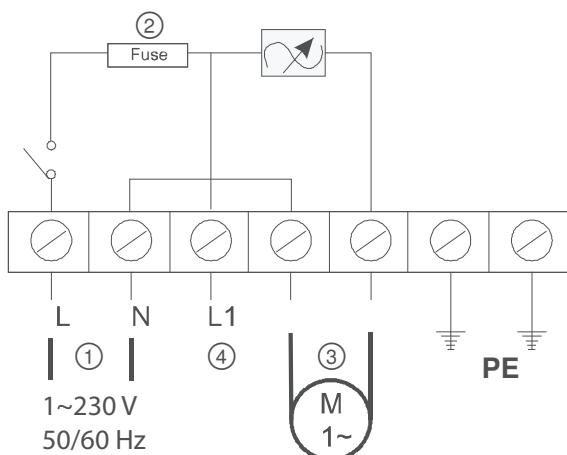

- ① Mains connection:
1~230 V, 50/60 Hz
- ② Built-in fuse
- ③ Controlled output to the motor
- ④ Uncontrolled output 230 V, or bridging of the ON/OFF contact

Electronic voltage controllers

3~ Ucontrol, universal controller with display



Most ZIEHL-ABEGG external rotor motors are voltage controllable. For simple and cost-effective speed control of these motors or fans, electronic voltage controllers can be supplied.

For the various applications in refrigeration, air-conditioning and general ventilation technology we supply universal devices from the Ucontrol product family.

These universal control devices also provide an option to control based on temperature, pressure (for example refrigerant pressure in cooling equipment), differential pressure in ventilation systems, or other physical factors.

The Ucontrol universal devices are ideal for following applications: refrigeration, air conditioning, agriculture, general air supply and ventilation jobs, clean room technology. By selecting pre-programmed operating modes, fast commissioning for typical applications in the stated sectors is possible.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e. g. sensors type TF.. e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

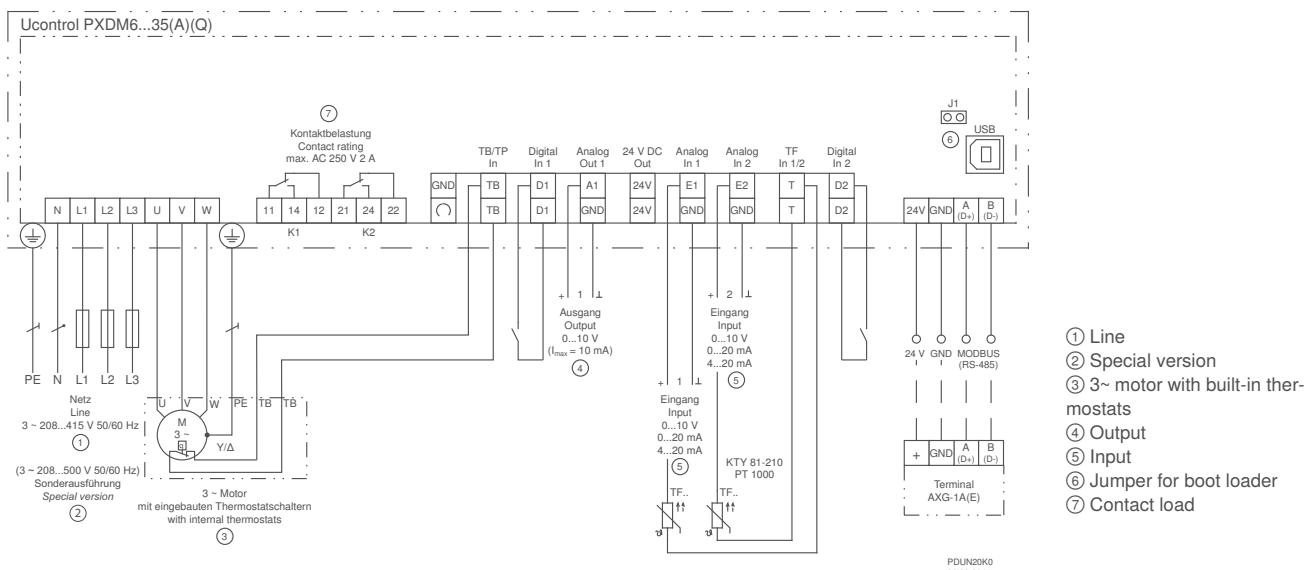

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

LC multi-function display with plain text display:

Different menu languages can be selected

Optional equipment

IO add-on module type Z-Modul-B, Article No. **380052**
if the integrated inputs and outputs are not sufficient
other inputs and outputs can be created with the Z-Modul-B
. These are also programmable:
1 analog input
1 analog output
3 digital inputs
2 digital outputs (relays)

LON® Add-on module type Z-Modul-L, Article No. **380086**

Simple start-up by operating modes:

Typical operating modes, e.g. for air conditioning, refrigerant or ventilation technology can be selected.

Simple programmability:

Typical settings can be made easily: e.g. minimum speed setting, limitation of the maximum speed, inversions and limits. Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA
analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outdoor temperature-dependent)

2 digital inputs D1 und D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch over control or manual mode, switch over E1 or E2, invert control function, output limitation, display external fault, reset

1 analog output A1:

Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, shutters, group control, fans, etc.

Integrated motor protection function:

Connection possibility for PTC thermistors or alternatively thermostats (TB or TP).

Interface RS485 MODBUS RTU:

Integration into bus system

Interface USB:

For e.g. software update, communication with PC (not for devices 50, 80 Ampere / not integrated in UL devices)

Set protection:

Activation set protection against unauthorised access, restoration of made settings

Event memory:

Querying of occurred events, operating times, etc.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix



Ucontrol, universal controller with display

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PXDM6A	304594	400	6	40	10	30	55	IP54	2.25	240 x 284 x 115
PXDM10A	304595		10	45	16	50	55		2.75	240 x 284 x 115
PXDM12A	304596		12	40	16	75	55		3.65	270 x 323 x 146
PXDM15A	304597		15	40	20	100	55		4.95	270 x 323 x 146
PXDM20A	304598		20	45	25	200	55		5.50	250 x 302 x 195.5
PXDM25A	304599		25	45	35	270	55		11.10	280 x 355 x 239
PXDM35A	304600		35	50	50	440	55		11.15	280 x 355 x 239
PXDM50A	305567		50	40	63	170	55		20.00	386 x 525 x 283
PXDM80A	305568		80	40	100	270	55		21.00	386 x 525 x 283
PXDM25AE	304624		25	50	35	260	55	IP20	7.65	246 x 362 x 180
PXDM35AE	304625		35	50	50	430	55		7.75	246 x 362 x 180
PXDM50AE	305592		50	50	63	160	55		13.80	336 x 471 x 220
PXDM80AE	305593		80	50	100	255	55		15.40	336 x 471 x 220

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Ucontrol, universal controller without display

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PXDM6	304620	400	6	40	10	30	55	IP54	2.20	240 x 284 x 115
PXDM10	304621		10	45	16	50	55		2.70	240 x 284 x 115

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Ucontrol, universal controller for increased ambient temperature with display

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PXDM6AZ	304607	400	6	50	10	25	55	IP54	2.25	240 x 284 x 115
PXDM10AZ	304608		10	50	16	45	55		2.75	240 x 284 x 115
PXDM12AZ	304609		12	50	16	70	55		3.65	270 x 323 x 146
PXDM15AZ	304610		15	50	20	95	55		4.95	270 x 323 x 146
PXDM20AZ	304611		20	50	25	190	55		5.50	250 x 302 x 195.5
PXDM25AZ	304612		25	50	35	260	55		11.10	280 x 355 x 239
PXDM35AZ	304613		35	55	50	430	55		11.15	280 x 355 x 239
PXDM50AZ	305586		50	50	63	160	55		18.60	386 x 525 x 283
PXDM80AZ	305587		80	50	100	255	55		19.60	386 x 525 x 283

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.



Electronic voltage controllers

3~ Ucontrol, universal controller with display and bypass main switch



Most ZIEHL-ABEGG external rotor motors are voltage controllable. For simple and cost-effective speed control of these motors or fans, electronic voltage controllers can be supplied.

For the various applications in refrigeration, air-conditioning and general ventilation technology we supply universal devices from the Ucontrol product family.

These universal control devices also provide an option to control based on temperature, pressure (for example refrigerant pressure in cooling equipment), differential pressure in ventilation systems, or other physical factors.

The Ucontrol universal devices are ideal for following applications: refrigeration, air conditioning, agriculture, general air supply and ventilation jobs, clean room technology. By selecting pre-programmed operating modes, fast commissioning for typical applications in the stated sectors is possible.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e.g. sensors type TF.. e.g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type DSG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h



Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

These versions have an additionally integrated bypass main switch. This offers the possibility of bypassing the internal device electronics. In the bypass position, the applied line voltage is switched directly to the output.

Ucontrol, universal controller with display and bypass main switch

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PXDM6AQ	304614	400	6	40	10	30	55	IP54	2.55	240 x 284 x 132
PXDM10AQ	304615		10	45	16	50	55		3.05	240 x 284 x 132
PXDM12AQ	304616		12	40	16	75	55		4.00	270 x 323 x 162
PXDM15AQ	304617		15	40	20	100	55		5.30	270 x 323 x 162
PXDM25AQ	304618		25	45	35	270	55		11.40	280 x 355 x 256
PXDM35AQ	304619		35	50	50	440	55		11.45	280 x 355 x 256
PXDM50AQ	305508		50	40	63	170	55		20.70	386 x 525 x 299.5
PXDM80AQ	305509		80	40	100	270	55		22.80	386 x 525 x 299.5

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Electronic voltage controllers

3~ Dcontrol, speed controller or pressure/temperature controller



These versions are primarily used as speed controllers. This is beneficial for upstream control applications or when the devices are combined with control modules from the ZIEHL-ABEGG UNIcon product family. Alternatively, speeds can be pre-set. They can also be set to second stage operation with external switchover, or implemented via an external potentiometer. The Dcontrol voltage controllers also provide an option to control based on temperature or pressure (for example, refrigerant pressure in cooling equipment).

Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V




Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e.g. sensors type TF.. e.g. active sensor type MTG..

Connection diagram

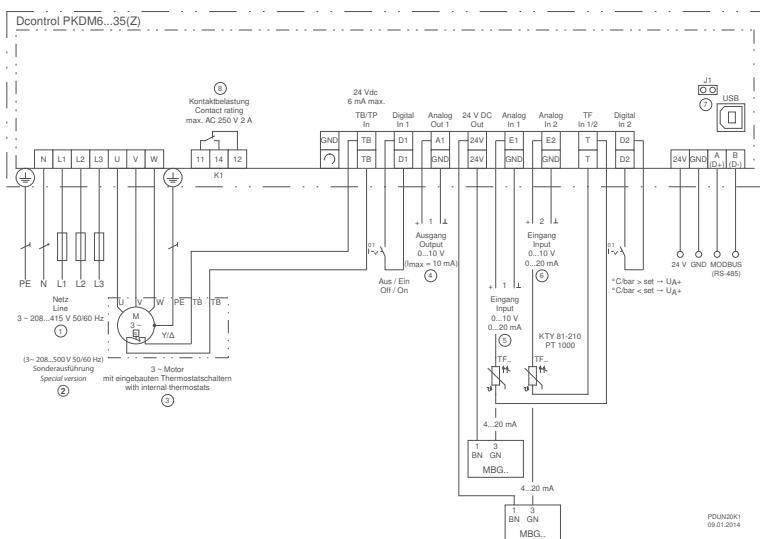

① Netz 3~ 208..415 V

50/60 Hz

② Special version UL 3~

208...500 V 50/60 Hz

③ 3~ motor motor with

built-in thermostats

④ Output

⑤ Input

⑥ Input

⑦ USB interface

⑧ Contact load



Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/Characteristics

Simple commissioning with dip switch and potentiometer:

The controls are accessible directly in the device terminal compartment. Set the dip switch to select the desired device function (operating modes: speed controller, temperature, or pressure controller). The setpoint preset is set with the potentiometer.

Two analogue inputs for sensors or default signal

Analogue input E1 and E2: Set/enable by selecting the operating mode (dip switch), e.g., 0-10 V, 4-20 mA. When operating as a controller, e.g. connection of two sensors for controlling the higher value (e.g., two-loop condenser)

2 digital inputs D1 and D2

For connecting an external, floating contact.

D1: Enable function On/Off

D2: Reverse the control function, e.g. heating, cooling

1 analogue output A1:

Output signal proportional modulation or constant voltage +10 V (max. 10 mA) to connect an external potentiometer for speed prese

1 floating alarm relay K1:

During a fault, the relay drops out. Max. load 250 V, 2 A.

Integrated motor protection function

Connection facility for thermostat "TB" or thermistor "TP"

Interface RS485 MODBUS RTU

Connection to bus system

Interface USB

e.g. for software update, communication with PC
(not on 50, 80 Ampere devices)

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix



Dcontrol, speed controller or pressure/temperature controller

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PKDM6	304587	400	6	40	10	30	55	IP54	2.20	240 x 284 x 115
PKDM10	304588		10	45	16	50	55		2.70	240 x 284 x 115
PKDM12	304589		12	40	16	75	55		3.60	270 x 323 x 146
PKDM15	304590		15	40	20	100	55		4.90	270 x 323 x 146
PKDM20	304591		20	45	25	200	55		5.45	250 x 302 x 195.5
PKDM25	304592		25	45	35	270	55		11.05	280 x 355 x 239
PKDM35	304593		35	50	50	440	55		11.10	280 x 355 x 239
PKDM50	305563		50	40	63	170	55		19.50	386 x 525 x 283
PKDM80	305564		80	40	100	270	55		20.50	386 x 525 x 283
PKDM25E	304622		25	50	35	260	55	IP20	7.40	246 x 362 x 180
PKDM35E	304623		35	50	50	430	55		7.50	246 x 362 x 180
PKDM50E	305588		50	50	63	160	55		13.80	336 x 471 x 220
PKDM80E	305589		80	50	100	255	55		15.40	336 x 471 x 220

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Dcontrol, speed controller or pressure/temperature controller for increased ambient temperature

3~ 208...415V 50/60Hz

Type	Article no.	Rated voltage	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		V	A	°C	A	W	°C		kg	mm
PKDM10Z	304601	400	10	50	16	45	55	IP54	2.70	240 x 284 x 115
PKDM12Z	304602		12	50	16	70	55		3.60	270 x 323 x 146
PKDM15Z	304603		15	50	20	95	55		4.90	270 x 323 x 146
PKDM20Z	304604		20	50	25	190	55		5.45	250 x 302 x 195.5
PKDM25Z	304605		25	50	35	260	55		11.05	280 x 355 x 239
PKDM35Z	304606		35	55	50	430	55		11.10	280 x 355 x 239
PKDM50Z	305578		50	50	63	160	55		18.10	386 x 525 x 283
PKDM80Z	305579		80	50	100	255	55		19.10	386 x 525 x 283

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.



Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Electronic voltage controllers

3~ Dcontrol, with UL certification



The following device versions are available with UL certification.
Due to the large wide voltage range of 208-500 V
they can be used in numerous applications.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V




Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..

Connection diagram

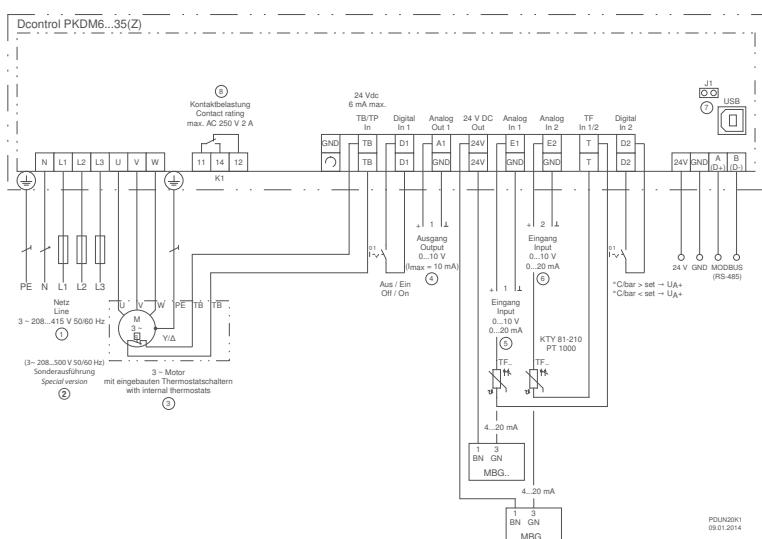

- ① Netz 3~ 208..415 V 50/60 Hz
- ② Special version UL 3~ 208...500 V 50/60 Hz
- ③ 3~ motor motor with built-inthermostats
- ④ Output
- ⑤ Input
- ⑥ Input
- ⑦ USB interface
- ⑧ Contact load



Dcontrol, with UL certification

3~ 208...500V 50/60Hz

Type	Article no.	Rated voltage V	Rated current A	Rated temperature °C	Max. line fuse A	Max. heat dissipation W	Maximum ambient temperature °C	Protection class	Weight kg	Dimensions (W x H x D) mm
PKDM10 (500V)	304628	500	10	45	16	50	55	IP54	2.80	240 x 284 x 115
PKDM15 (500V)	304629	500	15	40	20	100	55		5.00	270 x 323 x 146
PKDM25 (500V)	304630	500	25	45	35	270	55		11.20	280 x 355 x 239

Devices with a rated temperature below 55 °C can be used up to 55 °C with a reduction in performance.

Information

FE2owlet-ECblue

FE2owlet

FE2owlet-ECblue
with ZAplus

FE2owlet
with ZAplus

System components

Control technology

Appendix



Electronic voltage controllers

3~ Dcontrol, basic device for 5 amps



Version PKDT5 can be supplied for a maximum of 5 A rated current. The device is designed for a 400-415 V line voltage and is a cost-effective alternative to devices with a larger voltage range.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default,
e.g. 0...10 V



Connecting pressure sensors (refrigeration),
e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar




Connection of thermistors,
e. g. sensors type TF..
e. g. active sensor type MTG..

Dcontrol, basic device for 5 amps

3~ 415V 50/60Hz

Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	A	W	°C		kg	mm
PKDT5	304555	5	40	10	25	55	IP54	2.92	240 x 284 x 115

Connection diagram

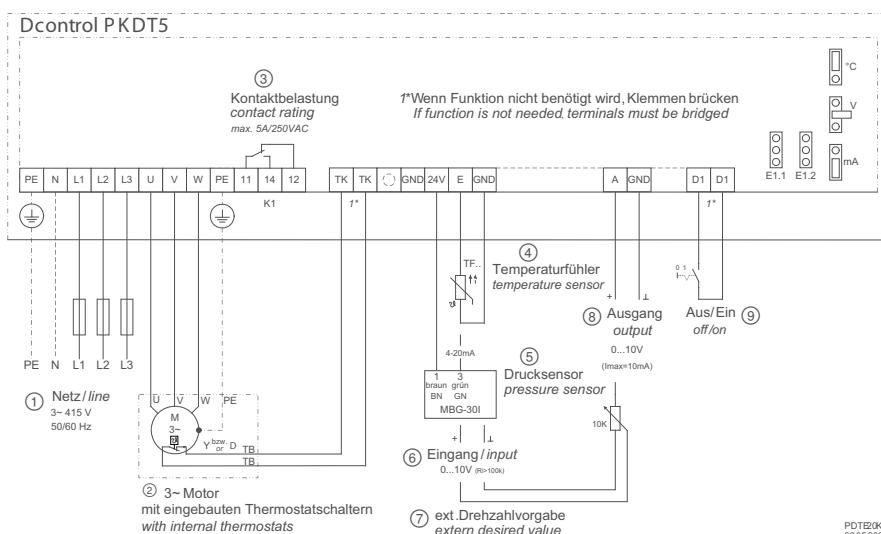

- ① Line
- ② 3-Motor with integrated thermostats
- ③ Contact rating
- ④ Temperature sensors
- ⑤ Pressure sensor
- ⑥ Input
- ⑦ External speed setting
- ⑧ Output
- ⑨ On/Off

1* If function is not needed
terminals must be bridged

PDTB202
02/2006



Electronic voltage controllers

3~ Dcontrol, speed controller for 2 amps



Version PSDT2V can be supplied for up to maximum of 2 A rated current. The device is designed for 400 V line voltage and is solely used as a speed controller.

Input for sensors or speed settings through




Setting of the desired speed through device or by external default,
e.g. 0...10 V

Dcontrol, speed controller for 2 amps 3~ 400V 50/60Hz

Type	Article no.	Rated current	Rated temperature	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	°C	A	W	°C		kg	mm
PSDT2V	304500	2	40	6	10	55	IP54	1.00	166 x 230 x 118

Connection diagram

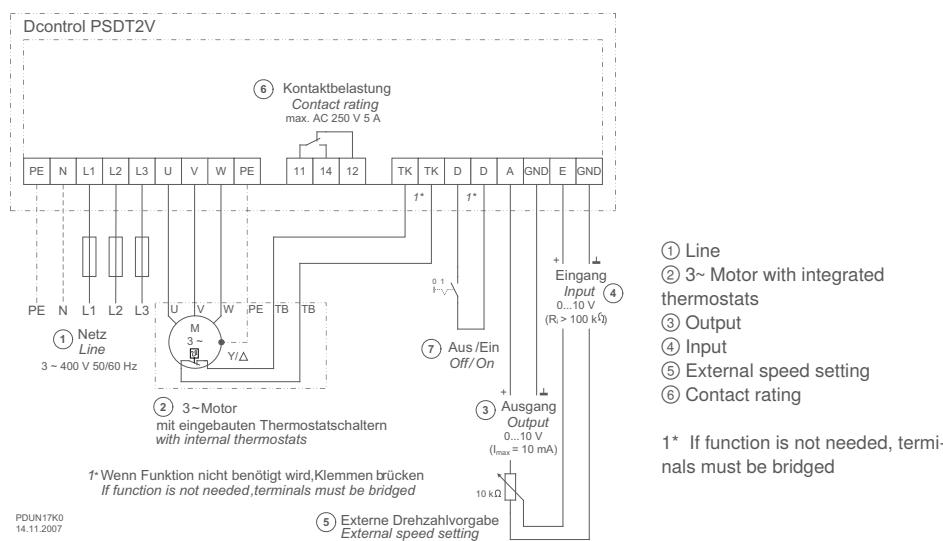

Motor protection units


For monitoring thermostats (TB)




Complete motor protection is implemented by connecting the thermostat, which is integrated into the motor, to the motor protection unit. Most ZIEHL-ABEGG external rotor motors are equipped with thermostats (TB) in the winding. These thermostats open during high winding temperatures, facilitating the direct monitoring of the temperature in the motor, thus ensuring the direct protection of the motor. When the thermostat opens, the motor protection unit is triggered and has to be manually reset; this is done to prevent an unwanted reconnection after the motor has cooled off.

Additional functions of the 3~ STDT motor protection units: They have an overcurrent trigger integrated. That means the device acts like a fuse and can be used for "current distribution". The adjustable overcurrent trigger protects the cable leading to the connected motors. Dual terminals located on the input and output sides of the motor protection unit facilitate simple wiring of multiple motors or fans on the output side of a powerful controller.

Anschlussplan S-ET

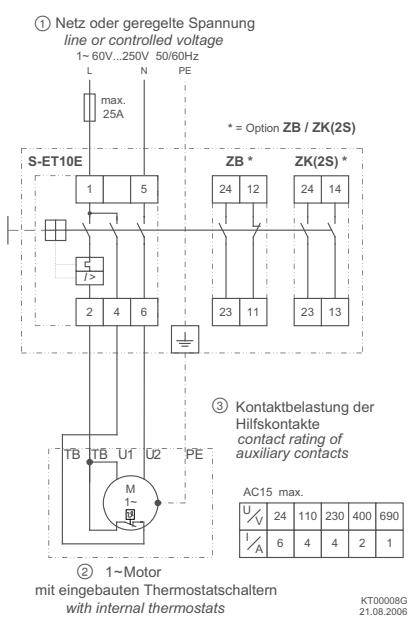

Connection diagram STDT

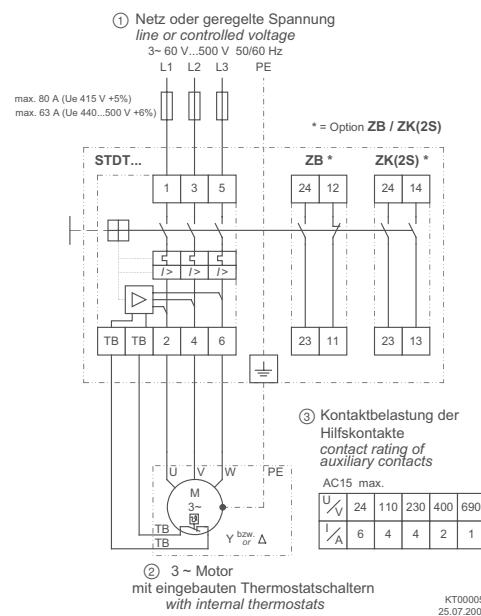

- ① Line or controlled voltage
- ② 3~ motor with integrated thermostats
- ③ Contact load of auxiliary contacts

* Option ZB/ZK(2S)

- ① Line or controlled voltage
- ② 1~ motor with integrated thermostats
- ③ Contact load of auxiliary contacts

* Option ZB/ZK(2S)



Equipment/Characteristics

Complete motor protection

Automatic shut-off when connected thermostat „TB“ opens (direct temperature monitoring in the motor winding).

Integrated button

Switch connected motors on and off manually. Manual reset after motor fault (protection from unwanted restarting)

Optional: operating status contact

Type "ZB" with one open contact and one close contact

Type "ZK" with two close contacts

Optional padlock feature

Type „Zrep“ for the IP55 housing version. The motor protection unit can be locked during servicing (max. 3 locks)

Cable protection (only in 3~ STDT devices)

Via integrated overcurrent trigger, which can be adjusted to the cable cross section.


Accessories		
Type	Article no.	Weight kg
S-ET10E	382021	0.17
S-ET10	382020	0.44
STDT16E	382012	0.33
STDT25E	382015	0.50
STDT16	382011	0.60
STDT25	382014	0.75
ZB	382013	0.03
ZK	382022	0.03
Zrep	382025	0.11


Motor protection units for monitoring thermostats (TB)

Line	Installation	Type	Article no.	Rated current	Overcurrent trigger	Minimum ambient temperature	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
				A		°C	°C		kg	mm
1~ 60...250V 50/60Hz	Rail according to EN 60715	S-ET10E	382021	10		-25	55	IP20	0.17	45 x 80 x 85.5
1~ 60...250V 50/60Hz	Wall mounting	S-ET10	382020	10		-25	40	IP55	0.44	80 x 150 x 97.5
3~ 60...500V 50/60Hz	Rail according to EN 60715	STDT16E	382012	16	Overcurrent 10...16 A	-25	55	IP20	0.33	54 x 80 x 85.5
3~ 60...500V 50/60Hz		STDT25E	382015	25	Overcurrent 20...25 A	-25	55		0.50	54 x 80 x 85.5
3~ 60...500V 50/60Hz	Wall mounting	STDT16	382011	16	Overcurrent 10...16 A	-25	40	IP55	0.60	80 x 150 x 97.5
3~ 60...500V 50/60Hz		STDT25	382014	25	Overcurrent 20...25 A	-25	40		0.75	80 x 150 x 97.5

Application example

Motor protection units S-ET or STDT, depending on the line. With S-ET monitoring of individual fans, with STDT monitoring of several fans per motor protection unit possible. Thermostats are wired in series.

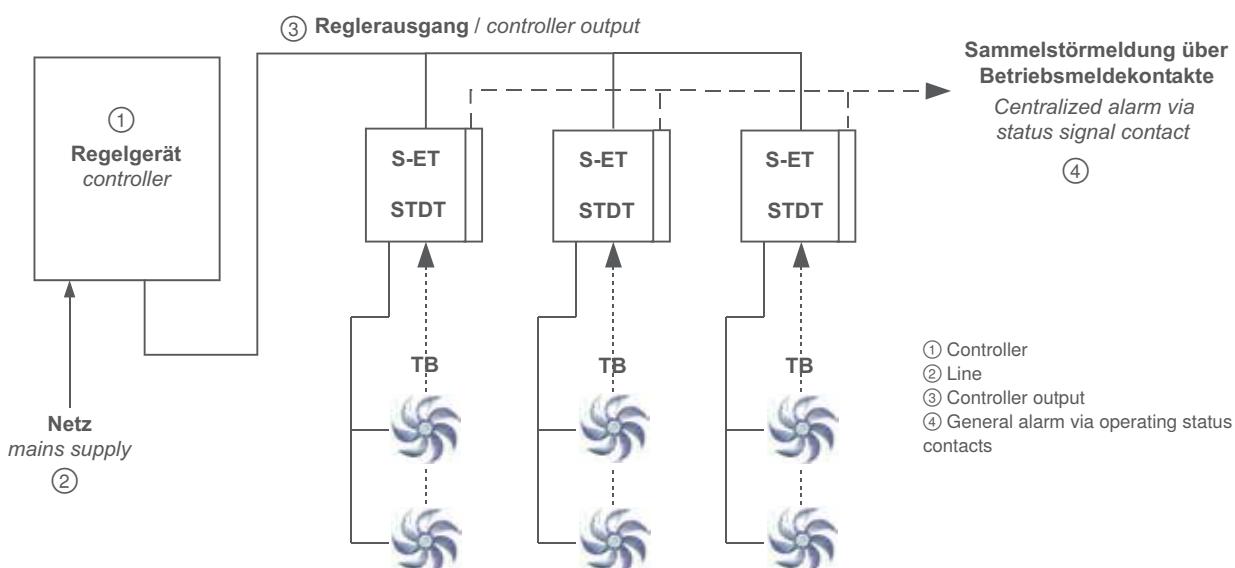

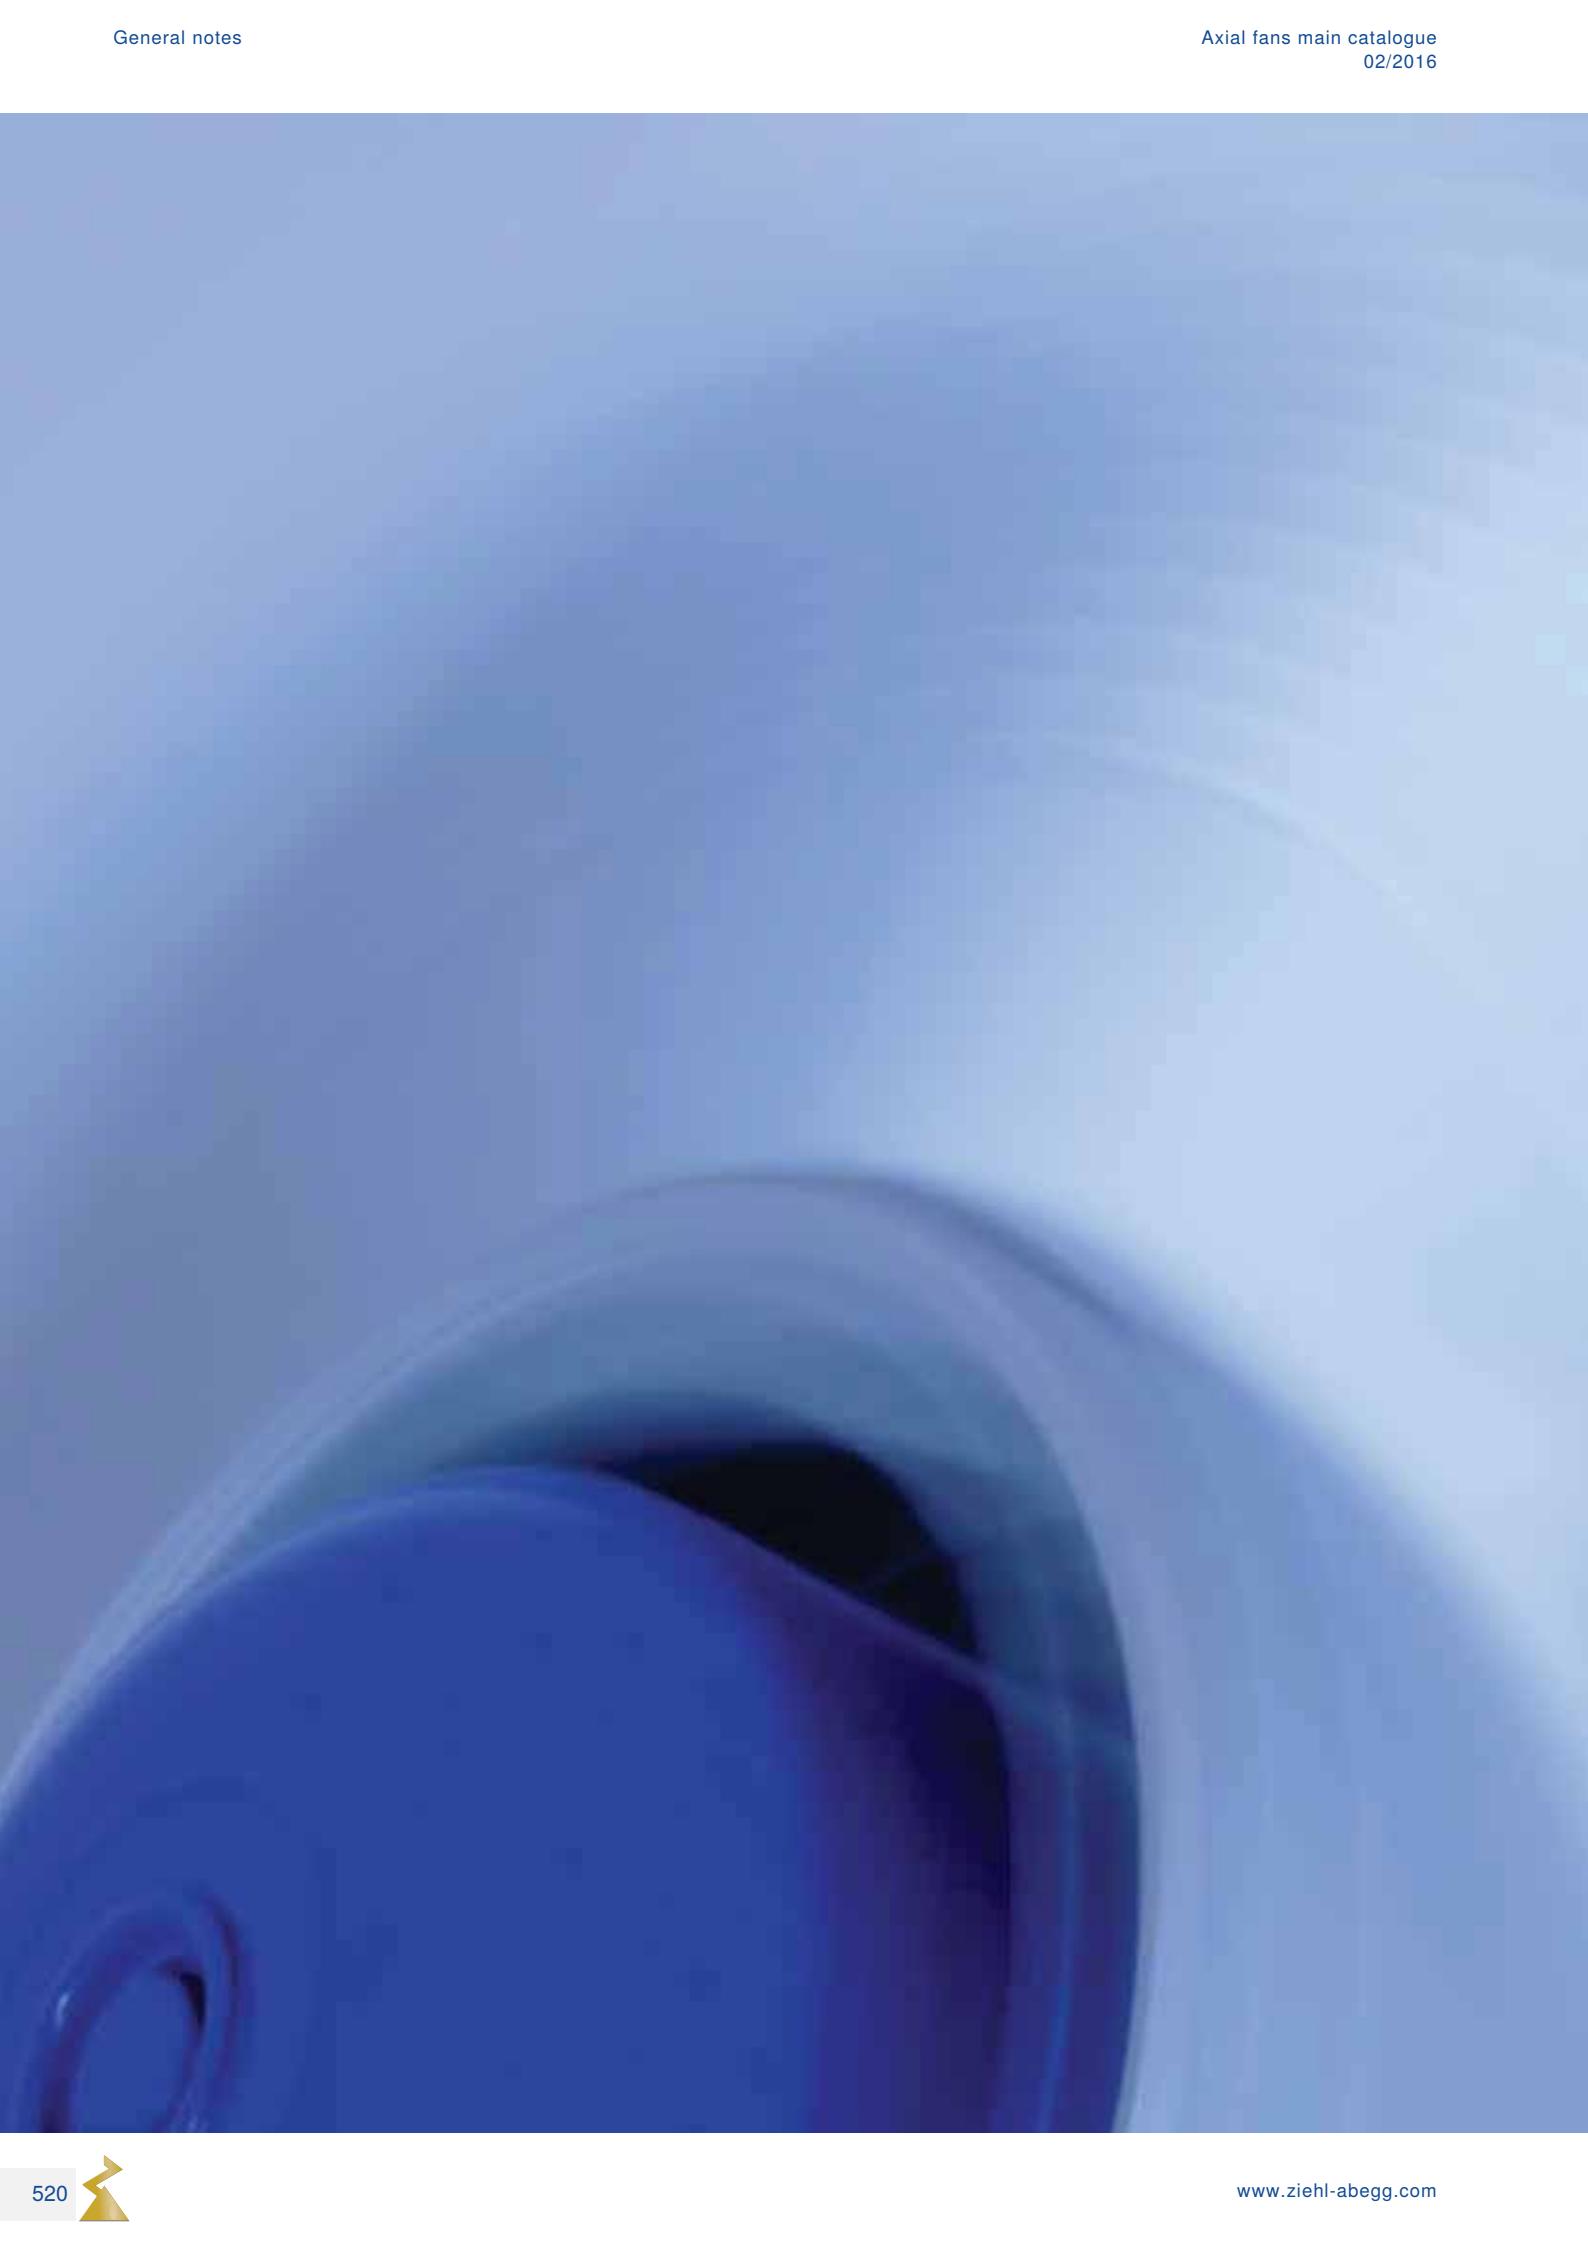

General notes

Overview

Explanation of technical details

Page 522

Aerodynamics and Acoustics

Page 524

Electrical connection and motor

Page 527

Connection diagram

Page 528

Installation and usage information

Page 533

Information

FE2owlet- ECblue

FE2owlet

FE2owlet- ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Explanation of technical details

Symbols, Units of Measure


Symbol	Unit	Description
p_{sf}	Pa	Static pressure increase
p_{fd}	Pa	Dynamic pressure
q_v	m³/h	Air flow
n_N	min⁻¹	Rated speed
P_i	kW	Input power
P_{sys}	kW	Input power system (including controller)
U_N	V	Rated voltage
f_N	Hz	Rated frequency
I_N	A	Rated current
I_A	A	Starting current
ΔI	%	Percentage increase of current based on rated current for speed control by voltage reduction
C_{400V}	µF	Capacity
$t_{R(min)}$	°C	Minimum permitted ambient temperature
$t_{R(max)}$	°C	Maximum permitted ambient temperature
L_{WA5}	dB(A)	A-rated suction-side sound power level
η_{statA}	%	Overall efficiency, static according to measurement category A at optimum duty point without losses of electronic speed control according to calculation method ErP-commission regulation No. 327/2011 annex II
N_{actual}	-	Actual efficiency grade of the fan based on an electrical input power of 10 kW at its point of optimum energy efficiency
N_{target}	-	Target efficiency grade at motor input power 10 kW
L_{pA}	dB(A)	A-rated suction-side or pressure-side acoustic pressure level
P_{spez}	Wh/1000m³	Specific power

Notes pertaining to the ErP evaluation

The identifier ErP2015 indicates that a fan meets the minimum efficiency factors of the respective level according to the ErP directive or the fan is not subject to the regulations of ErP directive ($P_i < 125$ W). The actual efficiency in the efficiency optimum of the fan which is used for the ErP evaluation is called η_{statA} . In order to meet ErP requirements, this efficiency must reach a certain minimum value (target energy efficiency). The efficiency N is a parameter in the calculation of the target energy efficiency of the ErP directive. As a reference value for the required efficiency N_{nom} we also specify the actual efficiency N_{act} based on a motor input power of 10 kW.

All ErP-relevant data refers to measured data according to measurement category A, which was determined in the long housing from ZIEHL-ABEGG with inlet ring without guard grille, as per ISO 5801.

Size	B	D	D1	R1
200	52	200		13,5
250	85	254	257	10
300	80	306	326	16
315	80	316,5	327	27
350	87	356	367	35
400	100	400	410	35
450	110	451	463	45
500	118	503	517	45
560	135	559	576	45
630	150	634	653	55
710	167	711	728	95
800	195	797	814	100
910	205	914	930	100
1000	205	1000	1016	105
1250	340	1260	1347	105

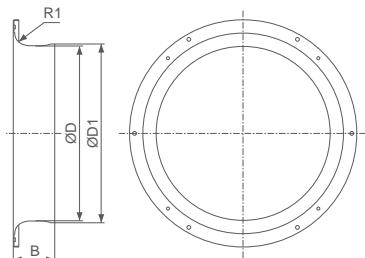

L-KL-3017



Conversion factors

Pressure

		SI-unit	Additional units		
		Pa (N/m ²)	mbar	in.wg	psi (lbs./in ²)
SI-unit	Pa (N/m ²)	1	0.01	0.004015	0.000145
Additional units	mbar	100	1	0.401463	0.014503
	in.wg	249.10	2.49	1	0.036127
	psi (lbs./in ²)	6894.76	68.95	27.68	1

Air flow

		SI-unit	Additional units		
		m ³ /s	m ³ /h	l/s	cfm
SI-unit	m ³ /s	1	3600	1000	2118.9
Additional units	m ³ /h	0.000277	1	0.277777	0.588583
	l/s	0.001	3.6	1	2.1189
	cfm	0.000472	1.698994	0.471943	1

Temperature

		SI-unit	Additional units	
		°C	°F	
SI-unit	°C	1	(°C × 1.8) + 32	
Additional units	°F	(°F - 32) / 1.8	1	

Dynamic pressure

Calculation of the dynamic pressure:

$$p_{fd} = k \cdot q_v^2$$

p_{fd} Dynamic pressure at fan outlet in Pa

k Constant

q_v Air flow in m³/h

Example:

Type FN050-4EQ.4I.A7P1, Article no. 140084

Size	Constant
020	$4,7 \cdot 10^{-5}$
025	$1,7 \cdot 10^{-5}$
030	$8,6 \cdot 10^{-6}$
031	$7,5 \cdot 10^{-6}$
035	$4,7 \cdot 10^{-6}$
040	$2,9 \cdot 10^{-6}$
042	$2,4 \cdot 10^{-6}$
045	$1,8 \cdot 10^{-6}$
050	$1,2 \cdot 10^{-6}$
056	$7,7 \cdot 10^{-7}$
063	$4,6 \cdot 10^{-7}$
071	$2,9 \cdot 10^{-7}$
080	$1,9 \cdot 10^{-7}$
081	$1,1 \cdot 10^{-7}$
100	$7,5 \cdot 10^{-8}$
125	$3,0 \cdot 10^{-8}$

$$p_{fd} = 1,2 \cdot 10^{-6} \cdot q_v^2$$

Aerodynamics and Acoustics

Measurement method

The 'characteristic curve' diagram shows the pressure increase Δp_{sf} in Pa as a function of the volume flow rate q_v in m^3/h .

Technical conditions of supply

The specified performance data meet the requirements for accuracy class 3 for AC fans and accuracy class 2 for ECblue fans in line with DIN 24 166 and apply to the rated data and air performance curves at the rated voltage. The continuous line in the characteristic map represents the optimum reliable operating range for axial fans.

Fan test bench


The fan characteristic curves are determined on a combined test bench for acoustics and air performance.

The characteristic curves are measured in compliance with DIN EN ISO 5801 and AMCA 210-99. The sound power levels are measured in compliance with DIN EN ISO 3745 and ISO 13347-3 using the enveloping surface measuring method.

The figure below shows an example of the measuring setup. The fan intake is installed in the measuring chamber at free intake and free exhaust (installation type A as per DIN EN ISO 5801 or AMCA 210-99).

Air density

The air density and humidity are conditioned during the measurement using heat exchangers and kept largely constant. The characteristic curves shown refer to the measuring density. The mean measuring density is 1.16 kg/m^3 .




KL-1290a

Installation type A according to ISO 5801



Technology Centre (InVent)

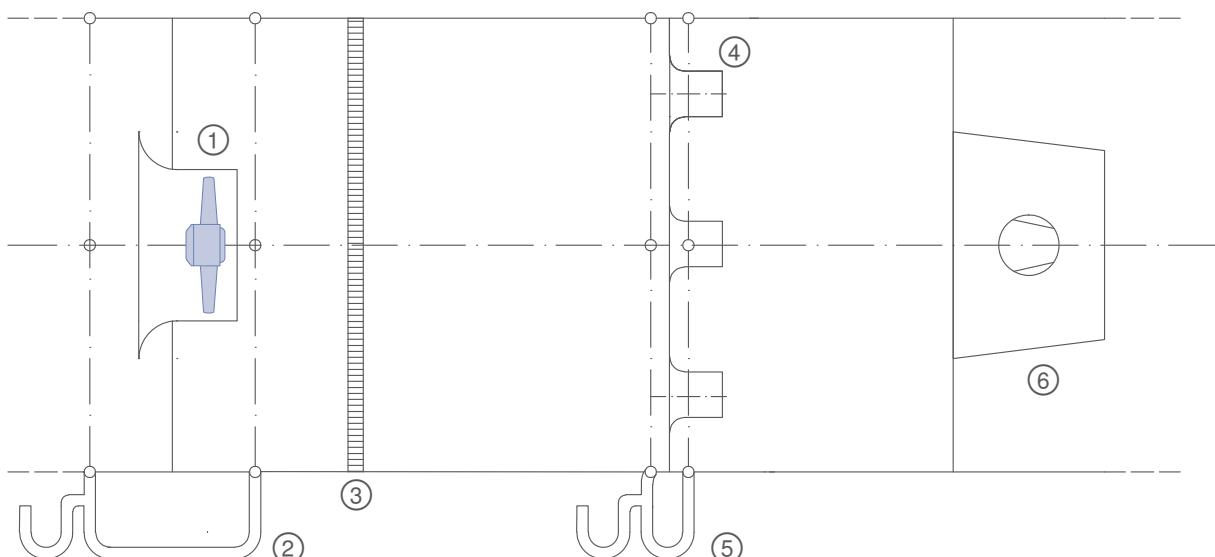

- ① Test fan
- ② P_{sf}
- ③ Flow straightener
- ④ Nozzles
- ⑤ Δp Differential pressure
- ⑥ Auxiliary fan



Noise level data

Unless otherwise indicated, this catalogue specifies the intake side, A-evaluated sound power levels L_{WA} .
The sound power levels are determined by using the enveloping surface method in compliance with **ISO 13347-3**, accuracy class 1 and/or **DIN EN ISO 3745**.

This is done by measuring the acoustic pressure level L_p of the individual third-octave bands at 12 points on the enveloping surface (Fig. 1a). The measured acoustic pressure levels for the third-octave bands are initially used to calculate the sound power level for the third-octave bands and then the intake side sound power level L_w . To do this, the fans are installed with a free intake (from the measuring chamber) and (air) outlet (into the surrounding area). The standard measurements are carried out without the need for additional parts, e.g. guard grille. The measuring equipment used complies with **DIN EN 61672**.

Because of the different weighting of the third-octave sound power level, the A-evaluation, which is typically carried out, takes into account the subjective nature of human sound perception. The A-tested sound power level is the standard variable used to assess the sound characteristics of technical equipment.

Calculation of pressure side sound power level and total sound power level

For axial fans, the pressure side sound power level is approximately equal to the intake side level. The total sound power level is calculated by adding up the power from the sound power levels of both the intake and the pressure side (see **DIN 45 635 Part 1, Appendix F**, **DIN EN ISO 3745**). Thus, it is approximately 3 dB higher than the intake side sound power level specified in the catalogue.

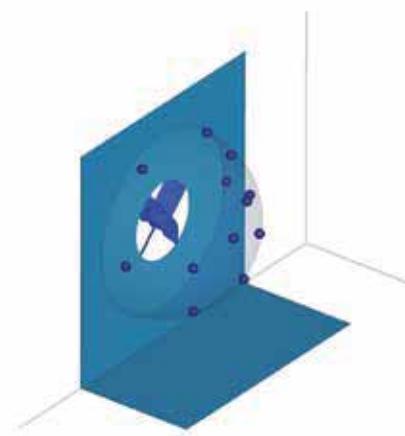


Fig. 1a: Position of microphones in relation to axial fans



Fig. 1b: Fan test-bench

Determination of total sound power level during the interaction of several sound sources

The total sound power level of several individual sound sources operating concurrently is calculated by adding the power of the individual levels in compliance with **DIN EN ISO 3745**. This equation is the basis for the diagrams in Fig. II and III.

To add up several sound sources with the same level, please see diagram (Fig. II) for complete level information; e.g. 6 identical sound sources operating concurrently results in a total level that is approx. 8 dB higher.

The total sound power level of two sound sources with different levels can be seen in diagram Fig. III. For example, two sound sources whose sound power levels differ by 4 dB produce a total sound power level that is around 1.5 dB higher than that of the louder sound source.

Determination of acoustic pressure level

The A-tested acoustic pressure level L_{PA} for rooms with average absorption capacity for a distance of 1m from the fan axis is calculated by subtracting 7 dB from the A sound power level L_{WA} . In most cases, this assumption is correct and provides a sufficient level of accuracy. However, the sound characteristics can be hugely influenced by the individual installation situation.

Absorption of the acoustic pressure level, depending on the distance with partial reflection, is shown in Fig. IV.

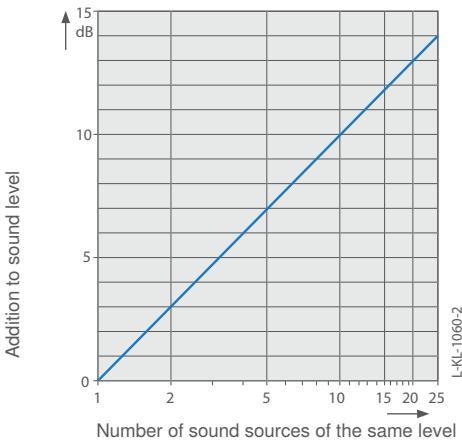


Fig. II: Addition of several sound sources

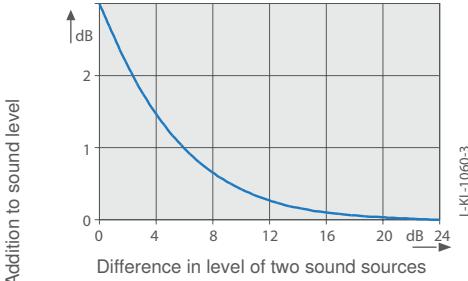


Fig. III: Sound sources of different levels

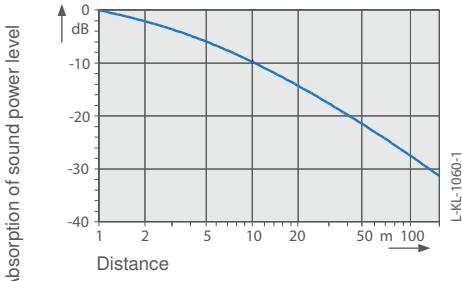


Fig. IV: Reduction of sound pressure level



Electrical connection and motor

Fan drive

The three-phase or single-phase AC external rotor motor integrated into the fan hub meets the requirements for circulating electrical machines set out in **DIN EN 60 034-1** (VDE 0530 Part 1).

AC technology:

The rated voltage for three-phase current is 400 V, for single-phase AC motors 230 V.

EC technology:

The FE2owlet-ECblue axial fans are powered by a highly efficient EC motor with integrated commutation electronics. Depending on the version, the ECblue motors have a broad voltage range.

1~ 200-277 V, 50/60 Hz

3~ 200-240 V, 50/60 Hz

3~ 380-480 V, 50/60 Hz

Operation with frequency inverter

ZIEHL-ABEGG axial fans are suitable for operation with frequency inverters if the following requirements are met:

All-pole sine filters - as supplied by some inverter manufacturers - must be installed between the inverter and the motor (sinusoid output voltage - phase to phase, phase to protective earth). Request our technical information L-TI-0510 for more details.

du/dt filters (also known as motor or attenuation filters) may not be used instead of sine filters.

When using sine filters, there may be no need for screened motor power cables, metal terminal boxes or a second earth connection on the motor (consult the sine filter supplier).

Electrical connection

Voltage

The single-phase or three-phase AC motors are suitable for 400 V or 230 V and are continuously voltage controllable. Please pay attention to the data sheet.

Current

Motor current is dependent on the installation (i.e. flow situation and nozzle) and operation (i.e. operating point in connection with air density). For the definition of electrical installations, the following value is recommended: $I_{\max} = I_N + \Delta I + \approx 30\%$

Motor connection

Mains connection via terminal box or connecting cable implemented as per dimensional drawings. Cable length tolerance ± 3 cm.

Terminal box

Terminal boxes are made of impact resistant and weather resistant plastic or die-cast aluminium.

All terminal boxes have two M20x1.5 cable inlets.

For FE2owlet and FE2owlet-ECblue axial fans in F design without guard grille, the terminal box is located on the outside on the flange ring. In the F design with guard grille, the terminal box is mounted on the front on the motor.

Connection cable

Heat and UV resistant halogen-free hose cables are used, marked by a colour code or connection designations.

The cable construction complies with VDE 0282 part 804 and is suitable for operating voltages of up to 690 V.

Temperature resistance -50 to +150 °C.

The ends of the connection are stripped for 10 cm and fitted with wire end ferrules.

Service capacitor


See system components chapter.



Connection diagrams

EC-Technology


KT00036A (EC074)

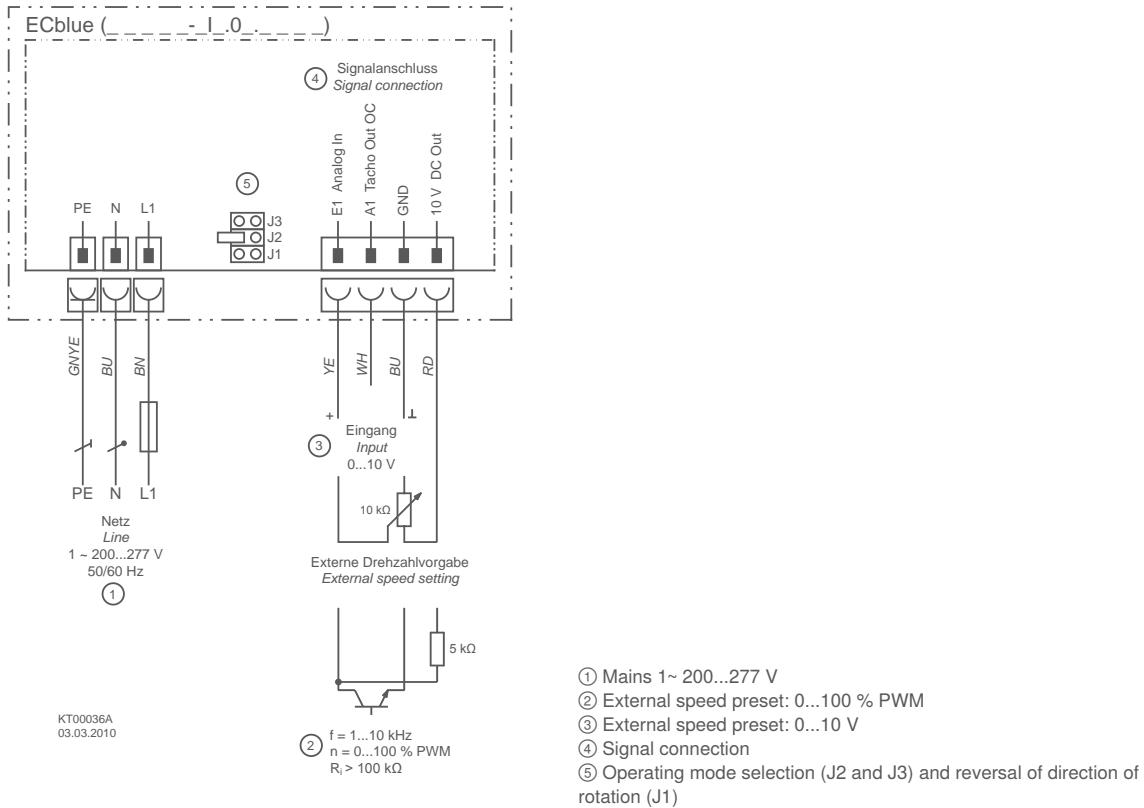

Connection diagrams

EC-Technology

1360-384 (EC090)

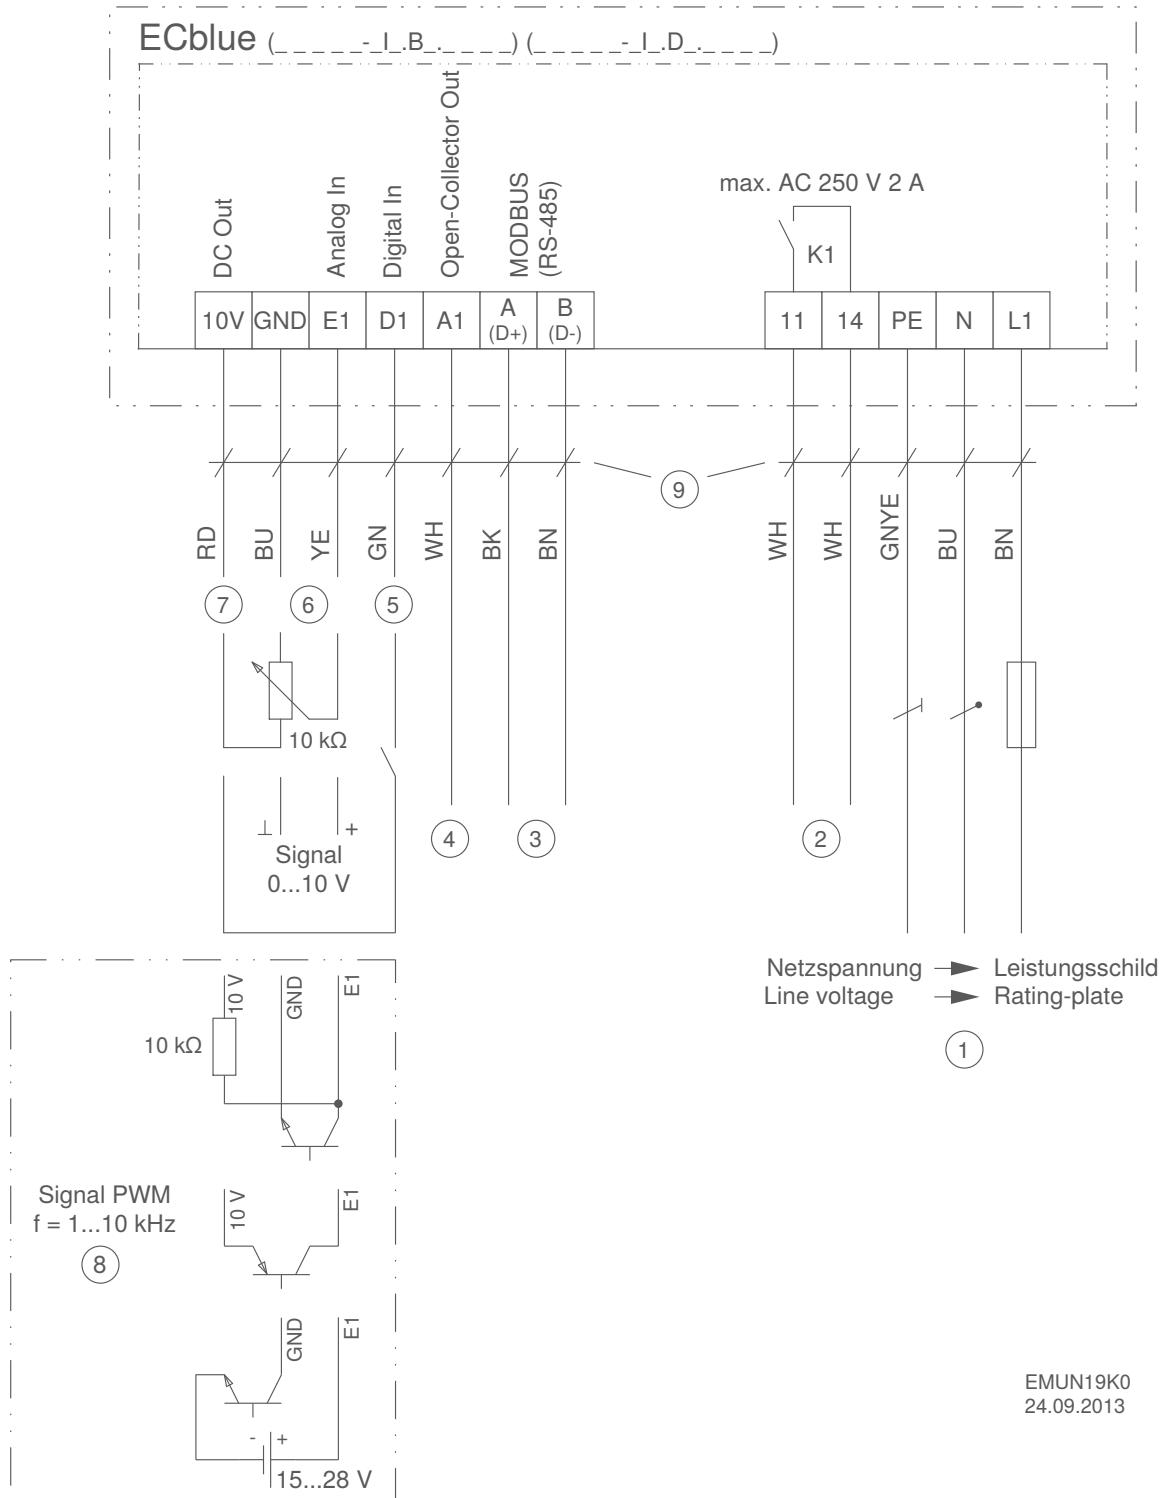


- ① Line voltage see rating-plate
- ② Relay output for fault indication (max. contact rating AC 250 V 2 A)
- ③ MODBUS (RS-485) interface
- ④ Open-Collector output status / tacho
- ⑤ Digital input for enable
- ⑥ Input for setting speed by 0...10 V signal / potentiometer ($R_i > 100 \text{ k}\Omega$)
- ⑦ Voltage supply 10 V DC ($I_{\text{max}} 50 \text{ mA}$)
- ⑧ Setting speed by PWM signal ($f = 1...10 \text{ kHz}$)
- ⑨ Version with connection cables

Connection diagrams

EC-Technology

1360-403 (EC116 / EC152)

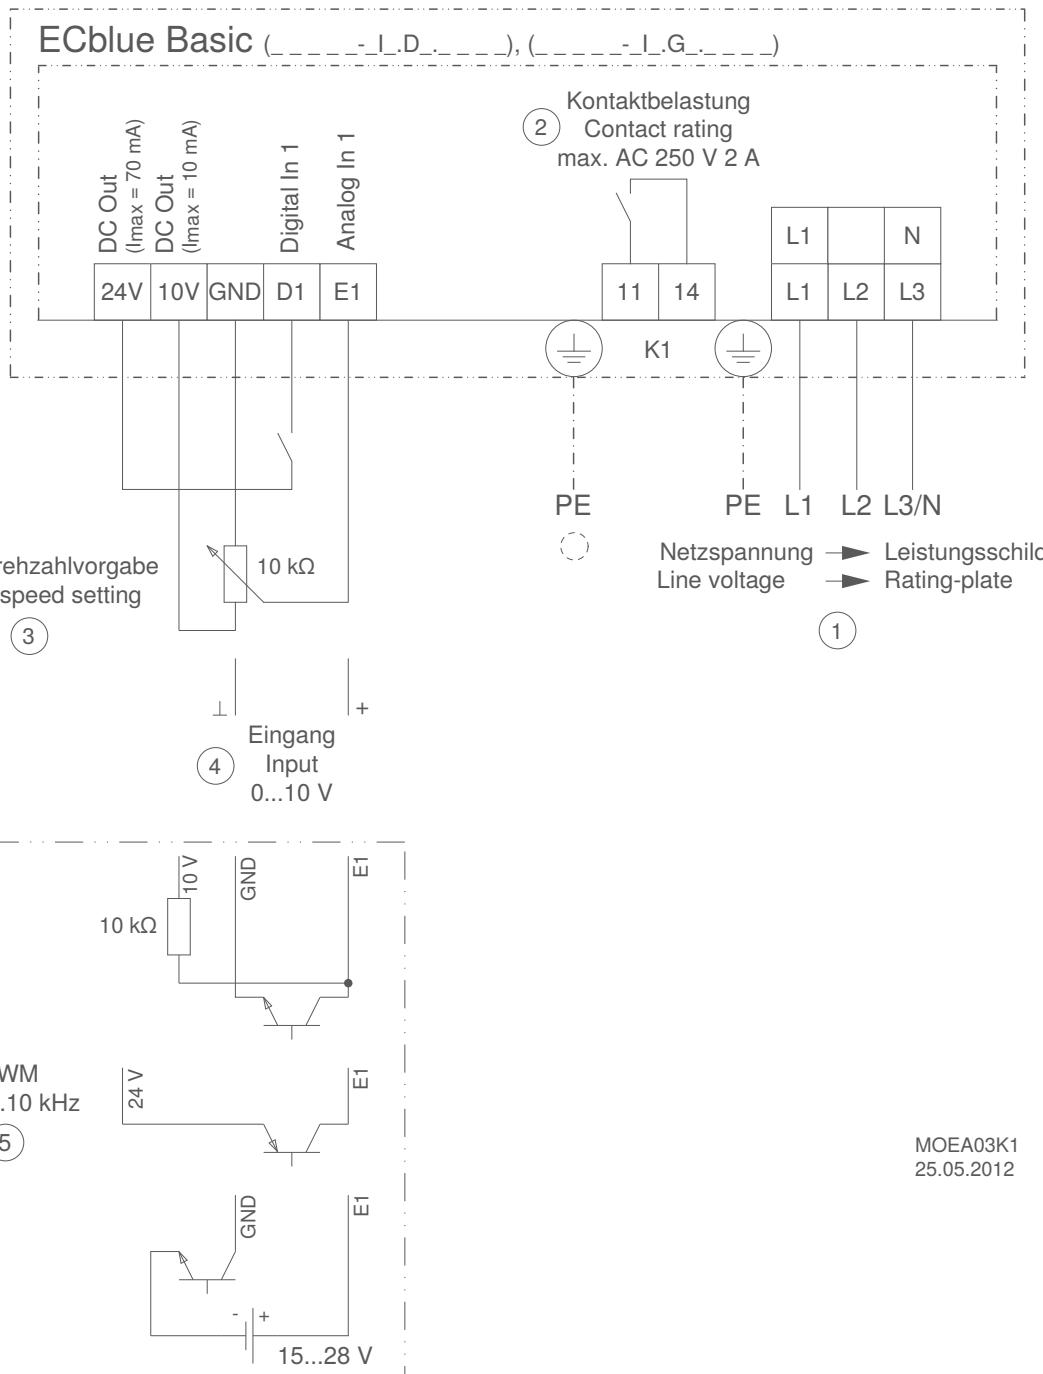

- ① line voltage
- ② contact load
- ③ external speed setting
- ④ input
- ⑤ PWM



Connection diagrams


AC-Technology

104XA

For 1~-motor with capacitor and thermostatic switch (if built in).

Airflow direction: V

Direction of rotation: clockwise




Cable colours:
U1 brown
U2 blue
Z1 black
Z2 orange
TB white

104XB

For 1~-motor with capacitor and thermostatic switch (if built in).

Airflow direction: A

Direction of rotation: counter clockwise




Cable colours:
U1 brown
U2 blue
Z1 black
Z2 orange
TB white

106XA

For 3~-motor with one speed and thermostatic switch (if built in).

Airflow direction: V

Direction of rotation: clockwise

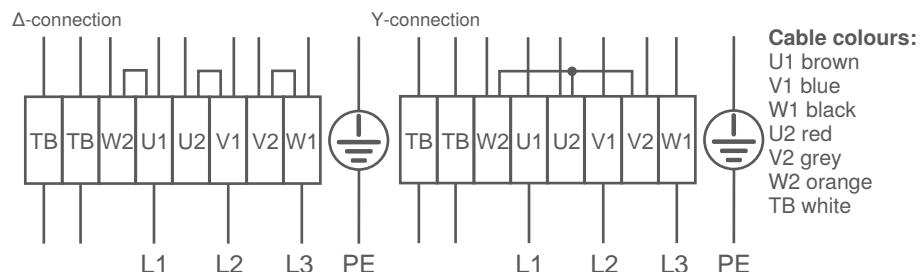


Cable colours:
U1 brown
V1 blue
W1 black
U2 red
V2 grey
W2 orange
TB white

106XB

For 3~-motor with one speed and thermostatic switch (if built in).

Airflow direction: A

Direction of rotation: clockwise

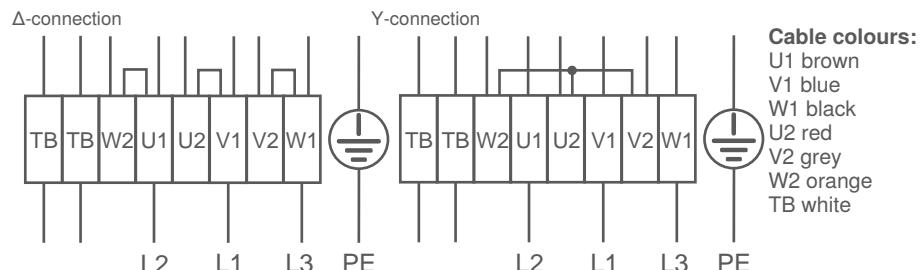


Cable colours:
U1 brown
V1 blue
W1 black
U2 red
V2 grey
W2 orange
TB white

108XA

For 3~-Motor with 2 speeds (Δ -/ Y switch over) and thermostatic switch (if built in). Without bridge when using speed change-over switch.

Direction of air flow: V

Direction of rotation: Clockwise

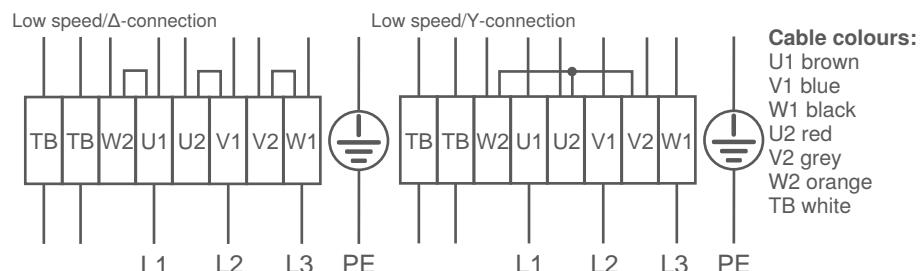


Cable colours:
U1 brown
V1 blue
W1 black
U2 red
V2 grey
W2 orange
TB white

108XB

For 3~-motor with 2 speeds (Δ -/ Y switch over) and thermostatic switch (if built in). Without bridge when using speed change-over switch.

Direction of airflow: A

Direction of rotation: Counter clockwise

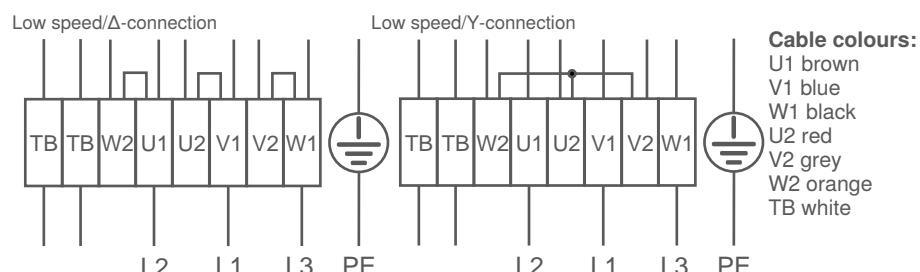

Cable colours:
U1 brown
V1 blue
W1 black
U2 red
V2 grey
W2 orange
TB white

177X

1~ Motor with condenser and thermostat switch.

FN Series

Airflow direction: A


Direction of rotation: Counter-clockwise rotation (looking at rotor)

FB Series

Airflow direction: A

Direction of rotation: clockwise rotation (looking at rotor)

Other speeds possible with capacitors connected in series.



Cable colours:
U2 blue or grey
Z2 black
TB brown



Installation and usage information

Materials and corrosion protection

FE2owlet-ECblue, FE2owlet, ZAplus-ECblue and ZAplus axial fans have an impeller made of high performance composite material or aluminium.

Rotor and stator flange are made of sea water resistant aluminium alloy using a die-casting method.

The fan nozzles are made of hot-dipped thin sheet. ZAplus nozzles consist of high performance composite material.

Additional painting possible upon request and at an extra charge.


Depending on the fan size, motor suspensions are produced as wire support grids or a welded structure with flat steel struts.

The wire carrying grille and welded structure with flat steel struts are provided with weather resistant plastic coating.

Notify us of the area of application subject to increased climatic stress or use in wet rooms such as breweries, dairies or similar.


Installation position

The axial fans are usually suitable for all installation positions. For details please see the part-specific documentation.

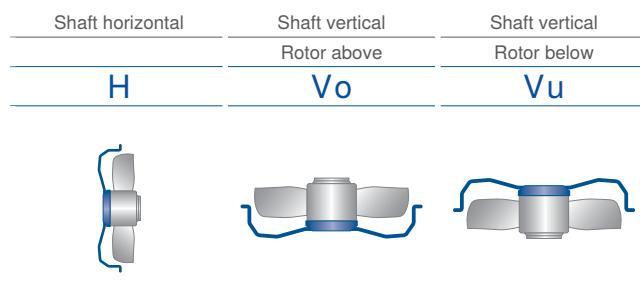

Airflow direction


Airflow direction A →
Sucking over stator



KL2065

Direction of rotation counter clockwise
looking at the rotor

← Airflow direction V
Blowing over stator



KL2064

Direction of rotation clockwise
looking at the rotor

Installation and usage information

Conditions for use and lifetime

Protective device

The fans may only be operated if installed appropriately for their purpose and when safety is ensured through protective devices as per DIN EN 13857 or ISO 13852 (DIN EN ISO 12100) or by other construction protection measures.

Condensation holes

According to the installation position Vo (rotor upwards) or Vu (rotor downwards), the condensation hole beneath must be open. In installation position H, condensation can flow through the seal gap between the stator and the rotor.

Operating mode

Constant operation (S1)

Lifetime

Thanks to the use of ball bearings with "lifetime lubrication", the axial fan is maintenance-free. The grease lifetime value (L10h) lasts for approx. 30,000-40,000 hours in standard applications. In the case of long-lasting operation under extreme conditions (max. speed and max. bearing temperature), it is recommended to have the grease life checked by ZIEHL-ABEGG. The fan or motor is maintenance-free due to the use of ball bearings with "life-time lubrication". Bearings must be changed at the end of the grease life. The grease life may be lower than the theoretical value (L10h) if particular operating conditions such as vibrations, humidity or soiling in the bearing, unfavourable control modes, etc. are present.



Guard grille

A guard grille can be included in the scope of delivery if the fan includes a motor suspension or motor suspension with wall ring.


The guard grille is on the suction or pressure side of the fan, depending on airflow direction.

The chapter on system components contains separate guard grilles, which can be installed on the exhaust or suction sides of the fan as required, depending on installation position and complying with the safety requirements as per DIN EN ISO 13857.

Please observe the section "Influence of guard grilles".



Axial fan FN, design Q

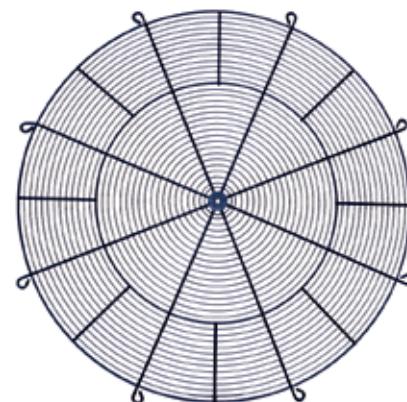

Guard grille system component, blow out side

Influence on guard grille

Safety distances set forth to keep out of reach of hazardous areas

DIN EN ISO 13857 sets forth the required safety distances to prevent upper limbs from getting into hazardous areas.

The preferred "protective construction" used on axial fans is a guard grille. As a standard feature, the vast majority of our axial fans (S, K, D, W, Q designs) are equipped with a guard grille integrated into the suspension. For fan types featuring a suspension without integrated guard grille, a separate guard grille is available as an optional accessory.

The guard grille results in a resistance to the conveyed airflow, which manifests itself in the pressure loss Δp_{VG} .

The pressure loss Δp_{VG} increases in a linear relationship with a coefficient of resistance ζ_G or squared with the conveyed volume flow rate q_v .

$$\Delta p_{VG} = \zeta_G \cdot \frac{\rho}{2} \cdot \frac{16 \cdot q_v^2}{\pi^2 \cdot d_n^4}$$


The coefficient of resistance ζ_G is largely determined by the screen design (mesh size, ring spacing), which is set forth in DIN EN ISO 13857. The coefficient of resistance for the ZIEHL-ABEGG guard grilles, which was obtained in a series of tests on FC series fans, is within the following range: $\zeta_G = 0.2-0.4$. This covers installation of the guard grille on the intake side as well as the pressure side. The following numerical equation provides an approximate estimate of the pressure loss caused by the guard grille in [Pa]:

$$\Delta p_{VG} = K_{VG} \times 10^{-8} \times q_v^2$$

The loss factor K_{VG} depends on the nominal fan diameter d_n and can be seen in the above diagram. The volume flow rate q_v is inserted in [m^3/h].

Note:

FANselect selection program supplies all characteristic curves, also including the influence of the guard grille. See <http://www.fanselect.net/>.

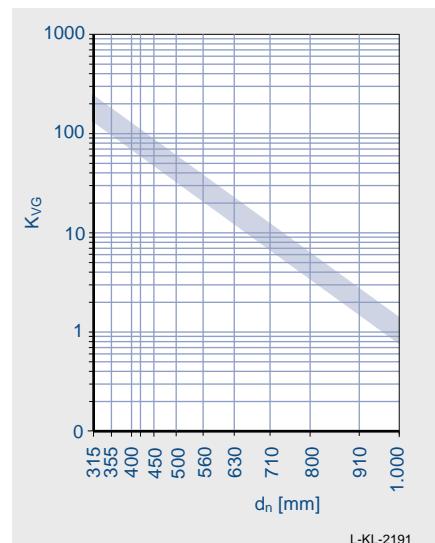

Factor for loss attributable to the grating K_{VG} as a function of the diameter d_n of the fan

Installation instructions

Airflow conditions

When installing fans in the devices, favourable airflow conditions must be maintained; this also applies to compact designs.

The following installation recommendations (Fig. I and II) indicate the required minimum distances.

Fig. I free air intake, connected to outlet side


Fig. II free air outlet, connected to intake side

Fig. III Air inlet nozzles

Please observe recommended gap s between fan blade and inner edge of nozzle


Fig. IV Influence of nozzle shape, comparison of characteristic curves (Fig. IV)

- ① Full nozzle (Design Q)
- ② Short nozzle, see Accessories

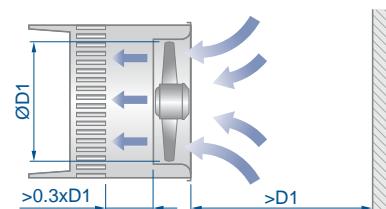


L-KL-2508

Fig. I

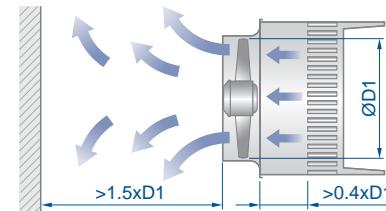


L-KL-2508/1

Fig. II

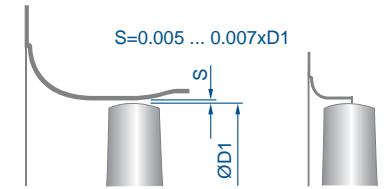

L-KL-2507

Fig. III

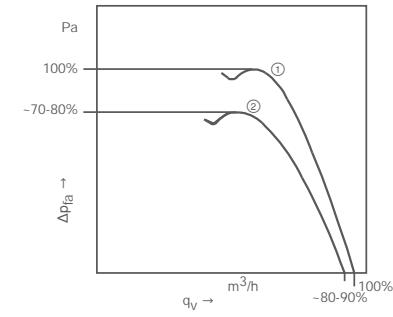

KL2022

Fig. IV




Installation / application examples

Fan-design FN_ _ _ _ K

- ① Fan mounting plate with short bell mouth
- ② Axial fan for refrigerant technology


Space saving construction due to the mounting plate with short bell mouth. Performance can be reduced by using a short bell mouth.



Example: Application with short nozzle for refrigeration

Fan-design FN_ _ _ _ Q


- ① Wall plate or fan mounting plate with full bell mouth
- ② Axial fan for refrigerant technology



Example: Application with full nozzle for refrigeration

Fan-design FN_ _ _ _ W

- ① Fan mounting plate
- ② Axial fan for heating technology



Example: Application with short nozzle for air heater

Usage examples



Small refrigeration units with ZIEHL-ABEGG fans



Condenser with axial fans




Condenser with axial fans



ZIEHL-ABEGG Germany

Field representatives

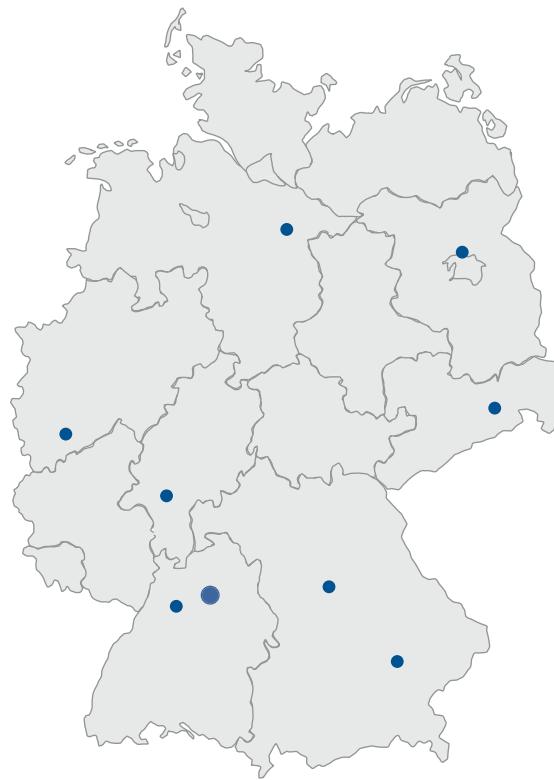

Information

FE2owlet- ECblue

FE2owlet

FE2owlet- ECblue
with ZAplus

FE2owlet
with ZAplus

System
components

Control
technology

Appendix

Headquarters

ZIEHL-ABEGG SE
Heinz-Ziehl-Straße
74653 Künzelsau
Tel. 07940 16-0
Fax 07940 16-300
info@ziehl-abegg.de
www.ziehl-abegg.com

Bavaria north

Michael Böhme
91126 Rednitzhembach
Phone 09122 8850964
Mobile 0160 90643765
Fax 09122 8850965
michael.boehme@ziehl-abegg.de

Baden-Württemberg

Tomas Pilic
74257 Untereisesheim
Phone 07132 3417922
Mobile 0171 7610136
Fax 07132 3417933
tomas.pilic@ziehl-abegg.de

Hessen, Rhineland Palatinate, Saarland

Harald Keim
64859 Eppertshausen
Phone 06071 3923385
Mobile 0171 7655880
Fax 06071 3923386
harald.keim@ziehl-abegg.de

North Rhine-Westphalia, Lower Saxony West

Hans-Peter Rommerscheidt
53111 Bonn
Phone 0228 9628754
Mobile 0170 7946555
Fax 0228 9628756
hans-peter.rommerscheidt@ziehl-abegg.de

Bavaria South

Willibald Walter
83533 Edling
Mobile 0175 2911908
willibald.walter@ziehl-abegg.de

Lower Saxony, north, east and south, Bremen, Hamburg, Schleswig-Holstein

Kai Städing
29559 Wrestedt/Nettelkamp
Phone 05802 9912
Mobile 0171 3044458
Fax 05802 9913
kai.staeding@ziehl-abegg.de

Mecklenburg-West Pomerania, Berlin, Brandenburg middle and north, Saxony-Anhalt middle and north

Wolfgang Kull
16348 Wandlitz
Phone 033056 82838
Mobile 0171 2295159
Fax 033056 82839
wolfgang.kull@ziehl-abegg.de

Saxons, Thuringia, Brandenburg south, Saxony-Anhalt south

Harald Höntsche
01219 Dresden
Phone 0351 8494892
Mobile 0170 9249851
Fax 0351 8584781
harald.hoentsch@ziehl-abegg.de



ZIEHL-ABEGG global

Subsidiaries, sales partners



Albania
supported by
ZIEHL-ABEGG Ges.m.b.H.
AUSTRIA

Argentina
supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

Armenia
supported by
OOO ZIEHL-ABEGG
RUSSIA

Australia
ZIEHL-ABEGG Australia Pty Ltd
(VIC)
181 Calarco Drive
Derrimut
VICTORIA 3030
AUSTRALIA
Phone +61 3 99310899
Fax +61 3 99310499
www.ziehl-abegg.com.au
info@ziehl-abegg.com.au

Austria
ZIEHL-ABEGG Ges.m.b.H.
Prinz Eugen Strasse 19
4020 LINZ
AUSTRIA
Phone +43 732 7850950
Fax +43 732 785702
www.ziehl-abegg.at
info@ziehl-abegg.at

Azerbaijan
supported by
ZIEHL-ABEGG Vantilator ve
Motor

San ve Tic. Ltd. Sti.
TURKEY

Belarus
supported by
OOO ZIEHL-ABEGG
RUSSIA

Belgium
supported by
ZIEHL-ABEGG Benelux B.V.
NETHERLANDS

Bolivia
supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

Bosnia-Herzegovina
supported by
ZIEHL-ABEGG Ges.m.b.H.
AUSTRIA

Brazil
ZIEHL-ABEGG do Brazil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
Rua Osasco, 1.295
Centro Empresarial Anhanguera
Cajamar -SP - CEP 07753-040
BRAZIL
Phone + 55 11 2898-0827
www.ziehl-abegg.com.br
info@ziehl-abegg.com.br

Bulgaria
supported by
ZIEHL-ABEGG Ges.m.b.H.
AUSTRIA

Canada
supported by
ZIEHL-ABEGG Inc.
USA

Chile
supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

China
ZIEHL-ABEGG Mechanical
and Electrical Equipment
(Shanghai)
Co. Ltd.

No. 65 Hong Mu Dan Road
Xinbang Town
Songjiang District
SHANGHAI 201605
CHINA
Phone +86 21 57893991
Fax +86 21 57893932
www.ziehl-abegg.cn
info@ziehl-abegg.com.cn

Colombia
ZIEHL-ABEGG fans and drives
Carrera 7B No. 126 – 49
Oficina 104 Bogotá
COLOMBIA

Croatia
supported by
ZIEHL-ABEGG Ges.m.b.H.
AUSTRIA

Czech Republic
ZIEHL-ABEGG s.r.o.
Škrobárenská 484/8
617 00 BRNO
Czech REPUBLIC
Phone +420 5 45421690
Fax +420 5 45421699
www.ziehl-abegg.cz
sales@ziehl-abegg.cz

Denmark
ZIEHL-ABEGG Danmark ApS
Pakhusgården 40
5000 Odense C
DENMARK
Phone +45 66 155800
Fax +45 66 155810
www.ziehl-abegg.com
carsten.sundman@ziehl-abegg.com

Ecuador
supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

Estonia
supported by
ZIEHL-ABEGG Finland OY
FINLAND

Finland
ZIEHL-ABEGG Finland OY
Olarinluoma 11
02200 ESPOO
FINLAND
Phone +358 10 40068-00
Fax +358 10 40068-10
www.ziehl-abegg.fi
info@ziehl-abegg.fi



France ZIEHL-ABEGG France Sarl Rue de la gare 01800 VILLIEU FRANCE Phone +33 474 4606-20 Fax +33 474 611958 www.ziehl-abegg.fr societe@ziehl-abegg.fr	Iraq supported by ZIEHL-ABEGG Vantilator ve Motor San ve Tic. Ltd. Sti. TURKEY	Malaysia supported by ZIEHL-ABEGG SEA Pte. Ltd. SINGAPORE	Poland ZIEHL-ABEGG Polska Sp. z o.o. ul. Sochaczewska 13 01-327 WARSZAWA POLAND Phone +48 22 6654933 Fax +48 22 6640134 www.ziehl-abegg.pl biuro@ziehl-abegg.pl
Georgia supported by ZIEHL-ABEGG Vantilator ve Motor San ve Tic. Ltd. Sti. TURKEY	Ireland supported by ZIEHL-ABEGG UK Ltd. GREAT BRITAIN	Mexico ZIEHL-ABEGG Inc. Torre IBS Lázaro Cárdenas 1007 Pte. Planta Baja, Ofcn # 127 Residencial Santa Bárbara 66266 San Pedro Garza García, NL MEXIKO Telefon +52 (81) 8220 9065 http://www.ziehl-abegg.us info@ziehl-abegg.us	Portugal supported by ZIEHL-ABEGG Ibérica S.L. SPAIN
Great Britain ZIEHL-ABEGG UK Ltd. Springfield Business Park Lonebarn Link, Unit 1 CHELMSFORD, ESSEX CM2 5AR GREAT BRITAIN Phone +44 1245 4490-10 Fax +44 1245 4490-11 www.ziehl-abegg.co.uk info@ziehl-abegg.co.uk	Italy ZIEHL-ABEGG Italia S.r.l. Via Primo Maggio 10 30031 DOLO (VE) ITALY Phone +39 041 5130-311 Fax +39 041 5131-953 www.ziehl-abegg.it info@ziehl-abegg.it	Japan ZIEHL-ABEGG Japan Co., Ltd. 5F Minami-Shinagawa N- Building, 2-2-10 Minami-Shinagawa Shinagawa-ku, TOKYO 140- 0004 JAPAN Phone +81 3 4520 5415 Fax +81 3 4520 5416 www.ziehl-abegg.com/jp info@ziehl-abegg.jp	Romania supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA
Greece supported by ZIEHL-ABEGG SE GERMANY	Moldova supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA	Russia OOO ZIEHL-ABEGG 34/building 3 Khotovskaya Str. Schelkovo 141101 MOSCOW REGION RUSSIA Phone +7 495 2215665 Fax +7 495 2215665 www.ziehl-abegg.ru info@ziehl-abegg.ru	Montenegro supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA
Hungary supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA Phone +36 30 821 5226	Netherlands ZIEHL-ABEGG Benelux B.V. Veldweg 20c Postbus 36 5320 AA HEDEL NETHERLANDS Phone +31 73 594 7000 Fax +31 73 594 7009 www.ziehl-abegg.nl info@ziehl-abegg.nl	New Zealand supported by ZIEHL-ABEGG Australia Pty Ltd (VIC) AUSTRALIA	Serbia supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA
Iceland Varmi HF Laugavegi 168 0105 REYKJAVIK ICELAND Phone +354 5517560 Fax +354 5624110 www.varmi.is varmi@varmi.is	Kazakhstan supported by OOO ZIEHL-ABEGG RUSSIA	Singapore ZIEHL-ABEGG SEA Pte. Ltd. 57 Ubi Avenue 1 #05-04 Ubi Centre SINGAPORE 408936 SINGAPORE Phone +65 67482587 Fax +65 67487357 www.ziehl-abegg.sg info@ziehl-abegg.com.sg	Paraguay supported by ZIEHL-ABEGG do Brasil Imp., Exp. e Com. de Equipamentos de Ventilação Ltda. BRASIL
India ZIEHL-ABEGG India Pvt Ltd. GAT No.679/2/3, Kuruli Village Tal Khed Dist. PUNE - 410501 INDIA Phone +91 21 3567 9679 Fax +91 21 3567 9680 www.ziehl-abegg.in vikas.kundra@ziehl-abegg.com	Korea Jung Air Technics Co., Ltd. #831, Hyundai Etrebeau Bldg. 852, Janghang-Dong, Ilsan-Ku GOYANG-CITY (411-837) KOREA Phone +82 31 9033071 Fax +82 31 9033072 www.jungairtechnics.com jat@nuri.net	Norway supported by ZIEHL-ABEGG Sverige AB SWEDEN	Slovakia supported by ZIEHL-ABEGG s.r.o. CZECH REPUBLIC
Indonesia ZIEHL-ABEGG SEA Pte. Ltd. Indonesia Representative Office Heartline Center Building, 2nd Floor, No.201, Jl. Permatasari 1000, Villa Permata Lippo Karawaci, Tangerang 15810 INDONESIEN Phone +62 21 5988181 Fax +62 21 5988181 www.ziehl-abegg.sg rudy.susanto@ziehl-abegg.com.sg	Kyrgyzstan supported by OOO ZIEHL-ABEGG RUSSIA	Philippines supported by ZIEHL-ABEGG SEA Pte. Ltd. SINGAPORE	Slovenia supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA
Lithuania supported by ZIEHL-ABEGG Polska Sp. z o.o. POLAND	Latvia supported by ZIEHL-ABEGG Polska Sp. z o.o. POLAND	South Africa ZIEHL-ABEGG South Africa (Pty) Ltd. 51 Loper Road Spartan / Aeroport Kempton Park JOHANNESBURG SOUTH AFRICA Phone +27 11 9744211 Fax +27 11 9747970 www.ziehl-abegg.co.za info@ziehl-abegg.co.za	Macedonia supported by ZIEHL-ABEGG Ges.m.b.H. AUSTRIA

Information

FE2owlet- ECblue

FE2owlet- ECblue
with Zappus

System
components

Control
technology

Appendix

ZIEHL-ABEGG global

Subsidiaries, sales partners

Spain

ZIEHL-ABEGG Ibérica S.L.
C/ Calidad 58
Polígono Industrial Los Olivos
28906 GETAFE (MADRID)
SPAIN
Phone +34 91 2953008
Fax +34 91 2953014
www.ziehl-abegg.es
info@ziehl-abegg.es

Sweden

ZIEHL-ABEGG Sverige AB
Kvartsgatan 11
749 40 ENKÖPING
SWEDEN
Phone +46 171 8588-0
Fax +46 171 8588-1
www.z-abegg.se
info@z-abegg.se

Switzerland

ZIEHL-ABEGG Schweiz AG
Limmattstrasse 12
8957 SPREITENBACH
SWITZERLAND
Phone +41 56 41850-10
Fax +41 56 41850-15
www.ziehl-abegg.ch
info@ziehl-abegg.ch

Syria

supported by
ZIEHL-ABEGG Vantilator ve
Motor
San ve Tic. Ltd. Sti.
TURKEY

Taiwan

Tuntos Enterprise Co. Ltd.
No. 23-1, Alley 10, Lane 437,
Pa-Der Road, Sec 2,
TAIPEI, TAIWAN R.O.C.
TAIWAN
Phone +886 2 27512135
Fax +886 2 27775343
www.tuntos.com.tw
tuntos@ms23.hinet.net

Tajikistan

supported by
OOO ZIEHL-ABEGG
RUSSIA

Thailand

supported by
ZIEHL-ABEGG SEA Pte. Ltd.
SINGAPORE

Turkey

ZIEHL-ABEGG Vantilator ve
Motor
San ve Tic. Ltd. Sti.
Atatürk Mah. Fırat Bulvarı
Gardenya Plaza 3. Binasi
Kat:3 Ofis No: 17
34758 ATAŞEHİR-İSTANBUL
TURKEY
Phone +90 216 5808250
Fax +90 216 5809530
www.ziehl-abegg.com.tr
omur.aydogan@ziehl-abegg.com.tr

Turkmenistan

supported by
ZIEHL-ABEGG Vantilator ve
Motor
San ve Tic. Ltd. Sti.
TURKEY

Ukraine

ZIEHL-ABEGG Ukraine Ltd
46 Budenogo str.
08700 OBUHOV, KIEV REGION
UKRAINE
Phone +38 067 4637958
Fax +38 044 4927409
ua.ziehl-abegg.com
info@ziehl-abegg.com.ua

Uruguay

supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

USA

ZIEHL-ABEGG Inc.
719 N. Regional Road
GREENSBORO, NC 27419
USA
Phone +1 336 8349339
Fax +1 336 8349340
www.ziehl-abegg.us
info@ziehl-abegg.us

Uzbekistan

supported by
OOO ZIEHL-ABEGG
RUSSIA

Venezuela

supported by
ZIEHL-ABEGG do Brasil Imp.,
Exp. e Com. de Equipamentos
de Ventilação Ltda.
BRASIL

Vietnam

supported by
ZIEHL-ABEGG SEA Pte. Ltd.
SINGAPORE



General notes

The information and data contained in this catalogue were composed to the best of our best ability and do not absolve the user from its duty to check the suitability of the products with respect to its intended application.

ZIEHL-ABEGG SE reserves the right to make design changes, which are used for continuous technical improvement.

The customer is obligated to inform the supplier about general information concerning the intended use, the type of installation, the operating conditions and any other conditions that need to be taken into consideration if the order is not based on catalogue information.

Copyright

ZIEHL-ABEGG SE reserves in its entirety the copyright of this catalogue. The catalogue is intended for proper use as intended and neither the catalogue, its content nor extracts may be passed on to third parties without our express written consent.

The Royal League



© ZIEHL-ABEGG SE - 00703770 - MA - 02/2016 - 4.000 - Qm - Subject to technical modifications

ZIEHL-ABEGG The ZIEHL-ABEGG logo consists of the company name in a bold, blue, sans-serif font, followed by a yellow, three-dimensional, stylized arrow or chevron shape pointing to the right.

ZIEHL-ABEGG SE Heinz-Ziehl-Straße 74653 Künzelsau +49 79 40 16-0 info@ziehl-abegg.com ziehl-abegg.com